

## Technology for Large Space Systems

NASA SP-7046(16)


May 1987

A Bibliography with Indexes

(NASA-SP-7046 (16)) TECHNOLOGY FOR LARGE SPACE SYSTEMS: A BIBLIOGRAPHY WITH INDEXES (NASA) 182 p Avail: NTIS HC A09 CSCL 22A

N87-25338

Unclas 00/12 0083805

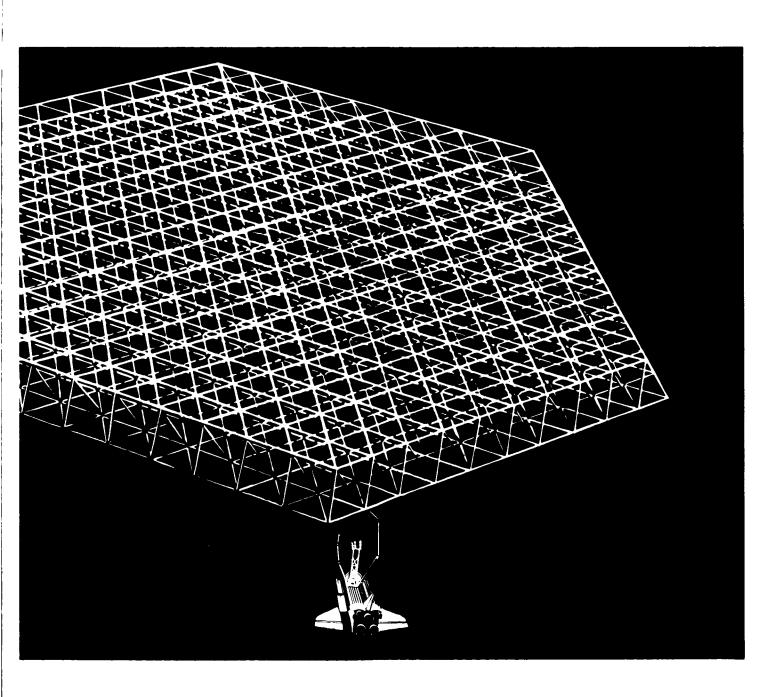

### FEDERAL DEPOSITORY LIBRARIES

#### ALABAMA

#### AUBURN UNIV. AT MONTGOMERY LIBRARY

**Documents Department** Montgomery, AL 36193 (205) 279-9110, ext. 253

#### UNIV. OF ALABAMA LIBRARY

Documents Dept.-Box S University, AL 35486 (205) 348-7369

#### **ARIZONA**

#### DEPT. OF LIBRARY, ARCHIVES AND PUBLIC RECORDS

Third Floor-State Cap. 1700 West Washington Phoenix, AZ 85007 (602) 255-4121

#### UNIVERSITY OF ARIZONA LIB.

Government Documents Dept. Tucson, AZ 85721 (602) 626-5233

#### **ARKANSAS**

#### ARKANSAS STATE LIBRARY

One Capitol Mall Little Rock, AR 72201 (501) 371-2326

#### **CALIFORNIA**

#### **CALIFORNIA STATE LIBRARY**

Govt. Publications Section P.O. Box 2037 Sacramento, CA 95809 (916) 322-4572

#### **COLORADO**

#### UNIV OF COLORADO LIB.

Government Pub. Division Campus Box 184 Boulder, CO 80309 (303) 492-8834

#### **DENVER PUBLIC LIBRARY**

Govt. Pub. Department 1357 Broadway Denver, CO 80203 (303) 571-2131

#### CONNECTICUT

#### **CONNECTICUT STATE LIBRARY**

Government Documents Unit 231 Capitol Avenue Hartford, CT 06106 (203) 566-4971

#### **FLORIDA**

#### **UNIV. OF FLORIDA LIBRARIES**

Library West **Documents Department** Gainesville, FL 32611 (904) 392-0367

#### GEORGIA

#### **UNIV. OF GEORGIA LIBRARIES**

Government Reference Dept. Athens, GA 30602 (404) 542-8951

#### HAWAII

#### UNIV. OF HAWAII LIBRARY

Govt. Documents Collection 2550 The Mall Honolulu, HI 96822 (808) 948-8230

#### **IDAHO**

#### **UNIV. OF IDAHO LIBRARY**

**Documents Section** Moscow, ID 83843 (208) 885-6344

#### ILLINOIS

#### ILLINOIS STATE LIBRARY

Information Services Branch Centennial Building Springfield, IL 62706 (217) 782-5185

#### INDIANA

#### INDIANA STATE LIBRARY

Serials Documents Section 140 North Senate Avenue Indianapolis, IN 46204 (317) 232-3686

#### **IOWA**

#### UNIV. OF IOWA LIBRARIES

Govt. Documents Department Iowa City, IA 52242 (319) 353-3318

#### KANSAS

#### UNIVERSITY OF KANSAS

Doc. Collect—Spencer Lib. Lawrence, KS 66045 (913) 864-4662

#### KENTUCKY

#### UNIV. OF KENTUCKY LIBRARIES

Govt. Pub. Department Lexington, KY 40506 (606) 257-3139

#### **LOUISIANA**

#### LOUISIANA STATE UNIVERSITY

Middleton Library Govt. Docs. Dept. Baton Rouge, LA 70803 (504) 388-2570

#### LOUISIANA TECHNICAL UNIV. LIBRARY

Documents Department Ruston, LA 71272 (318) 257-4962

#### MAINE

#### UNIVERSITY OF MAINE

Raymond H. Fogler Library Tri-State Regional Documents Depository Orono, ME 04469 (207) 581-1680

#### MARYLAND

#### UNIVERSITY OF MARYLAND

McKeldin Lib. - Doc. Div. College Park, MD 20742 (301) 454-3034

#### MASSACHUSETTS

#### **BOSTON PUBLIC LIBRARY**

Government Docs. Dept. Boston, MA 02117 (617) 536-5400 ext.226

#### **MICHIGAN**

#### **DETROIT PUBLIC LIBRARY**

Sociology Department 5201 Woodard Avenue Detroit, MI 48202 (313) 833-1409

#### **MICHIGAN STATE LIBRARY**

P.O. Box 30007 Lansing, MI 48909 (517) 373-0640

#### **MINNESOTA**

#### UNIVERSITY OF MINNESOTA

Government Pubs. Division 409 Wilson Library 309 19th Avenue South Minneapolis, MN 55455 (612) 373-7813

#### MISSISSIPPI

#### UNIV. OF MISSISSIPPI LIB.

Documents Department University, MS 38677 (601) 232-5857

#### MONTANA

#### UNIV. OF MONTANA

Mansfield Library Documents Division Missoula, MT 59812 (406) 243-6700

#### **NEBRASKA**

#### NEBRASKA LIBRARY COMM.

Federal Documents 1420 P Street Lincoln, NE 68508 (402) 471-2045 In cooperation with University of Nebraska-Lincoln

#### **NEVADA**

#### UNIVERSITY OF NEVADA LIB.

Govt. Pub. Department Reno, NV 89557 (702) 784-6579

#### **NEW JERSEY**

#### **NEWARK PUBLIC LIBRARY**

5 Washington Street Newark, NJ 07101 (201) 733-7812

#### **NEW MEXICO**

#### UNIVERSITY OF NEW MEXICO

Zimmerman Library Government Pub. Dept. Albuquerque, NM 87131 (505) 277-5441

#### **NEW MEXICO STATE LIBRARY**

Reference Department 325 Don Gaspar Avenue Santa Fe, NM 87501 (505) 827-2033, ext. 22

#### **NEW YORK**

#### **NEW YORK STATE LIBRARY**

Empire State Plaza Albany, NY 12230 (518) 474-5563

#### **NORTH CAROLINA**

#### UNIVERSITY OF NORTH CAROLINA AT CHAPEL HILL

Wilson Library **BA/SS Documents Division** Chapel Hill, NC 27515 (919) 962-1321

#### NORTH DAKOTA

#### **UNIVERSITY OF NORTH DAKOTA**

Chester Fritz Library **Documents Department** Grand Forks, ND 58202 (701) 777-2617, ext. 27 In cooperation with North Dakota State Univ. Library

#### STATE LIBRARY OF OHIO

**Documents Department** 65 South Front Street Columbus, OH 43215 (614) 462-7051

#### **OKLAHOMA**

#### OKLAHOMA DEPT. OF LIB.

Government Documents 200 NE 18th Street Oklahoma City, OK 73105 (405) 521-2502

#### OKLAHOMA STATE UNIV. LIB.

**Documents Department** Stillwater, OK 74078 (405) 624-6546

#### **OREGON**

#### PORTLAND STATE UNIV. LIB.

Documents Department P.O. Box 1151 Portland, OR 97207 (503) 229-3673

#### **PENNSYLVANIA**

#### STATE LIBRARY OF PENN.

Government Pub. Section P.O. Box 1601 Harrisburg, PA 17105 (717) 787-3752

#### **TEXAS**

#### **TEXAS STATE LIBRARY**

**Public Services Department** P.O. Box 12927-Cap. Sta. Austin, TX 78753 (512) 471-2996

#### **TEXAS TECH. UNIV. LIBRARY**

Govt. Documents Department Lubbock, TX 79409 (806) 742-2268

#### UTAH

#### **UTAH STATE UNIVERSITY**

Merrill Library, U.M.C. 30 Logan, UT 84322 (801) 750-2682

#### **VIRGINIA**

#### **UNIVERSITY OF VIRGINIA**

Alderman Lib. - Public Doc. Charlottesville, VA 22901 (804) 924-3133

#### WASHINGTON

#### **WASHINGTON STATE LIBRARY**

Documents Section Olympia, WA 98504 (206) 753-4027

#### **WEST VIRGINIA**

#### WEST VIRGINIA UNIV. LIB.

Documents Department Morgantown, WV 26506 (304) 293-3640

#### WISCONSIN

#### **MILWAUKEE PUBLIC LIBRARY**

814 West Wisconsin Avenue Milwaukee, WI 53233 (414) 278-3000

#### ST. HIST LIB. OF WISCONSIN

Government Pub. Section 816 State Street Madison, WI 53706 (608) 262-4347

#### **WYOMING**

#### WYOMING STATE LIBRARY Supreme Ct. & Library Bld. Cheyenne, WY 82002

(307) 777-6344

## **TECHNOLOGY FOR** LARGE SPACE SYSTEMS

### **A BIBLIOGRAPHY** WITH INDEXES

**Supplement 16** 

Compiled by Technical Library Branch and Edited by Space Systems Division NASA Langley Research Center Hampton, Virginia

A selection of annotated references to unclassified reports and journal articles that were introduced into the NASA scientific and technical information system between July 1 and December 31, 1986 in

- Scientific and Technical Aerospace Reports (STAR)
- International Aerospace Abstracts (IAA).



#### NOTE TO AUTHORS OF PROSPECTIVE ENTRIES:

The compilation of this bibliography results from a complete search of the *STAR* and *IAA* files. Many times a report or article is not identified because either the title, abstract, or key words did not contain appropriate words for the search. A number of words are used, but to best insure that your work is included in the bibliography, use the words *Large Space Structures* somewhere in your title or abstract, or include them as a key word.

This supplement is available from the National Technical Information Service (NTIS), Springfield, Virginia 22161 at the price code A09.

### INTRODUCTION

This bibliography is designed to be helpful to the researcher and manager engaged in the developing technology within the discipline areas of the Large Space Systems Technology (LSST). Also, the designers of large space systems for approved missions (in the future) will utilize the technology described in the documents referenced herein.

This literature survey lists 673 reports, articles and other documents announced between July 1, 1986 and December 31, 1986 in *Scientific and Technical Aerospace Reports (STAR)*, and *International Aerospace Abstracts (IAA)*.

The coverage includes documents that define specific missions that will require large space structures to achieve their objectives. The methods of integrating advanced technology into system configurations and ascertaining the resulting capabilities is also addressed.

A wide range of structural concepts are identified. These include erectable structures which are earth fabricated and space assembled, deployable antennas which are fabricated, assembled, and packaged on Earth with automatic deployment in space, and space fabricated structures which use pre-processed materials to build the structure in orbit.

The supportive technology that is necessary for full utilization of these concepts is also included. These technologies are identified as analysis and design techniques, structural and thermal analysis, structural dynamics and control, electronics, advanced materials, assembly concepts, and propulsion.


A separate companion document "Space Station Systems Bibliography" (NASA SP-7056) incorporates space station technology not applicable to large space systems. Space station systems technology that is also applicable to large space systems may be documented in both bibliographies.

Robert L. Wright, Space Systems Division Sue K. Seward, Technical Library Branch


## **TABLE OF CONTENTS**

F	Page
Category 01 Systems Includes mission and program concepts and requirements, focus missions, conceptual studies, technology planning, systems analysis and integration, and flight experiments.	1
Category 02 Analysis and Design Techniques Includes interactive techniques, computerized technology design and development programs, dynamic analysis techniques, environmental modeling, thermal modeling, and math modeling.	17
Category 03 Structural Concepts Includes erectable structures (joints, struts, and columns), deployable platforms and booms, solar sail, deployable reflectors, space fabrication techniques and protrusion processing.	23
Category 04 Structural and Thermal Analysis Includes structural analysis and design, thermal analysis and design, analysis and design techniques, and thermal control systems.	30
Category 05 Structural Dynamics and Control Includes modeling, systems identification, attitude and control techniques, surface accuracy measurement and control techniques and systems, sensors and actuators.	35
Category 06 Electronics Includes techniques for power and data distribution, antenna RF performance analysis, communications systems, and spacecraft charging effects.	65
Category 07 Advanced Materials Includes matrix composites, polyimide films and thermal control coatings, bonding agents, antenna components, manufacturing techniques, and space environmental effects on materials.	71
Category 08 Assembly Concepts Includes automated manipulator techniques, EVA, robot assembly, teleoperators, and equipment installation.	81
Category 09 Propulsion Includes propulsion concepts and designs utilizing solar sailing, solar electric, ion, and low thrust chemical concepts.	85
Category 10 General Includes either state-of-the-art or advanced technology which may apply to Large Space Systems and does not fit within the previous categories. Publications of conferences, seminars, and workshops are covered in this area.	91
Subject Index	B-1 C-1 D-1 E-1 F-1

#### TYPICAL REPORT CITATION AND ABSTRACT

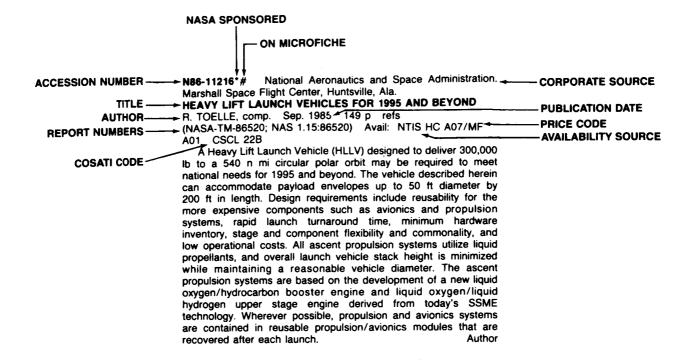

### TYPICAL JOURNAL ARTICLE CITATION AND ABSTRACT

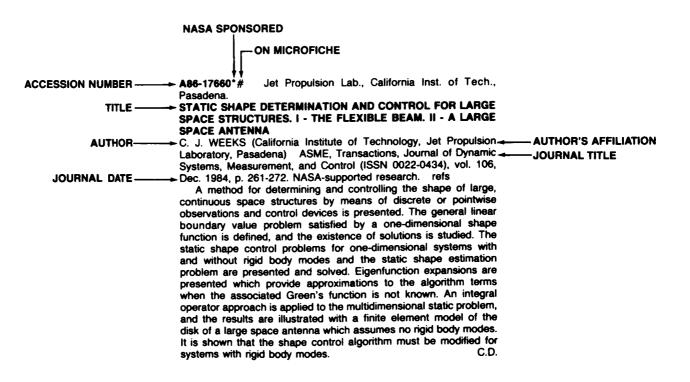

## **TECHNOLOGY FOR** LARGE SPACE SYSTEMS

A Bibliography (Suppl. 16)

**MAY 1987** 

#### 01

#### **SYSTEMS**

Includes mission and program concepts and requirements, focus missions, conceptual studies, technology planning, systems analysis and integration, and flight experiments.

A86-30117\* National Aeronautics and Space Administration. Lyndon B. Johnson Space Center, Houston, Tex.

#### STRATEGIES FOR A PERMANENT LUNAR BASE

M. B. DUKE, W. W. MENDELL, and B. B. ROBERTS (NASA, Johnson Space Center, Houston, TX) IN: Lunar bases and space activities of the 21st century . Houston, TX, Lunar and Planetary Institute, 1985, p. 57-68. refs

One or more of three possible objectives, encompassing scientific research, lunar resource exploitation for space infrastructure construction, and lunar environment self-sufficiency refinement with a view to future planetary habitation, may be the purpose of manned lunar base activities. Attention is presently given to the possibility that the early phases of all three lunar base orientations may be developed in such a way as to share the greatest number of common elements. An evaluation is made of the cost and complexity of the lunar base, and the Space Transportation System used in conjunction with it, as functions of long term base use strategy.

#### A86-30180

#### LUNAR INDUSTRALIZATION AND SETTLEMENT - BIRTH OF POLYGLOBAL CIVILIZATION

K. A. EHRICKE (Space Global, La Jolla, CA) IN: Lunar bases and space activities of the 21st century . Houston, TX, Lunar and Planetary Institute, 1985, p. 827-855. refs

Major aspects of lunar industrialization and settlement are presented, together with evolutionary justification for this settlement. Three interlocking phases of open-world development are defined: (1) exoindustrialization, the capability of productive existence in the new environment; (2) space urbanization, the capability of establishing large-scale industrial and biotechnically productive settlements; and (3) extraterrestrialization, the prolonged process of socio-psychological development and anthropological divergence based on the integration and further evolution of the first two phases. Lunar development, which offers the earliest, highest benefit relevance to terrestrial humanity and to the development of cislunar space, involves five developmental stages (DS): DS-1, the synoptic prospecting for mineralogical provinces and a candidate base site; DS-2, the establishment of a circumlunar space station; DS-3, the establishment of a nuclear powered central lunar processing complex, initiating industrial production; DS-4, productivity diversification through feeder stations in distant metallogenic provinces; and DS-5, the founding of Selenopolis, a self-sustaining lunar civilization. Technoogical approaches, ecnonomic strategies, mining techniques, energy and transportation are discussed along with socioanthropological factors. A systematic approach to creating a positive earth-moon balance of trade is proposed.

#### A86-32413\* Arizona Univ., Tucson.

#### AN OVERVIEW OF OPTICAL TELESCOPE TECHNOLOGY

A. B. MEINEL (Arizona, University, Tucson) and M. P. MEINEL (California Institute of Technology, Jet Propulsion Laboratory, Pasadena) IN: Optical Fabrication and Testing Workshop: Large Telescope Optics, Albuquerque, NM, March 4-8, 1985, Proceedings Bellingham, WA, Society of Photo-Optical Instrumentation Engineers, 1985, p. 35-41.

Telescopes had tended to follow established designs until costs made it essential to look toward significant departures from conventional designs. Attempts to introduce some new concepts were without success until the Multiple Mirror Telescope broke the established pattern. Now several new possibilities are being engineered for the very large telescopes of the future.

#### A86-32536

#### **STRATEGIES** TO MINIMIZE DELTA OF **EXTRATERRESTRIAL RESOURCES**

C. P. MEINEL (Analytic Decisions, Inc., Arlington, VA) and K. PARKS (Arizona, University, Tucson) IN: EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 . New York, Institute of Electrical and Electronics Engineers, Inc., 1985, p. 111-127. refs

According to the projected U.S. space activities in the 1990s, large amounts of structural elements may be needed which might be readily produced in orbit if suitable raw materials were available. This paper is concerned with the possible sources of raw materials for space activities, and the delivery of these resources to users with minimum fuel cost. Attention is also given to missions to known near-earth asteroids with high mass payback ratios on fuel consumption, and the conditions suitable for a participation of private capital in a mining mission. The resources of moons and asteroids are considered along with the minimization of velocity difference (Delta V) costs among earth, lunar, and asteroidal resources. Other topics explored are related to an electromagnetic launch, the round trip problem, asteroid mission opportunities, the search for near-earth asteroids, the advantages of the high elliptical earth orbit, and means to minimize fuel use.

A86-32540\*# National Aeronautics and Space Administration.

#### Langley Research Center, Hampton, Va. ACCESS (ASSEMBLY CONCEPT FOR CONSTRUCTION OF ERECTABLE SPACE STRUCTURE) - A SHUTTLE FLIGHT **EXPERIMENT**

W. L. HEARD, JR. (NASA, Langley Research Center, Hampton, IN: EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30. 1985 . New York, Institute of Electrical and Electronics Engineers, Inc., 1985, p. 157-165. refs

ACCESS is a planned Shuttle flight experiment to assess the potential of an on-orbit construction concept designed for efficient manual assembly of a space truss. The experiment, which is scheduled for launch November 27, 1985, on the Space Transportation System (STS) flight 61-B, uses two astronauts secured in fixed foot restraints located in the Shuttle cargo bay to assemble a 45-foot long aluminum truss beam from 93 tubular struts and 33 nodal joints. Neutral buoyancy simulations of the flight experiment indicate the truss can be assembled in less than thirty minutes. Structural assembly, structural repair, flexible cable attachment and manual manipulation of the truss is also planned for the experiment using an astronaut secured in the Manipulator Foot Restraint attached to the Remote Manipulator System arm Flight assembly data will be generated for correlation of the neutral buoyancy ground test data. This paper describes the ACCESS flight experiment and presents results of the neutral buoyancy development and training tests.

**A86-32543\*#** National Aeronautics and Space Administration, Washington, D.C.

#### SPACE STATION ADVANCED DEVELOPMENT PROGRAM

R. F. CARLISLE (NASA, Office of Space Station, Washington, DC) IN: EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 . New York, Institute of Electrical and Electronics Engineers, Inc., 1985, p. 183-191.

The Space Station Advanced Development Program has the objective to transform promising new techniques into mature proven concepts to enable design options for the initial Space Station. It is pointed out that the options should improve system performance and reduce operational costs. Attention is given to the approach employed in the implementation of the program, the technology issues, aspects of Space Station evolution and growth, a Space Station technology overview, and subsystem technologies. The Advanced Development Power Program is considered along with the advanced development of auxiliary propulsion, the program dealing with attitude control and stabilization, and developments related to data management. Other developments are concerned with communication, system operation, manned systems technology, structures, and environmental control and life support.

#### A86-32547

#### **GEOSTATIONARY COMMUNICATIONS PLATFORMS**

J. V. BROWN and N. J. BARBERIS (Ford Aerospace and Communications Corp., Palo Alto, CA) IN: EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 . New York, Institute of Electrical and Electronics Engineers, Inc., 1985, p. 207-209.

In early 1984, NASA released two requests for proposal (RFPs) designed to answer several questions concerning geosynchronous (GEO) communications platforms. One RFP, released by NASA's Lewis Research Center, was designed to establish 'what aggregation of communications payloads, if any, would be appropriate for a commercial GEO communications platform in the mid- to late 1990s'. A second RFP, released by NASA's Marshall Space Flight Center, was designed to 'address the requirements for future spacecraft buses, space transportation systems and space operations capabilities necessary to enable GEO communications platforms'. The aggregated communications payloads developed in the NASA/Lewis study are briefly discussed, while primary attention is given to the results obtained to date in the NASA/Marshall platform bus studies.

**A86-32548\***# National Aeronautics and Space Administration. Marshall Space Flight Center, Huntsville, Ala.

#### MARS MISSIONS AND BASES - A RECENT LOOK

J. M. BUTLER, JR. (NASA, Marshall Space Flight Center, Huntsville, AL) IN: EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 . New York, Institute of Electrical and Electronics Engineers, Inc., 1985, p. 211-222. refs

This paper discusses some of the key options for Mars programs, missions, bases, elements, and systems. Program and mission options include Mars flyby, orbiting, and landing missions; they include near-term 'sortie' missions, and later, longer-duration Mars-base missions. Key program and mission parameters include the mix of manned/unmanned elements, the number and types of space vehicles used, types of science done, trajectory options

and implications launch timing and schedules, etc. The key mission parameters strongly affect the nature, sizing, and quantity of earth-to-orbit (ETO) vehicles. On-orbit assembly of space vehicles (SVs) is also an important related consideration. The potential degree of utilization of the Space Station (SS) and other then-existing elements is a key question, and several possibilities are discussed in this paper. Several configurations of SVs are provided. Several options are identified for the Mars base infra-structure, and parametric data is shown for buildup of bases as a function of mission and vehicle type. Technologies required for the missions are also discussed.

 $\bf A86\text{-}32566^*\#$  National Aeronautics and Space Administration, Washington, D.C.

#### THE NASA FLIGHT DEMONSTRATION PROGRAM

G. M. LEVIN (NASA, Washington, DC) and D. ROUTH (NASA, Marshall Space Flight Center, Huntsville, AL) IN: EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 . New York, Institute of Electrical and Electronics Engineers, Inc., 1985, p. 371-378.

The Flight Demonstration Program was initiated by the Office of Space Flight in October 1983. The purposes of this program are to conduct an ongoing series of flight demonstrations which demonstrate critical enabling technology to potential Shuttle users and at the same time provide hands on experience to NASA engineers. Flight demonstrations are selected through a peer review process in response to an annual solicitation issued by the Flight Demonstration Office at NASA Headquarters. As of July 1985 one major flight demonstration has been successfully conducted, two flight demonstrations are scheduled to fly in November on STS 61-B, and five flight demonstrations are in various stages of development and planned to be flown during the next three years.

**A86-34594\*** National Aeronautics and Space Administration, Washington, D.C.

## NASA SPACE PLANS AND SCENARIOS TO 2000 AND BEYOND

Park Ridge, NJ, Noyes Publications, 1986, 252 p.

NASA's research and development plans, as reflected in its missions, goals, and objectives to the year 2000 and beyond, are presented. New starts for the next decade and space program activities are highlighted, including space science and applications, space flight, space stations, space tracking and data systems, and space research and technology. Space programs for the 21st century are also covered.

**A86-34962\*** National Aeronautics and Space Administration. Lyndon B. Johnson Space Center, Houston, Tex.

## INITIATION OF THE NEXT STEP - THE ACQUISITION OF A SPACE STATION PROGRAM

T. G. MANCUSO (NASA, Johnson Space Center, Houston, TX) IN: Space and society - Progress and promise; Proceedings of the Twenty-second Space Congress, Cocoa Beach, FL, April 23-26, 1985 . Cape Canaveral, FL, Canaveral Council of Technical Societies, 1985, p. 3-1 to 3-4.

Attention is given to NASA's Space Station Program acquisition strategy, as well as the internal implementation of the strategy and the nature of NASA's relations with industry. While the acquisition strategy addresses phased procurement, design-to-cost, and advanced development emphasis, internal implementation concerns itself with 'skunk works' activities and the exploitation of the Technical and Management Information System. NASA's relationship to contractors will stress competition, extensive commercial and international involvement, and design/development phase competition flexibility.

#### A86-35173#

#### **EUROPEAN SPACE PLATFORM DEVELOPMENTS**

G. ALTMANN and W. NELLESSEN (ESA, Paris, France) DGLR, Jahrestagung, Bonn, West Germany, Sept. 30-Oct. 2, 1985. 28 p. (DGLR PAPER 85-123)

The present paper is concerned with European activities related to the development of automated space platforms for low earth orbits. In the context of this paper, the term 'space platform' is used to describe 'reusable carrier systems providing basic resources and standard interfaces to temporarily attached payloads which can be replaced on orbit or on the ground'. The status of European platform developments is considered, taking into account potential platform developments based on the Spacelab pallet, the platform concept of Robus, the Spas (Shuttle-Pallet-Satellite) platform concept, the Eureca (European Retrievable Carrier) platform concept, and concepts for future space-based platforms. European developments are evaluated, taking into account efforts to establish cost effective design and operational concepts which are commercially attractive.

**A86-35217** National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

WEIGHTS ASSESSMENT FOR ORBIT-ON-DEMAND VEHICLES
I. O. MACCONOCHIE, J. A. MARTIN (NASA, Langley Research
Center, Hampton, VA), C. A. BREINER, and J. A. CERRO (Kentron
International, Inc., Hampton, VA) Society of Allied Weight
Engineers, Annual Conference, 44th, Arlington, TX, May 20-22,
1985. 32 p. refs
(SAWE PAPER 1674)

Future manned, reusable earth-to-orbit vehicles may be required to reach orbit within hours or even minutes of a mission decision. A study has been conducted to consider vehicles with such a capability. In the initial phase of the study, 11 vehicles were sized for deployment of 5000 lbs to a polar orbit. From this matrix, two of the most promising concepts were resized for a modified mission and payload. A key feature of the study was the use of consistent mass estimating techniques for a broad range of concepts, allowing direct comparisons of sizes and weights.

#### A86-35319

#### **MORE SPACE IN SPACE**

I. PARKER Space (ISSN 0267-954X), vol. 2, Mar.-May 1986, p. 14, 15.

In response to demands made by the scientific community and the DOD, Spacehab has signed a memorandum of understanding with NASA for the development of modules which would increase SS living and working space by 1000 cubic feet by the year 1988. These modules, comprised of truncated aluminum alloy cylinders, will carry up to 2700 kg of payload. The basic version of the module will share environmental control/life support resources with the mid-deck and will have passive thermal control. With project costs estimated at 50 million U.S. dollars, Spacehab will provide full service to NASA including mission support and post-flight services.

#### A86-35518

#### AIR AND SPACE TRAVEL - TASKS FOR THE FUTURE [LUFT-UND RAUMFAHRT - AUFGABEN DER ZUKUNFT]

F. J. STRAUSS (DFVLR, Jahreshauptversammlung, Munich, West Germany, Nov. 11, 1985) DFVLR-Nachrichten (ISSN 0011-4901), March 1986, p. 3-5. In German.

The past and present states of the European space effort are reviewed, and recommendations for the future course of action are presented. The importance of a united, vigorous European space program in competition with the United States space program is emphasized. The benefits flowing from European participation in the Strategic Defense Initiative are discussed. The European Eureka project is criticized for costing too much money while producing few results.

C.D.

#### A86-36035#

THE GIOTTO SPACECRAFT'S PERFORMANCE DURING THE GEOSTATIONARY TRANSFER ORBIT AND NEAR-EARTH MISSION PHASES

J. L. TRACY, F. FELICI, D. LEVINS, and F. C. VANDENBUSSCHE (ESA, European Space Research and Technology Centre, Noordwijk, Netherlands) ESA Journal (ISSN 0379-2285), vol. 9, no. 3, 1985, p. 375-391.

Design features and the results of operational status checks of Giotto in the early flight stages are summarized. Successful spin-up to 15 rpm was performed once a 200 km orbit was attained. The spin was soon increased to 90 rpm before firing the Mage booster to put Giotto in a heliocentric orbit. Calibration of the thrusters was performed between the steps of the spin-up. Booster firing was accurate to within 3 m/sec of the intended velocity, thereby precluding any necessity for corrective firings. Thrusters were then fired to despin the outward bound spacecraft for earth pointing. Nutation was determined to be within the expected range, although numerous slew adjustments were required to achieve satisfactory earth pointing. The on-board power system, fueled by solar panels, ran flawlessly and never permitted depth-of-discharge data to be acquired for the batteries, which shared power well. The tests validated the performance of the mechanical and thermal subsystems, although a retraction of the bumper shield was required to offset a temperature rise that exceeded expectations during firing of the kick motor.

**A86-37853\***# National Aeronautics and Space Administration, Washington, D.C.

#### THE U.S. SPACE STATION PROGRAM

P. E. CULBERTSON (NASA, Office of Space Station, Washington, DC) IN: International Conference on Space, 25th, Rome, Italy, March 26-28, 1985, Proceedings . Rome, Rassegna Internazionale Elettronica Nucleare ed Aerospaziale, 1985, p. 11-22.

An overview is given of the U.S. Space Station program, beginning with President Reagan's directive to NASA 'to develop a permanently manned Space Station and to do it within a decade'. The international aspects of the project are emphasized, and fruitful cooperation between Italy and the U.S. in past and present space research is noted. The Station is to serve diverse functions, including that of a laboratory in space, a permanent observatory, a servicing facility, a transportation node, and assembly and manufacturing facility, a storage depot, and a staging base for future endeavors. Management-related and engineering-related guidelines are laid out. The plan is to make the Space Station a legacy from this century to the next, with the help of and to the benefit of all who share our goals.

## A86-37854# COLUMBUS - THE EUROPEAN PARTICIPATION II INTERNATIONAL SPACE STATIONS

E. VALLERANI (Aeritalia S.p.A., Gruppo Sistemi Spaziali, Turin, Italy) and H. E. W. HOFFMANN (ERNO Raumfahrttechnik GmbH, Bremen, West Germany) IN: International Conference on Space, 25th, Rome, Italy, March 26-28, 1985, Proceedings . Rome, Rassegna Internazionale Elettronica Nucleare ed Aerospaziale, 1985, p. 29-44.

A history of the Columbus project to date is presented, beginning with the demonstration by ESA and its member States that there is a capability to take on a project of this magnitude. Columbus is intended to complement the U.S. Space Station, being (in one concept) a free-flying facility in orbit near the Space Station. It will be manned and serviced as needed from time to time by personnel who actually reside on the Space Station. The Columbus system is to consist of four elements: the pressurized module; the resource module; the payload platform; and the servicing vehicle. Anticipated to be ready by 1992 (the 500th anniversary of Columbus' discovery of America), the system will have the potential of evolving to meet future needs.

#### A86-37856#

## THE COLUMBUS PREPARATORY PROGRAMME SUPPORTING TECHNOLOGY OF THE EUROPEAN SPACE AGENCY

H. STOEWER and R. BARBERA (ESA, Systems Engineering Dept., Noordwijk, Netherlands) IN: International Conference on Space, 25th, Rome, Italy, March 26-28, 1985, Proceedings . Rome, Rassegna Internazionale Elettronica Nucleare ed Aerospaziale, 1985, p. 79-96.

The status of preparation for the technical and program aspects of the European Space Agency's Columbus Preparatory Technology Research and Development activities is summarized. Technology R&D activities for the manned module, unmanned platforms including resources technologies and servicing vehicles are described. Priorities, funding allocations, and schedule aspects for industrial implementation are indicated. The Supporting Technology together with the Phase B System Definition studies permit ESA and European industry to work together toward the 1986/87 milestone for Columbus Phase C/D implementation. The process of going from the system definition phase to supporting-technology development should provide a valuable data base and give confidence in the technical, cost and schedule predictions already derived.

#### A86-37862#

## A PAYLOAD FOR UTILIZATION OF SPACE PLATFORM IN THE FIELD OF COMMUNICATION AND EARTH OBSERVATION

F. SCIARRINO (Contraves Italiana S.p.A., Rome, Italy) IN: International Conference on Space, 25th, Rome, Italy, March 26-28, 1985, Proceedings . Rome, Rassegna Internazionale Elettronica Nucleare ed Aerospaziale, 1985, p. 185-197.

Experiments in the field of communication and earth observation are described which can be carried out on board the Space Platform and the Shuttle Tethered Satellite. Three payloads are discussed. SLACOM will be a space platform adaptive communication module to perform a series of experiments to investigate new K-band, C-band, and L-band techniques for improving point-to-point communications via satellite. A microwave SAR (synthetic aperture radar) will be used for high resolution imaging of land surfaces and ocean waves, monitoring earth resources, disaster assessment, navigation aids, weather and sea-state forecasting, altimetry, and subsatellite tracking. COMLINK will be an experiment using a conducting tether 10-100 km long connecting a transmitter on a subsatellite to a Space Shuttle orbiting at a higher altitude; both communications and tethering technology can be tested.

#### A86-37863#

## INFLATABLE TECHNOLOGY IN ORBIT DEMONSTRATION WITHIN THE EUROPEAN SPACE AGENCY PROGRAMS

G. G. REIBALDI (ESA, Mechanical Systems Div., Noordwijk, Netherlands) IN: International Conference on Space, 25th, Rome, Italy, March 26-28, 1985, Proceedings . Rome, Rassegna Internazionale Elettronica Nucleare ed Aerospaziale, 1985, p. 199-205.

To support future space projects in general and the Space Station program in particular, the European Space Agency has proposed to the European countries an in-orbit technology demonstration experiment, designated 'Inflatable Space Rigidized Technology' or ISRT. ISRT has been developed within the ESA Technology Research Program, and the technology has been applied to design large size reflecting telescopes. A first in-orbit demonstration on the Space Shuttle of a 3.5-m scale model was planned for early 1986. A full-scale 14-m off-set reflector in-orbit demonstration is proposed for the middle of 1988.

**A86-37868\*#** National Aeronautics and Space Administration, Washington, D.C.

#### SPACE STATION UTILIZATION

W. P. RANEY (NASA, Office of Space Station, Washington, DC) IN: International Conference on Space, 25th, Rome, Italy, March 26-28, 1985, Proceedings . Rome, Rassegna Internazionale Elettronica Nucleare ed Aerospaziale, 1985, p. 251-256.

The essential requirement of the Space Station that the customer be continually involved in all aspects of the program is

considered. Potential users of the Space Station need both formal and informal channels into the program at an early stage of the definition process to secure their influence and participation in the development process. Only with this participation can users' needs and requirements be integrated into the design phase to produce 'user friendliness' in the Space Station. A Space Station that is easy and economical to use will generate more users that can take advantage of the available resources. The Space Station must be: a research facility; a satellite servicing and astronomical viewing; and a transportation node for orbit transfer vehicles. NASA intends to see that the Space Station is developed and operated so as to serve its users.

#### A86-37869#

## UNITED STATES SCIENTIFIC COMMUNITY VIEWS OF THE SPACE STATION

B. LICHTENBERG (Payload Systems, Inc., Wellesley, MA) IN: International Conference on Space, 25th, Rome, Italy, March 26-28, 1985, Proceedings . Rome, Rassegna Internazionale Elettronica Nucleare ed Aerospaziale, 1985, p. 257-264.

Results are presented from a summer (1983) study conducted by the Task Force on the Scientific Uses of the Space Station. The charter of the committee is: (1) to assist NASA in planning for the scientific utility of the space station; (2) to assist NASA in understanding the relationship between the existing and new parts of the space program; (3) to periodically update scientific requirements on Space Station hardware and operations; and (4) to act as a focal point for the U.S. science community and to interact as needed with contractors during the definition phase of the program. Science discipline teams included: astronomy and astrophysics; solar system exploration and planetary science; solar-terrestrial processes; earth observations; life sciences; microgravity sciences and applications; and physics and chemistry in space. Major concerns are flexibility, adequate resources, and easy access. Strong emphasis was put on a continuing Shuttle experiment program, including a request for additional power resources to enable the Shuttle to remain in orbit for up to 15 days.

#### A86-37872#

## MISSION REQUIREMENTS FOR COORBITING AND POLAR PLATFORMS - A CRITICAL SURVEY

G. MANNARA, L. G. NAPOLITANO, and R. MONTI (Napoli, Universita, Naples, Italy) IN: International Conference on Space, 25th, Rome, Italy, March 26-28, 1985, Proceedings . Rome, Rassegna Internazionale Elettronica Nucleare ed Aerospaziale, 1985, p. 325-337. In Italian. refs

Missions proposed for platforms in the Space Station program are analyzed. Mission requirements are characterized for polar platforms and those coorbiting with the Space Station. It is concluded that polar platforms should satisfy different requirements from coorbiting platforms; the former should emphasize servicing operations while the latter should emphasize flexibility.

B.J.

#### A86-38100

#### PIONEERING THE SPACE FRONTIER

New York, Bantam Books, 1986, 221 p. No individual items are abstracted in this volume.

The goals and plans of the program for exploration and development of the space frontier recommended by the National Commission on Space for the next 50 years are described. The topics discussed include civilian space goals for 21st-century America, low-cost access to the solar system, opening the space frontier, and American leadership on the space frontier. Papers are presented on advancing science; exploring, prospecting, and settling the solar system; space enterprise and building the technology base; and on an economical, phased approach. In addition, consideration is given to the aspects of conducting an effective science program, government policy and the private sector, international cooperation and competition, 21st-century America, and to what the recommended program will do.

#### A86-38168

### A COMPARATIVE ANALYSIS OF SPACE COLONIZATION ENTERPRISES

F. D. DRAKE (California, University, Santa Cruz) IN: The search for extraterrestrial life: Recent developments; Proceedings of the Symposium, Boston, MA, June 18-21, 1984. Dordrecht, D. Reidel Publishing Co., 1985, p. 443-447.

It is shown that the energy requirements for interstellar colonization exceed that for intraplanetary colonization by a factor of ten million or perhaps much more. This is offered as an argument against extensive interstellar colonization as a means of dealing with population expansion, and as a possible explanation of the Fermi paradox.

Author

#### A86-38273#

## THE GIOTTO ASSEMBLY, INTEGRATION AND VERIFICATION PROGRAMME

H. BACHMANN and J. CREDLAND (ESA, Giotto Project Div., Noordwijk, Netherlands) ESA Bulletin (ISSN 0376-4265), no. 45, Feb. 1986, p. 61-67.

The Assembly, Integration and Verification (AIV) program for ESA's Giotto satellite was designed to provide maximum possible confidence in the spacecraft system's ability to withstand the launch phase and to satisfy all of the mission objectives within the imposed program and cost constraints. Owing to Giotto's unique launch window in July 1985, and an encounter opportunity only every 76 years, the AIV program had to be constructed so as to endure such project problems as late delivery and malfunctioning units. In effect, alternative work flows and schedules had to be predefined so as to allow for increased flexibility and the incorporation of contingency plans. The overall AIV program is presented in detail, with emphasis placed on integration and electrical-system testing. and the environmental test program. In addition, a comparison is made between the original system plans and what was actually achieved. It is noted that all testing was successful and that the Giotto spacecraft was allowed to begin its mission as scheduled.

**A86-39502\*#** National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

## CONTROL OF FLEXIBLE STRUCTURES (COFS) FLIGHT EXPERIMENT PROGRAM

A. FONTANA and B. R. HANKS (NASA, Langley Research Center, Hampton, VA) IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985 . Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 413-422.

The Control of Flexible Structures (COFS) Flight Experiment Program consists of a series of four Shuttle-attached experiments specifically designed to systematically evaluate algorithms and techniques for on-orbit systems identification and flexible body control of large flexible structures, and as such, develops the enabling technologies for future NASA missions such as the evolutionary Space Station and large orbital antennas. These flight experiments are conducted on 1-year centers starting in 1989. This paper presents a description of the test article for the first two flights (COFS-I) and a discussion of the strategy for conducting the various experiments. A guest investigator program provides the opportunity for the research community to participate in the structures/controls research associated with the multi-flight COFS Program.

## A86-39905\*# Grumman Aerospace Corp., Bethpage, N.Y. THE SHARE FLIGHT EXPERIMENT - AN ADVANCED HEAT PIPE RADIATOR FOR SPACE STATION

J. P. ALARIO and P. J. OTTERSTEDT (Grumman Aerospace Corp., Space Systems Div., Bethpage, NY) AIAA and ASME, Joint Thermophysics and Heat Transfer Conference, 4th, Boston, MA, June 2-4, 1986. 10 p. NASA-sponsored research. refs (AIAA PAPER 86-1297)

This paper reports on the design and thermal vacuum certification testing of the Space Station Heat Pipe Advanced Radiator Element (SHARE) Shuttle flight experiment, with primary

emphasis on the heat pipe radiator system. The main objective of the SHARE experiment is to demonstrate suitable 0 g heat transfer performance of a 50 ft-long high-capacity monogroove heat pipe radiator element being developed for possible Space Station application. All of the flight certification tests were achieved, including a maximum heat rejection of 2 kW and thawing of a frozen heat pipe; and uninterrupted operation under cycling environmental and evaporator heat loads.

#### A86-40502

## GEOSTATIONARY PLATFORM - AN APPLICATION OF THE SPACE STATION

K. L. ROSE (Ford Aerospace and Communications Corp., Palo Alto, CA) IN: Space tech; Proceedings of the Conference and Exposition, Anaheim, CA, September 23-25, 1985. Dearborn, MI, Society of Manufacturing Engineers, 1985, p. 1-1 to 1-10.

Aggregate communication payloads developed in the NASA LeRC study are presented, and platform bus concepts currently evolving in the NASA MSFC study are described. The payloads encompass varying mixes of FSS. DBS, and maritime mobile services, WARC region 2, intraregion 2, and CONUS Intelsat traffic into the Atlantic and Pacific Ocean regions. The major features of four representative payload scenarios as developed by Ford Aerospace are described: (1) Scenario II, an FSS satellite with DBS capability, contains conventional C- and Ku-band transponders with two times frequency reuse at C-band and three times frequency at Ku-band; (2) Scenario IV is a high capacity, high power video distribution satellite; (3) Scenario V has CONUS coverage, and can be described as a high capacity CONUS, FSS satellite payload that is designed to address the distributional characteristics of CONUS traffic; and (4) Scenario VI-A, is the first of a complementary pair of satellites designed to handle all of the WARC region 2 Intelsat traffic, intraregion 2 as well as AOR and POR traffic. It is noted that Scenarios II, IV and V can be accommodated by a platform requiring a single STS launch while that accomodating Scenario VI-A requires multiple launches.

K.K.

#### A86-40515\* Alabama Univ., Huntsville.

#### AN ORBITAL MANEUVERING VEHICLE SIMULATOR

W. TEOH, J. WALLS (Alabama, University, Huntsville), T. BRYAN, F. ROE (NASA, Marshall Space Flight Center, Huntsville, AL), and N. SHIELDS (Essex Corp., Huntsville, AL) IN: Space tech; Proceedings of the Conference and Exposition, Anaheim, CA, September 23-25, 1985. Dearborn, MI, Society of Manufacturing Engineers, 1985, p. 6-14 to 6-23.

The Orbital Maneuvering Vehicle (OMV) is a teleoperated vehicle designed to dock with a target vehicle in space to peform certain tasks. This vehicle is not yet in production, but a simulator of the OMV is located at Marshall Space Flight Center (MSFC). The MSFC facility provides a realistic simulation of the OMV. Various docking maneuvers can be studied in some detail. A special robot has been constructed that provides a moving target for the simulator to dock with. This facility is valuable for conducting studies on the OMV; it also is excellent for personnel training. Author

#### A86-40592#

#### **EXPLORING AUTONOMY - THE T(2)C(2) SYSTEM**

T. TURNER (Gulton Industries, Inc., Data Systems Div., Albuquerque, NM) IN: Space Systems Technology Conference, San Diego, CA, June 9-12, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 111-117. refs

(AIAA PAPER 86-1184)

The functions of command and data handling systems are described. The command and telemetry system is applicable to satellites, rockets, satellite propulsion stages, experimental platforms, planetary exploration vehicles, and Space Stations. The benefits provided by an autonomous system and the implementation of autonomy in the areas of health and welfare maintenance are discussed. The architecture and capabilities of the Telemetry, Timing Command, and Control system, which is a spacecraft whose command and telemetry system is designed to

facilitate the design of an autonomous spacecraft, is examined. On-board processing is integrated into this system; three methods of integration are proposed. The use of fault tolerance, defined by fault detection, diagnosis, and correction, to satisfy the system's reliability requirements is studied.

**A86-40593\***# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

## RESULTS OF THE ACCESS SPACE CONSTRUCTION SHUTTLE FLIGHT EXPERIMENT

W. L. HEARD, JR., J. J. WATSON (NASA, Langley Research Center, Hampton, VA), J. L. ROSS, S. C. SPRING, and M. L. CLEAVE (NASA, Johnson Space Center, Houston, TX) IN: Space Systems Technology Conference, San Diego, CA, June 9-12, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 118-125. refs (AIAA PAPER 86-1186)

The ACCESS (Assembly Concept for Construction of Erectable Space Structure) experiment was launched on the Orbiter Atlantis on November 26, 1985. ACCESS was designed to study manual assembly of a 45-foot long truss structure by two astronauts working in space suits in the Orbiter cargo bay. This paper describes the experiment and hardware used, and compares on-orbit construction timelines to underwater neutral buoyancy data. In-flight photographs of assembly tasks and comments made by the crew at the postflight debriefing are also included. It was found that all tasks could be accomplished and that assembly times compared favorably with neutral buoyancy data.

Author

**A86-40609\***# National Aeronautics and Space Administration, Washington, D.C.

## SPACECRAFT TECHNOLOGY REQUIREMENTS FOR FUTURE NASA MISSIONS

W. R. HUDSON (NASA, Washington, DC) and E. V. PAWLIK (California Institute of Technology, Jet Propulsion Laboratory, Pasadena) AIAA, Space Systems Technology Conference, San Diego, CA, June 9-12, 1986. 9 p. refs (AIAA PAPER 86-1160)

Missions selected by NASA as representative of the most critical technology issues are described and the key technology requirements are discussed. The following are considered: (1) the Large Deployable Reflector (LDR), (2) the Sample Return Missions (SRM), (3) the Earth Observing System (EOS), and (4) the Geostationary Communications Platform (GCP). The LDR, designed for infrared and submillimeter astronomical measurements, will contain the following components for its instruments: indium antimonide charge-coupled arrays, extrinsic photodetector arrays, and heterodyne photoconductors. New technology developed for SRM includes an X-band transponder, a fiber-optic rotation sensor, and long-life batteries. The EOS will consist of instruments designed to measure the earth's atmosphere, interior, and surface, as well as an information system to support scientific research. Inherent in the platform of the GCP is the ability to effectively utilize both the geostationary arc and the electromagnetic spectrum; the GCP can also reduce overall satellite communications system costs.

K. K.

**A86-40616\***# National Aeronautics and Space Administration. Langlev Research Center, Hampton, Va.

FUTURE SPACE TRANSPORTATION OPTIONS - OVERVIEW

P. F. HOLLOWAY (NASA, Langley Research Center, Hampton, VA) and W. F. H. ZERSEN (USAF, Space Div., Los Angeles, CA) AIAA, Space Systems Technology Conference, San Diego, CA, June 9-12, 1986. 16 p. (AIAA PAPER 86-1210)

A comprehensive consideration of space transportation system design possibilities and capabilities has noted that the U.S. (NASA and Department of Defense) launch vehicle users may enter the post-1995 period with a high operating cost space transportation architecture, primarily consisting of a small Space Shuttle fleor and its Complementary Expendable Launch Vehicle for unmanned operations. On the other hand, many technologies critical to the future of space transportation could yield substantial benefits in

the post-1995 period. Current funding levels are expected to inhibit the timely development of many such technologies, however, and many current development programs have narrow and short term objectives that will not yield a cohesive data base for further development.

O.C.

**A86-40618\*#** National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

ASSESSMENT OF INTERNATIONAL PAYLOAD REQUIREMENTS ON THE DUAL KEEL SPACE STATION - A SYSTEMS ANALYSIS CAPABILITIES EXAMPLE

C. L. ALLEN and G. C. ANDERSEN (NASA, Langley Research Center, Hampton, VA) AIAA, Space Systems Technology Conference, San Diego, CA, June 9-12, 1986. 10 p. refs (AIAA PAPER 86-1226)

In the early stages of spacecraft conceptual design, an investigation of subsystem requirements and their impacts on the total system provides insight into many aspects of the spacecraft design. Such an analysis has been performed on the dual keel space station to examine the system effects contributed by three international payloads provided by the Canadian, Japanese, and European Space Agencies. This example is used to illustrate some capabilities of available computer-driven tools and methods for a system analysis. Two space station configurations were examined, one without international payloads (the baseline configuration for the study) and one with the three international payloads. Each configuration was evaluated to define viewing limitations, rigid body dynamics and controls, structural dynamics, orbit lifetime, environmental control and life support, and thermal management effects. The performance, based on each subsystem evaluation, was then compared for the two configurations, and the results and recommendations are presented.

## A86-41154\* Alabama Univ., Huntsville. COMMERICAL USE OF SPACE - STATUS AND PROSPECTS

C. A. LUNDQUIST (Alabama, University, Huntsville) and W. C. SNODDY (NASA, Marshall Space Flight Center, Huntsville, AL) IN: Winter National Design Engineering Show and Conference, Anaheim, CA, December 11-13, 1985, Conference Talks. Stamford, CT, Cahners Exposition Group, 1985, p. 225-239. refs

The development of commercial enterprises in space is discussed. The convenience and cost-effectiveness of satellites for communications are examined; satellite communications is an established industry and continues to grow. Meteorological satellites and remote sensing satellite systems (Landsat and SPOT) are being utilized to collect earth resources data. The development of materials processing facilities in space is studied. Current and proposed systems for transporting payloads to space and space lab facilities are investigated. The advantages a space station will provide to communications, earth resources, and materials processing are analyzed. The role of governments in the commercialization of space is described.

#### A86-41679

## NASA FINDS THE WAY TOWARD BUILDING A STATION FRAUGHT WITH LEGAL HURDLES

J. W. ANDERSON (Wilson, Elser, Moskowitz, Edelman, and Dicker, New York) Commercial Space (ISSN 8756-4831), vol. 2, Spring 1986, p. 57, 59-61.

Political and legal questions concerning the financing, design, and use of the Space Station by the Europeans, Japanese, Canadians, NASA, and the Defense Department are addressed. Disagreements include the Europeans' desire for a free-flying material processing module, and the Japanese wish for 70 percent of their on-board activities to be proprietary. The development of 'astrolaw' to determine a space criminal code, and the need for the presence of an astrolawyer to arbitrate conflicts among the various groups and individuals, are discussed. Though the Defense Department maintains that it has no use for the Space Station, its increasing role in U.S. space activities, as evidenced by the announcement of the X-31 spaceplane, and its space budget of twice that of NASA, suggest its possible involvement in the future.

Final agreement on the Station is not expected before the spring of 1987.

## **A86-41747\***# Massachusetts Inst. of Tech., Lexington. **SATELLITE DEBRIS - RECENT MEASUREMENTS**

L. G. TAFF (MIT, Lexington, MA) Journal of Spacecraft and Rockets (ISSN 0022-4650), vol. 23, May-June 1986, p. 342-346. NASA-sponsored research. refs (Contract F19628-85-C-0002)

More frequent reports concerning orbital debris damage to spacecraft have prompted the design, development and testing of equipment and techniques for the observation of moving objects by passive optical means. A consolidation is presently made of hundreds of hours of space debris observation, quantifying the numbers of small bodies in space relative to the actively watched artificial satellite population and estimating the numbers of detectable objects from near-earth orbit to geostationary orbit distances. The debris reported constitutes 11 times the tracked population in near-earth orbit and between 25 and 50 percent of the deep space population.

**A86-43228\*** Jet Propulsion Lab., California Inst. of Tech., Pasadena.

## POLAR PLATFORM PAYLOAD REQUIREMENTS IN THE 1990'S

D. VANE (California Institute of Technology, Jet Propulsion Laboratory, Pasadena) and M. DONOHOE (NASA, Goddard Space Flight Center, Greenbelt, MD) IN: Astrodynamics 1985; Proceedings of the Conference, Vail, CO, August 12-15, 1985. Part 1 . San Diego, CA, Univelt, Inc., 1986, p. 519-528. NASA-sponsored research. refs (AAS PAPER 85-396)

NASA's Earth Orbiting System (EOS) and NOAA's operational payloads represent two of the major users of the Space Station Polar Platform capabilities. The EOS program will be designed for Shuttle launch, servicing and on-orbit augmentation, while the NOAA's payload will be designed for the operational monitoring of the earth's atmosphere, oceans, and land masses. An overview is given of both the EOS and NOAA platform programs as well as the implied platform requirements. It is concluded that the generic platform design must be capable of operating at altitudes ranging from Shuttle altitudes to NOAA altitudes (approximately 850 km). In addition, it must be able to accommodate approximately 5000 kg of payload mass, provide 5000 W of continuous power and up to 13 kW of peak power for short durations, and store and transmit data at rates up to 300 Mbps.

**A86-43231\*** Jet Propulsion Lab., California Inst. of Tech., Pasadena.

# PLATFORM OPTIONS FOR THE SPACE STATION PROGRAM M. J. MANGANO and R. W. ROWLEY (California Institute of Technology, Jet Propulsion Laboratory, Pasadena) IN: Astrodynamics 1985; Proceedings of the Conference, Vail, CO, August 12-15, 1985. Part 1 . San Diego, CA, Univelt, Inc., 1986, p. 569-592. NASA-supported research. refs (AAS PAPER 85-399)

Platforms for polar and 28.5 deg orbits were studied to determine the platform requirements and characteristics necessary to support the science objectives. Large platforms supporting the Earth-Observing System (EOS) were initially studied. Co-orbiting platforms were derived from these designs. Because cost estimates indicated that the large platform approach was likely to be too expensive, require several launches, and generally be excessively complex, studies of small platforms were undertaken. Results of these studies show the small platform approach to be technically feasible at lower overall cost. All designs maximized hardware inheritance from the Space Station program to reduce costs. Science objectives as defined at the time of these studies are largely achievable.

#### A86-43259

### ORBIT MANOEUVRE AND DETERMINATION STRATEGY FOR THE EURECA MISSION

J. M. DOW and R. MUGELLESI (ESA, European Space Operations Centre, Darmstadt, West Germany) IN: Astrodynamics 1985; Proceedings of the Conference, Vail, CO, August 12-15, 1985. Part 2 . San Diego, CA, Univelt, Inc., 1986, p. 1077-1098. refs (AAS PAPER 85-408)

EURECA (EUropean REtrievable CArrier) is a reuseable platform which will be deployed and retrieved by the Shuttle. The paper describes manoeuvre and orbit determination strategies which have been developed to meet the requirements of the EURECA payload and those imposed by NASA retrieval policy. The initial altitude of the operational orbit is selected in such a way as to minimise the expected overall fuel usage for the mission. Optimisation of maneouvres based on a medium thrust level of 70 N has been studied. The accuracy feasible for orbit determination and prediction has been analysed for the most important phases of the mission and an error propagation made through the ascent and descent manoeuvres. A strategy is proposed for the manoeuvres which are to be performed during a period of one month prior to, and 2 to 3 days following the Shuttle launch.

**A86-43337\*** National Aeronautics and Space Administration, Washington, D.C.

## AMERICAN EXPERIENCES AND PERSPECTIVES - INTERNATIONAL COOPERATION ON A PERMANENTLY MANNED SPACE STATION

K. S. PEDERSEN (NASA, Washington, DC) IN: Space stations: Legal aspects of scientific and commercial use in a framework of transatlantic cooperation; Proceedings of the International Colloquium, Hamburg, West Germany, October 3, 4, 1984. Cologne, West Germany, Carl Heymanns Verlag, 1985, p. 27-32.

In the late 1960s, NASA contemplated the establishment of a permanently manned Space Station along with the development of the Space Shuttle. After a temporary postponement of the Space Station project, it was finally decided to develop a Space Station and to have it operating by the early 1990s. This station is to serve in a variety of functions which are important for further advances with respect to the utilization of space. The Space Station could even serve as a staging base for trips to the moon and visits to Mars. An international approach is to be taken regarding the development and utilization of the Space Station, giving attention to a cooperation of the U.S. with Canada, Europe, and Japan. The implementation of such a cooperation requires that a number of problems are solved. Basic approaches suitable for achieving such a solution are discussed, taking into account the development of operational schemes which provide for efficient management, while permitting the exercise of diverse 'ownership' rights.

#### A86-43650

## THE EXPLOITATION OF SPACE: POLICY TRENDS IN THE MILITARY AND COMMERCIAL USES OF OUTER SPACE

M. SCHWARZ, ED. and P. STARES, ED. London and Stoneham, MA, Butterworth, 1985, 182 p. No individual items are abstracted in this volume.

Current developments and planning for the military and commercial exploitation of near-earth and outer space are examined critically from a global perspective in contributions to a revised and updated version of the survey of Schwarz and Stares (1982). Chapters are devoted to the evolution of space flight from Sputnik to the present, the transition from passive support to active weapons systems in the military use of space, civilian space exploitation, space industrialization, telecommunications, space as a potential future battlefield, problems of and prospects for the U.S. Strategic Defense Initiative, space stations, the relatively low availability of space exploitation to third-world nations, and alternative space futures. Maps, drawings, diagrams, and tables of numerical data are provided.

#### A86-43705

#### OLYMPUS, THE SPACECRAFT OF THE FUTURE

D.N. GREGORY (British Aerospace, PLC, Stevenage, England) IN: SPACECOM '85; Space and Radiocommunications Symposium, 5th, Paris and Le Bourget, France, June 5-7, 1985, Speakers' Papers . Geneva, Switzerland, International Telecommunication Union, 1985, p. 53-59.

The Olympus communications satellite development program of the European Space Agency is reaching the manufacturing stage, with the object of launching the first flight model in the latter half of 1987. The paper describes the main features of the program, and the spacecraft itself. It continues with a review of the experimental program, and concludes with a discussion of the development potential of the Olympus platform.

#### A86-44402

#### SPACE STATION - THE NEW FRONTIER

E. VALLERANI (Aeritalia S.p.A., Turin, Italy) Space Policy (ISSN 0265-9646), vol. 2, May 1986, p. 95-98.

It is pointed out that the Space Station currently under design in the U.S. will constitute the breakthrough for a new frontier: the space environment. Developments regarding the Space Station since the U.S. decision concerning its establishment are examined, taking into account agreements between NASA and ESA to coordinate studies conducted on both sides of the Atlantic, the type of cooperation considered, a package proposed by ESA regarding Columbus, and a certain dilemma related to issues regarding 'cooperation versus autonomy'. Attention is given to the reasons which make a European participation in the development and operation of the Space Station necessary, the idea that Europe would provide an integrated pressurized module, studies performed by an Italian firm under ESA contracts, and the challenge represented by the concept of a U.S.-European cooperation in the case of the Space Station.

**A86-44405\*** National Aeronautics and Space Administration, Washington, D.C.

## THE CHANGING FACE OF INTERNATIONAL SPACE COOPERATION - ONE VIEW OF NASA

K. S. PEDERSEN (NASA; Georgetown University, Washington, DC) Space Policy (ISSN 0265-9646), vol. 2, May 1986, p. 120-137. refs

It is pointed out that from its earliest years NASA has incorporated international participation into many of its programs. Guidelines were developed with the objective to maximize the benefits of international cooperation. The cooperative guidelines were accepted because they reflected conditions which applied during much or all of the 1960-1980 period. There existed a clear technology and experience gap between the U.S. and even its largest cooperative partners. Thus, the U.S. enjoyed a virtual Free World monopoly on launching large satellites, especially those destined for geostationary or interplanetary orbits. However, on the basis of new developments, NASA faces now a modified international operating environment, in which the U.S. technological lead has been significantly reduced. The results of this situation are examined, taking into account the equalization of capabilities, the rise of commercial competition, Soviet competition, multinational patterns, and reduced cooperative opportunities.

**A86-44528\*** National Aeronautics and Space Administration, Washington, D.C.

#### JOINING FORCES IN SPACE - NASA'S VIEW

K. S. PEDERSEN (NASA, Washington, DC) IN: Space - Technology and opportunity; Proceedings of the Conference, Geneva, Switzerland, May 28-30, 1985. Pinner, England, Online Publications, 1985, p. 1-4.

The NASA history of international cooperation is briefly reviewed. The evolving nature of the international space environment is discussed. The proposed international Space Station is described as an example of the continuing cooperative spirit and of the need to adapt to changed circumstances as they arise.

Author

**A86-44529\*** National Aeronautics and Space Administration, Washington, D.C.

#### NASA'S SPACE STATION PLANNING - AN UPDATE

F. T. HOBAN (NASA, Office of Space Station, Washington, DC) IN: Space - Technology and opportunity; Proceedings of the Conference, Geneva, Switzerland, May 28-30, 1985 . Pinner, England, Online Publications, 1985, p. 5-15.

The Manned Space Station (MSS) program is summarized, along with the program guidelines, activities, plans, management approach, international involvement and the present and future private sector role in space. The MSS, the first continually-manned facility in space, will be configured to grow modularly to meet future needs. Comprising both manned and unattached unmanned elements, the program is to advance the state of robotics and automation. Numerous uses of the MSS have been defined in support of and as the primary platform for astronomical observations, experimentation on prototype space-based industrial processes, and as a staging area for the launch and refurbishment of spacecraft. Current studies are targeted at defining the final design of the initial operating configuration, the hardware to be developed by the nations and organizations which are sharing in the work, and developing interest among potential commercial users of the MSS capabilities.

#### A86-44530

#### STATUS OF ESA'S PLANNING FOR THE SPACE STATION

G. ALTMANN (ESA, Manned and Retrievable Systems Dept., Noordwijk, Netherlands) IN: Space - Technology and opportunity; Proceedings of the Conference, Geneva, Switzerland, May 28-30, 1985 . Pinner, England, Online Publications, 1985, p. 17-33.

The present status of preparation for the European Space Station Programme (COLUMBUS) is reviewed. A description of the COLUMBUS Programme concept placed in the context of ESA's long term space plane is presented and all facets of the COLUMBUS Preparatory Programme are outlined to provide an overview of ESA's planning for the Space Station Programme.

Author

#### A86-44531

## SPACE PLATFORM DESIGN OPTIONS - A COMPARISON, FOR COST-EFFECTIVENESS, OF EXPENDABLE, REUSABLE AND SERVICEABLE SPACECRAFT

J. A. VANDENKERCKHOVE (ESA, Paris, France) IN: Space - Technology and opportunity; Proceedings of the Conference, Geneva, Switzerland, May 28-30, 1985. Pinner, England, Online Publications, 1985, p. 45-68. refs

Various operational scenarios are considered, along with their required hardware infrastructures, the associated costs, and applications for unmanned orbiting platforms in the era of the Manned Space Station (MSS). The use of unmanned platforms as part of the MSS complex will compete with expendable satellites, retrievable/reusable satellites an serviceable satellites. The selection of which capability to use for any particular purpose will be the cost-effectiveness. A polar-orbiting platform is expected to carry 5 instruments and function for a 10 yr lifetime, after which only 30 percent of the payload will have to be replaced, probably by personnel orbited by either STS or Hermes launch or by an orbiting service vehicle. Comparisons are made among the expected serviceable lifetimes relative to the costs for launch and/or retrieval by the Ariane 5, Hermes, in-orbit assembly and MSK.

#### A86-45627

#### THE EUROPEAN SPACE STATION PROGRAMME

M. BIGNIER (ESA, Paris, France) (Columbus Workshop, 1st, Capri, Italy, June 17-21, 1985) Earth-Oriented Applications of Space Technology (ISSN 0277-4488), vol. 6, no. 1, 1986, p. 3-6.

After reaching agreements at the ministerial level, ESA in 1985 began negotiations with NASA to define the European role in the MSS Phase B design effort. Prime European goals were equal access and sharing of all facilities, equitable cost-sharing, satisfactory security measures, and compatibility with future ESA space transportation systems. Configurations considered by ESA

include the Columbus pressurized module, Space-Station co-orbiting and polar orbiting platforms, and a pressurized resources module. The tasks which ESA negotiators and technicians face in order to meet the MSS project schedule, to finalize the hardware plans and to ensure compatibility with other MSS systems are delineated.

M.S.K.

#### A86-45628

### THE COLUMBUS PROGRAMME CONCEPT AND ITS INITIAL IMPLEMENTATION STEPS

G. ALTMANN (ESA, Manned and Retrievable Systems Dept., Noordwijk, Netherlands) (Columbus Workshop, 1st, Capri, Italy, June 17-21, 1985) Earth-Oriented Applications of Space Technology (ISSN 0277-4488), vol. 6, no. 1, 1986, p. 7-12.

The present status of the preparations for the European Space Station Programme (Columbus) is reviewed. Starting off with a description of the Columbus Programme concept and baselines, the paper then presents the major features of the Columbus preparatory programme which will be carried out in two steps, Phase B1 between June 1985 until March 1986 and Phase B2 between April 1986 and spring 1987, in cooperation with NASA.

Author

## A86-45629 TECHNOLOGY CHALLENGES FOR THE COLUMBUS PROGRAMME

M. TRELLA (ESA, European Space Research and Technology Centre, Noordwijk, Netherlands) (Columbus Workshop, 1st, Capri, Italy, June 17-21, 1985) Earth-Oriented Applications of Space Technology (ISSN 0277-4488), vol. 6, no. 1, 1986, p. 17-20.

ESA participation in the NASA Manned Space Station (MSS) project is accelerating the development of indigenous European Technologies and facilities which were only partially required for the Spacelab effort. The MSS project requires hardware for extensive demonstration flights before implementation and detailed plans for future expansion. The technology programs comprise manned, platform and resources, and in-orbit operations elements. The manned element includes technologies for data management and information systems, structures and materials, environmental control and life support, electrical power management, and human factors. The platform and resources technologies cover thermal control, power generation, distribution and storage, attitude and orbit control, and data acquistion and communication. In-orbit operations comprise servicing, maneuvering and propulsion, and rendezvous and docking. Details of each of the program elements, along with their ESA funding breakdown, are provided.

#### A86-45630

#### US STATUS OF SPACE STATIONS PHASE B ACTIVITIES

J. AARON (JSP, Houston, TX) (Columbus Workshop, 1st, Capri, Italy, June 17-21, 1985) Earth-Oriented Applications of Space Technology (ISSN 0277-4488), vol. 6, no. 1, 1986, p. 21-23.

Phase B efforts for the Manned Space Station (MSS) project in mid-1985 are described, along with activities to follow in the succeeding 9 mos. Phase B is formal systems definition and is projected to require 21 mos of work comprising the identification of options, evaluations and selections, carried out by NASA centers and internationally. An Engineering Master Schedule has been defined on the basis of trends that emerged in analyses of proposed configurations, operations and missions. The Schedule is intended in part to force convergence of the various proposed configurations. The design options thus far adopted are a solar power tower and a minimum of 37.5 kW power for a crew of four, increasing to 105 kW for a crew of 12. Cost estimates are also to be determined in Phase B.

 ${\bf A86\text{-}45637^{\star}}$  National Aeronautics and Space Administration, Washington, D.C.

#### SPACE STATION UTILIZATION

W. RANEY (NASA, Office of Space Station, Washington, DC) (Columbus Workshop, 1st, Capri, Italy, June 17-21, 1985) Earth-Oriented Applications of Space Technology (ISSN 0277-4488), vol. 6, no. 1, 1986, p. 65-68.

Progress in the definition of Manned Space Station (MSS) capabilities and operations as of June 1985 is assessed in terms of the user requirements and engineering decisions. Input for making design and performance envelope decisions has come from various NASA offices, the NOAA, ESA and Japan. NASA, in coordinating the planning, is incorporating as much flexibility as possible to accommodate unforeseen requirements of the various participants. The decisions extend to the co-orbiting and polar orbiting platforms that are actually integral parts of the MSS concept. The rapid identification of uses of the MSS and man-tended platforms has defined sufficient uses to surpass the STS launch capabilities in the late 1990s and projected data recording capabilities. Other activity requests to-date have included 400 hr of EVA, 120 kW solar power input and six Orbital Maneuvering Vehicle missions the first year of operation. M.S.K.

**A86-45641\*** National Aeronautics and Space Administration, Washington, D.C.

#### POINT OF VIEW OF THE U.S. SCIENCE COMMUNITY

D. C. BLACK (NASA, Washington, DC) (Columbus Workshop, 1st, Capri, Italy, June 17-21, 1985) Earth-Oriented Applications of Space Technology (ISSN 0277-4488), vol. 6, no. 1, 1986, p. 91-93.

A special task force was formed by the National Academy of Sciences to examine the applications of Manned Space Station (MSS) platforms, communications and information systems, MSS operations and satellite assembly and repair capabilities on seven areas of space research. The task force reached several conclusions, including comprehensive space science planning by NASA with the MSS being one element of the plan. The STS is to provide a test bed for space research technologies and its basic design should be studied for conversion to an extended duration flight vehicle. The MSS could be categorized as a national facility, and payloads should be developed which specifically take advantage of its capabilities. The repair and maintenance capabilities which the MSS will furnish are concluded to be a significant asset to any future space science activities, and participation in those activities by the international science community is to be encouraged.

#### A86-45642

## VIEWING THE EARTH FROM SPACE - TOWARDS THE SPACE STATION POLAR PLATFORM

D. L. CROOM and D. T. LLEWELLYN-JONES (SERC, Rutherford Appleton Laboratory, Didcot, England) (Columbus Workshop, 1st, Capri, Italy, June 17-21, 1985) Earth-Oriented Applications of Space Technology (ISSN 0277-4488), vol. 6, no. 1, 1986, p. 97-100.

Current and proposed remote sensing techniques that may be used on the Manned Space Station (MSS) polar orbiting platforms to characterize various terrestrial phenomena are reviewed. The instruments operate in either passive or active modes, performing limb, nadir or side scanning operations to produce imagery with details ranging from 10-1000 m for high resolution to 10-100 km for low resolution. The sensor platforms are used for atmospheric. climate, ocean and ice and earthquake research, hydrology, to characterize biochemical cycles, for geophysics, etc. The polar orbits will provide access to scenes out of reach of the MSS orbit. The use of platforms will permit periodic visits, repairs, refurbishments and retrieval of the instruments. Over 12 platforms have been proposed for the initial operating configuration. The number will be significantly reduced to eliminate redundancy and to fit available launch schedules, which may permit on-station visits spaced no less than 2 yr apart. M.S.K.

#### A86-45647

## FRENCH VIEWS ON COLUMBUS - PREPARATION OF ITS UTILIZATION RELATIONS WITH OTHER PROGRAMS

A. PERARD (CNES, Direction des Programmes, Paris, France) (Columbus Workshop, 1st, Capri, Italy, June 17-21, 1985) Earth-Oriented Applications of Space Technology (ISSN 0277-4488), vol. 6, no. 1, 1986, p. 117-119.

#### A86-45709#

#### TECHNOLOGY BASE FOR THE FUTURE OF SPACE

R. A. DAVIS Aerospace America (ISSN 0740-722X), vol. 24, July 1986, p. 44-47.

A summary is given of the detailed report of the AIAA's Ad Hoc Technical Committee on Space Systems, presented in November 1985 to the National Commission on Space. Among the key technologies detailed in the AIAA report that were highlighted by the Commission are high-performance electric propulsion systems, processing of lunar and other nonterrestrial materials, autonomous fault-tolerant machinery, aerospaceplane propulsion, advanced rocketry, aerobraking, long-duration closed ecosystems, nuclear-electric power plants, space tethers, and high-performance materials. Themes for civil space agendas are cooperative international ventures, considered: commercialization, manned space stations leading protocolony, a Moon base, a Mars base during the third decade of the next century, and development and refinement of all the necessary support technologies.

### A86-45767# THE SPACE SETTLEMENT PAPERS

E. M. JONES (Los Alamos National Laboratory, NM), P. W. QUIGG, and J. I. GABRYNOWICZ British Interplanetary Society, Journal (Interstellar Studies) (ISSN 0007-084X), vol. 39, July 1986, p. 291-311.

The Space Settlement Papers are a written submission to the National Commission on Space appointed by President Reagan in April, 1985 to consider long range goals for the American Space program. The papers broadly consider the cultural, political, moral and economic bases for permanent space settlement rather than the more narrowly technical issues of transportation and life support technology. Attention is given to the frontier experience history of Americans, the global political context, analogous Antarctic conditions, the potential contribution of the social sciences to space settlement, and commercial regulation and environmental issues.

A86-46947\*# National Aeronautics and Space Administration. John F. Kennedy Space Center, Cocoa Beach, Fla.

## SPACE STATION - AN INTEGRATED APPROACH TO OPERATIONAL LOGISTICS SUPPORT

G. J. HOSMER (NASA, Kennedy Space Center; Boeing Co., Cocoa Beach, FL) AIAA, Space Station in the Twenty-first Century, Meeting, Reno, NV, Sept. 3-5, 1986. 13 p. (AIAA PAPER 86-2321)

Development of an efficient and cost effective operational logistics system for the Space Station will require logistics planning early in the program's design and development phase. This paper will focus on Integrated Logistics Support (ILS) Program techniques and their application to the Space Station program design, production and deployment phases to assure the development of an effective and cost efficient operational logistics system. The paper will provide the methodology and time-phased programmatic steps required to establish a Space Station ILS Program that will provide an operational logistics system based on planned Space Station program logistics support.

#### A86-46951#

### SPACE STATION OPERATIONS IN THE TWENTY-FIRST CENTURY

G. R. BENNETT (McDonnell Douglas Astronautics Co., Houston, TX) AIAA, Space Station in the Twenty-first Century, Meeting, Reno, NY, Sept. 3-5, 1986. 10 p. refs (AIAA PAPER 86-2328)

A model outlining the requirements for achieving manned space operations is presented. Several Space Stations, each serving specific functions are proposed for effective use of space. The components of the Stations are to be designed for modularity and flexibility. The advantages of a multi-Space-Station system are discussed. The transportation system necessary for accomplishing the proposed space operations is described. The implementations of robotics to assist in operations, due to a limit on crew size, and of a computer system to schedule the use of limited resources are examined. The effect of the National Aerospace Plane on Space Station operations is investigated. The participation of industry in Space Station operations is considered.

#### A86-46955#

## MAINTAINING AND SERVICING A SPACE-BASED ORBITAL TRANSFER VEHICLE (OTV) AT THE SPACE STATION

J. W. MALONEY and L. R. PENA (General Dynamics Corp., Space Systems Div., San Diego, CA) AIAA, Space Station in the Twenty-first Century, Meeting, Reno, NV, Sept. 3-5, 1986. 10 p. (AIAA PAPER 86-2332)

A candidate space-based OTV (SBOTV) is described as well as the advantages inherent to space basing, the requirements for accommodating an SBOTV, candidate hangar/support equipment, turnaround operations options, selection and definition of the most economical turnaround operations at the Space Station and maintenance of an OTV at the Space Station (SS). OTV launching, servicing/maintenance, payload integration and retrieval comprise the various space operations to be performed. Alternative methods for performing the turnaround operations (i.e. EVA with teleoperations or teleoperations only) are investigated and it is shown that the 'teleoperation only' option fulfills the need for reducing the amount of EVA manhours while simultaneously reducing the total manhours for SBOTV turnaround at the Space Station. It is concluded that modularity, accessibility, standardization of interfaces, lightweight construction, and a proper balance between EVA and teleoperations/robotics activities are key to the successful performance of an OTV at the SS in the 1990s. Man's ability to react to unexpected situations, interpret results and modify operations in real time must also be taken advantage of.

#### A86-46956#

## SPACE STATION SERVICES PROVIDED TO COMMUNICATIONS SATELLITES

T. J. SHESKIN (Cleveland State University, OH) AIAA, Space Station in the Twenty-first Century, Meeting, Reno, NV, Sept. 3-5, 1986. 4 p. refs (AIAA PAPER 86-2333)

The role of the Space Station in future satellite communications is discussed. Satellite communications in the 21st century are to be provided by modular geostationary platforms. The interference problems and use of fiber optics are considered. The assembly and testing of the platforms on the Space Station are described. The use of orbital transfer vehicles based on the Station to launch the platforms into geostationary earth orbit is examined. Remote servicing of the platforms is to be performed with teleoperational servicing units which will also be located on the Space Station.

I.F

#### A86-46961#

## AN ECONOMICS PERSPECTIVE OF THE 21ST CENTURY SPACE STATION

M. K. MACAULEY (Resources for the Future, Washington, DC) AIAA, Space Station in the Twenty-first Century, Meeting, Reno, NV, Sept. 3-5, 1986. 5 p. refs (AIAA PAPER 86-2348)

This paper offers an admonition for effective Space Station growth in the next century. Short of ability either to forecast or influence levels of economic activity, there nonetheless remains one aspect of near-term station use that can be implemented by station planners and that has direct consequences for the longer term. This aspect is the role of pricing policy for station access and use. Pricing can be crucial in determining where technical change and new developments in station design and operation will be needed. Furthermore, if past experience with technical change in the use of nonpriced resources is a guide to the future (as with the geostationary orbit and electromagnetic spectrum), the absence of prices can invite the presence of stringent, costly technical rules to accommodate scarcity, as well as emotive debate. Given the large amount of international collaboration envisioned for the Space Station, efficient pricing established early on in the program may perpetuate the most objective long-run allocation of scarce station resources.

#### A86-47445#

## DESIGN STUDY FOR A HIGH STABILITY LARGE CENTRIFUGE TEST BED

L. DEMORE, H. HAVLISCEK, N. ANDRIANOS, M. HARSHMAN, C. WOOLHEATER et al. IN: Guidance, Navigation and Control Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 403-419. refs (Contract F08635-84-R-0098)

(AIAA PAPER 86-2100)

A comprehensive design study of a large (120-inch radius) Centrifuge Test Bed was completed. During the study, several dynamic models were created to predict the G-stability of the system. A 6 degree-of-freedom Euler model was used to predict rigid body variations due to bearing motion, mass unbalance, and dynamic torque disturbances. The dynamic simulation of the control system produced total, instantaneous, rate variations due to sensor errors, command errors, and various torque disturbances. Structural displacements were determined by combining the results of a finite element model with an estimate of dynamic loading. Over the entire range of operating conditions, the predicted, instantaneous G-stability was calculated to be less than 5 ppm peak-to-peak. By using composite materials for the boom and magnetic suspension for the main axis, the calculated, instantaneous G-stability was less than 2 ppm peak-to-peak. Author

A86-47453\*# National Aeronautics and Space Administration. Goddard Space Flight Center, Greenbelt, Md.

## FLIGHT RESULTS FROM THE GRAVITY-GRADIENT-CONTROLLED RAE-1 SATELLITE

D. L. BLANCHARD (NASA, Goddard Space Flight Center, Greenbelt; Ford Aerospace and Communications Corp., College Park, MD) IN: Guidance, Navigation and Control Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 479-487. refs

(AIAA PAPER 86-2140)

The in-orbit dynamics of a large, flexible spacecraft has been modeled with a computer simulation, which was used for designing the control system, developing a deployment and gravity-gradient capture procedure, predicting the steady-state behavior, and designing a series of dynamics experiments for the Radio Astronomy Explorer (RAE) satellite. This flexible body dynamics simulator permits three-dimensional, large-angle rotation of the total spacecraft and includes effects of orbit eccentricity, thermal bending, solar pressure, gravitational accelerations, and the damper system. Flight results are consistent with the simulator predictions

and are presented for the deployment and capture phases, the steady-state mission, and the dynamics experiments. Author

## A86-47960\*# RCA Astro-Electronics Div., Princeton, N. J. SPACE STATION POLAR ORBITING PLATFORM - MISSION ANALYSIS AND PLANNING

P. A. MILLER (RCA, Astro-Electronics Div., Princeton, NJ) AIAA and AAS, Astrodynamics Conference, Williamsburg, VA, Aug. 18-20, 1986. 8 p. refs (Contract NAS5-29400)

(AIAA PAPER 86-2178)

The Space Station Polar Orbiting Platform will be a serviceable spacecraft supporting a range of missions. The planning and analysis of these missions is investigated. The subjects of STS compatibility, rendezvous strategy, and requisite launch windows are addressed. General, as well as, two specific cases are detailed with respect to their incremental velocity requirements. Author

#### A86-48373

## SPACE STATION EVOLUTION - THE UNCERTAINTY PRINCIPLE PREVAILS

C. BULLOCH Interavia (ISSN 0020-5168), July 1986, p. 779-782.

NASA planners have repeatedly reduced the scope of initial Space Station design concepts in order to realistically respond to financial stringencies. The number of U.S.-operated pressurized modules has been reduced to two, not counting the Space Station's logistics module. A decision has been made to rely on a solar dynamic electrical generation system based on a closed thermodynamic cycle that is powered by a solar concentrator-reflector. Attention is given to Canadian, European and Japanese plans for participation, and the ownership/legal status consequences that various collaborative arrangements can have.

#### A86-48451#

## PROJECTIONS OF SPACE SYSTEMS OPPORTUNITIES AND TECHNOLOGIES FOR THE 2000 TO 2030 TIME PERIOD

New York, American Institute of Aeronautics and Astronautics, 1985, 101 p. refs

The present work is a report compiled by an Ad Hoc Committee of AlAA and subsequently presented to AlAA for submittal to the National Commission on Space. Particular emphasis is placed on the establishment of a technology base which would be crucial to civil space endeavors in the 2000-2030 time period. It considers the impact of technologically relevant events of the last five years, discusses future space system missions and opportunities, highlights critical technology developments, and outlines the steps necessary to the enhancement of the technology base over the next few decades. Space system technologies for the following areas are discussed in detail: information processing; guidance navigation and control; autonomy and automation; sensors; communications; materials; propulsion, power and energy; atmospheric flight; thermal management; environment; human support manufacturing; test and evaluation; and economics. K.K.

A86-49554\*# Jet Propulsion Lab., California Inst. of Tech., Pasadena.

## LARGE SPACE REFLECTOR TECHNOLOGY ON THE SPACE STATION

J. C. MANKINS, R. M. DICKINSON, R. E. FREELAND, and N. I. MARZWELL (California Institute of Technology, Jet Propulsion Laboratory, Pasadena) AIAA, Space Station in the Twenty-first Century, Meeting, Reno, NV, Sept. 3-5, 1986. 9 p. NASA-supported research. refs

(AIAA PAPER 86-2302)

This paper discusses the role of the Space Station in the evolutionary development of large space reflector technology and the accommodation of mission systems which will apply large space reflectors during the late 1990s and the early part of the next century. Reflectors which range from 10 to 100 meters in size and which span the electromagnetic spectrum for applications that include earth communications, earth observations, astrophysics and

solar physics, and deep space communications are discussed. The role of the Space Station in large space reflector technology development and system performance demonstration is found to be critical; that role involves the accommodation of a wide variety of technology demonstrations and operational activities on the Station, including reflector deployment and/or assembly, mechanical performance verification and configuration refinement, systematic diagnostics of reflector surfaces, structural dynamics and controls research, overall system performance characterization and modification (including both radio frequency field pattern measurements and required end-to-end system demonstrations), and reflector-to-spacecraft integration and staging. A unique facility for Space Station-based, large space reflector research and development is proposed. A preliminary concept for such a Space Station-based Large Space Reflector Facility (LSRF) is described.

#### A86-49563# SPACE STATION - THE CANADIAN CONTRIBUTION

K. H. DOETSCH (National Research Council of Canada, Space Div., Ottawa) and T. H. USSHER (Spar Aerospace Ltd., Remote Manipulator Systems Div., Toronto, Canada) AIAA, Space Station in the Twenty-first Century, Meeting, Reno, NV, Sept. 3-5, 1986, Paper. 17 p.

The Canadian-supplied Mobile Servicing System (MSS), a contribution to the U.S. Space Station program, is described. The flight and ground hardware elements of this system are discussed, and the expected benefits from this international cooperative endeavor are briefly examined. The Mobile Servicing Centre (MSC) functions are listed along with the role of Canada as either user or supplier of various Space Station infrastructure functions. Canadian responsibilities in the servicing and hardware on the Space Station are given, and the MSS hierarchy is shown along with MSC system elements.

## A86-49565# THE ROLE OF COLUMBUS IN A FUTURE SPACE STATION SCENARIO

W. WIENSS (ERNO Raumfahrttechnik, GmbH, Bremen, West Germany) AIAA, Space Station in the Twenty-first Century, Meeting, Reno, NV, Sept. 3-5, 1986, Paper. 22 p.

The possible functions and necessary space infrastructure of the European Space Station and the Columbus Program are discussed with emphasis on the Man-Tended Freeflyer (MTFF). The envisioned MTFF configuration consists of a two-segment pressurized laboratory module couple to a resource module, and Ariane 5 has been baselined as the reference launch vehicle. Maintenance, servicing, and logistics supply for the MTFF will occur via Hermes and a special logistics module. An MTFF growth scheme leading towards a permanently manned freeflyer is discussed, and the scenario for the time period of 2000 and beyond also includes the availability of an orbital infrastructure to support the transportation systems, on-orbit assembly, and servicing activities, as well as the production of materials in space.

**A86-50266\*#** National Aeronautics and Space Administration. Ames Research Center, Moffett Field, Calif.

#### SIRTF AND THE SPACE STATION

M. W. WERNER and C. B. WILTSEE (NASA, Ames Research Center, Moffett Field, CA) AlAA, Space Station in the Twenty-first Century, Meeting, Reno, NV, Sept. 3-5, 1986. 10 p. refs (AlAA PAPER 86-2353)

An evaluation is made of the technical prospects and scientific goals of the Space IR Telescope Facility (SIRTF), whose telescope is of 1-m aperture and cryogenically cooled and will be able to improve on IRAS performance in such areas as wavelength coverage, spectral and spatial resolution, and sensitivity. Attention is given to the findings of an intensive review of the long-life SIRTF mission, with a view to new determinations on its orbit, scientific performance requirements, and baseline design concepts, as well as the ways in which it will employ elements of the NASA Space Station.

#### A86-50337#

#### CONCEPTS ON COLUMBUS FLIGHT OPERATIONS

M. GASS (DFVLR, Oberpfaffenhofen, West Germany) and H. KUMMER (ESA, European Space Operations Centre, Darmstadt, West Germany) IN: Towards Columbus and Space Station; Proceedings of the International Symposium, Bonn, West Germany, October 2-4, 1985 . Bonn, Deutsche Gesellschaft fuer Luft- und Raumfahrt, 1985, p. 129-144.

European participation in the U.S. manned Space Station (MSS) effort is part of a long range plan for an autonomous European space station. The Columbus is the first hardware element, and is to fly either connected-to or co-orbiting the MSS. Flight operations for the Columbus will have three phases: launch/assembly, verification, and mature operations. Wherever possible, Columbus flight operations are to be controlled from Europe, although as many real-time actions as possible are to be performed by the on-board crew, assisted by expert systems and a user-friendly environment. The assignment of on-board tasks will be heavily influenced by the country and company of origin of payloads. Docking operations will be handled by the flight crew. If the Eureca is involved, then the European crew will maneuver the free-flyer into position for pick-up by the Orbiter crew. Initially, the Europeans will access the TDRSS satellite system for communications until an ESA DRS system is in place.

#### A86-50338#

#### **COLUMBUS TECHNOLOGY - STATUS AND PLANS**

H. STOEWER (ESA, European Space Research and Technology Centre, Noordwijk, Netherlands) IN: Towards Columbus and Space Station; Proceedings of the International Symposium, Bonn, West Germany, October 2-4, 1985. Bonn, Deutsche Gesellschaft fuer Luft- und Raumfahrt, 1985, p. 169-206.

Current and needed technological developments are described for satisfying the requirements of the indefinite service life on-orbit design specifications of the Columbus segment of the Space Station. Phase B studies identified the flight suitability or at least the feasibility of various candidate technologies, which are to be further evaluated to arrive at a baseline design in Phase C/D studies. The criteria for the Phase C/D designs are low risk, compatibility with NASA/ESA interface standards, and fostering European development of subsystems, wherever possible. R&D efforts supporting the design studies are divided into three areas: elements, unmanned platforms and resources technologies, and in-orbit operations. Design options being explored for the data management and information systems, structures and materials, environmental control and life support, electrical power management, and crew systems and human factors technologies M.S.K. are summarized.

N86-24588# Space Command, Peterson AFB, Colo. Cost and Economic Analysis Div.

## PRIMER ON OPERATING AND SUPPORT (O AND S) COSTS FOR SPACE SYSTEMS

R. H. LAMONTAGNE Sep. 1985 16 p Presented at the 19th Annual Department of Defense Cost Analysis Symposium, Leesburg, Va., 17-20 Sep. 1985

(AD-A162381) Avail: NTIS HC A02/MF A01 CSCL 14A Currently, the most common space system is the satellite with its associated ground-based support facilities. However, other systems are currently being developed such as the Strategic Defense Initiative (SDI), Space Station, space based radar, anti-satellite weapon, and others. Our difficulty in the cost community is in developing O&S cost estimates for all these systems. As a result HQ Space Command/ACM is in the process of developing a primer on O&S costs for Space Systems. It is intended to provide some guidelines and fundamentals for estimating the O&S cost for space systems; to address the O&S costs associated with space systems; and to present methodologies and factors to estimate the O&S costs. An O&S cost element structure will be developed for space systems. The primer will result in providing cost visibility for space systems for developing budget and life cycle cost estimates and analyses.

## N86-24732\*# Rockwell International Corp., Huntsville, Ala. SPACE PLATFORM EXPENDABLES RESUPPLY CONCEPT DEFINITION STUDY Final Report, Jan. - Oct. 1985

Dec. 1985 116 p

(Contract NAS8-35618)

(NASA-CR-178819; NAS 1.26:178819; STS85-0174-ADD) Avail: NTIS HC A06/MF A01 CSCL 22B

NASA has recognized that the capability for remote resupply of space platform expendable fluids will help transition space utilization into a new era of operational efficiency and cost/effectiveness. The emerging Orbital Maneuvering System (OMV) in conjunction with an expendables resupply module will introduce the capability for fluid resupply enabling satellite lifetime extension at locations beyond the range of the Orbiter. This report summarizes a supplemental study to the original Phase A study and is presented as addenda to that study.

## N86-24733\*# Rockwell International Corp., Downey, Calif. SPACE PLATFORM EXPENDABLES RESUPPLY CONCEPT DEFINITION STUDY. VOLUME 1: EXECUTIVE SUMMARY Report, Mar. - Dec. 1984

Dec. 1984 36 p 4 Vol. (Contract NAS8-35618)

(NASA-CR-178820; NAS 1.26:178820; STS-85-0174-VOL-1)

Avail: NTIS HC A03/MF A01 CSCL 22B

NASA has recognized that the capability for remote resupply of space platform expendable fluids will help transition space utilization into a new era of operational efficiency and cost/effectiveness. The emerging Orbital Maneuvering System (OMV) in conjunction with an expendables resupply module will introduce the capability for fluid resupply enabling satellite lifetime extension at locations beyond the range of the Orbiter. This report summarizes a Phase A study of a remote resupply module for the OMV. Volume 1 is the executive summary.

## N86-24734\*# Rockwell International Corp., Downey, Calif. SPACE PLATFORM EXPENDABLES RESUPPLY CONCEPT DEFINITION STUDY, VOLUME 2 Technical Report, Mar. - Dec. 1984

Dec. 1984 295 p 4 Vol. (Contract NAS8-35618)

(NASA-CR-178821; NAS 1.26:178821; STS-85-0174-VOL-2)

Avail: NTIS HC A13/MF A01 CSCL 22B

NASA has recognized that the capability for remote resupply of space platform expendable fluids will help transition space utilization into a new era of operational efficiency and cost/effectiveness. The emerging Orbital Maneuvering System (OMV) in conjunction with an expendables resupply module will introduce the capability for fluid resupply enabling satellite lifetime extension at locations beyond the range of the Orbiter. This report summarizes a Phase A study of a remote resupply module for the OMV. Volume 2 represents study results.

# N86-24735\*# Rockwell International Corp., Downey, Calif. SPACE PLATFORM EXPENDABLES RESUPPLY CONCEPT DEFINITION STUDY. VOLUME 3: WORK BREAKDOWN STRUCTURE AND WORK BREAKDOWN STRUCTURE DICTIONARY Technical Report, Mar. 1984 - Dec. 1984

Dec. 1984 13 p 4 Vol. (Contract NAS8-35618)

(NASA-CR-178822; NAS 1.26:178822; STS-85-0174-VOL-3)

Avail: NTIS HC A02/MF A01 CSCL 22B

The work breakdown structure (WBS) for the Space Platform Expendables Resupply Concept Definition Study is described. The WBS consists of a list of WBS elements, a dictionary of element definitions, and an element logic diagram. The list and logic diagram identify the interrelationships of the elements. The dictionary defines the types of work that may be represented by or be classified under each specific element. The Space Platform Expendable Resupply WBS was selected mainly to support the program planning, scheduling, and costing performed in the programmatics task (task 3). The WBS is neither a statement-of-work nor a work authorization document. Rather, it is a framework around which to

define requirements, plan effort, assign responsibilities, allocate and control resources, and report progress, expenditures, technical performance, and schedule performance. The WBS element definitions are independent of make-or-buy decisions, organizational structure, and activity locations unless exceptions are specifically stated.

Author

N86-24875\*# Martin Marietta Aerospace, Denver, Colo.
SATELLITE VOICE BROADCAST. VOLUME 1: EXECUTIVE
SUMMARY Final Report, Apr. 1984 - Jun. 1985

E. E. BACHTELL, S. S. BETTADAPUR, J. V. COYNER, and C. E. FARRELL Nov. 1985 17 p refs (Contract NAS3-24233)

(NASA-CR-175016; NAS 1.26:175016) Avail: NTIS HC A02/MF A01 CSCL 17B

An Executive Summary of the Satellite Voice Broadcast System Study designs are synthesized for direct sound broadcast satellite systems for HF-, VHF-, and Ku-bands. Methods are developed and used to predict satellite weight, volume, and RF performance for the various concepts considered. Cost and schedule risk assessments are performed to predict time and cost required to implement selected concepts. Technology assessments and tradeoffs are made to identify critical enabling technologies that require development to bring technical risk to acceptable levels for full scale development.

## N86-24876\*# Martin Marietta Aerospace, Denver, Colo. SATELLITE VOICE BROADCAST. VOLUME 2: SYSTEM STUDY Final Report, Apr. 1984 - Jun. 1985

E. E. BACHTELL, S. S. BETTADAPUR, J. V. COYNER, and C. E. FARRELL Nov. 1985 261 p refs 2 Vol.

(Contract NAS3-24233)

(NASA-CR-175017; NAS 1.26:175017; MTR-85-556-VOL-2)

Avail: NTIS HC A12/MF A01 CSCL 17B

The Technical Volume of the Satellite Broadcast System Study is presented. Designs are synthesized for direct sound broadcast satellite systems for HF-, VHF-, L-, and Ku-bands. Methods are developed and used to predict satellite weight, volume, and RF performance for the various concepts considered. Cost and schedule risk assessments are performed to predict time and cost required to implement selected concepts. Technology assessments and tradeoffs are made to identify critical enabling technologies that require development to bring technical risk to acceptable levels for full scale development.

**N86-25398\***# National Aeronautics and Space Administration, Washington, D.C.

## AN OVERVIEW OF EUROPEAN SPACE TRANSPORTATION SYSTEMS

R. E. LO Nov. 1985 31 p refs Transl. into ENGLISH of conf. paper "Europaeische Raumfahrt-Transportsysteme" presented at the DGLR Annual Conference, 1985 p 1-24 Conference held in Bad Godesberg, West Germany, 30 Sep. - 2 Oct. 1985 Transl. by The Corporate Word, Inc., Pittsburgh, Pa. (Contract NASW-4006)

(NASA-TM-77683; NAS 1.15:77683; DGLR-85-100) Avail: NTIS HC A03/MF A01 CSCL 22A

With the completion of the launch rocket series Ariane 1 to 4, Europe will have reached the same capacity to transport commercial payloads as the USA has with the Space Shuttle and the kick stages which are presently operative. The near term development of these capacities would require Europe to develop a larger launch rocket, Araine 5. Further motivations for this rocket are access to manned spaceflight, the development of an European space station, and the demand for shuttle technology. Shuttle technology is the subject of research being done in France on the winged re-entry vehicle Hermes. Operation of the European space station Columbus will require development of an interorbital transport system to facilitate traffic between the various segments of the space station. All European space transportation systems will have to match their quality to that of the other countries involve in space flight. All areas of development are marked not

only by possible cooperation but also by increased competition because of increasing commercialization of space flight. Author

N86-25401\*# Alabama Univ., University. Environmental and Energy Center.

PERSONNEL OCCUPIED WOVEN ENVELOPE ROBOT Progress Report

F. C. WESSLING 1 Jun. 1986 45 p refs (Contract NAGW-847)

(NASA-CR-176832; NAS 1.26:176832) Avail: NTIS HC A03/MF A01 CSCL 22B

The use of nonmetallic or fabric structures for space application is considered. The following structures are suggested: (1) unpressurized space hangars; (2) extendable tunnels for soft docking; and (3) manned habitat for space stations, storage facilities, and work structures. The uses of the tunnel as a passageway: for personnel and equipment, eliminating extravehicular activity, for access to a control cabin on a space crane and between free flyers and the space station are outlined. The personnal occupied woven envelope robot (POWER) device is shown. The woven envelope (tunnel) acts as part of the boom of a crane. Potential applications of POWER are outlined. Several possible deflection mechanisms and design criteria are determined.

N86-25403# National Environmental Satellite Service, Washington, D. C.

PLAN FOR SPACE STATION POLAR-ORBITING PLATFORM Final Report

J. H. MČELROY, S. R. SCHNEIDER, D. B. MILLER, and J. W. SHERMAN, III Jun. 1985 105 p refs (AD-A164405) Avail: NTIS HC A06/MF A01 CSCL 22B

This ENVIROSAT-2000 Report concerns utilization of the polar platform component of NASA's Space Station program. Issues covered in the report include instrument payloads, altitudes, orbits, serviceability, communications, and data processing. A scenario is set forth for operational utilization of the platform, including issues surrounding integration of operational and research missions. The discussion is broken down by discipline: oceanography, meteorology, land sciences, atmospheric sciences, and solar-terrestrial investigations. A cost analysis shows that performing NOAA operations from the polar platforms would prove extremely beneficial by replacing the expendable two Polar-orbiting Operational Environmental Satellite (POES) system that NOAA now maintains.

## N86-27146\*# Indiana Univ. Northwest, Gary. COSMIC DUST COLLECTION WITH A SUB-SATELLITE TETHERED TO A SPACE STATION

G. J. CORSO *In* NASA. Lyndon B. Johnson Space Center Space Station Planetology Experiments (SSPEX) 2 p May 1986 Prepared in cooperation with Northwestern Univ., Evanston, Ill. Avail: NTIS HC A05/MF A01 CSCL 03A

The number concentration and density of 1 micron and submicron sized grains in interplanetary space, as well as their relation to the larger zodical dust particles, and the importance of the Beta meteoroid phenomenon are currently being questioned. The best approach to collecting large numbers of intact micron and submicron sized cosmic dust particles in real time while avoiding terrestrial and man made contamination would be to employ a tethered subsatellite from a space station down into the Earth's atmosphere. Such a subsatellite tied to the space shuttle by a 100 km long tether is being developed. It is also possible that a permanent space station would allow the use of a tether even longer that 100 km. It should be noted that the same tethered collectors could also be employed to study the composition and flux of man made Earth orbiting debris in any direction within 100 km or so of the space station. B.G.

N86-27162\*# Brown Univ., Providence, R. I. Dept. of Geological Sciences.

## IMPACTS OF FREE-FLOATING OBJECTS: UNIQUE SPACE STATION EXPERIMENTS

P. H. SCHULTZ and D. E. GAULT (Murphys Center of Planetology, Calif.) In NASA. Lyndon B. Johnson Space Center Space STation Planetology Experiments (SSPEX) 2 p May 1986
Avail: NTIS HC A05/MF A01 CSCL 03A

The transfer of momentum and kinetic energy between planetary bodies forms the basis for wide ranging problems in planetary science ranging from the collective long term effects of minor perturbations to the catastrophic singular effect of a major collision. Although the collisional transfer of momentum and energy was discussed over the last two decades, major issues remain that largely reflect current limitations in Earth based experimental conditions and 3-D numerical codes. Two examples with potential applications in a Space Station laboratory, are presented: asteroid spin rates and orientations, and planetary disruption/spin rates. Asteroid spin rate and orientation experiments are needed wherein free floating nonspining and spining objects of varying strength, porosity, and volatility are impacted at varying velocities and angles. A space station platform also could provide an opportunity to test important facets of planetary disruption/spin rate models by allowing freely suspended spherical targets of varying viscosities, internal density gradients, and spin rates. Author

## N86-27402\*# RCA Astro-Electronics Div., Princeton, N. J. COMMUNICATIONS PLATFORM PAYLOAD DEFINITION

H. W. CLOPP, T. A. HAWKES, C. R. BERTLES, B. A. PONTANO (Communications Satellite Corp., Clarksburg, Md.), and T. KAO Washington, D.C. NASA Jul. 1986 245 p (Contract NAS3-24236)

(NASA-CR-174986; NAS 1.26:174986) Avail: NTIS HC A11/MF A01 CSCL 22B

geostationary communications Large investigated in a number of studies since 1974 as a possible means to more effectively utilize the geostationary arc and electromagnetic spectrum and to reduce overall satellite communications system costs. The commercial feasibility of various communications platform payload concepts circa 1998 was addressed. Promising payload concepts were defined, recurring costs were estimated, and critical technologies needed to enable eventual commercialization were identified. Ten communications service aggregation scenarios describing potential groupings of service were developed for a range of conditions. Payload concepts were defined for four of these scenarios: (1) Land Mobile Satellite Service (LMSS) meets 100% of Contiguous United States (CONUS) plus Canada demand with a single platform; (2) Fixed Satellite Service (FSS) (trunking + Customer Premises Service (CPS)), meet 20% of CONUS demand;(3) FSS (trunking + CPS + video distribution), 10 to 13% of CONUS demand; and (4) FSS (20% of demand) + Inter Satellite Links (ISL) + Tracking and Data Relay Satellite System (TDRSS)/Tracking and Data Acquisition System Author (TDAS) Data Distribution.

## N86-27407\*# RCA Astro-Electronics Div., Princeton, N. J. COMMUNICATIONS PLATFORM PAYLOAD DEFINITION STUDY, EXECUTIVE SUMMARY

H. W. CLOPP, T. A. HAWKES, C. R. BERTLES, B. A. PONTANO (Communications Satellite Corp., Washington, D.C.), and T. KAO Jul. 1986 34 p

(Contract NAS3-24236)

(NASA-CR-174985; NÁS 1.26:174985) Avail: NTIS HC A03/MF A01 CSCL 22B

Large geostationary communications platforms have been investigated in a number of studies since 1974 as a possible means to more effectively utilize the geostationary orbital arc and electromagnetic spectrum and to reduce overall satellite communications system costs. This NASA Lewis sponsored study addresses the commercial feasibility of various communications platform payload concepts circa 1998. It defines promising payload concepts, estimates recurring costs and identifies critical

technologies needed to permit eventual commercialization. Ten communications service aggregation scenarios describing potential groupings of services were developed for a range of conditions. Payload concepts were defined for four of these scenarios: (1) Land Mobile Satellite Service (LMSS), meet 100% of CONUS plus Canada demand with a single platform; (2) Fixed Satellite Service (FSS) (Trunking + Customer Premises Service (CPS), meet 20% of CONUS demands; (3) FSS (Trunking + video distribution), 10 to 13% of CONUS demand; and (4) FSS (20% of demand) + Inter Satellite Links (ISL) + TDRSS/TDAS Data Distribution.

Author

N86-27409\*# National Aeronautics and Space Administration, Washington, D.C.

### THE SUITABILITY OF VARIOUS SPACECRAFT FOR FUTURE SPACE APPLICATIONS MISSIONS

C. W. MATHEWS, R. BERNSTEIN (International Business Machines Corp., Palo Alto, Calif.), and D. C. MACLELLAN (Massachusetts Inst. of Tech., Cambridge.) Jul. 1986 18 p

(NASA-TM-88986; NAS 1.15:88986) Avail: NTIS HC A02/MF A01 CSCL 22B

The Space Applications Advisory Committee (SAAC) of NASA's Advisory Council was asked by the Associate Administrator for Space Science and Applications to consider the most suitable future means for accomplishing space application missions. To comply with this request, SAAC formed a Task Force whose report is contained in this document. In their considerations, the Task Force looked into the suitability of likely future spacecraft options for supporting various types of application mission payloads. These options encompass a permanent manned space station, the Space Shuttle operating in a sortie mode, unmanned platforms that integrate a wide variety of instruments or other devices, and smaller free fliers that accommodate at most a few functions. The Task Force also recognized that the various elements could be combined to form a larger space infrastructure. This report summarizes the results obtained by the Task Force. It describes the approach utilized, the findings and their analysis, and the conclusions.

Author

N86-28420\*# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

**TECHNOLOGY AND TEST** 

P. SIEMERS In NASA, Washington Applications of Tethers in Space: Workshop Proceedings, Volume 1 p 279-283 Jun. 1986

Avail: NTIS HC A25/MF A01 CSCL 131

The chairman of the Technology Applications in Space Working Group summarizes the technology issues for each of the disciplines in Tethered Satellite Systems. The disciplines are Tether Materials and Configurations, Tether System Dynamic Simulation Capability, Tether System Instrumentation, TAS Program Related Science Instrumentation, Atmospheric/Aerothermodynamic tethered system research, and TAS Discipline Program Accomplishment. To enable these tether applications, design and development programs have been recommended and are presently underway relative to the demonstration of the hollow cathode concept which is an enabling electrodynamic tether mission technology.

## N86-28424\*# Naples Univ. (Italy). Inst. of Gasdynamics. HIGH RESOLUTION REMOTE SENSING MISSIONS OF A TETHERED SATELLITE

S. VETRELLA and A. MOCCIA *In* NASA, Washington Applications of Tethers in Space: Workshop Proceedings, Volume 1 p 349-363 Jun. 1986

Avail: NTIS HC A25/MF A01 CSCL 13I

The application of the Tethered Satellite (TS) as an operational remote sensing platform is studied. It represents a new platform capable of covering the altitudes between airplanes and free flying satellites, offering an adequate lifetime, high geometric and radiometric resolution and improved cartographic accuracy. The operational remote sensing missions are proposed: one using two linear array systems for along track stereoscopic observation and one using a synthetic aperture radar combined with an

interferometric technique. These missions are able to improve significantly the accuracy of future real time cartographic systems from space, also allowing, in the case of active microwave systems, the Earth's observation both in adverse weather and at any time, day or night. Furthermore, a simulation program is described in which, in order to examine carefully the potentiality of the TS as a new remote sensing platform, the orbital and attitude dynamics description of the TSS is integrated with the sensor viewing geometry, the Earth's ellipsoid, the atmospheric effects, the Sun illumination and the digital elevation model. A preliminary experiment has been proposed which consist of a metric camera to be deployed downwards during the second Shuttle demonstration flight.

 $\textbf{N86-28970}^{\star}\#$  National Aeronautics and Space Administration, Washington, D.C.

PLANETARY EXPLORATION THROUGH YEAR 2000: AN AUGMENTED PROGRAM. PART TWO OF A REPORT BY THE SOLAR SYSTEM EXPLORATION COMMITTEE OF THE NASA ADVISORY COUNCIL

1986 240 p Original contains color illustrations (NASA-TM-89235; NAS 1.15:89235) Avail: SOD HC \$12.00 as 033-000-00987-9; NTIS MF A01 CSCL 22A

In 1982, the NASA Solar System Exploration Committee (SSEC) published a report on a Core Program of planetary missions, representing the minimum-level program that could be carried out in a cost effective manner, and would yield a continuing return of basic scientific results. This is the second part of the SSEC report, describing missions of the highest scientific merit that lie outside the scope of the previously recommended Core Program because of their cost and technical challenge. These missions include the autonomous operation of a mobile scientific rover on the surface of Mars, the automated collection and return of samples from that planet, the return to Earth of samples from asteroids and comets, projects needed to lay the groundwork for the eventual utilization of near-Earth resources, outer planet missions, observation programs for extra-solar planets, and technological developments essential to make these missions possible. M.G.

**N86-30589\***# Northwestern Univ., Evanston, III. Astronomical Research Center.

## THE USE OF TETHERED SATELLITES FOR THE COLLECTION OF COSMIC DUST AND THE SAMPLING OF MAN MADE ORBITAL DEBRIS FAR FROM THE SPACE STATION

G. J. CORSO *In* Lunar and Planetary Inst. Trajectory Determinations and Collection of Micrometeoroids on the Space Station p 52-53 1986 refs Prepared in cooperation with Loyola Univ., Chicago, III.

Avail: NTIS HC A06/MF A01 CSCL 03B

The use of a tethered subsatellite employed downward into the earth's upper atmosphere to an altitude of about 110 km above the earth would eliminate the orbital contamination problem while at the same time affording a measure of atmospheric braking to reduce the velocities of many particles to where they may be captured intact or nearly so with properly designed collectors. The same technique could also be used to monitor the flux of all types of man-made orbital debris out to a distance of more than a hundred kilometers in any direction from the space station. In this way the build up of any debris belt orbiting earth could be determined. The actual collecting elements used for both purposes could be of several different materials and designs so as to optimize the collection of different types of particles with different densities. Stacks of foils, films, plastics, and foams, as well as simple capture cells would be mounted in clusters around the outside of a tethered satellite and protected by iris covers until the tethered had been fully deployed. If the orientation history of the satellite were known the direction of the incoming material could be infered. A chief advantage in deploying such tethered collectors from the Space Station instead of from the shuttle is the ability to maintain deployment of the tether for days instead of hours resulting in much greater yields of intact particles and impact debris. M.G.

**N86-30602\*#** National Aeronautics and Space Administration. Lyndon B. Johnson Space Center, Houston, Tex.

SPACE STATION

D. R. THOMPSON In Lunar and Planetary Inst. IN Trajectory Determination and Collection of Micrometeoroids on the Space Station p 83-84 1986

Avail: NTIS HC A06/MF A01 CSCL 03B

The Space Station is being defined as a multi-purpose facility with emphasis in the following areas: scientific and technology research laboratory; permanent observatory; spacecraft servicing facility; construction and assembly facility; manufacturing facility; transportation node; and staging base for future space endeavors. The Station complex, in its initial operating capability configuration, includes a continuously habitable manned element, a polar orbiting unmanned platform, and a second unmanned platform co-orbiting with the manned element. All elements are dependent on the Space Transportation System (STS) for initial placement on-orbit and for subsequent logistical services. The manned element will be designed for long duration operations with systems maintainable on-orbit and operationally autonomous from ground control. A major feature of the Station will be its adaptability to evolutionary technology upgrades; and the Space Station, as a system, is to be designed for maximum ease of use by its users.

N86-30604\*# Technische Univ., Munich (West Germany). Lehrstuhl fuer Raumfahrttechnik.

## COSMIC DUST DETECTION WITH LARGE SURFACE PIEZOCERAMICS

U. WEISHAUPT In Lunar and Planetary Inst. Trajectory Determinations and Collection of Micrometeoroids on the Space Station p 88-90 1986

Avail: NTIS HC A06/MF A01 CSCL 03B

Piezoelectric transducers mounted on targets made out of metal plates or plastic foils have been used in many former space missions to detect impacting dust particles and to determine some of their parameters (e.g., momentum). The proposed detector is based on a large disc made out of piezoceramic material. Dust particles impacting on the detector will cause electrical charge pulses due to the piezoelectric nature of the target material. These charge pulses are measured on the electrodes of the disc and transformed with a charge sensitive amplifier (CSA) to voltage pulses. Counting the number of pulses leads to the dust-flux impacting on the detector. Additionally the amplitude and the rise time of the pulse slopes are determinated to evaluate the momentum and the size of the dust particles. Due to the high charge production rate per force unit of piezoceramics and momentum transfer without loss the sensivity of this acoustic sensor is very high. A method to derive size and momentum from the rising slope of an acoustic signal is described.

N86-30933\*# Foldes, Inc., Wayne, Pa.

A DESIGN STUDY FOR THE USE OF A MULTIPLE APERTURE DEPLOYABLE ANTENNA FOR SOIL MOISTURE REMOTE SENSING SATELLITE APPLICATIONS Final Report

P. FOLDES Aug. 1986 208 p (Contract NAS1-17209)

(NASA-CR-178154; NAS 1.26:178154) Avail: NTIS HC A10/MF A01 CSCL 09A

The instrumentation problems associated with the measurement of soil moisture with a meaningful spatial and temperature resolution at a global scale are addressed. For this goal only medium term available affordable technology will be considered. The study while limited in scope, will utilize a large scale antenna structure, which is being developed presently as an experimental model. The interface constraints presented by a singel Space Transportation System (STS) flight will be assumed. Methodology consists of the following steps: review of science requirements; analyze effects of these requirements; present basic system engineering considerations and trade-offs related to orbit parameters, number of spacecraft and their lifetime, observation angles, beamwidth, crossover and swath, coverage percentage, beam quality and resolution, instrument quantities, and integration time; bracket the key system characteristics and develop an electromagnetic design

of the antenna-passive radiometer system. Several aperture division combinations and feed array concepts are investigated to achieve maximum feasible performacne within the stated STS constraints.

D C

N86-31637# Societe Nationale Industrielle Aerospatiale, Paris (France).

SPACEBUS: MULTIMISSION COMMUNICATION SATELLITES [SPACEBUS: SATELLITES DE TELECOMMUNICATION MULTIMISSIONS]

A. DAGUET 1986 5 p In FRENCH Presented at Journees Industrielles France-Canada, Ottawa, Ontario, 10-12 Sep. 1985 (SNIAS-861-422-119; ETN-86-97604) Avail: NTIS HC A02/MF A01

The Spacebus satellite system is described. The family includes three capacities (Spacebus 100 to 300). The characteristics are a modular design, three axis stabilization, unified two component propulsion and deployable solar generator. Output power is from 1400 W to 6000 W. The mass in synchronous orbit is from 650 kg to 1500 kg. Arabsat is an example of Spacebus 100 design.

ESA

N86-32106# National Aerospace Lab., Amsterdam (Netherlands). Flight Div.

CONTROL THEORETIC ANALYSIS OF HUMAN OPERATOR MEDIATED RENDEZVOUS AND DOCKING

P. MILGRAM and P. H. WEWERINKE 26 Feb. 1985 10 p Presented at 2nd IFAC/IFIP/IFORS/IEA Conf. on Analysis, Design and Evaluation of Man-Machine Systems, Varese, Italy, 10-12 Sep. 1985

(NLR-MP-85020-U; B8661085; ETN-86-97669) Avail: NTIS HC A02/MF A01

A model based analysis of manual control of space rendezvous and docking in the presence of transmission time delays (nominal case: human operator (HO) on the ground) is presented. The variables studied are time delay, human induced motor noise levels, rotational and translational control and the effect of display prediction. An envelope of performance is estimated, bounded by performance with optimal prediction and performance with no prediction at all. Nominal performance for a simple second order Taylor predictor display is estimated. An HO imperfect internal representation of the system is used to model the no-predictor and predictor display cases.

N86-32107# National Aerospace Lab., Amsterdam (Netherlands). Space Flight Div.

CONTROL LOOPS WITH HUMAN OPERATORS IN SPACE OPERATIONS. PART 1: HUMAN ENGINEERING ANALYSIS, SYNTHESIS AND EVALUATION TECHNIQUES Final Report

P. MILGRAM, R. C. VANDEGRAAFF, and P. H. WEWERINKE Paris ESA 17 May 1985 280 p

(Contract ESA-5594/83)

(NLR-TR-84116-L-PT-1; ESA-CR(P)-2190-PT-1; ETN-86-97787)

Avail: NTIS HC A13/MF A01

Human engineering approaches and methodologies applicable for analysis of performance of human-machine systems, particularly space teleoperator applications, are reviewed. Motivated by the presumed active role of the human operator in future space teleoperation missions, the application of human engineering within the various stages of system development is discussed, emphasizing the impact on the development cycle of being able to analyze various aspects of human-in-the-loop system performance. Experimental and theoretical approaches to human performance analysis are identified. Fundamental and practical aspects of each approach are outlined. A modeling approach for the analysis of a specific class of supervisory space teleoperator missions is proposed. Human-computer task allocation for such missions is considered.

N86-32108# National Aerospace Lab., Amsterdam (Netherlands). Space Flight Div.

CONTROL LOOPS WITH HUMAN OPERATORS IN SPACE OPERATIONS. PART 3: RENDEZVOUS AND DOCKING OPERATIONS AND MODEL ANALYSIS OF PERFORMANCE WITH HUMAN-IN-THE-LOOP Final Report

P. MILGRAM, P. T. L. M. VANWOERKOM, and P. H. WEWERINKE Paris ESA 7 Dec. 1984 192 p (Contract ESA-5594/83)

(NLR-TR-84116-L-PT-3; ESA-CR(P)-2190-PT-3; ETN-86-97789) Avail: NTIS HC A09/MF A01

Human-in-the-loop rendezvous and docking (RVD) performance was analyzed to demonstrate the practicality of applying engineering methods and techniques to the analysis of control loops with human operators in space operations. The RVD space segment and the related autonomous operations are described. Model analyses of RVD performance in the final approach phase, for the case in which the human operator is involved in manual control of RVD, and for the case in which the human operator is monitoring an automated RVD for the occurrence of failures are aiven.

N86-32109# National Aerospace Lab., Amsterdam (Netherlands). Space Flight Div.

CONTROL LOOPS WITH HUMAN OPERATORS IN SPACE OPERATIONS. PART 4: RESEARCH REQUIREMENTS FOR **HUMAN-IN-THE-LOOP SPACE TELEOPERATOR DEVELOPMENT** Final Report

P. MILGRAM Paris ESA 17 May 1985 62 p (Contract ESA-5594/83)

(NLR-TR-84116-L-PT-4; ESA-CR(P)-2190-PT-4; ETN-86-97790) Avail: NTIS HC A04/MF A01

Short-term human engineering research requirements for developing rendezvous and docking and space telemanipulation capabilities are presented. A catalog of research topics related to human-in-the-loop teleoperation performance is given. Available resources for model analytical investigation of these research topics and resources for the establishment of an initial human performance research laboratory for carrying out such investigations and for testing proposed design concepts by ESA are reviewed.

N86-32110# National Aerospace Lab., Amsterdam (Netherlands). Space Flight Div.

CONTROL LOOPS WITH HUMAN OPERATORS IN SPACE **OPERATIONS. PART 5: EXECUTIVE SUMMARY Final Report** P. MILGRAM Paris ESA 17 May 1985 157 p (Contract ESA-5594/83)

(NLR-TR-84116-L-PT-5; ESA-CR(P)-2190-PT-5; ETN-86-97791)

Avail: NTIS HC A08/MF A01

Human engineering analysis, synthesis, and evaluation techniques; robotics operations and manual control experiments; spacecraft rendezvous and docking operations and model analysis of performance with human-in-the-loop; and ESA research requirements for human-in-the-loop space teleoperator development are discussed. **ESA** 

N86-32504\*# Boeing Aerospace Co., Kennedy Space Center,

**ORBITAL TRANSFER VEHICLE LAUNCH OPERATIONS STUDY:** MANPOWER SUMMARY AND FACILITY REQUIREMENTS, **VOLUME 5 Final Report** 

7 Mar. 1986 36 p

(Contract NAS10-11165)

(NASA-CR-179705; NAS 1.26:179705) Avail: NTIS HC A03/MF A01 CSCL 22D

All manpower numbers, number of heads (by skill), serial time and manhours have been accumulated and compiled on a per subtask basis in spreadsheet format for both the ground based and the space based data flows. To aid in identifying the facility resources required to process the Ground Based Orbital Transfer Vehicle (GBOTV) and/or the space based orbital transfer vehicle (SBOTV) through the ground facilities at Kennedy Space Center

(KSC), a software application package was developed using a general purpose data base management system known as Data Flex. The facility requirements are used as the basic input to this software application. The resources of the KSC facility that could be used by orbital transfer vehicle program were digitized in the same format used to identify facility requirements. The facility capabilities were digitized in this format for subsequent, automated comparative analyses. Composite facility requirements are compared to each of the baseline facility capabilities and the system generates a relative score that indicates how each facility weighs against the composite requirements in relation to the other facilities in the set.

N86-32505\*# Boeing Aerospace Co., Kennedy Space Center,

ORBITAL TRANSFER VEHICLE LAUNCH OPERATIONS STUDY. PROCESSING FLOWS. VOLUME 3 Final Report

7 Mar. 1986 230 p (Contract NAS10-11165)

(NASA-CR-179766; NAS 1.26:179766) Avail: NTIS HC A11/MF

A01 CSCL 22D

The Orbit Transfer Vehicle (OTV) processing flow and Resource Identification Sheets (RISs) for the ground based orbit transfer vehicle and for the space based orbit transfer vehicle are the primary source of information for the rest of the Kennedy Space Center (KSC) OTV Launch Operations Study. Work is presented which identifies KSC facility requirements for the OTV Program, simplifies or automates either flow though the application technology, revises test practices and identifies crew sizes or skills used. These flows were used as the primary point of departure from current operations and practices. Analyses results were documented by revising the appropriate RIS page.

02

#### **ANALYSIS AND DESIGN TECHNIQUES**

Includes interactive techniques, computerized technology design and development programs, dynamic analysis techniques, environmental modeling, thermal modeling, and math modeling.

A86-32538\*# National Aeronautics and Space Administration. Lyndon B. Johnson Space Center, Houston, Tex. ARTIFICIAL INTELLIGENCE - NASA

J. D. ERICKSON (NASA, Johnson Space Center, Houston, TX) IN: EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985. New York, Institute of Electrical and Electronics Engineers, Inc., 1985, p. 145-150. refs

Artificial Intelligence (AI) represents a vital common space support element needed to enable the civil space program and commercial space program to perform their missions successfully. It is pointed out that advances in Al stimulated by the Space Station Program could benefit the U.S. in many ways. A fundamental challenge for the civil space program is to meet the needs of the customers and users of space with facilities enabling maximum productivity and having low start-up costs, and low annual operating costs. An effective way to meet this challenge may involve a man-machine system in which artificial intelligence, robotics, and advanced automation are integrated into high reliability organizations. Attention is given to the benefits, NASA strategy for AI, candidate space station systems, the Space Station as a stepping stone, and the commercialization of space.

#### A86-32553

## ENVIRONMENTAL CRITERIA GUIDELINES FOR SPACE VEHICLE AND SPACE DESIGN

R. E. TURNER and W. FROST (FWG Associates, Inc., Tullahoma, TN) IN: EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 . New York, Institute of Electrical and Electronics Engineers, Inc., 1985, p. 273-279.

The natural environment plays an important role in the design of space vehicles and systems to ensure the operational capabilities are met in an efficient and economical manner. It is necessary that the criteria be specified to agree with the operational requirements for the system under development. This paper discusses the philosophy used in the development of natural environment criteria and describes the two major criteria guidelines documents prepared to support the criteria development activities.

Author

#### A86-32910#

#### **DESIGN FOR SPACE DEBRIS PROTECTION**

N. ELFER and G. KOVACEVIC (Martin Marietta Corp., New Orleans, LA) IN: Man's permanent presence in space; Proceedings of the Third Annual Aerospace Technology Symposium, New Orleans, LA, November 7, 8, 1985. New Orleans, LA, American Institute of Aeronautics and Astronautics, 1985, 14 p. Research supported by the Martin Marietta Independent Research and Development Program. refs

This paper reviews the process of designing a spacecraft to survive the space debris and meteroid environemnt. The effective exposed area, the flux and the exposure time can be used to determine the probability of impact. Due to the highly directional nature of orbiting debris, the actual surface area can be broken up and each increment should be multiplied by a flux factor according to its orientation to convert it to an effective surface area. The probability of penetration is then calculated from the probability of impact including oblique impact effects and low velocity penetration. New results are presented for the analysis of space debris shadowing effects; for the incorporation of low velocity penetration; and also for the penetration resistant properties of some composite materials. Composites have been tested as bumpers, and will be tested as intermediate shields and rear walls.

#### A86-35216

### SPACE STATION DESIGN-TO-COST - A MASSIVE ENGINEERING CHALLENGE

M. C. SIMON (General Dynamics Corp., Space Systems Div., San Diego, CA) Society of Allied Weight Engineers, Annual Conference, 44th, Arlington, TX, May 20-22, 1985. 11 p. refs (SAWE PAPER 1673)

The Space Station, NASA's first major test of design-to-cost concepts, must include: (1) pressurized modules with habitat provisions for six crewpersons as well as space for laboratory and logistics functions; (2) a power system capable of generating 75 kilowatts of continuous power; and (3) unmanned platforms for conducting experiments that cannot be accommodated on the core facility. Beyond the implementation of these basic necessities, NASA and its contractors must adhere to a rigorous design-to-cost approach to SS design, development and production. Ultimately, size, shape and function of the SS will be determined by cost more than any single evaluation criterion.

#### A86-36866#

## FINITE ELEMENT ANALYSIS OF SUBREGIONS USING A SPECIFIED BOUNDARY STIFFNESS METHOD

C. C. JARA-ALMONTE and C. E. KNIGHT (Virginia Polytechnic Institute and State University, Blacksburg) IN: Computers in engineering 1985; Proceedings of the International Computers in Engineering Conference and Exhibition, Boston, MA, August 4-8, 1985. Volume 2. New York, American Society of Mechanical Engineers, 1985, p. 407-411. refs

A new approach is presented to the problem of modeling subregions, important in order to accomplish finite element analysis of large, complex structures. The approach requires the specification of the stiffnesses and forces at the nodes on the boundary of the subregion model. These stiffnesses and forces would be those acting upon the subregion from the rest of the structure and would come from an analysis of the entire structure. Accurate displacement and stress solutions are obtained with this method because it takes into account the boundary loading and the interaction between the stiffnesses of the subregion and the rest of the structure. The approach combines the improved accuracy of the exact zooming method and the reduction in computer time inherent in the specified boundary displacement and linear constraint methods. Examples applying the method to the problem of a plate with a center hole in tensile loading are presented.

#### A86-37184

#### MODELING OF A TETHERED TWO-BODY SYSTEM IN SPACE

D. K. LE (Lockheed Engineering and Management Services Co., Inc., Houston, TX) IN: Aerospace simulation II; Proceedings of the Second Conference, San Diego, CA, January 23-25, 1986. San Diego, CA, Society for Computer Simulation, 1986, p. 86-97.

A massive tether is treated as a chain of lumped point-mass beads connected by massless flexible strings. The Lagrangian approach yields a very convenient expression for the dynamics of this system relative to a moving frame which follows the 'central' direction of the tether. For all practical simulation purposes, it is enough to approximate this expression of the system's relative dynamics to the first order. A simple and numerically stable method is then presented for simulating the interaction between the tether dynamics and the orbital motions of the connected heavy bodies.

Author

#### A86-37861#

LARGE SPACE STRUCTURAL MODELS BY COMBINATION OF FINITE ELEMENTS AND TRANSFER MATRIX METHODS [MODELLI STRUTTURALI DI GRANDI STRUTTURE-SPAZIALI PER COMBINAZIONE DEI METODI AGLI ELEMENTI FINITI E DELLA MATRICE DI TRANSFERIMENTO]

L. LECCE, F. MARULO, and G. BUONO (Napoli, Universita, Naples, Italy) IN: International Conference on Space, 25th, Rome, Italy, March 26-28, 1985, Proceedings . Rome, Rassegna Internazionale Elettronica Nucleare ed Aerospaziale, 1985, p. 153-161. In Italian. refs

To implement a structural model able to study large space structures, a methodology is proposed based on a proper combination of the finite Element and Transfer Matrix Methods. Taking into account the repetitive aspect of such structures, it is possible to gain full advantage of the Transfer Matrix Method applied to periodic structures, without loss of the detail offered by the FEM. Some examples involving simple structures are presented, showing the characteristics and the reliability of the proposed method. Finally the implementation on already existing structural computer code (NASTRAN, SAP, etc.) is discussed and proposed to take full advantage of the method.

#### A86-38061

OPTIMIZING ACCURACY IN TRIANGULATION FOR GEOMETRICAL VERIFICATION OF LARGE SPACE STRUCTURES

A. M. C. HOLMES (Lockheed Missiles and Space Co., Inc., Palo Alto, CA) IN: International Instrumentation Symposium, 31st, San Diego, CA, May 6-9, 1985, Proceedings . Research Triangle Park, NC, Instrumentation Society of America, 1985, p. 261-270.

The triangulation process used for geometrical verification of large space structures such as deployable antenna reflectors is analyzed. The selection and placement of the proper reference length considering the theodolite are examined. A computer program, ERNA, for optimizing the theodolite placement in relation to the measurement span is described. Utilizing the triangulation process with reference lengths which are 80 percent of the desired measurement spans, accuracies of + or - 0.013 in. and + or - 0.024 in. are achieved for spans of 100 and 200 ft, respectively.

ÍΕ

## A86-38813\*# Massachusetts Inst. of Tech., Cambridge. EXPERIMENTAL VERIFICATION OF DISTRIBUTED PIEZOELECTRIC ACTUATORS FOR USE IN PRECISION SPACE STRUCTURES

E. F. CRAWLEY and J. DE LUIS (MIT, Cambridge, MA) IN: Structures, Structural Dynamics and Materials Conference, 27th, San Antonio, TX, May 19-21, 1986, Technical Papers. Part 1. New York, American Institute of Aeronautics and Astronautics, 1986, p. 116-124. refs (Contract NAGW-21)

(AIAA PAPER 86-0878)

An analytic model for structures with distributed piezoelectric actuators is experimentally verified for the cases of both surface-bonded and embedded actuators. A technique for the selection of such piezoelectric actuators' location has been developed, and is noted to indicate that segmented actuators are always more effective than continuous ones, since the output of each can be individually controlled. Manufacturing techniques for the bonding or embedding of segmented piezoelectric actuators are also developed which allow independent electrical contact to be made with each actuator. Static tests have been conducted to determine how the elastic properties of the composite are affected by the presence of an embedded actuator, for the case of glass/epoxy laminates.

#### A86-38845#

## OPTIMUM DESIGN OF LARGE STRUCTURES WITH MULTIPLE CONSTRAINTS

R. A. CANFIELD, V. B. VENKAYYA (USAF, Flight Dynamics Laboratory, Wright-Patterson AFB, OH), and R. V. GRANDHI (Wright State University, Dayton, OH) IN: Structures, Structural Dynamics and Materials Conference, 27th, San Antonio, TX, May 19-21, 1986, Technical Papers. Part 1. New York, American Institute of Aeronautics and Astronautics, 1986, p. 398-408. USAF-supported research. refs (AIAA PAPER 86-0952)

Relative numerical efficiencies of different commonly used optimization techniques for solving problems with multiple constraints have been compared with an aim of developing an efficient optimization method for the automated design of large aerospace structures. A hybrid algorithm using both optimality criteria and mathematical programming methods is suggested. As a result of the study, the CONMIN computer program, and possibly NEWSUIT-A, will be used in conjunction with an optimality criteria algorithm built from OPTSTAT to develop the multidisciplinary hybrid optimization algorithm.

A86-38847\*# Structural Dynamics Research Corp., San Diego, Calif

## SPACE STATION MULTIDISCIPLINARY ANALYSIS CAPABILITY - IDEAS2

M. BAKER, H. D. CHIGER, J. A. HABERMEYER, P. J. HIPOL, C. L. JOHNSON (Structural Dynamics Research Corp., San Diego, CA), and L. J. DERYDER (NASA, Langley Research Center, Hampton, VA) IN: Structures, Structural Dynamics and Materials Conference, 27th, San Antonio, TX, May 19-21, 1986, Technical Papers. Part 1. New York, American Institute of Aeronautics and Astronautics, 1986, p. 421-434.

(AIAA PAPER 86-0954)

A computer-aided engineering tool now in use at NASA for systems engineering and integration analysis of the Space Station is described. This tool, called IDEAS2, combines the spacecraft-specific analysis software from NASA IDEAS (truss synthesizer, rigid body controls, plume impingement, orbital lifetime, orbit heat loads, and life support systems) with the interactive graphics, geometric database, solids modeler, structural and thermal analysis capability of the SDRC I-DEAS to obtain an integrated package suitable for Space Station design. This integrated package was applied to a very recent study of growth scenarios of the Space Station dual keel configuration, in which a comparison was made between designs using a combination of photovoltaic solar arrays and solar dynamic collectors, and those using only solar dynamic collectors.

**A86-38953\*#** Virginia Polytechnic Inst. and State Univ., Blacksburg.

## AN IMPROVED MULTILEVEL OPTIMIZATION APPROACH FOR THE DESIGN OF COMPLEX ENGINEERING SYSTEMS

J.-F. M. BARTHELEMY (Virginia Polytechnic Institute and State University, Blacksburg) and M. F. RILEY (PRC Kentron, Inc., Hampton, VA) AIAA, ASME, ASCE, and AHS, Structures, Structural Dynamics, and Materials Conference, 27th, San Antonio, TX, May 19-21, 1986. 15 p. refs (Contract NAGI-145)

(AIAA PAPER 86-0950)

Multilevel optimization methods are being considered for the design of complex systems on distributed networks of computers or even parallel processors. An obstacle to the use of multilevel methods is that they can be computationally expensive because of the cycling necessary to account for the coupling between the subproblems. This research effort aims at increasing the efficiency of multilevel optimization by adapting two techniques that are widely in conventional one-level optimization: approximation and temporary constraint deletion. improvements are implemented and tested on three-, ten- and 52-bar planar truss designs. The results show that for larger problems (approximately 100 design variables and larger), the cost of analysis dominates the total cost so that multilevel optimization is no more expensive than one-level optimization. If parallel processing is used or the analysis process itself is decomposed, then multilevel optimization stands to become more economical than one-level optimization.

#### A86-39490#

## REDUCED ORDER MODELS FOR DISTRIBUTED SYSTEMS BASED ON HANKEL-NORM APPROXIMATIONS

R. F. CURTAIN (Groningen, Rijksuniversiteit, Netherlands), K. GLOVER, and J. LAM (Cambridge University, England) IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985. Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 231-244. refs

Recently the authors have developed a mathematical theory for finite-dimensional approximations for a class of infinite-dimensional systems based on its Hankel operator. The feasibility of this approach is investigated by considering two examples which model some of the essential features of large flexible structures.

Author

#### A86-39888#

DEVELOPMENT OF A GENERALIZED RADIATOR WEIGHT OPTIMIZATION DESIGN CODE FOR HIGH POWER SPACECRAFT APPLICATIONS

S. J. MERTESDORF (TRW, Inc., TRW Space and Technology Group, Redondo Beach, CA) AIAA and ASME, Joint Thermophysics and Heat Transfer Conference, 4th, Boston, MA, June 2-4, 1986. 9 p. refs (AIAA PAPER 86-1268)

A heat pipe radiator weight optimization computer code is under development for high power spacecraft applications. The code can be used for preliminary design or for the assessment of radiator components. It is assumed that heat is supplied to the radiator by a constant temperature two-phase thermal bus. Included in the radiator weight are the heat pipe, radiating fin, and the thermal bus/radiator heat exchanger. The code minimizes the radiator weight with respect to both the heat pipe spacing and heat exchanger temperature drop. The fin efficiency may be chosen by the user or the code can optimize with respect to this parameter. Preliminary results indicate large weight penalties when utilizing high capacity heat pipes or contact heat exchangers. Additionally, a significant radiator weight reduction could be achieved by increasing the ratio of the fin thermal conductivity to density. Additional work is required to assess the weight penalty associated with the structural and micrometeoroid survivability requirements.

Author

#### A86-39924#

## CONCEPTUAL DESIGN OF AN 1 M LONG 'ROLL OUT FIN' TYPE EXPANDABLE SPACE RADIATOR

R. PONNAPPAN (Universal Energy Systems, Inc., Dayton, OH), J. E. BEAM, and E. T. MAHEFKEY (USAF, Aero Propulsion Laboratory, Wright-Patterson AFB, OH) AIAA and ASME, Joint Thermophysics and Heat Transfer Conference, 4th, Boston, MA, June 2-4, 1986. 9 p. USAF-sponsored research. refs (AIAA PAPER 86-1323)

Waste heat rejection in space at temperatures 300-423 K is posing technological problems for spacecraft of 100 KW capacity or more. The development of a light weight expandable type radiator is the prime objective of this work. A vapor pressure activated, expandable, near-room temperature, roll out type radiator fin working on phase change of fluid (evaporation and condensation) has been developed. The demonstration testing of a 1 m long 10 cm wide fin segment of the radiator is explained. A mass to radiating power ratio of the order of 1 Kg/KW is possible and large radiator panels can be constructed using modular concept.

#### A86-40521

#### **EVA SUIT GLOVE DESIGN**

B. PEACOCK, R. SHAMBAUGH, F. STRITZ (Oklahoma, University, Norman), and J. HORDINSKY (FAA, Oklahoma City, OK) IN: Space tech; Proceedings of the Conference and Exposition, Anaheim, CA, September 23-25, 1985. Dearborn, MI, Society of Manufacturing Engineers, 1985, p. 8-14 to 8-25. refs

Traditional testing of gloves has been a subjective study by experienced designers and astronauts. An objective series of standardized tests were developed to test dexterity, strength, and tactility in a single-handed vacuum chamber. A finite element analysis simulates the effects of restraints and pleats at various glove pressures. For the finger, the incorporation of a lateral restraint and pleats on both the front and back of the joint led to near zero resistance to bending. A total glove model also was developed. A process was developed which used a computer to control the movement of an air jet to lay down continuous fiber on a fine mesh which overlaid a suction mechanism. With this technique, gloves can be quickly and economically produced with infinite selectibility of size, construction, and materials.

**A86-40613\*#** National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

## INTEGRATED ANALYSIS TOOLS FOR TRADE STUDIES OF SPACECRAFT CONTROLLER AND SENSOR LOCATIONS

L. F. ROWELL (NASA, Langley Research Center, Hampton, VA) AIAA, Space Systems Technology Conference, San Diego, CA, June 9-12, 1986. 14 p. refs (AIAA PAPER 86-1192)

The present investigation was conducted with the aim to evaluate the practicality and difficulties of modern control design methods for large space structure controls. The evaluation is used as a basis for the identification of useful computer-based analysis tools which would provide insight into control characteristics of a spacecraft concept. A description is presented of the wrap-rib antenna and its packaging concept. Attention is given to active control requirements, a mathematical model of structural dynamics, aspects of sensor and actuator location, the analysis approach, controllability, observability, the concept of balanced realization, transmission zeros, singular value plots, analysis results, model reduction, and an interactive computer program. It is pointed out that the application of selected control analysis tools to the wrap-rib antenna demonstrates several capabilities which can be useful during conceptual design.

G.R.

## A86-43216 ELECTRONIC COMPENSATION FOR STRUCTURAL DEFORMATIONS OF LARGE SPACE ANTENNAS

R. X. MEYER (Aerospace Corp., Los Angeles, CA) IN: Astrodynamics 1985; Proceedings of the Conference, Vail, CO, August 12-15, 1985. Part 1 . San Diego, CA, Univelt, Inc., 1986, p. 277-285.

(AAS PAPER 85-395)

A conceptual design for large, spaceborne, phased-array antennas is considered. The principal feature of the control system is a purely electronic compensation for structural deformations of the antenna. A planar array, corporate fed, with a perpendicular mast is considered. Each phased-array element receives calibration RF signals from two sources located on the mast. The analysis shows the perhaps surprising result that even though the mast is also allowed to arbitrarily deflect, all structural deflections can be correctly compensated for to first order by relating the array phase shifter inputs to phase differences in the calibration signals. The algorithm for the control loop is described.

**A86-43223\*** Jet Propulsion Lab., California Inst. of Tech., Pasadena.

#### MODELING, ESTIMATION AND IDENTIFICATION METHODS FOR STATIC SHAPE DETERMINATION OF FLEXIBLE STRUCTURES

G. RODRIGUEZ and R. E. SCHEID, JR. (California Institute of Technology, Jet Propulsion Laboratory, Pasadena) IN: Astrodynamics 1985; Proceedings of the Conference, Vail, CO, August 12-15, 1985. Part 1 . San Diego, CA, Univelt, Inc., 1986, p. 409-429. refs

(AAS PAPER 85-424)

This paper outlines methods for modeling, identification and estimation for static determination of flexible structures. The shape estimation schemes are based on structural models specified by (possibly interconnected) elliptic partial differential equations. The identification techniques provide approximate knowledge of parameters in elliptic systems. The techniques are based on the method of maximum-likelihood that finds parameter values such that the likelihood functional associated with the system model is maximized. The estimation methods are obtained by means of a function-space approach that seeks to obtain the conditional mean of the state given the data and a white noise characterization of model errors. The solutions are obtained in a batch-processing mode in which all the data is processed simultaneously. After methods for computing the optimal estimates are developed, an analysis of the second-order statistics of the estimates and of the related estimation error is conducted. In addition to outlining the above theoretical results, the paper presents typical flexible

structure simulations illustrating performance of the shape determination methods.

#### A86-43756

#### NONLINEAR DEFORMATION ANALYSIS OF THE OLYMPUS ASTROMAST [NICHTLINEARE VERFORMUNGSANALYSE DES OLYMPUS ASTROMAST]

O. BRUNNER (IKO Software Service GmbH, Stuttgart, West Germany), M. EIDEN, and C. STAVRINIDIS (ESA, European Space Research and Technology Centre, Noordwijk, Netherlands) IN: International FEM-Congress, 14th, Baden-Baden, West Germany, November 18, 19, 1985, Proceedings . Stuttgart, West Germany, IKOSS GmbH, 1985, p. 145, 147-159. In German.

LARSTRAN 80, a nonlinear quasi-static updated-Lagrange finite-element program developed at the Universitaet Stuttgart (1984) to treat problems with large extensions and deflections, is applied to the extension process of the Astromast for the Olympus satellite. The Astromast is a coilable continuous-longeron GFRP structure intended to support the Olympus solar arrays, and its components are subject to large deformations, material nonlinearities, and contact forces during extension. The construction of a 10-bay FEM mast model, the nonlinear computation strategy, and the techniques used to obtain experimental measurements on a 3-m demonstration model of the mast are described, and the results are presented in tables, graphs, and drawings. The FEM technique is found to give accurate predictions of the forces, deformations, and dynamic processes encountered in the deployment sequence.

#### A86-46465#

## INTEGRATED DESIGN OF SPACE STRUCTURES USING LATTICE PLATE FINITE ELEMENTS

S. E. LAMBERSON (U.S. Air Force Academy, Colorado Springs, CO) and T. Y. YANG (Purdue University, West Lafayette, IN) (Structures, Structural Dynamics, and Materials Conference, 26th, Orlando, FL, April 15-17, 1985, Technical Papers. Part 2, p. 743-750) Journal of Guidance, Control, and Dynamics (ISSN 0731-5090), vol. 9, July-Aug. 1986, p. 478-484. Previously cited in issue 13, p. 1856, Accession no. A85-30404. refs (Contract AF-AFOSR-83-0204)

#### A86-47048#

## AI APPLICATIONS FOR THE SPACE STATION PROGRAM - TECHNOLOGY, DESIGN AND INTEGRATION CHALLENGES

T. M. COOK (Martin Marietta Aerospace, Denver, CO) AIAA, Space Station in the Twenty-first Century, Meeting, Reno, NV, Sept. 3-5, 1986. 4 p. refs (AIAA PAPER 86-2315)

Initial and growth configurations of the Space Station strongly suggest that advanced command, control and information management techniques and technologies will be required for both ground and on-board functions. Such advanced technologies are expected to significantly increase crew productivity, reduce long-term support and maintenance costs, and facilitate the transfer of such technologies to the general economy. The area of artificial intelligence offers considerable promise for achieving many of these important national and international goals. This paper addresses some of the most important issues associated with incorporating artificial intelligence into the design of the Space Station, and the integration of such technologies with more traditional automation approaches. Specificially, the following challenges are discussed: (1) technology readiness, (2) function allocation/implementation criteria, (3) knowledge transfer from man to machine (knowledge engineering), and (4) test, verification and validation methods.

Author

A86-47115\* Howard Univ., Washington, D. C.

INTERACTIVE COMPUTER GRAPHICS AND ITS ROLE IN CONTROL SYSTEM DESIGN OF LARGE SPACE STRUCTURES

A. S. S. R. REDDY (Howard University, Washington, DC) IN: International Modal Analysis Conference, 3rd, Orlando, FL, January 28-31, 1985, Proceedings. Volume 2 . Schenectady, NY, Union College, 1985, p. 782-788. Research supported by Howard University and NASA. refs

This paper attempts to show the relevance of interactive computer graphics in the design of control systems to maintain attitude and shape of large space structures to accomplish the required mission objectives. The typical phases of control system design, starting from the physical model such as modeling the dynamics, modal analysis, and control system design methodology are reviewed and the need of the interactive computer graphics is demonstrated. Typical constituent parts of large space structures such as free-free beams and free-free plates are used to demonstrate the complexity of the control system design and the effectiveness of the interactive computer graphics.

**A86-47413\***# Harvard-Smithsonian Center for Astrophysics, Cambridge, Mass.

#### A THREE-MASS TETHERED SYSTEM FOR MICRO-G/VARI-ABLE-G APPLICATIONS

E. C. LORENZINI (Harvard-Smithsonian Center for Astrophysics, Cambridge, MA) IN: Guidance, Navigation and Control Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 97-105. refs

(Contract NAS8-36606) (AIAA PAPER 86-1990)

This paper describes a Space-Station attached tethered system for micro-g/variable-g applications. The system consists of three platforms: the Space Station, an end mass anchored at the end of a 10 km long kevlar tether and a micro-g/variable-g laboratory with the capability of crawling along the tether. Control strategies are devised for performing both the deployment and the station-keeping maneuvers of the system. Effective algorithms are identified for damping out the major vibrational modes. Author

## A86-48713\* Kansas State Univ., Manhattan. IMPROVED FLEXIBILITY OF AN EVA GLOVE

G. W. EGGEMAN and J. J. HELD (Kansas State University of Agriculture and Applied Science, Manhattan) IN: 1986 SEM Spring Conference on Experimental Mechanics, New Orleans, LA, June 8-13, 1986, Proceedings . Bethel, CT, Society for Experimental Mechanics, Inc., 1986, p. 788-792. NASA-supported research.

A student design contest was held between four universities. The project was to improve the flexibility of the NASA extra-vehicular activities (EVA) glove with the internal pressure increased from 4 psi to 8 psi. The Kansas State University team used an experimental design methodology and an industrial management scheme. This approach succeeded in making Kansas State University the winner of the competition.

**N86-24541\***# Tennessee Technological Univ., Cookeville. Dept. of Mathematics and Computer Science.

## RELIABILITY MODELS APPLICABLE TO SPACE TELESCOPE SOLAR ARRAY ASSEMBLY SYSTEM

S. A. PATIL *In* NASA. Marshall Space Flight Center Research Reports: 1985 NASA/ASEE Summer Faculty Fellowship Program 26 p Jan. 1986 refs

Avail: NTIS HC A99/MF E04 CSCL 03A

A complex system may consist of a number of subsystems with several components in series, parallel, or combination of both series and parallel. In order to predict how well the system will perform, it is necessary to know the reliabilities of the subsystems and the reliability of the whole system. The objective of the present study is to develop mathematical models of the reliability which are applicable to complex systems. The models are determined by assuming k failures out of n components in a subsystem. By taking k=1 and k=n, these models reduce to parallel and series models; hence, the models can be specialized to parallel,

series combination systems. The models are developed by assuming the failure rates of the components as functions of time and as such, can be applied to processes with or without aging effects. The reliability models are further specialized to Space Telescope Solar Arrray (STSA) System. The STSA consists of 20 identical solar panel assemblies (SPA's). The reliabilities of the SPA's are determined by the reliabilities of solar cell strings, interconnects, and diodes. The estimates of the reliability of the system for one to five years are calculated by using the reliability estimates of solar cells and interconnects given n ESA documents. Aging effects in relation to breaks in interconnects are discussed. Author

N86-27375# Centre National d'Etudes Spatiales, Toulouse (France).

DEFINITION AND TESTING OF GEARS FOR SPACE **ROBOTICS** 

L. PETITJEAN and A. BORRIEN In ESA Second European Space Mechanisms and Tribology Symposium p 149-154 In FRENCH; ENGLISH summary

Avail: NTIS HC A15/MF A01; ESA, Paris FF 150 or \$18 Member States, AU, CN, NO (+20% others)

An automatic manipulator arm for the capture of a three-axis stabilized satellite by another satellite on the same orbit was investigated. A general design study highlighted critical technological problems, such as the design and manufacturing of the joint gear-boxes, as the joints must transmit high forces and torques (60 Nm holding torque) which induce high contact stresses on the gear teeth. The research in lubrication processes, the experimental program to prove the feasibility of the concept, and the test results under atmosphere are summarized.

N86-27387# Dornier-Werke G.m.b.H., Friedrichshafen (West Germany).

A DORNIER LATCH DESIGN FOR A DOCKING MECHANISM K. PRIESETT, F. GAMPE, R. H. BENTALL, and N. CABLE ESA Second European Space Mechanisms and Tribology Symposium p 227-232 Dec. 1985

Avail: NTIS HC A15/MF A01; ESA, Paris FF 150 or \$18 Member States, AU, CN, NO (+20% others)

Within a technology study of a spacecraft docking mechanism subsystem, it is shown that based on the selection of a very low impact docking concept, a simple latching and connecting interface can be applied to the coupling of two spacecraft. Structural joining is accomplished by three or four equispaced capture latches. A capture latch mechanism for this docking technique is described. Latching requirements, the standard docking interface, the latch mechanism design and analysis, and results of a predevelopment model latch test are outlined.

N86-27403\*# Ford Aerospace and Communications Corp., Palo Alto, Calif.

COMMUNICATION PLATFORM PAYLOAD DEFINITION (CPPD) STUDY. VOLUME 1: EXECUTIVE SUMMARY Final Report, Jun. 1984 - Jul. 1985

E. M. HUNTER Mar. 1986 40 p

(Contract NAS3-24235)

(NASA-CR-174928; NAS 1.26:174928; WDL-TR-10631-VOL-1)

Avail: NTIS HC A03/MF A01 CSCL 22B

This is Volume 1 (Executive Summary) of the Ford Aerospace & Communications Corporation Final Report for the Communication Platform Payload Definition (CPPD) Study program conducted for NASA Lewis Research Center under contract No. NAS3-24235. This report presents the results of the study effort leading to five potential platform payloads to service CONUS and WARC Region 2 traffic demand as projected to the year 2008. The report addresses establishing the data bases, developing service aggregation scenarios, selecting and developing 5 payload concepts, performing detailed definition of the 5 payloads, costing them, identifying critical technology, and finally comparing the payloads with each other and also with non-aggregated equivalent services.

N86-27404\*# Ford Aerospace and Communications Corp., Palo Alto, Calif.

COMMUNICATION PLATFORM PAYLOAD DEFINITION (CPPD) STUDY. VOLUME 2: TECHNICAL REPORT Final Report, Jun. 1984 - Jul. 1985

E. M. HUNTER, T. DRIGGERS, and R. JORASCH Mar. 1986 598 p

(Contract NAS3-24235)

(NASA-CR-174929; NÁS 1.26:174929; WDL-TR-10632-VOL-2) Avail: NTIS HC A25/MF A01 CSCL 22B

This is Volume 2 (Technical Report) of the Ford Aerospace & Communications Corporation Final Report for the Communication Platform Payload Definition (CPPD) Study program conducted for NASA Lewis Research Center under contract No. NAS3-24235. This report presents the results of the study effort leading to five potential platform payloads to service CONUS and WARC Region 2 traffic demand as projected to the year 2008. The report addresses establishing the data bases, developing service aggregation scenarios, selecting and developing 5 payload concepts, performing detailed definition of the 5 payloads, costing them, identifying critical technology, and finally comparing the payloads with each other and also with non-aggregated equivalent services.

N86-27405\*# Ford Aerospace and Communications Corp., Palo Alto, Calif.

COMMUNICATION PLATFORM PAYLOAD DEFINITION (CPPD) STUDY. VOLUME 3: ADDENDUM Final Report, Jun. 1984 - Jul.

E. M. HUNTER, T. DRIGGERS, and R. JORASCH Mar. 1986 424 p

(Contract NAS3-24235)

(NASA-CR-174930; NÁS 1.26:174930; WDL-TR-10633-VOL-3) Avail: NTIS HC A18/MF A01 CSCL 22B

This is Volume 3 (Addendum) of the Ford Aerospace & Communications Corporation Final Report for the Communication Platform Payload Definition (CPPD) Study Program conducted for NASA Lewis Research Center under contract No. NAS3-24235. This report presents the results of the study effort leading to five potential platform payloads to service CONUS and WARC Region 2 traffic demand as projected to the year 2008. The report addresses establishing the data bases, developing service aggregation scenarios, selecting and developing 5 payload concepts, performing detailed definition of the 5 payloads, costing them, identifying critical technology, and finally comparing the payloads with each other and also with non-aggregated equivalent services.

N86-28118# Societe Nationale Industrielle Aerospatiale, Saint-Medard-en-Jalles (France). Lab. des Materiaux.

DESIGN OF BONDED STRUCTURAL **JOINTS** FOR **SPACECRAFT** [CALCUL DES LIASONS COLLEES STRUCTURALES DANS LES VEHICULES SPATIAUX

In FRENCH J. P. MAIGRET and M. MARTIN 1986 20 p Presented at Collog. sur les Tendances en Calcul des Struct., Bastia, France, 6-8 Nov. 1985

(SNIAS-861-430-105; ETN-86-97167) Avail: NTIS HC A02/MF A01

It is shown that for designing bonded joints, computer programs must include joint geometry, stress, environment, tolerances, and adhesive characteristics. The results of the experimental evaluation of characterization methods are presented and the most important unsolved problems are indicated. FSA

N86-28409\*# Consiglio Nazionale delle Ricerche, Rome (Italy). Programma Spaziale Nazionale.

TETHERED SATELLITE DESIGN

G. MANARINI In NASA, Washington Applications of Tethers in Space: Workshop Proceedings, Volume 1 p 63-79Vol-1) 1986

Avail: NTIS HC A25/MF A01 CSCL 131

The capability of the satellite to perform a variety of space operations to be accomplished from the shuttle is reviewed considering use of the satellite with man-in-loop and closed loop modes and deployment (toward or away from Earth, up to 100 km), stationkeeping, retrieval and control of the satellite. Scientific payloads are to be used to perform experiments and scientific such as magnetometry, investigation applications for electrodynamics, atmospheric science, chemical release. communications, plasmaphysics, dynamic environment, and power and thrust generation. The TSS-S will be reused for at least 3 missions after reconfiguration and refurbishment by changing the peculiar mission items such as thermal control, fixed boom for experiments, aerodynamic tail for yaw attitude control, external skin, experiments, and any other feature. The TSS-S is to be composed of three modules in order to allow independent integration of a single module and to facilitate the refurbishment and reconfiguration between flights. The three modules are service, auxiliary propulsion, and payload modules.

N86-30776# Industrieanlagen-Betriebsgesellschaft m.b.H., Ottobrunn (West Germany).

HOLOGRAPHIC INTERFEROMETRY FOR DISTORTION MEASUREMENTS OF ANTENNAS

H. U. FREY *In* ESA Proceedings of a Workshop on Composites Design for Space Applications p 149-155 Feb. 1986 Avail: NTIS HC A16/MF A01

Holographic interferometry was developed and adapted to a space environment simulation chamber. The test method is described and test results of antenna dishes from 1.2 to 3.6 m diameter are presented.

N86-31418\*# Prairie View Agricultural and Mechanical Coll., Tex. Dept. of Electrical Engineering.

## AN IBM PC-BASED MATH MODEL FOR SPACE STATION SOLAR ARRAY SIMULATION

E. M. EMANUEL /n NASA. Johnson Space Center NASA/American Society for Engineering Education (ASEE) Summer Faculty Fellowship Program, 1985 28 p Jul. 1986 Avail: NTIS HC A99/MF E03 CSCL 10A

This report discusses and documents the design, development, and verification of a microcomputer-based solar cell math model for simulating the Space Station's solar array Initial Operational Capability (IOC) reference configuration. The array model is developed utilizing a linear solar cell dc math model requiring only five input parameters: short circuit current, open circuit voltage, maximum power voltage, maximum power current, and orbit inclination. The accuracy of this model is investigated using actual solar array on orbit electrical data derived from the Solar Array Experiment/Dynamic Augmentation Experiment (SAFE/DAE), conducted during the STS-41D mission. This simulator provides real-time simulated performance data during the steady state portion of the Space Station orbit (i.e., array fully exposed to sunlight). Eclipse to sunlight transients and shadowing effects are not included in the analysis, but are discussed briefly. Integrating the Solar Array Simulator (SAS) into the Power Management and Distribution (PMAD) subsystem is also discussed.

N86-31629 Centre National d'Etudes Spatiales, Toulouse (France).

#### **DESIGN OF SPACECRAFT**

D. MARTY and F. DALLEST 1986 669 p in FRENCH; ENGLISH summary

(ISBN-2-225-80732-9; ETN-86-97643) Avail: CEPADUES, Toulouse, France

Satellite orbit calculation, orbit perturbations, structural design, thermal control, satellite tests, interplanetary vehicles, conventional launchers, space shuttles, avionics, propulsion, stability and optimization are covered in this textbook.

N86-31640# Societe Nationale Industrielle Aerospatiale, Cannes (France).

DESIGN AND TEST OF A SPACE DEPLOYABLE RADIATOR
B. MOSCHETTI, M. AMIDIEU, and B. TATRY 1986 8 p
(SNIAS-861-440-103; ETN-86-97612) Avail: NTIS HC A02/MF

A deployable panel of hinged type where the power is spread over the surface by means of embedded heat pipes and the thermal rotating joints are coaxial with the panel hinge is described. The prototype model has a radiation panel of  $800 \times 600$  mm with 5 embedded heat pipes and 2 radiative faces capability. In the hot case the capability is 160 W to maintain 30 C. Thermal performance test results are given.

#### 03

#### STRUCTURAL CONCEPTS

Includes erectable structures (joints, struts, and columns), deployable platforms and booms, solar sail, deployable reflectors, space fabrication techniques, and protrusion processing.

#### A86-33287

#### SPACECRAFT STRUCTURES DESIGN AND VERIFICATION

C. STAVRINIDIS (ESA, European Space Research and Technology Centre, Noordwijk, Netherlands) IN: International Symposium on Aeroelasticity and Structural Dynamics, 2nd, Aachen, West Germany, April 1-3, 1985, Collected Papers . Bonn, Deutsche Gesellschaft fuer Luft- und Raumfahrt, 1985, p. 669-671. refs

The scope and associated cost related with spacecraft structures design and verification depend on such factors as the weight criticality, and the degree of dynamic interaction of the payload with the launch vehicle. For large complex spacecraft which often have significant dynamic interaction with a launch vehicle, structural design and verification usually require a combination of analysis, development testing, and qualification testing. It is important when a project is initiated that the payload developer understands fully the various options, which often include specific requirements for a chosen launcher, since the selection of any of these options have a significant impact on the project cost and schedule.

#### A86-33921

## INFLATABLE, SPACE-RIGIDIZED REFLECTORS FOR MOBILE MISSIONS

M. C. BERNASCONI (Contraves AG, Zurich, Switzerland), E. PAGANA (Centro Studi e Laboratori Telecomunicazioni S.p.A., Turin, Italy), and G. REIBALDI (ESA, European Space Research and Technology Center, Noordwijk, Netherlands) IN: GLOBECOM '85 - Global Telecommunications Conference, New Orleans, LA, December 2-5, 1985, Conference Record. Volume 1 . New York, Institute of Electrical and Electronics Engineers, Inc., 1985, p. 407-411. refs

The structural concept of a 12-m inflatable, space-rigidized antenna reflector for operations at 800-900 MHz mobile-user satellite communications is described. The method consists in inflating prepreg balloons and having them chemically rigidized in space. The reflector takes the shape of a disk whose main surfaces exhibit a slight curvature with a quasi-elliptical contour. The results on the theoretical analysis of a reflector model and the preliminary test results on a 3-m diameter rigidized prototype reflector are presented. The electrical test results, the specifications, and the performances of the nominal paraboloid are of a promising quality.

A86-34634\* Howard Univ., Washington, D. C.

## AN EVALUATION OF FOLDABLE ELASTIC TUBES FOR APPLICATION IN SPACE STRUCTURES

I. W. JONES (Howard University, Washington, DC), C. BOATENG (Exxon Co., Houston, TX), and C. D. WILLIAMS (Shell Oil Co., Houston, TX) IN: 1985 SEM Spring Conference on Experimental Mechanics, Las Vegas, NV, June 9-14, 1985, Proceedings Brookfield Center, CT, Society for Experimental Mechanics, Inc., 1985, p. 590-598. refs (Contract NSG-1320)

An experimental investigation and design study has been performed on one type of foldable elastic tube in order to assess its suitability as a member of deployable space structures. It is demonstrated that one or more slots inserted longitudinally in the center of the tube to alleviate strain serves to prevent collapse of the tube. The nonlinear spring characteristics of the tube that are required for computer-based deployment dynamic analysis of space structures are determined, and it is shown that strain energy levels over a certain range are realizable for tubes representing space structure members in the 15-20 ft length range. Approximate strain energy/geometric parameter relationships are developed which may be useful for preliminary design or concept studies. C.D.

#### A86-34987

### TRUSS STRUCTURE ADVANCED DEVELOPMENT FOR SPACE STATION

J. F. DUBEL (McDonnell Douglas Astronautics Co., Huntington Beach, CA) IN: Space and society - Progress and promise; Proceedings of the Twenty-second Space Congress, Cocoa Beach, FL, April 23-26, 1985. Cape Canaveral, FL, Canaveral Council of Technical Societies, 1985, p. 12-7 to 12-11.

This paper identifies three challenging structural aspects to the Space Station program. The first is to define the relationship between the structure and the attitude control system. The second is to determine the truss structure material that meets current initial operating capability and growth requirements. The third is to determine how much truss structure deployment will be automatic and how much will require crew interface operations. This mix of automatic and crew operations involves rigidizing joints, articulating utility lines and supports, packaging, accommondating requirements imposed by extravehiculer activites (EVA), preparing for growth, and other automatic and crew interface provisions.

**A86-35215\*** National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

### OPTIMIZATION OF MASS PLACEMENT IN SPACE STATION APPLICATIONS

M. J. FEREBEE, JR. (NASA, Langley Research Center, Hampton,
 VA) Society of Allied Weight Engineers, Annual Conference,
 44th, Arlington, TX, May 20-22, 1985. 17 p.
 (SAWE PAPER 1672)

A methodology is presented by means of which the projected NASA Space Station's structural elements, primarily involving externally attached masses reresenting payloads, can be prearranged to meet all constraints imposed on Station design by mission type, safety, and physical criteria. Five different configurations are considered. The methodology has been automated in the form of a computer-aided engineering tool for the optimization of masses with respect to the products of inertia. By minimizing the induced gravity-gradient torques, the momentum buildup over an orbital period is also minimized.

#### A86-36029#

## ESA-SPONSORED DEVELOPMENTS IN THE FIELD OF DEPLOYABLE MASTS

M. A. AGUIRRE-MARTINEZ (ESA, European Space Research and Technology Centre, Noordwijk, Netherlands) ESA Journal (ISSN 0379-2285), vol. 9, no. 3, 1985, p. 313-321.

The agency is sponsoring two parallel development efforts in the field of advanced deployable masts. Both are extending tube devices capable of pushing out solar arrays and deploying such items as antennas and scientific experiments. This paper describes their current status and the present and future applications for such devices. It includes a presentation of the background to the two programmes, functional descriptions of the devices, and analyses of their performances.

Author

**A86-38809\***# Jet Propulsion Lab., California Inst. of Tech., Pasadena.

VERIFICATION OF LARGE BEAM-TYPE SPACE STRUCTURES C.-F. SHIH, J. C. CHEN, and J. A. GARBA (California Institute of Technology, Jet Propulsion Laboratory, Pasadena) IN: Structures, Structural Dynamics and Materials Conference, 27th, San Antonio, TX, May 19-21, 1986, Technical Papers. Part 1. New York, American Institute of Aeronautics and Astronautics, 1986, p. 78-84. NASA-supported research. refs (AIAA PAPER 86-0860)

The verification approach here proposed for large, beam-type space structures consists of a first part, which removes the gravity effect on the substructure tested and identifies its on-orbit dynamic characteristics, on the basis of ground test measurements, and a second part which develops an adequate scaling law that extrapolates the dynamic characteristics of the prototype structure by using results from the substructure. These approaches are presently demonstrated for the cases of a wrap-rib antenna's feed support structure and a candidate Space Shuttle flight experiment.

#### A86-38854#

## BUCKLING AND NON-LINEAR RESPONSE OF IMPERFECT THREE-LEGGED TRUSS COLUMNS

D. ELYADA (Raphael Armament Development Authority, Haifa, Israel) and C. D. BABCOCK (California Institute of Technology, Pasadena) IN: Structures, Structural Dynamics and Materials Conference, 27th, San Antonio, TX, May 19-21, 1986, Technical Papers. Part 1. New York, American Institute of Aeronautics and Astronautics, 1986, p. 495-501. Research supported by the California Institute of Technology. refs (AIAA PAPER 86-0974)

A closed form theoretical investigation of the non-linear structural behavior of idealized imperfect three-legged truss columns is presented. The columns examined have equilateral-triangular cross-sections formed by three longerons held in place by equally spaced battens. The columns are simply-supported and loaded by a pure axial compressive force. Local as well as global finite geometrical imperfections and bluckling, post-buckling, imperfection sensitivities, non-linear response and limit loads. Local-global mode interaction is fully accounted for. Comparisons are made with numerical results and those in the literature.

#### A86-38879#

## REDUCED MODELING AND ANALYSIS OF LARGE REPETITIVE SPACE STRUCTURES VIA CONTINUUM/DISCRETE CONCEPTS

K. C. SAW and K. K. TAMMA (West Virginia University, Morgantown) IN: Structures, Structural Dynamics and Materials Conference, 27th, San Antonio, TX, May 19-21, 1986, Technical Papers. Part 1. New York, American Institute of Aeronautics and Astronautics, 1986, p. 720-729. refs (AIAA PAPER 86-1022)

The paper describes reduced modeling/analysis approaches for repetitive lattice configurations with emphasis on tetrahedral type space structures although the basic concepts can be extended to general repetitive lattice structures as well. The approach is based on transforming the actual configuration to a significantly reduced discrete configuration using scaling transformations and constitutive properties derived via the concept of equivalent continuum. Therein, the approach seeks to model/analyze the much simpler and reduced configurations, wherein, transformations and extrapolation/interpolation procedures are utilized to relate back the response to that of the significantly complex actual configurations. The effectiveness and accuracy of the approach is demonstrated via comparisons with detailed analysis of the actual

models. Results obtained are in good agreement and the approach offers potential for further extension.

#### A86-38881#

## COMPARISON OF TENSION STABILIZED STRUCTURES FOR LARGE SPACE ANTENNA REFLECTORS

J. J. HERBERT and E. E. BACHTELL (Martin Marietta Corp., Denver, CO) IN: Structures, Structural Dynamics and Materials Conference, 27th, San Antonio, TX, May 19-21, 1986, Technical Papers. Part 1 . New York, American Institute of Aeronautics and Astronautics, 1986, p. 752-756.

(AIAA PAPER 86-0876)

The structural characteristics of large tension-stabilized antenna surfaces are studied. The use of tie cord systems for large space structures such as the Earth Observation Spacecraft is discussed. The design of catenary and direct tieback tie systems are examined. A nonlinear finite element technique for analyzing mesh tie systems is described; the Newton-Raphson method is utilized to solve the nonlinear stress-stiffened finite-element equation for the systems. The system designs are applied to a representative antenna configuration and compared. The effects of the thermal and gravity environment on the surface accuracy are investigated. The dynamic performance and tie cord coupling of the systems are evaluated. It is noted that both the catenary and direct tieback systems are stable designs for large space antennas; however, the direct tieback design is not cost effective to manufacture due to the extensive coupling of the system.

## A86-38883\*# Martin Marietta Aerospace, Denver, Colo. HYBRID DEPLOYABLE/ERECTABLE SOLAR DYNAMIC BOX TRUSS SYSTEM

J. V. COYNER, JR. (Martin Marietta Corp., Denver, CO) and T. B. IRVINE (NASA, Lewis Research Center, Cleveland, OH) IN: Structures, Structural Dynamics and Materials Conference, 27th, San Antonio, TX, May 19-21, 1986, Technical Papers. Part 1. New York, American Institute of Aeronautics and Astronautics, 1986, p. 764-768.

(AIAA PAPER 86-0955)

The design of a hybrid deployable/erectable solar dynamic box truss power generation system for the initial operation capability (IOC) of the Space Shuttle is examined. An organic Rankine cycle heat engine for IOC solar power generation is studied. The design configuration is a simple parabolic concentration where the receiver is located in the focal plane with its aperture at the focal point. The relationship between concentrator size and collection efficiency is analyzed. The geometry of the deployable graphite/epoxy box truss ring and the reflective panels of the system are described. Mass properties and dynamic analyses are performed to evaluate the center of gravity location and moments of inertia characteristics subsystem energy conversion deployable/erectable truss is applicable for large IR space telescopes and center and offset fed ECSs. LF.

#### A86-38885#

## ERROR ESTIMATION AND COMPENSATION IN REDUCED DYNAMIC MODELS OF LARGE SPACE STRUCTURES

J.-S. FUH, B. GUSTAVSON, and A. BERMAN (Kaman Aerospace Corp., Bloomfield, CT) IN: Structures, Structural Dynamics and Materials Conference, 27th, San Antonio, TX, May 19-21, 1986, Technical Papers. Part 2. New York, American Institute of Aeronautics and Astronautics, 1986, p. 1-9. refs (Contract F33615-84-C-3219)

(AIAA PAPER 86-0837)

The design of large space structures using the Guyan reduction (1965) is described. The development of linear reduced structure models to evaluate the dynamic characteristics of large space structures is discussed. The natural frequency errors that result from the Guyan reduction are examined. A minimum-ratio criterion is proposed for selecting a best set of retained degrees of freedom. The errors are reduced further using the analytical model improvement (AMI); the sensitivity of AMI under various conditions is studied. The ability of the reduced models to accurately represent the effects of structural changes is investigated. The design

procedure is applied to a delta wing model and it is noted, based on the data of eigensolution and forced response computations, that the reduced models are useful for efficient structural design studies.

#### A86-39923#

## FLUID RECIRCULATION, DEPLOYMENT AND RETRACTION OF AN EXPANDABLE PULSE POWER RADIATOR

I. C. CHOW (Kentucky, University, Lexington) and E. T. MAHEFKEY (USAF, Aero Propulsion Laboratory, Wright-Patterson AFB, OH) AIAA and ASME, Joint Thermophysics and Heat Transfer Conference, 4th, Boston, MA, June 2-4, 1986. 7 p. USAF-sponsored research. refs

(AIAA PAPER 86-1322)

Three methods for the stowage of a space power system radiator bag are considered in the present study. Fluid recirculation, as well as the deployment and retraction of this expandable, megawatt-pulse power radiator are discussed. Attention is given to the response of the radiator to a duty cycle, the rolling in and out of the radiator bag, and alternative wiper-, liquid channel-, and rotating bag-mechanisms of condensate return.

O.C.

**A86-40611\*#** National Aeronautics and Space Administration, Washington, D.C.

## FUTURE DIRECTIONS IN MATERIALS AND STRUCTURES FOR SPACE APPLICATIONS

S. L. VENNERI and R. J. HAYDUK (NASA, Washington, DC) AIAA, Space Systems Technology Conference, San Diego, CA, June 9-12, 1986. 29 p. refs (AIAA PAPER 86-1185)

A comprehensive evaluation is made of materials and structural technology requirements for future space transportation systems, large spacecraft, and space structures. Exceptional promise is noted in carbon-carbon composites for large area thermal protection systems. High temperature test facilities, techniques, and instrumentation systems have unfortunately been neglected, and a materials systems data base suitable for high confidence design of long life space structures has yet to be compiled with a view to material environments in low earth and geosynchronous orbits. A coordinated analysis, ground test, and in-orbit experimentation program for candidate structure designs is called for.

#### A86-41742#

#### PRELOAD MODELING, ANALYSIS, AND OPTIMAL DESIGN TECHNIQUES FOR BEAM/ROD/CABLE ELEMENT STRUCTURES

R. C. SHIEH (MRJ, Inc., Oakton, VA) (Structures, Structural Dynamics, and Materials Conference, 26th, Orlando, FL, April 15-17, 1985, Technical Papers. Part 1, p. 299-307) Journal of Spacecraft and Rockets (ISSN 0022-4650), vol. 23, May-June 1986, p. 308-315. Previously cited in issue 13, p. 1894, Accession no. A85-30261.

#### A86-43328#

#### PROSPECTS FOR INTELLIGENT AEROSPACE STRUCTURES

W. J. ROWE (Lockheed-Georgia Co., Marietta) AIAA and SOLE, Aerospace Maintenance Conference, 2nd, San Antonio, TX, May 21-23, 1986. 10 p. refs (AIAA PAPER 86-1139)

An evaluation is made of NDE sensor and instrumentation concepts that have demonstrated promise for the future monitoring of critical structures in flight, in light of past and current efforts to implement such systems and with a view to their operational and economic advantages. Attention is given to the NDE challenges posed by advanced composite laminates, which are affected by both manufacturing and service-incurred defects. Electrical resistance strain gages in various configurations, and optical fiber-based sensors, are considered as suitable bases for composite materials' NDE systems.

A86-49818#

SIMPLIFIED LATTICE BEAM ELEMENTS FOR GEOMETRICALLY NONLINEAR STATIC, DYNAMIC, AND POSTBUCKLING ANALYSIS

D. T. BERRY and T. Y. YANG (Purdue University, West Lafayette, IN) (Structures, Structural Dynamics, and Materials Conference, 26th, Orlando, FL, April 15-17, 1985, Technical Papers. Part 1, p. 316-324) AIAA Journal (ISSN 0001-1452), vol. 24, Aug. 1986, p. 1346, 1347. Previously cited in issue 13, p. 1894, Accession no. A85-30263. refs

(Contract AF-AFOSR-83-0104)

#### A86-49988#

## CFRP SUPPORT STRUCTURE FOR HIGH STABILITY REFLECTOR ANTENNAS

G. L. SCIALINO (Selenia Spazio S.p.A., Rome, Italy) IN: Satellite Broadcasting; Congress on Electronics, 32nd, Rome, Italy, March 26-28, 1985, Proceedings . Rome, Rassegna Internazionale Elettronica Nucleare ed Aerospaziale, 1985, p. 169-178.

The development of support structures for a pair of 1-m-diameter steerable spot-beam antennas for spacecraft is reported. The alternative configurations and materials evaluated are indicated, and the configuration adopted, comprising two bonded tubular CFRP-laminate arms, Al-honeycomb-sandwich-plate reflector and spacecraft interfaces, and Ti launch-lock bushings, is described in detail. The analysis of thermal protection; grounding; temperature distribution; stiffness, stress, and fracture; thermal stress/distortion; and dynamic response are summarized; and some manufacturing problems are discussed. The results of tensile, sine-vibration, and thermal-cycling tests on the two complete antenna structures (weighing 8.0 and 9.2 kg) are briefly characterized.

**N86-22630**# Societe Nationale Industrielle Aerospatiale, Cannes (France). Div. Systemes Balistiques et Spatiaux.

## ACCOMMODATION STUDY OF THE CRHESUS CRYOSTAT ON THE EURECA PLATFORM Final Report

Paris ESA May 1985 109 p refs (Contract ESTEC-5814/84-NL-B) (SNIAS-1048ACA/LL/V; ESA-CR(P)-2104) Avail: NTIS HC A06/MF A01

The integration and operational constraints of CRHESUS cryostat as payload on EURECA are defined. The optimum configuration for CRHESUS on EURECA is proposed. The design of the structural support, and a mechanical analysis of the whole CRHESUS plus the structural interface are provided. The data system and the electric power system between CRHESUS and EURECA, and the passive thermal control of payloads are defined. Operational constraints of the system determine ground support equipment. Studies of necessary improvements on the cryostat for compliance as EURECA payload were performed and consequences on the thermal balance and lifetime of cryostat were identified. A development plan, a schedule, and interface requirements for flight of CRHESUS on EURECA are provided.

Author (ESA)

provided.

N86-23624# Tokyo Univ. (Japan). Institute of Space and Astronautical Science.

## METHOD OF PACKAGING AND DEPLOYMENT OF LARGE MEMBRANES IN SPACE

K. MIURA Dec. 1985 11 p refs

(ISAS-618; ISSN-0285-6808) Avail: NTIS HC A02/MF A01

A new concept of packaging and deployment of large membranes in space is presented. The problem of biaxially folding of a plane is transferred to the elastic problem of a biaxially compressed infinite plate. After solving the problem, the plate thickness is reduced infinitesimally small, and thus the results represents the isometric transfer of an infinite plane subject to biaxial shortening. As a result, the concave polyhedral surface is discovered, which is composed of a repetition of a fundamental region, which is further composed of four congruent parallelograms. It is shown that the packaging and deployment by this surface geometry satisfies various requirements as to operations in space.

N86-24652# National Aeronautics and Space Administration, Washington, D.C.

SELECTIONS FROM FLUG REVUE UND FLUGWELT INTERNATIONAL. A. ON THE BORDER OF TIME-HYPERSONIC FLIGHT. B. NASA PROGRAMS PAVE THE WAY FOR THE HYPERSONIC AIRCRAFT. C. SHUTTLE FLIGHT 61-B; CONSTRUCTION IN SPACE. D. FASTER THAN A BULLET; HYPERSONIC MILITARY AIRCRAFT

H. PENNER, K. MUELLER, H. MULLER, G. WANGE, and N. LYNN May 1986 40 p Transl. into ENGLISH of Flug Revue and Flugwelt International (West Germany), Feb. 1986 p 9-22 and 46-50 Transl. by SCITRAN, Santa Barbara, Calif. (Contract NASW-4004)

(NASA-TM-88418; NAS 1.15:88418) Avail: NTIS HC A03/MF A01 CSCL 01B

Planned research and future developments in hypersonic aircraft, including possible military applications of hypersonic transport aircraft are discussed. NASA's development of hypersonic aircraft is discussed. Other topics include an overview of the 61-B Space Shuttle mission that pertains to the construction of space structures.

Author

N86-24729\* National Aeronautics and Space Administration. Marshall Space Flight Center, Huntsville, Ala.

SHUTTLE-LAUNCH TRIANGULAR SPACE STATION Patent W. C. SCHNEIDER, inventor (to NASA), R. B. BERKA, inventor (to NASA), C. KAVANAUGH, inventor (to NASA), K. NAGY, inventor (to NASA), R. C. PARISH, inventor (to NASA), J. A. SCHLIESING, inventor (to NASA), P. D. SMITH, inventor (to NASA), F. J. STEBBINS, inventor (to NASA), and C. J. WESSELSKI, inventor (to NASA) 1 Apr. 1986 9 p Filed 9 Mar. 1984 Sponsored by NASA

(NASA-CASE-MSC-20676-1; US-PATENT-4,579,302; US-PATENT-APPL-SN-587764; US-PATENT-CLASS-244-159) Avail: US Patent and Trademark Office CSCL 22B

A triangular space station deployable in orbit is described. The framework is comprized of three trusses, formed of a pair of generally planar faces consistine of foldable struts. The struts expand and lock into rigid structural engagement forming a repetition of equilater triangles and nonfolding diagonal struts interconnecting the two faces. The struts are joined together by node fittings. The framework can be packaged into a size and configuration transportable by a space shuttle. When deployed, the framework provides a large work/construction area and ample planar surface area for solar panels and thermal radiators. A plurity of modules are secured to the framework and then joined by tunnels to make an interconnected modular display. Thruster units for the space station orientation and altitude maintenance are

Official Gazette of the U.S. Patent and Trademark Office

**N86-24867\***# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

## DEPLOYABLE GEODESIC TRUSS STRUCTURE A01 Patent Application

M. M. MIKULAS, JR., inventor (to NASA), M. D. RHODES, inventor (to NASA), and J. W. SIMONTON, inventor (to NASA) 20 Feb. 1986 15 p

(NASA-CASE-LAR-13113-1; NAS 1.71:LAR-13113-1; US-PATENT-APPL-SN-831371) Avail: NTIS HC A02/MF A01 CSCL 13B

A deployable geodesic truss structure which can be deployed from a stowed state to an erected state is described. The truss structure includes a series of bays, each bay having sets of battens connected by longitudinal cross members which give the bay its axial and torsional stiffness. The cross members are hinged at their mid point by a joint so that the cross members are foldable for deployment or collapsing. The bays are deployed and stabilized by actuator means connected between the mid point joints of the cross members. Hinged longerons may be provided to also connect the sets of battens and to collapse for stowing with the rest of the truss structure. The truss structure has the capability of serving a structural function even when only partly deployed.

N86-25789\* National Aeronautics and Space Administration.

Langley Research Center, Hampton, Va.

SYNCHRONOUSLY DEPLOYABLE TRUSS STRUCTURE Patent H. G. BUSH, inventor (to NASA), M. MIKULAS, JR., inventor (to NASA), and E. WALLSOM, inventor (to NASA) (Kentron International, Inc., Hampton, Va.) 1 Apr. 1986 8 p Nov. 1983 Sponsored by NASA (NASA-CASE-LAR-13117-1; US-PATENT-4,578,920; US-PATENT-APPL-SN-556512; US-PATENT-CLASS-52-645;

US-PATENT-CLASS-52-111; US-PATENT-CLASS-52-648; US-PATENT-CLASS-244-159; US-PATENT-CLASS-244-173; US-PATENT-CLASS-343-881; US-PATENT-CLASS-343-882)

A collapsible-expandable truss structure, including first and second spaced surface truss layers having an attached core layer is described. The surface truss layers are composed of a plurality of linear struts arranged in multiple triangular configurations. Each linear strut is hinged at the center and hinge connected at each end to a nodular joint. A passive spring serves as the expansion force to move the folded struts from a stowed collapsed position to a deployed operative final truss configuration. A damper controls the rate of spring expansion for the synchronized deployment of the truss as the folded configuration is released for deployment by the restrain belts. The truss is synchronously extended under the control of motor driven spools.

Official Gazette of the U.S. Patent and Trademark Office

N86-27364# Dornier-Werke G.m.b.H., Friedrichshafen (West Germany).

THE EXTENDABLE AND RETRACTABLE MAST (ERM)

M. SCHMID and M. AGUIRRE In ESA Second European Space Mechanisms and Tribology Symposium p 69-74 Dec. 1985 Avail: NTIS HC A15/MF A01; ESA, Paris FF 150 or \$18 Member States, AU, CN, NO (+20% others)

The Extendable and Retractable Mast (ERM) used to deploy and retract large foldable structures such as solar arrays and furlable spacecraft antennas is presented. The design is based on a telescopic carbon-fiber structure with high stiffness, strength. and pointing accuracy. To verify the chosen design a breadboard model of an ERM was built and tested under TV conditions.

**ESA** 

N86-27365# European Space Agency. European Space Research and Technology Center, ESTEC, Noordwiik (Netherlands).

THE COLLAPSIBLE TUBE MAST (CTM)

M. AGUIRRE, A. BUREO, M. FUENTES, and J. RIVACOBA In ESA Second European Space Mechanisms and Tribology Symposium p 75-81 Dec. 1985

Avail: NTIS HC A15/MF A01; ESA, Paris FF 150 or \$18 Member States, AU, CN, NO (+20% others)

A biconvex tube mast that can be flattened and rolled around a drum into a small volume package is described. A drive system pulls the tube by the edges to deploy it, and rotates the stowing drum to retract it. The mast can be manufactured in metal or composite; in both cases a continuous manufacturing method is used, providing a mast of unlimited length. An engineering model with tubes in copper beryllium and carbon fiber reinforced epoxy and thermoplastic is planned. **ESA** 

N86-27368# Sener, S.A., Madrid (Spain). THE ULYSSES MECHANISMS

F. ABARRATEGUI, M. FUENTES, S. UGALDEA, and M. AGUIRRE In ESA Second European Space Mechanisms and Tribology Symposium p 95-104 Dec. 1985

Avail: NTIS HC A15/MF A01; ESA, Paris FF 150 or \$18 Member States, AU, CN, NO (+20% others)

The Ulysses (ex ISPM) radial boom, two wire booms, and a rigid axial boom are described. The radial boom is used to deploy five experiment sensors away from the spacecraft body. It is constructed with nonmagnetic materials, and consists of two articulated arms. The wire boom antennas when deployed form a 72 m tip-to-tip dipole for the radio and plasma wave experiment.

The antenna element is a tape of 5 x 0.04 mm section in CuBe2 material. The axial boom antenna, located at the spinning axis, is used as a monopole antenna by the radio and plasma wave experiment. The antenna consists of a tube of lenticular section. The section shape permits the tube to be pressed flat and rolled into a drum.

N86-27389# Royal Netherlands Aircraft Factories Fokker, Amsterdam. Space Div.

DEPLOYABLE AND RETRACTABLE STRONGBACK STRUCTURE

R. ZWANENBURG In ESA Second European Space Mechanisms and Tribology Symposium p 239-245 Dec. 1985

Avail: NTIS HC A15/MF A01; ESA, Paris FF 150 or \$18 Member States, AU, CN, NO (+20% others)

A deployable/retractable structure whose parts deploy or retract simultaneously was developed for spacecraft antennas, solar arrays, heat rejection systems, sensors, concentrators, and platforms. Its advantages include simplicity and high reliability; excellent strength and stiffness in deployed condition; high design flexibility without the need for complete redesign; low production cost due to large number of identical elements; low development

N86-27392# British Aerospace Dynamics Group, Stevenage (England). Space and Communications Div.

effort; and simple ground testing.

THE OLÝMPUS ANTENNA DEPLOYMENT SUBSYSTEM DESIGN AND TESTING

M. D. DEATH In ESA Second European Space Mechanisms and Tribology Symposium p 267-272 Dec. 1985

Avail: NTIS HC A15/MF A01; ESA, Paris FF 150 or \$18 Member States, AU, CN, NO (+20% others)

Satellite Antenna Deployment Subsystem design engineering model testing is presented. The design, philosophies, and their implications for the hardware are discussed. Functional, vibration and thermal vacuum test results are summarized and the hardware implications considered. The consequences of the engineering model test program and its implications for qualification and flight model testing are treated.

ESA

N86-30206\*# National Aeronautics and Space Administration. Lewis Research Center, Cleveland, Ohio.
FEASIBILITY STUDY OF A DISCRETE BEARING/ROLLER

DRIVE ROTARY JOINT FOR THE SPACE STATION

S. H. LOEWENTHAL and F. T. SCHULLER Jul. 1986 43 p. (NASA-TM-88800; E-3138; NAS 1.15:88800) Avail: NTIS HC A03/MF A01 CSCL 131

The most critical mechanism on board the proposed space station is the continously rotating joint which must accurately align the solar power units with the sun during earth orbit. The feasibility of a multiple, discrete bearing supported joint driven by a self-loading, pinch drive actuator was investigated for this application. This concept appears to offer greater protection against catastrophic jamming, less sensitivity to adverse thermal gradients, greater accessibility to inorbit servicing or replacement and greater adaptability to very large (5 m) truss members than to more conventional continuous support bearing/gear reducer joints. Analytical trade studies performed herein establish that a discrete cam roller bearing support system having eight hangers around a continuous ring would provide sufficient radial and bending stiffness to prevent any degradation in the fundamental frequencies of the solar wing structure. Furthermore, it appears that the pinch roller drive mechanism can be readily sized to meet or exceed system performance and service life requirements. Wear life estimates based on experimental data for a steel roller coated with an advanced polyimide film show a continuous service life more than two orders of magnitude greater than required for this application.

European Space Agency. European Space N86-30685# Technology Center, ESTEC, Noordwijk Research and (Netherlands).

SPACECRAFT STRUCTURES DESIGN AND VERIFICATION

C. STAVRINIDIS In DGLR The 2nd International Symposium on Aeroelasticity and Structural Dynamics p 669-671 Avail: NTIS HC A99/MF E03

Definition of spacecraft design loads, design and development of spacecraft structures, and qualification and acceptance of spacecraft structures are discussed. State of the art structural engineering; maturity of methodologies; sequence of events as they arise in spacecraft projects; trends; and future requirements are described.

Messerschmitt-Boelkow-Blohm G.m.b.H., Bremen N86-30686# (West Germany).

LOW FREQUENCY DESIGN VERIFICATION OF LARGE SPACECRAFT STRUCTURES

In DGLR The 2nd International E. ERBEN and K. ECKHARDT Symposium on Aeroelasticity and Structural Dynamics p 672-682 1985 Sponsored by INTELSAT and ESTEC

Avail: NTIS HC A99/MF E03

Multiaxis vibration system (MAVIS) testing of large spacecraft structures is described. Specified acceleration time histories are compared with the realized time histories measured at base point of test item. For the uniaxial excitation compliance is very good. During two axis excitation the differences between specified and measured input time histories are significant. The deviations are associated with strong frequency and amplitude changes in the transient motion. However, these results are achieved with an open loop control configuration of test facility and improvements are possible. Simulations of antenna reactions suggest deviations between applied and specified forces but resulting acceleration responses on different structure points are comparable with results achieved in test with complete S/C (same order of maximum acceleration peaks).

N86-30765# Imperial Coll. of Science and Technology, London (England). Center for Composite Materials.

THE STRENGTH OF BOLTED JOINTS IN KEVLAR RP

J. M. HODGKINSON, D. L. DEBEER, and F. L. MATTHEWS In ESA Proceedings of a Workshop on Composites Design for Space Applications p 53-61 Feb. 1986 Sponsored by ESA Avail: NTIS HC A16/MF A01

Failure data for single and multibolt joints in woven Kevlar reinforced epoxy resin are presented. The results are relevant to 6-ply, 0.5 mm thick, symmetrical laminates of different fiber orientation. Bolts used were M4 diameter (d) with standard washers. Lay-up, bolt tensile load, and hence washer pressure, end (e) and width (w) effects were explored in single and double lap joint configurations. Quasi-isotropic lay-ups fail at higher stresses than orthotropic laminates, and, for sufficiently large e/d and w/d ratios, failure is in bearing with no observable edge effects. Multiple bolt tests concerned lines and rows of bolts, the pitch being varied to determine the effects of bolt interaction. These tests were performed on the preferred quasi-isotropic lay-up.

N86-30769# Royal Netherlands Aircraft Factories Fokker, Schiphol-Oost.

CALCULATION METHOD FOR BUCKLING OF COMPOSITE SHELL STRUCTURES

R. F. P. VANZELST In ESA Proceedings of a Workshop on Composites Design for Space Applications p 87-93 Feb. 1986 Avail: NTIS HC A16/MF A01

The buckling load of a simply supported composite shell structure is determined. The laminate properties including the transverse shear properties are derived from the classical laminate theory. From the general buckling equation the panel buckling allowable and the local buckling allowable of several types of cross sections are derived. The equations are put into a small FORTRAN program. Results for an undisturbed shell structure are in good agreement with the results from the finite difference program BOSOR 4.

N86-30772# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Brunswick (West Germany).

DESIGN AND MANUFACTURING ASPECTS OF SPACE **TRUSSES** 

In ESA Proceedings of a Workshop on H. W. BERGMANN Composites Design for Space Applications p 109-115 1986

Avail: NTIS HC A16/MF A01

The dimensional stability of fiber reinforced composites for large space structure trusses is discussed. Temperature and moisture effects cannot be accurately assessed by extrapolation from the response of small test coupons. The buckling strength of hollow filament-wound struts depends very sensitively on the angular directions of the individual plies. Optimal configurations can be derived by a computerized program. An alternative approach to filament-wound strut construction by surrounding a prefabricated foam core by carbon fiber rovings or fabrics is viable. The interconnection of struts in rigid three-dimensional trusses is possible by filament-wound joints with the advantages of low cost, low weight, and improved thermal compatibility.

N86-30773# Construcciones Aeronauticas S.A., Madrid (Spain). Space and Systems Div.

HIGH-STABILITY TELESCOPE STRUCTURES

G. GALIPIENSO and S. DELLAMICO In ESA Proceedings of a Workshop on Composites Design for Space Applications p 119-132 Feb. 1986

Avail: NTIS HC A16/MF A01

A methodology for the design of structures requiring a high degree of dimensional stability, of the Space Telescope/GRIST type, was derived. The optimum structural configuration and the optimum laminate lay-up compatible with the structural strength and stiffness requirements were determined. The global behavior of the complete structure as a function of less-than-ideal component properties was established. Levels of maximum allowable deviations for real properties of components belonging to different families were determined. A method for adjustment of the coefficient of thermal expansion after manufacturing to compensate for unavoidable deviations in component properties was devised. A test method allowing measurement of very small distortions was developed.

N86-30790# British Aerospace Dynamics Group, Bristol (England). Space and Communications Div.

DESIGN AND DEVELOPMENT TESTING OF THE BONDED JOINT BETWEEN A TYPICAL LAUNCH VEHICLE ATTACHMENT RING AND CFRP THRUST CONE

J. T. SHARKEY, G. H. F. NAYLER, and J. REYNOLDS In ESA Proceedings of a Workshop on Composites Design for Space Applications p 275-284 Feb. 1986

Avail: NTIS HC A16/MF A01

The development of the principal structural joint of a Shuttle payload is described. The joint is subjected to large tension and compression loads due to the spacecraft being cantilevered perpendicular to the direction of flight of the launch vehicle. Finite element modeling was included in the investigation of joint designs. A bonded and bolted double lap shear configuration was chosen. Manufacturing and inspection methods were developed and testing of joint samples was undertaken including static, thermal and fatigue loading. The static test results were used to determine the design allowable strength of the joint.

Messerschmitt-Boelkow-Blohm G.m.b.H., Bremen N86-30791# (West Germany).

ON THE DEVELOPMENT OF A CORRUGATED CFRP CENTRAL CYLINDER FOR SATELLITES

D. BROSDA In ESA Proceedings of a Workshop on Composites Design for Space Applications p 285-290 Feb. 1986 Avail: NTIS HC A16/MF A01

Development of a corrugated central cylinder for satellites in the DFS-class, including design, analyses, manufacture, assembly and tests is summarized. The central cylinder has a mean diameter of 938 mm and a length of 1780 mm. The cylinder wall consists of a corrugated CFRP shell of variable thickness. Three CFRP rings provide for the attachment of antenna, equipment, and payload platforms. The thrust cylinder is designed to meet the standard frequency requirements (less than 15 Hz lateral and less than 35 Hz axial) and carry the loads associated with a typical satellite mass of 1400 kg whose CG position lies 1000 mm above the separation plane. The first flight structure to be equipped with the cylinder is the German communication satellite DFS Kopernikus.

**N86-30792**# Societe Nationale Industrielle Aerospatiale, Les Mureaux (France).

COMPARISON OF CLASSICAL AND COCURING MANUFACTURING TECHNIQUES FOR A CFRP HONEYCOMB CENTRAL TUBE

J. L. PETTEX *In* ESA Proceedings of a Workshop on Composites Design for Space Applications p 291-294 Feb. 1986 Avail: NTIS HC A16/MF A01

Classical and cocuring manufacturing of a sandwich structure using CFRP skins and an aluminum alloy honeycomb core for the Arabsat central tube are compared. The cocuring technology leads to a simplification of the manufacturing and consequently to a cost reduction.

N86-30797# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (West Germany).

DEVELOPMENT OF AN ANTENNA STRUCTURE FOR A DEPLOYABLE OFFSET ANTENNA

H. HERBIG, W. TAUBER, and H. VORBRUGG In ESA Proceedings of a Workshop on Composites Design for Space Applications p 329-336 Feb. 1986

(Contract ESTEC-5206/82-NL-PB(S6))

Avail: NTIS HC A16/MF A01

An unfurlable spacecraft antenna is described. The antenna consists of a central hub, ribs being radially arranged around the hub, and a mesh which produces the parabolic reflector surface shape. The hub and the ribs are made of CFRP. For the stowed and deployed reflector configuration the CFRP-components were analyzed and optimized under dynamical and dimensional stability aspects. The analytical results and the development of the CFRP components are presented.

N86-31606\*# National Aeronautics and Space Administration. Marshall Space Flight Center, Huntsville, Ala.

EVALUATION OF SOLAR ARRAY FLIGHT EXPERIMENT RESPONSE DURING FLIGHT FOR EXTENSION/RETRACTION PHASE

J. SLABY Jun. 1986 17 p

(NASA-TM-86551; NAS 1.15:86551) Avail: NTIS HC A02/MF A01 CSCL 22A

This post flight evaluation of the Solar Array Flight Experiment's (SAFE) deployment dynamics explains the encountered resonances. Author

N86-31630\*# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

PRELOADED SPACE STRUCTURAL COUPLING JOINTS Patent Application

M. D. RHODES, inventor (to NASA) 30 Jul. 1986 16 p

(NASA-CASE-LAR-13489-1; US-PATENT-APPL-SN-890445; NAS 1.71:LAR-13489-1) Avail: NTIS HC A02/MF A01 CSCL 22B

This invention relates to a coupling device for tubular members. of large truss structures, with a locking collar being the only moving part. Each tubular member is constructed with an end bell section that has a belled flange with a mating face, and a necked area which is smaller in diameter than the tubular members to be joined. A split ring is affixed to each tubular member and is constructed so that when two tubular members are laterally moved into axial alignment and the collar is rotated thereover, the split ring loads the joint with axial force by pressing the belled flange mating surfaces together, and a preloading force is provided by the collar mating with a taper on the outside of the split rings. All free play is thereby removed by preloaded force. A major object of the invention is to provide an ability to remove and replace individual tubular members without disturbing other structural parts of a truss structure. An additional anticipated use of this joint is to couple high pressure fluid lines.

N86-32622# Messerschmitt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany). Space Div.

OFFSET UNFURLABLE ANTENNA, PHASE 1 Final Report

Paris ESA Mar. 1984 570 p Prepared in cooperation with TICRA Engineering Consultants

(Contract ESTEC-5206/82-NL-PB(SC))

(MBB-RX11; ESA-CR(P)-2180; ETN-86-97782) Avail: NTIS HC A24/MF A01

The configuration, technology requirements, development aspects, and experimental activities for satellite reflectors for fixed and mobile communications and television broadcasting are outlined. A 4.5 m antenna for 4 GHz, and an 8 m antenna for 1.6 GHz were studied, assuming an L-Sat type satellite. A radial rib concept with auxiliary adjustment ribs, and a three dimensional scissors concept (spatial framework) with mesh adjustment elements were compared concerning mass, stowage, volume, development risk, and reliability. For antennas of diameter from 3.6 to 12 m (12 GHz to 800 MHz) the radial rib reflector is preferred. Main advantages (with rib folding for larger reflector diameters) are: lower costs; less critical technology problems; lower development risks; high deployment reliability; lightweight intermediate ribs can adapt surface accuracy to higher frequency requirements (high application flexibility); and folded main ribs provide high package capability at larger diameters. The scissors concept is advantageous for applications requiring reflectors from 12 m diameter onwards.

N86-32737\* National Aeronautics and Space Administration. Langley Research Center, Hampton, Va. DEPLOYABLE M-BRACED TRUSS STRUCTURE Patent

M. M. MIKULAS, JR., inventor (to NASA) and M. D. RHODES,

inventor (to NASA) 12 Aug. 1986 8 p Filed 30 Jul. 1985 Supersedes N86-20799 (24 - 11, p 1783)

(NASA-CASE-LAR-13081-1; US-PATENT-4,604,844; US-PATENT-APPL-SN-760378; US-PATENT-CLASS-52-632;

US-PATENT-CLASS-52-645; US-PATENT-CLASS-52-645; US-PATENT-CLASS-52-646; US-PATENT-CLASS-52-646) Avail: US Patent and Trademark Office CSCL 13I

A deployable M-braced truss structure, efficiently packaged into a compact stowed position and expandable to an operative position at the use site is described. The M-braced configuration effectively separates tension compression and shear in the structure and permits efficient structural design. Both diagonals and longerons telescope from an M-braced base unit and deploy either pneumatically, mechanically by springs or cables, or by powered reciprocating mechanisms. Upon full deployment, the diagonals and longerons lock into place with a simple latch mechanism.

Official Gazette of the U.S. Patent and Trademark Office

### 04

### STRUCTURAL AND THERMAL ANALYSIS

Includes structural analysis and design, thermal analysis and design, analysis and design techniques, and thermal control systems.

# A86-32933# NON-DESTRUCTIVE MEASUREMENT OF RESIDUAL STRESSES

J. BERLIEN, C. BOUVIER, and G. SCOTT (Martin Marietta Corp., Michoud Div., New Orleans, LA) IN: Man's permanent presence in space; Proceedings of the Third Annual Aerospace Technology Symposium, New Orleans, LA, November 7, 8, 1985. New Orleans, LA, American Institute of Aeronautics and Astronautics, 1985, 23

Residual stresses are responsible for the formation of contour deformations, known as oil canning, in large aerospace structures. Heat treated aluminum alloy sheet material having a thin cross section is used in the construction of the External Fuel Tank. Determination of the pattern and magnitude of residual stresses could potentially aid in correcting oil can conditions. Because measurement of residual stresses requires a nondestructive method, the use of ultrasonics has been explored. Stresses have been found to be directly proportional to the ultrasonic parameter. Determination of Stress Acoustic Constants enable conversion of the measured ultrasonic parameter to stress values in KSI. Preliminary data are presented for surveys of stress measurement on External Tank component parts.

# A86-32943# PREDICTED TEMPERATURE FIELD IN A THERMOMECHANICALLY HEATED VISCOPLASTIC SPACE TRUSS STRUCTURE

D. H. ALLEN and W. E. HAISLER (Texas A & M University, College Station) (Structures, Structural Dynamics, and Materials Conference, 26th, Orlando, FL, April 15-17, 1985, Technical Papers. Part 1, p. 773-779) Journal of Spacecraft and Rockets (ISSN 0022-4650), vol. 23, Mar.-Apr. 1986, p. 178-183. Previously cited in issue 13, p. 1897, Accession no. A85-30311. refs (Contract F49620-83-C-0067)

#### A86-33942

SPACE REFLECTOR SUPPORTED BY RADIATION PRESSURE P. L. CSONKA (Oregon, University, Eugene) and J. J. MURAY (SRI International, Menlo Park, CA) IN: GLOBECOM '85 - Global Telecommunications Conference, New Orleans, LA, December 2-5,

Telecommunications Conference, New Orleans, LA, December 2-5, 1985, Conference Record. Volume 2. New York, Institute of Electrical and Electronics Engineers, Inc., 1985, p. 939-942.

The use of radiation pressure to support a reflector is proposed. The design of the floating telecommunication mirror is described. The inertial effects caused by the rotation of the earth are studied. The torque exerted by the radiation pressure and electromagnetic radiation is applied to control mirror orientation and induce mirror rotation. The stabilization of the mirror with respect to vertical and horizontal displacement, libration, and shape distortions is examined.

### A86-35186#

DEFORMATION MEASUREMENTS ON ANTENNAS UNDER SIMULATED OUTER SPACE CONDITIONS USING HOLOGRAPHIC INTERFEROMETRY [VERFORMUNGSMES-SUNGEN VON ANTENNEN UNTER WELTRAUMSIMULATIONS-BEDINGUNGEN MIT HOLOGRAFISCHER INTERFEROMETRIE] H. U. FREY (Industrieanlagen-Betriebsgesellschaft mbH, Ottobrunn, West Germany) DGLR, Jahrestagung, Bonn, West Germany, Sept. 30-Oct. 2, 1985. 10 p. In German. (DGLR PAPER 85-150)

A procedure for measuring the deformation of large dish antennas under simulated space conditions with an accuracy of + or - 0.05 mm for a 4 m antenna has been developed and successfully utilized. To assist this method, which uses holographic interferometry, a half-automated procedure for evaluating the interference images has been developed. The test method, test bed, and the evaluation procedure are described, and results of conducted tests are presented.

C.D.

#### A86-36673

SOME PROBLEMS RELATED TO THE THERMALLY INDUCED DEFORMATIONS OF LARGE SPACE STRUCTURES [NEKOTORYE VOPROSY TEMPERATURNYKH DEFORMATSII KRUPNOGABARITNYKH KOSMICHESKIKH KONSTRUKTSII]

S. K. GROMOV IN: Conversion of solar energy . Moscow, Izdatel'stvo Nauka, 1985, p. 94-99. In Russian. refs

The problem of determining the temperature fields and thermally induced deformations of large space structures consisting of rod-like elements is examined in the stationary case, i.e., for constant external heat flow and constant temperatures at all points of the structure. In particular, attention is given to the sources of external heat fluxes, consideration of radiant heat transfer and heat conduction when determining temperature distribution along a rod, thermal bending of a cylindrical structural element, and anisotropy of the thermal expansion of a rod element.

#### A86-37041 THERMAL DESIGN OF AEROASSISTED ORBITAL TRANSFER VEHICLES

H. F. NELSON, ED. (Missouri-Rolla, University, Rolla) New York, American Institute of Aeronautics and Astronautics, Inc. (Progress in Astronautics and Aeronautics. Volume 96), 1985, 578 p. No individual items are abstracted in this volume.

Recent studies concerning the design of the aeroassisted orbital transfer vehicle (AOTVs) are presented. The basic equations for the flight regimes of AOTVs and numerical calculations of flowfields over AOTVs are reviewed, and trajectories of AOTVs are addressed. The thermal protection of AOTVs and phenomena occurring at the surface of an AOTV are examined. Some individual topics discussed include: relaxation algorithm for AOTV bluff body flow, performance aerodynamics of AOTVS, multiple pass trajectories for an AOTV, and AOTV aeroheating and thermal protection study, thermal response of an AOTV with a conical brake drag, design and performance analysis of a conical aerobrake OTV concept, temperature-dependent reaction rate expressions for oxygen recombination, surface-slip equations for low Reynolds number multicomponent air flow, rate chemistry problems in the flight regimes of AOTVs, and progress in noncatalytic surfaces for metallic heat shields.

### A86-37107 THERMAL ENGINEERING OF SPACECRAFT COMPOSITE STRUCTURES

R. D. KARAM (Fairchild Space Co., Germantown, MD) IN: Composite structures 3; Proceedings of the Third International Conference, Paisley, Scotland, September 9-11, 1985. London, Elsevier Applied Science Publishers, 1985, p. 100-117. refs

Standard methods in thermal engineering are extended for application to spacecraft composites. The mathematical formulation is shown to reduce to the two-dimensional case when applied to configurations commonly encountered in spacecraft design, and the controllable parameters which affect temperature and associated distortion are identified. Thermal control is discussed in terms of treatment with surface coatings, insulation, and the use of heaters and thermostats. Vacuum testing is recommended to determine conductance and long-term operation in space. The results of trade-off studies on the Fairchild Leasecraft mounting structure are presented.

#### A86-38811#

### A FINITE ELEMENT MODEL FOR THE THERMOELASTIC ANALYSIS OF LARGE COMPOSITE SPACE STRUCTURES

J. D. LUTZ, D. H. ALLEN, and W. E. HAISLER (Texas A & M University, College Station) IN: Structures, Structural Dynamics and Materials Conference, 27th, San Antonio, TX, May 19-21, 1986, Technical Papers. Part 1. New York, American Institute of Aeronautics and Astronautics, 1986, p. 96-102. refs (Contract F49620-83-C-0067) (AIAA PAPER 86-0875)

A finite element model is outlined for an integrated thermoelastic analysis of large composite space structures. The model allows for temperature gradients within structural member cross-sections and for bending of the members themselves. Nonlinear effects, such as radiation boundary conditions and temperature-dependent material properties are also included. Once the model is outlined, a preliminary investigation into the importance of thermally-induced forces and moments is carried out. The problem chosen is that of a long, cantilevered lattice beam in a geosynchronous orbit. For the structure and loading chosen, no significant dynamic responses, such as vibration, occurred. In addition, thermally induced axial forces were the predominant type of loading. For this problem, thermally-induced moments could be neglected. The magnitude of axial stresses generated by the transitioon from shadow to sunlight is on the order of 30 percent of yield stress. Author

### A86-38823\*# Old Dominion Univ., Norfolk, Va.

A TAYLOR-GALERKIN FINITE ELEMENT ALGORITHM FOR TRANSIENT NONLINEAR THERMAL-STRUCTURAL ANALYSIS E. A. THORNTON and P. DECHAUMPHAI (Old Dominion University, Norfolk, VA) IN: Structures, Structural Dynamics and Materials Conference, 27th, San Antonio, TX, May 19-21, 1986, Technical Papers. Part 1. New York, American Institute of Aeronautics and Astronautics, 1986, p. 210-220. NASA-USAF-supported research. (AIAA PAPER 86-0911)

A Taylor-Galerkin finite element method for solving large, nonlinear thermal-structural problems is presented. The algorithm is formulated for coupled transient and uncoupled quasistatic thermal-structural problems. Vectorizing strategies ensure computational efficiency. Two applications demonstrate the validity of the approach for analyzing transient and quasistatic thermal-structural problems.

### A86-39903#

### APPLICATION OF CAPILLARY PUMPED LOOP HEAT TRANSPORT SYSTEMS TO LARGE SPACECRAFT

D. R. CHALMERS, J. J. PUSTAY (RCA, Astro-Electronics Div., Princeton, NJ), C. B. MOY, and E. J. KROLICZEK (OAO Corp., Greenbelt, MD) AIAA and ASME, Joint Thermophysics and Heat Transfer Conference, 4th, Boston, MA, June 2-4, 1986. 13 p. refs

(AIAA PAPER 86-1295)

The current developmental status of capillary pumped loop (CPL) technology, and the application of two-phased CPL heat transport systems in the future Space Station Free-Flying Platform (FFP) thermal control subsystem (TCS), advanced communications satellite TCSs, and high-powered spacecraft TCSs, are considered. The CPL permits the wick structure to be isolated in the evaporator section, and provides for the concurrent flow of liquid and vapor. An ammonia-based NASA/GSFC CPL II engineering model demonstrating a 7-kW heat transport capacity over 10 m was ground tested in 1985, and a 0.5-kW capacity model has been successfully flight tested. CPL system design concepts to satisfy mission requirements, thermal/mechanical constraints, and operational needs are discussed. Future developments will focus on capillary pump design, isolator design, system evaporator design, the condensor/heat exchanger, and the reservoir. R.R.

# A86-39907\*# Grumman Aerospace Corp., Bethpage, N.Y. HEAT PIPE RADIATOR TECHNOLOGY FOR SPACE POWER SYSTEMS

A. W. CARLSON, E. GUSTAFSON (Grumman Aerospace Corp., Space Systems Div., Bethpage, NY), and B. A. ERCEGOVIC (NASA, Lewis Research Center, Cleveland, OH) AIAA and ASME, Joint Thermophysics and Heat Transfer Conference, 4th, Boston, MA, June 2-4, 1986. 11 p. refs (Contract NAS3-24665) (AIAA PAPER 86-1300)

High-reliability high-performance deployable monogroove and dual-slot heat pipe radiator systems to meet the requirements for electric power in future space missions, such as the 300-kW(e) electric powder demand projected for NASA's Space Station, are discussed. Analytical model trade studies of various configurations show the advantages of the dual-slot heat pipe radiator for high temperature applications as well as its weight reduction potential over the 50-350 F temperature range. The ammonia-aluminum monogroove heat pipe, limited to below-180 F operating temperatures, is under development, and can employ methanol-stainless steel heat pipes to achieve operating temperatures in excess of 300 F. Dual-slot heat pipe configuration proof-of-concept testing was begun in 1985.

#### A86-39939#

### A THERMAL CONTROL DESIGN FOR THE LEASAT F-3 SALVAGE MISSION

G. J. REYNOLDS, M. CONNOR, and R. R. GARIPAY (Hughes Engineering Mechanics Laboratory, Los Angeles, CA) AIAA and ASME, Joint Thermophysics and Heat Transfer Conference, 4th, Boston, MA, June 2-4, 1986. 9 p. (AIAA PAPER 86-1340)

The thermal control system designed to condition the Leasat F-3 spacecraft's solid rocket motor is described in this paper. This passive system was used on a geosynchronous satellite that had been drifting uncontrolled in a low earth orbit environment for an extended period of time. A solar absorbing, low infrared emitting surface was designed to return the solid rocket motor to the desired operating temperatures. This concept for the passive thermal control system was not part of the initial design. The system was designed for installation by the astronauts during a Space Shuttle rescue mission. A temperature telemetry system was included in the thermal system to monitor the thermal profile of the motor. Verification of the temperature data was obtained from a thermal-vacuum test in which the flight hardware and a simulation of the spacecraft motor case were used. The flight data was correlated with the thermal math model enabling prefire temperature predictions to be made. The thermal control system was proven to be successful when the motor was fired and the satellite was placed in its proper orbit.

# A86-39941\*# OAO Corp., Greenbelt, Md. DEVELOPMENT OF AN ADVANCED TRAPEZOIDAL AXIALLY GROOVED (ATAG) HEAT PIPE

R. F. G. RICHTER, P. J. BRENNAN (OAO Corp., Greenbelt, MD), and J. G. RANKIN (NASA, Johnson Space Center, Houston, TX) AIAA and ASME, Joint Thermophysics and Heat Transfer Conference, 4th, Boston, MA, June 2-4, 1986. 9 p. refs (AIAA PAPER 86-1342)

This paper discusses the breadboard development of an Advanced Trapezoidal Axially Grooved (ATAG) heat pipe, which will satisfy space constructible radiator heat rejection requirements for large space power systems. The ATAG heat pipe development program includes a technology demonstration of Space Station heat load and temperature requirements through the design, fabrication, and testing of breadboard and preprototype units. A parametric analysis was conducted to determine trapezoidal groove geometries that could meet the transport performance goal and could be fabricated by available extrusion technology for a diameter chosen to be compatible with an existing development test unit of a cylindrical, pressure-actuated contact heat exchanger. Performance test results for the breadboard heat pipes are presented.

#### A86-40496

### DESIGN PREPARATIONS FOR LARGE SPACE STRUCTURES

H. W. BERGMANN (DFVLR, Institut fuer Strukturmechanik, Brunswick, West Germany) IN: Carbon fibres and their composites . Berlin and New York, Springer-Verlag, 1985, p. 159-172.

The DFVLR has undertaken a program for the evaluation of fiber-resin systems applicable to composite space structures before and after realistic exposure to simulated space environments. Also under development are computer programs for the design and analysis of such space structures, and methodologies for the validation of these programs against test structures that are sufficiently large to exhibit behaviors characteristic of lattice structures in space. Attention is being given to the influence of thermal cycling, the influence of electron irradiation, and the weight optimization of tubular components.

**A86-40516\*** National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

### THERMAL ANALYSIS OF THE ACCESS SPACE TRUSS

R. A. FOSS and O. H. BRADLEY (NASA, Langley Research Center, Hampton, VA) IN: Space tech; Proceedings of the Conference and Exposition, Anaheim, CA, September 23-25, 1985. Dearborn, MI, Society of Manufacturing Engineers, 1985, p. 7-1 to 7-10. refs

This paper introduces the Assembly Concept for the Construction of Erectable Space Structure (ACCESS) experiment and describes the thermal requirements in detail. The experiment, an erectable truss beam to be flown and assembled aboard the Space Shuttle, was thermally modeled using the TRASYS and SINDA computer codes. Results from the thermal analysis are presented. Development tests dictate the application of a metallized film insulation on the aluminum beam struts to control transient orbital temperature extremes.

### A86-42809#

### ANALYSIS AND MODELING OF FLUID TRANSFER IN ORBIT

J. P. GILLE (Martin Marietta Corp., Denver, CO) AIAA, ASME, SAE, and ASEE, Joint Propulsion Conference, 22nd, Huntsville, AL, June 16-18, 1986. 9 p. (AIAA PAPER 86-1718)

The need for future systems to resupply fluids to vehicles in orbit is clearly defined. Transfer of liquid between tanks is not straight-forward because of the low-g environment. The normal procedure of venting a tank as it is filled is not applicable because of the uncertainty of liquid and gas location. A good alternative is to perform a no-vent transfer. This operation will be more difficult for cryogenic liquids, and the transfer rate is difficult to predict because of a lack of basic information on low-g processes. Two approaches are investigated. The first uses the kinetic transfer energy to promote random mixing within the receiver tank to achieve required heat transfer. The second relies on centrifugal positioning and a fine spray of liquid to achieve the same purpose. The latter approach appears to offer the advantage of being less dependent on low-g mechanisms, and is not restricted by tank size.

# A86-47924\*# Howard Univ., Washington, D. C. THE DEVELOPMENT OF AN ENVIRONMENTAL DISTURBANCE MODEL FOR LARGE SPACE STRUCTURES AFTER THE ONSET

N. HAMSATH, P. M. BAINUM (Howard University, Washington, DC), and R. KRISHNA (Advanced Technology and Research, Inc., Burtonsville, MD) IN: Astrodynamics Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 243-249. Research supported by the Howard University and NASA. refs (AIAA PAPER 86-2123)

Expressions for the temperature response across a thin large space structure during and immediately following the onset of thermal shock are obtained as a function of the properties of the material and the solar incidence angle. The thermal gradients induced due to solar radiation heating result in thermal deformation. From the temperature gradient information, expressions are

developed for the time history of the thermally induced deflections based on the thermoelastic relationships. The effect of the variation of the solar incidence angle and the variation of the emissivity of the surface is considered. From the deflection time history, a model of the disturbance moments is developed and evaluated for different solar incidence angles.

Author

# A86-49599\*# Washington Univ., Seattle. SPECULAR AND DIRECT RADIATIVE LOADS ON SPACE STRUCTURE

A. F. EMERY, A. ABROUS (Washington, University, Seattle), and D. R. HEDGLEY, JR. (NASA, Flight Research Center, Edwards, CA) AlAA and ASME, Joint Thermophysics and Heat Transfer Conference, 4th, Boston, MA, June 2-4, 1986. 9 p. (Contract NAG1-41)

(AIAA PAPER 86-1355)

The use of special models for trusses, and of fast graphical computational techniques, are discussed to reduce the computation times of intersurface radiation loads and specularly reflected radiation. The conditions under which the One-Dimensional approximation can be used, and the computation of the obstructed view factors for arbitrary surfaces, including the One-Dimensional surface, are considered using both contour and double area integration. The Adaptive Ray Tracing method is found to be very fast for surface configurations and obstruction densities typical of space structures, and it is shown to be best suited to views of J from I which are relatively simple and cover only a few subareas of S.

**A86-49621\***# National Aeronautics and Space Administration. Lewis Research Center, Cleveland, Ohio.

### LIQUID DROPLET RADIATOR PROGRAM AT THE NASA LEWIS RESEARCH CENTER

A. F. PRESLER, C. E. COLES, P. S. DIEM-KIRSOP, and K. A. WHITE, III (NASA, Lewis Research Center, Cleveland, OH) AIAA and ASME, Joint Thermophysics and Heat Transfer Conference, 4th, Boston, MA, June 2-4, 1986. 9 p. Previously announced in STAR as N86-12246. refs (ASME PAPER 86-HT-15)

The NASA Lewis Research Center and the Air Force Rocket Propulsion Laboratory (AFRPL) are jointly engaged in a program for technical assessment of the Liquid Droplet Radiator (LDR) concept as an advanced high performance heat ejection component for future space missions. NASA Lewis has responsibility for the technology needed for the droplet generator, for working fluid qualification, and for investigating the physics of droplets in space; NASA Lewis is also conducting systems/mission analyses for potential LDR applications with candidate space power systems. For the droplet generator technology task, both micro-orifice fabrication techniques and droplet stream formation processes have been experimentally investigated. High quality micro-orifices (to 50 micron diameter) are routinely fabricated with automated equipment. Droplet formation studies have established operating boundaries for the generation of controlled and uniform droplet streams. A test rig is currently being installed for the experimental verification, under simulated space conditions, of droplet radiation heat transfer performance analyses and the determination of the effect radiative emissivity of multiple droplet streams. Initial testing has begun in the NASA Lewis Zero-Gravity Facility for investigating droplet stream behavior in microgravity conditions. This includes the effect of orifice wetting on jet dynamics and droplet formation. Results for both Brayton and Stirling power cycles have identified favorable mass and size comparisons of the LDR with conventional radiator concepts.

OF THERMAL SHOCK

### A86-50115\* Maryland Univ., College Park. THERMAL STRESSES IN COMPOSITE TUBES

M. W. HYER (Maryland, University, College Park) IN: International Symposium on Composite Materials and Structures, Beijing, People's Republic of China, June 10-13, 1986, Proceedings Lancaster, PA, Technomic Publishing Co., Inc., 1986, p. 246-251. (Contract NAG1-343)

This paper summarizes work to determine the thermally-induced stresses and deformations in specially-constructed angle-ply composite tubes subjected to a uniform temperature change relative to their stress-free cure state. The tubes are designed for application to space structures and have high axial stiffness. Four angle-ply designs are examined in an effort to determine which design might have the most favorable thermally-induced response. A planar elasticity solution is used, the solution being valid away from the ends of the tube. Of the four designs considered, none has any particular advantage as far as stress levels are concerned. However, despite the fact that the tube wall is a balanced laminate, one design exhibits a significant amount of thermally-induced twist.

# N86-22618# Du Pont (UK) Ltd., Stevenage (England). MULTILAYER PRINTED CIRCUIT BOARD CHARACTERIZATION BY THERMAL ANALYSIS

J. N. LECKENBY In ESA Proceedings of 3rd European Symposium on Spacecraft Materials in Space Environment p 215-222 Nov. 1985 refs Sponsored by International Computers Ltd., Kidsgrove, England and Fortin Industries Inc., Sylmar, Calif. Avail: NTIS HC A13/MF A01

Thermal analysis techniques used to test multilayer printed circuit boards are described. Differential scanning calorimetry laminate cure determination; thermomechanical analysis (TMA) delamination testing; gel time and resin flow determination by TMA; dynamic mechanical analysis (DMA) prepreg cure determination; cured laminate determination by DMA; thermogravimetric analysis (TGA) compositional analysis; and thermal stability kinetic studies by TGA are covered.

N86-22628# European Space Agency, Paris (France).

SPACE ENVIRONMENT SIMULATION TO TEST SATELLITE THERMAL CONTROL COATINGS. VOLUME 2, APPENDIX 1: DETAILED RESULTS OF OPTICAL MEASUREMENTS MADE AFTER THE VARIOUS STAGES OF THE FIRST TEST

Aug. 1985 139 p Transl. into ENGLISH of 'Essais de Simulation d'Environmentale Spatial sur Revetements de Controle Thermique de Satellites. Tome 2, Annexe 1: Resultats Detailles des Mesures Optiques Effectuees apres les Diverses Etapes du Premier Test'' Rept. CERT-4128-Vol-2-App-1 Centre d'Etudes et de Recherche de Toulouse, France Original language document was announced as N85-17013 3 Vol.

(ESA-TT-891-VOL-2; CERT-4128-VOL-2-APP-1) Avail: NTIS HC A07/MF A01

Simultaneous irradiation of satellite thermal control coatings by electrons, protons, and ultraviolet radiation, simulating 5 yr in geostationary orbit, was carried out. A layer of contaminant, originating from adhesive RTV566 by molecular flux, was applied to samples under controlled conditions. Changes were followed by microbalances and by measurements of optical reflectance over the spectrum. Results for optical measurements before deposition and for 0.2, 0.5, and 1 yr after are presented.

Author (ESA)

N86-22629# European Space Agency, Paris (France).

SPACE ENVIRONMENT SIMULATION TO TEST SATELLITE THERMAL CONTROL COATINGS. VOLUME 2: APPENDICES 2, 3, AND 4. APPENDIX 2: DETAILED RESULTS OF OPTICAL MEASUREMENTS MADE AFTER THE VARIOUS STAGES OF THE SECOND TEST. APPENDIX 3: SUMMARY OF OPTICAL RESULTS OBTAINED DURING THE FIRST TEST. APPENDIX 4: SUMMARY OF OPTICAL RESULTS OBTAINED DURING THE SECOND TEST

Aug. 1985 259 p refs Transl. into ENGLISH of 'Essais de Simulation d'Environentale Spatial sur Revetements de Controle Thermique de Satellites. Tome 2: Annexe 2: Resultats Detailles des Mesures Optiques Effectuees apres les Diverses Etapes du Deuxieme Test. Annexe 3: Recapitulatif des Essais Optiques au Cours du Premier Test. Annexe 4: Recapitulatif des Mesures Optiques Effectuees au Cours du Deuxieme Test" Rept. CERT-4128-Vol-2-App-2-App-3-App-4 Centre d'Etudes et de Recherche de Toulouse, France Original language document was announced as N85-17014 3 Vol.

(ESA-TT-891-VOL-3; CERT-4128-VOL-2-APP-2,3,4) Avail: NTIS HC A12/MF A01

Simultaneous irradiation of satellite thermal control coatings by electrons, protons, and ultraviolet radiation, simulating 5 yr in geostationary orbit, was carried out. A layer of contaminant, originating from adhesive RTV566 by molecular flux, was applied to samples under controlled conditions. Changes were followed by microbalances and by measurements of optical reflectance over the spectrum. Results at minus 35 and plus 2 C for up to 5.08 yr after deposition are presented.

**N86-23623\*#** National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

ANALYSIS OF A SINGLE-FOLD DEPLOYABLE TRUSS BEAM PRELOADED BY EXTENSION OF SELECTED FACE DIAGONAL MEMBERS

K. C. WU and M. S. LAKE Apr. 1986 17 p refs (NASA-TM-87673; NAS 1.15:87673) Avail: NTIS HC A02/MF A01 CSCL 22B

A technique for preloading a deployable box truss beam by extension of one face diagonal per bay was studied to determine if it would result in uniform loading of truss joints without causing excessive truss deformations. Results indicate that it is possible to accomplish uniform loading in the beam region way from beam boundaries, whereas in the regions near boundaries the member loading becomes non-uniform with magnitudes greater than those in the uniform load region. Also, the type of deformation which results in the beam depends on the pattern of preloaded members.

N86-23631# Texas A&M Univ., College Station.

A MODEL FOR PREDICTING THERMOMECHANICAL RESPONSE OF LARGE SPACE STRUCTURES Annual Technical Report, May 1984 - Apr. 1985

D. H. ALLEN and W. E. HAISLER Jun. 1985 196 p. (Contract F49620-83-C-0067)

(AD-A162139; MM-4875-85-11; AFOSR-85-1016TR) Avail: NTIS HC A09/MF A01 CSCL 22B

A model is being developed for predicting the thermomechanical response of large space structures to cyclic transient temperature loading conditions. The research is being conducted in the following stages: (1) selection and specialization of thermomechanical constitutive equations to be utilized in the analysis of large space structures; (2) construction (where necessary) of coupled energy balance equations (modified Fourier heat conduction equations) applicable to the constitutive models selected in item (1); (3) casting (where necessary) the resulting field laws into coupled and uncoupled variational principles suitable for use with the finite element method; (4) finite element discretization of the variational principles for several element types; (5) experimentation to determine material properties to be utilized in the constitutive models; and (6) parametric studies of the quasistatic and dynamic response of large space structures undergoing thermomechanically and environmentally degraded material properties. GRA

Massachusetts Inst. of Tech., Cambridge. Space N86-24730\*# Systems Lab.

GENERALIZED PARITY RELATIONS FOR LARGE SPACE STRUCTURES WITH UNCERTAIN PARAMETERS M.S. Thesis

J. R. DUTILLOY Jan. 1986 72 p refs

(Contract NAG1-126)

(NASA-CR-176762; NAS 1.26:176762; REPT-2-86) Avail: NTIS HC A04/MF A01 CSCL 22B

The generalized parity relations method is a technique that can be used to detect sensor and actuator failures on a large space structure. A model of a grid structure was used to evaluate the performance of these relations. It shows their relative sensitivity to modeling errors. A method using sensor outputs and actuator inputs is required for the design of the generalized parity relations. Three different estimators are studied. The last estimator can generate relations optimized for the detection of a particular failure which are interesting when the level of sensor noise is high

E.A.K.

N86-24731\*# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

### STRUCTURAL PERFORMANCE OF SPACE STATION TRUSSES WITH MISSING MEMBERS

J. T. DORSEY May 1986 35 p refs

(NASA-TM-87715; NAS 1.15:87715) Avail: NTIS HC A03/MF A01 CSCL 22B

Structural performance of orthogonal tetrahedral Warren-type full truss beams and platforms are compared. In addition, degradation of truss structural performance is determined for beams, platforms and a space station when individual struts are removed from the trusses. The truss beam, space station, and truss platform analytical models used in the studies are described. Stiffness degradation of the trusses due to single strut failures is determined using flexible body vibration modes. Ease of strut replacement is assessed by removing a strut and examining the truss deflection at the resulting gap due to applied forces. Finally, the reduction in truss beam strength due to a missing longeron is determined for a space station transverse boom model.

N86-27380# Spar Aerospace Ltd., Ste-Anne-de-Bellevue (Quebec).

### DESIGN AND TEST OF A LINEAR THERMAL ACTUATOR

G. BUSH, D. OSBORNE, and V. A. WEHRLE In ESA Second European Space Mechanisms and Tribology Symposium p 181-185

Avail: NTIS HC A15/MF A01; ESA, Paris FF 150 or \$18 Member States, AU, CN, NO (+20% others)

A linear thermal actuator (LTA) to serve as the actuating element of a shape control system which compensates actively for deployment inaccuracies or thermal distortions of large antennas or other space structures requiring high dimensional stability was developed. The LTA was subjected to spacecraft-level vibration and thermal vacuum tests. Results and effect on ambient performance are presented. A follow-on development effort in which it is proposed to incorporate a network of distributed LTAs into a shape control system for a phased-array planar antenna of a hypothetical ice surveillance satellite is outlined.

N86-27652\*# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

### SHUTTLE TETHERED AEROTHERMODYNAMICS RESEARCH **FACILTY (STARFAC) INSTRUMENTATION REQUIREMENTS**

G. M. WOOD, P. M. SIEMERS, G. M. CARLOMAGNO (Naples Univ. (Italy).), and J. HOFFMAN (Texas Univ., Dallas.) In NASA. Washington Applications of Tethers in Space: Workshop Proceedings, Vol. 2 p 251-263 Jun. 1986 Avail: NTIS HC A23/MF A01 CSCL 131

The instrumentation requirements for the Shuttle Tethered Aerothermodynamic Research Facility (STARFAC) are presented. The typical physical properties of the terrestrial atmosphere are given along with representative atmospheric daytime concentrations and the equilibrium and nonequilibrium gas property comparison from a point away from a wall. STARFAC science and engineering measurements are given as are the TSS free stream gas analysis. The potential nonintrusive measurement techniques for hypersonic boundary layer research are outlined along with the quantitative physical measurement methods for aerothermodynamic studies.

N86-27653\*# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

#### SHUTTLE TETHERED AEROTHERMODYNAMICS RESEARCH FACILITY (STARFAC)

P. M. SIEMERS, G. M. WOOD, and H. WOLF In NASA, Washington Applications of Tethers in Space: Workshop Proceedings, Vol. 2 p 265-285 Jun. 1986

Avail: NTIS HC A23/MF A01 CSCL 131

The Earth's atmosphere from 90 km to 200 km provides the last aerothermodynamics frontier. Present NASA programs which require but also can provide an understanding of the aerodynamics and aerothermodynamics of the free molecule and transition flows that exist at these altitudes are the Aeroassisted OTV. Entry Research Vehicle and the Tethered Satellite. Each of these programs provides a unique opportunity to do flight research in the rarefied upper atmosphere. However, the Tethered Satellite Program provides, because of its capability to obtain global, in-situ, steady state data, the greatest potential to: (1)define the performance of aerodynamic shapes as a function of environmental characteristics (free molecule, transition, slip flow regimes); (2)define the characteristics of the upper atmosphere and the global variability of properties such as composition temperature, pressure and density. Such data are required to accomplish the systematic development and verification of analytical prediction techniques required to support advance configuration designs.

N86-27677 Stanford Univ., Calif.

### THERMAL AND ELECTROMAGNETIC DAMPING ANALYSIS AND ITS APPLICATION Ph.D. Thesis

L. USIK 1985 308 p

Avail: Univ. Microfilms Order No. DA8511326

Passive damping techniques, as a part of vibration control, have been researched extensively during the past decade to gain successful performance of vibrating systems by reducing undesirable vibrations. Most of the research has been focussed on artificially furnished damping which is relatively larger than material damping. Large space structures require light-weight construction with extremely accurate positioning requirements. Even a tiny amount of material damping has been recognized as essential for meeting such requirements of large space structures such as telescopes and attennas in space. The purpose of this research is to estimate analytically the thermal damping due to thermal currents and the electromagnetic damping due to electric conduction currents based on coupled thermoelasticity and coupled magnetoelasticity. Also, the influence of thermal damping on the aeroelastic stabilities is investigated based on the theory of two-dimensional aerodynamics. In this research the study of effects of structural and geometrical constraints on damping loss factors are investigated. Optimum conditions for the maximum damping, which may be useful on the stage of system design, are Dissert. Abstr. investigated.

N86-28427\*# Consiglio Nazionale delle Ricerche, Frascati (Italy). Ist. Fisica Spazio Interplanetario.

### SPONTANEOUS RADIATION EMITTED BY MOVING TETHERED **SYSTEMS**

M. DOBROWOLNY In NASA, Washington Applications of Tethers in Space: Workshop Proceedings, Volume 1 p 431-439

Avail: NTIS HC A25/MF A01 CSCL 13I

Some concepts related to radiation emitted by a large conductor moving through a magnetoplasma are outlined and referred to the case of long tethers. Some recent results of a theoretical calculation of Alfven wings, their structure and the power associated with are shown. How the problem of radiation from TSS or for any large conductor moving through a magnetoplasma should be

approached is presented. The approach is that of the theory of antennas in plasmas.

N86-28984\*# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

# INTEGRATED THERMAL-STRUCTURAL-ELECTROMAGNETIC DESIGN OPTIMIZATION OF LARGE SPACE ANTENNA REFLECTORS

H. M. ADELMAN and S. L. PADULA Jun. 1986 18 p Presented at the 27th AIAA/ASME/ASCE/AHS Structures, Structural Dynamics and Materials Conference, San Antonio, Tex., 19-21 May 1986

(NASA-TM-87713; NAS 1.15:87713) Avail: NTIS HC A02/MF A01 CSCL 22B

The requirements for low mass and high electromagnetic (EM) performance in large, flexible space antenna structures is motivating the development of a systematic procedure for antenna design. In contrast to previous work which concentrated on reducing rms distortions of the reflector surface, thereby indirectly increasing antenna performance, the current work involves a direct approach to increasing electromagnetic performance using mathematical optimization. The thermal, structural, and EM analyses are fully integrated in the context of an optimization procedure, and consequently, the interaction of the various responses is accounted for directly and automatically. Preliminary results are presented for sizing cross-sectional areas of a tetrahedral truss reflector. The results indicate potential for this integrated procedure from the standpoint of mass reduction, performance increase, and efficiency of the design process. Author

N86-30774# Royal Inst. of Tech., Stockholm (Sweden). Dept. of Aeronautical Structures and Materials.

### THERMAL STABILITY OF SANDWICH REFLECTORS

H. GROTH *In* ESA Proceedings of a Workshop on Composites Design for Space Applications p 133-139 Feb. 1986 Sponsored by Ericsson Radio System

Avail: NTIS HC A16/MF A01

The inplane coefficient of thermal expansion (CTE) of the honeycomb sandwich of a spacecraft antenna reflector was treated using an analytical model, where the panel is treated like a sandwich panel, and an approach using the finite element method. Both methods are based on linear elasticity. For the first model the influence of different sandwich parameters is discussed. For the second model, the CTE is calculated for a typical panel, and results are compared with the first model. A difference between the two models is explained by the behavior of the honeycomb core. In the analytical model the core and the faces are assumed to keep their initial shape, i.e., no bending or out of plane deformations of the honeycomb cell walls or of the faces. The analytical model may therefore serve as an upper bound solution of the thermal expansion of the panel.

N86-30775# European Space Agency, Paris (France). Mechanical Systems Div.

### DIMENSIONAL STABILITY OF CFRP TUBES FOR SPACE STRUCTURES

G. G. REIBALDI *In its* Proceedings of a Workshop on Composites Design for Space Applications p 141-147 Feb. 1986 Avail: NTIS HC A16/MF A01

Dimensional stability of CFRP tubes used in spacecraft structures was investigated as a function of the number of thermal cycles. Length and weight decrease with the number of cycles. Thermal cycling generates microcracking, which increases desorption rate for the weight and length. For the SPAS tube T006 the length increases with respect to the initial value, probably due to large microcracking. The polythene bag does not influence the absorption rate. No clear asymptotic value for the weight and length variation with the increasing of thermal cycles is found. Permanent deformations are expected in orbit, about 25 microns after 300 thermal cycles. Lay-up of the CFRP tube is important for dimensional stability. A CIBA-GEIGY tube shows lower length variation, even if the weight loss is similar to that of the SPAS.

N86-30798# Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (West Germany).

### STRUCTURAL ANALYSIS, MANUFACTURING AND TEST EVALUATION OF A POLARIZATION SENSITIVE REFLECTOR

W. WEISS, K. PFEIFER, and R. LEITNER In ESA Proceedings of a Workshop on Composites Design for Space Applications p 337-347 Feb. 1986

(Contract ESTEC-5494/84-NL(CM))

Avail: NTIS HC A16/MF A01

A parabolic reflector for space applications was developed. The reflector consists of two Kevlar/Nomex sandwich shells with a diameter of 1100 mm. Their edges are connected by a Kevlar/glass ring. The rear shell is fixed to the satellite by a conical carbon fiber composite cylinder and stiffened by four Kevlar/Nomex ribs. To minimize the thermal stresses the thermal expansion coefficients were adjusted to the reflector shells. In the static analysis a finite element calculation was performed for an acceleration of 15 g and for the most critical Sun irradiation with a partly shadowed reflector. All stresses are below the strength limits. The antenna was tested by sine vibration, acoustic noise, thermal cycling, and solar simulation without failure.

### 05

### STRUCTURAL DYNAMICS AND CONTROL

Includes modeling, systems identification, attitude and control techniques and systems, surface accuracy measurement and control techniques and systems, sensors, and actuators.

#### A86-31024#

### THERMALLY-INDUCED VIBRATION AND STABILITY OF BOOMS WITH OPEN CROSS SECTION CAUSED BY UNIDIRECTIONAL RADIANT HEATING

M. MUROZONO, Y. HASHIMOTO, and S. SUMI Japan Society for Aeronautical and Space Sciences, Journal (ISSN 0021-4663), vol. 33, no. 383, 1985, p. 719-727. In Japanese, with abstract in English. refs

A long extensible spacecraft boom subjected to solar radiant heating is modelled as a thin-walled long cylinder of split nonoverlapping sections. A tip mass is attached to one end which is free to wrap, while the other end is fixed. The boom is heated by unidirectional solar radiation normal to the longitudinal axis. The equation of thermally-induced torsional vibration in the system is formulated by considering the coupling effect of mechanical and thermal phenomena as a one-degree-of-freedom system. The characteristic equation is evaluated using the Routh-Hurwitz stability criterion, and it is found that the stability characteristics are dependent upon the direction of radiant heating as well as on the three system parameters. The boundary curves, which divide the parameter plane into regions of stability and instability according to the direction of radiation, and some typical responses based on the closed-form solution, are also given.

### A86-31651#

### SPACECRAFT ATTITUDE DYNAMICS AND CONTROL - A PERSONAL PERSPECTIVE ON EARLY DEVELOPMENTS

P. LIKINS (Lehigh University, Bethlehem, PA) Journal of Guidance, Control, and Dynamics (ISSN 0731-5090), vol. 9, Mar.-Apr. 1986, p. 129-134. refs

This paper represents the personal perspective of one observer and participant in the evolution of the field of spacecraft attitude dynamics, stabilization, and control. The first lessons in the attitude stability of spinning spacecraft are related to the launch of Explorer I. A natural extension to the spinning satellite involved the attachment of a 'despun platform', using a closed-loop control system with a torque motor to maintain the desired relative rotation rate of 'rotor' and 'platform'. The first of the dual-spin spacecraft was the Orbiting Solar Observatory. It is pointed out that dual-spin spacecraft have provided some of the most intriguing dynamics

and control problems in the evolution of spacecraft attitude dynamics. Attention is also given to developments related to gravity-stabilized satellites, actively controlled spacecraft, and implications of the discussed events for engineering education.

3.R

#### A86-31664#

#### UNIFORM DAMPING CONTROL OF SPACECRAFT

L. SILVERBERG (North Carolina State University, Raleigh) Journal of Guidance, Control, and Dynamics (ISSN 0731-5090), vol. 9, Mar.-Apr. 1986, p. 221-227. refs

This paper introduces the uniform damping control of flexible spacecraft. The dynamic characteristics of spacecraft are reviewed and a criterion for dynamic performance is described by a uniform damping control approach which exhibits three distinctly attractive features. It is shown that (1) the associated uniform damping control law is independent of the spacecraft stiffness, (2) the associated control forces are proportional to the spacecraft mass density, and (3) the uniform damping control law is decentralized. The uniform damping control solution is shown to represent a first-order approximation to a special globally optimal control problem. Also, the implementation of uniform damping control is considered using discrete (in space) actuation and sensing type devices. Robustness in the presence of errors due to implementing the control using discrete components is characterized.

#### A86-31665#

### ROBUST BEAM-POINTING AND ATTITUDE CONTROL OF A FLEXIBLE SPACECRAFT

J. S.-C. YUAN (Spar Aerospace, Ltd., Toronto, Canada) and M. E. STIEBER (Department of Communications, Ottawa, Canada) (Guidance, Navigation and Control Conference, Snowmass, CO, August 19-21, 1985, Technical Papers, p. 688-695) Journal of Guidance, Control, and Dynamics (ISSN 0731-5090), vol. 9, Mar.-Apr. 1986, p. 228-234. Sponsorship: Department of Supply and Services of Canada. Previously cited in issue 22, p. 3239, Accession no. A85-45950. refs (Contract DSS-06ST-36001-3-2484)

#### A86-31666#

### VARIABLE-STRUCTURE CONTROL OF SPACECRAFT LARGE-ANGLE MANEUVERS

S. R. VADALI (lowa State University of Science and Technology, Ames) Journal of Guidance, Control, and Dynamics (ISSN 0731-5090), vol. 9, Mar.-Apr. 1986, p. 235-239. Research supported by the Iowa State University of Science and Technology. refs

The spacecraft large-angle maneuver problem is treated using the principles of variable-structure control theory. A control law that constrains the state to follow a specified path (the so-called sliding mode) in the state-space is designed on the basis of a simplified model of the spacecraft dynamics. The sliding mode is obtained by solving an optimal control posed in a reduced space, the solution being the angular velocities of the spacecraft as functions of the attitude variables (Euler parameters or quaternions in the present context). It is shown that the motion along the sliding mode is insenstive to parameter variations and unmodeled effects.

### A86-31668#

# COMPENSATING STRUCTURE AND PARAMETER OPTIMIZATION FOR ATTITUDE CONTROL OF A FLEXIBLE SPACECRAFT

D. C. CEBALLOS (Instituto de Pesquisas Espaciais, Sao Josedos Campos, Brazil) Journal of Guidance, Control, and Dynamics (ISSN 0731-5090), vol. 9, Mar.-Apr. 1986, p. 248, 249. refs

In this paper, a feedback double path compensating (FDPC) control structure is considered for the attitude control of a flexible spacecraft, where vibration modes and modeling errors are present. It is pointed out that the basic idea involved in the FDPC scheme is related to the nullification of the accumulated effect of the truncated modes and the modeling errors. A parameter optimization procedure is applied to find the gains for the FDPC structure. Attention is given to the gain selection procedure and the

application of the considered approach to a flexible spacecraft. It is found that the discussed double-path compensating controller can satisfy the requirements of performance, sensitivity to modeling errors, and simplicity for onboard implementation.

G.R.

**A86-31781\*** Jet Propulsion Lab., California Inst. of Tech., Pasadena.

### PAYLOAD ISOLATION AND PRECISION POINTING FOR THE 1990'S

S. W. SIRLIN and R. A. LASKIN (California Institute of Technology, Jet Propulsion Laboratory, Pasadena) IN: Guidance and control 1985; Proceedings of the Eighth Annual Rocky Mountain Conference, Keystone, CO, February 2-6, 1985. San Diego, CA, Univelt, Inc., 1985, p. 39-60. NASA-supported research. refs (AAS PAPER 85-010)

The design of a pointing system that is applicable for a variety of payloads is examined. The system employs a very soft interface coupled with inertial control torques which use reaction wheels or control moment gyros. The fundamental stability and disturbance rejection characteristics of simple gimbal pointing systems and the soft mounted inertially reacting concept are evaluated and compared. It is observed that in simple and two-stage gimbal systems there is dynamic interaction with the basebody and these types of systems are not applicable for a Space Station/Space Platform environment in which system dynamics are uncertain; however, the soft mounted inertially reacting concept minimizes the dynamic interaction with the basebody and retains stability. It is concluded that the soft mounted inertially reacting concept has the pointing accuracy and disturbance isolation of a free flying spacecraft while still obtaining power, communication, orbit maintenance, and servicing from a basebody.

### **A86-31794\*** National Aeronautics and Space Administration. Marshall Space Flight Center, Huntsville, Ala.

### ORBITAL MANEUVERING VEHICLE GUIDANCE, NAVIGATION AND CONTROL

W. G. HUBER and W. FINNELL, III (NASA, Marshall Space Flight Center, Huntsville, AL) IN: Guidance and control 1985; Proceedings of the Eighth Annual Rocky Mountain Conference, Keystone, CO, February 2-6, 1985. San Diego, CA, Univelt, Inc., 1985, p. 285-295.

(AAS PAPER 85-043)

This paper describes the Orbital Maneuvering Vehicle (OMV) concept and its intended role. It recaps the past activities leading up to the current concept and summarizes the present status and plans. The various types of missions and operating modes required by the OMV are described as the basis of the guidance, navigation and control (GN&C) requirements. The general GN&C problem is outlined with potential hardware solutions.

# A86-31795\* Rutgers - The State Univ., Piscataway, N. J. THE GALILEO SCAN PLATFORM POINTING CONTROL SYSTEM - A MODERN CONTROL THEORETIC VIEWPOINT

G. E. SEVASTON (Rutgers University, Piscataway, NJ), G. A. MACALA, and G. K. MAN (California Institute of Technology, Jet Propulsion Laboratory, Pasadena, CA) IN: Guidance and control 1985; Proceedings of the Eighth Annual Rocky Mountain Conference, Keystone, CO, February 2-6, 1985. San Diego, CA, Univelt, Inc., 1985, p. 297-321. refs (AAS PAPER 85-044)

The current Galileo scan platform pointing control system (SPPCS) is described, and ways in which modern control concepts could serve to enhance it are considered. Of particular interest are: the multi-variable design model and overall control system architecture, command input filtering, feedback compensator and command input design, stability robustness constraint for both continuous time control systems and for sampled data control systems, and digital implementation of the control system. The proposed approach leads to the design of a system that is similar to current Galileo SPPCS configuration, but promises to be more systematic.

#### A86-31796

SINGLE-STEP OPTIMAL CONTROL OF THE RPL EXPERIMENT M. A. FLOYD (Integrated Systems, Inc., Palo Alto, CA) IN: Guidance and control 1985; Proceedings of the Eighth Annual Rocky Mountain Conference, Keystone, CO, February 2-6, 1985. San Diego, CA, Univelt, Inc., 1985, p. 323-350. Research supported by the Fannie and John Hertz Foundation. refs (Contract F04611-82-K-0037)

(AAS PAPER 85-045)
This paper presents

This paper presents a control strategy which is applicable to a broad class of large space structure control problems. The considered strategy makes it possible to handle diverse sets of control inputs, including on-off thrusters and linear-limited actuators, either individually or simultaneously. Attention is given to aspects of single-step optimal control, the selection of the state weighting matrix, rigid body mode costs for large angle slews using on-off thrusters, the acceleration phase, the deceleration/terminal phase, acceleration to deceleration phase transition logic, flexible mode costs, control input lumping, a description of the experiment, simulation results, and experimental results.

# A86-32940# DAMPING SYNTHESIS FOR A SPACECRAFT USING SUBSTRUCTURE AND COMPONENT DATA

K. W. LIPS and F. R. VIGNERON (Department of Communications, Ottawa, Canada) (Structures, Structural Dynamics and Materials Conference, 25th, Palm Springs, CA, May 14-16, 1984, and AIAA Dynamics Specialists Conference, Palm Springs, CA, May 17, 18, 1984, Technical Papers. Part 2, p. 497-506) Journal of Spacecraft and Rockets (ISSN 0022-4650), vol. 23, Mar.-Apr. 1986, p. 158-164. Previously cited in issue 13, p. 1847, Accession no. A84-31739. refs

**A86-32944\***# Jet Propulsion Lab., California Inst. of Tech., Pasadena.

### EXTENSION FOR GROUND-BASED TESTING FOR LARGE SPACE STRUCTURES

B. K. WADA, C. P. KUO, and R.J. GLASER (California Institute of Technology, Jet Propulsion Laboratory, Pasadena) (Structure, Structural Dynamics, and Materials Conference, 26th, Orlando, FL, April 15-17, 1985, Technical Papers. Part 2, p. 477-483) Journal of Spacecraft and Rockets (ISSN 0022-4650), vol. 23, Mar.-Apr. 1986, p. 184-188. NASA-supported research. Previously cited in issue 13, p. 1852, Accession no. A85-30375. refs

### A86-33204

### CONTROLLER DESIGN OF FLEXIBLE SPACECRAFT ATTITUDE CONTROL

S. MANABE (Mitsubishi Electric Corp., Kamakura Works, Japan) and K. TSUCHIYA (Mitsubishi Electric Corp., Central Research Laboratory, Amagasaki, Japan) IN: A bridge between control science and technology. Volume 5. Oxford and New York, Pergamon Press, 1985, p. 2939-2944.

A controller design method for flexible spacecraft attitude control is presented. The design method uses the frequency domain approach. The system is first described by partial differential equation with internal damping model. Then the frequency response is analyzed, and the three basic characteristics of the flexible system, namely, average function, lower bound and upper bound are defined. A compensator design method is proposed on the basis of these characteristics. The result shows that the direct velocity feedback combined with weak lag networks seems to be the optimum in the sense that the bandwidth required for the actuator is the narrowest. This approach is very robust and immune to the parameter changes such as mode frequency variations. This is because the design method is based on only the general information of flexible structure and not on the specific ones. Some experiment is performed to investigate the validity of the method.

Author

A86-33254\* Jet Propulsion Lab., California Inst. of Tech., Pasadena.

### STIFFNESS CONTROL OF LARGE SPACE STRUCTURES

J.-C. CHEN (California Institute of Technology, Jet Propulsion Laboratory, Pasadena) and J. L. FANSON (California Institute of Technology, Pasadena) IN: International Symposium on Aeroelasticity and Structural Dynamics, 2nd, Aachen, West Germany, April 1-3, 1985, Collected Papers . Bonn, Deutsche Gesellschaft fuer Luft- und Raumfahrt, 1985, p. 368-373. NASA-sponsored research.

A method of using internal force producing dual element/actuators for vibration suppression of large space structures is proposed. This technique is applied to a vibrating string as well as a low order system. Response feedback control for the vibrating string and selected modal control are used for achieving the modal damping. The actuators used in this method may be electrically powered and are suitable for structures with extremely low rigidity.

Author

#### A86-33255

# ASPECTS OF ACTIVE ISOLATION AS APPLIED TO A SATELLITE STRUCTURE WITH SHAPE PRECISION PAYLOAD W. CHARON (Dornier System GmbH, Friedrichshafen, West Germany) IN: International Symposium on Aeroelasticity and Structural Dynamics, 2nd, Aachen, West Germany, April 1-3, 1985, Collected Papers . Bonn, Deutsche Gesellschaft fuer Luft- und Raumfahrt, 1985, p. 374-380. Sponsorship: European Space Research and Technology Centre. refs (Contract ESTEC-5326/83-NL-PB(SC))

Future large space structures need, as precision payloads, active control of vibration because of their very low eigenfrequencies. This paper investigates some aspects of the first step in active isolation design. In this first step, the satellite structure is divided into two rigid modules: the shape precision payload and a vibrating equipment module containing the attitude sensors and the attitude actuators. The two modules are connected by six spring-force actuator devices which are considered here together to determine the isolation control forces. These connections transmit the low-frequency attitude control to the precision payload but attenuate the higher-frequency disturbances whose shape and magnitude are here unknown to the isolation control system.

**A86-33284\*** Jet Propulsion Lab., California Inst. of Tech., Pasadena.

### TEST AND ANALYSIS CORRELATION FOR STRUCTURAL DYNAMIC SYSTEMS

B. K. WADA and J.-C. CHEN (California Institute of Technology, Jet Propulsion Laboratory, Pasadena) IN: International Symposium on Aeroelasticity and Structural Dynamics, 2nd, Aachen, West Germany, April 1-3, 1985, Collected Papers . Bonn, Deutsche Gesellschaft fuer Luft- und Raumfahrt, 1985, p. 632-647. NASA-supported research. refs

In this paper the authors summarize the activities at the Jet Propulsion Laboratory (JPL) in modifying the structural mathematical model to correlate with its modal test results. In addition to the results from the Viking and Galileo spacecrafts, developments in the parameter estimation of structural mathematical models of large flexible structures using Multiple Boundary Condition Tests (MBCT) are presented.

**A86-33285\*** National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

### DYNAMIC VERIFICATION OF VERY LARGE SPACE STRUCTURES

B. R. HANKS (NASA, Langley Research Center, Hampton, VA) IN: International Symposium on Aeroelasticity and Structural Dynamics, 2nd, Aachen, West Germany, April 1-3, 1985, Collected Papers . Bonn, Deutsche Gesellschaft fuer Luft- und Raumfahrt, 1985, p. 648-655. refs

The dynamic verification of spacecraft relies heavily on ground-based tests. These tests usually simulate flight environments or validate analytical models used in establishing

design loads and in designing control algorithms. They also provide security against failures resulting from unanticipated or unmodeled hardware behavior. Future orbital antennas, space stations, and solar power systems are likely to be of sizes difficult to test using current ground test technology. In addition to size, other factors such as low natural frequencies, lightweight construction, and the presence of many structural joints, cause significant sensitivity of the test process to the earth-gravity environment. Yet, accuracy requirements on the verification process will be more stringent because of modern flexible-structure control approaches. This paper describes some of the problems and discusses research on potential solutions. The importance of an integrated ground test, analysis, and flight test program is emphasized. An ongoing research program of this type focusing on a 60-meter, deployable, truss-beam test article is described.

#### A86-33288

### LOW FREQUENCY DESIGN VERIFICATION OF LARGE SPACECRAFT STRUCTURES

E. ERBEN and K. ECKHARDT (ERNO Raumfahrttechnik GmbH, Bremen, West Germany) IN: International Symposium on Aeroelasticity and Structural Dynamics, 2nd, Aachen, West Germany, April 1-3, 1985, Collected Papers . Bonn, Deutsche Gesellschaft fuer Luft- und Raumfahrt, 1985, p. 672-682. Research sponsored by the European Space Research and Technology Centre and INTELSAT.

Current trends in spacecraft structural technologies toward greater complexity, modularity and novel launcher systems call for a structural design verification process using a multiaxis vibration system (MAVIS) and transient input functions. Attention is given to MAVIS' application to such physical and practical aspects as hardware model philosophy and performance requirements. An existing satellite structure could be used as the basis for initial experiences with multiaxis transient testing.

# A86-33289 VIBRATION QUALIFICATION AT THE DAVID FLORIDA LABORATORY

R. MAMEN (Department of Communications, David Florida Laboratory, Ottawa, Canada) IN: International Symposium on Aeroelasticity and Structural Dynamics, 2nd, Aachen, West Germany, April 1-3, 1985, Collected Papers . Bonn, Deutsche Gesellschaft fuer Luft- und Raumfahrt, 1985, p. 683-688.

The David Florida Laboratory, a national facility for spacecraft integration and environmental test, provides the support required to qualify flight hardware for a wide range of Canadian and export projects. Its thermal vacuum, mass properties, radio frequency and vibration testing services are used by a growing list of aerospace companies and government departments for programs ranging from black box level to complete spacecraft and space systems. Its comprehensive structural qualification capabilities were selected for the remote manipulator system ('CANADARM'), ANIK-D and Brazilsat and for L-Sat ('OLYMPUS'). The facilities and staff skills are being improved significantly, in order to facilitate the qualification of larger and more complex structures.

**A86-35212\*** National Aeronautics and Space Administration. Goddard Space Flight Center, Greenbelt, Md.

MASS PROPERTY CONTROL OF A SPIN STABILIZED SPACECRAFT WITH RESTRICTIVE MISSION AND WEIGHT CONSTRAINTS

W. E. LANG (NASA, Goddard Space Flight Center, Greenbelt, MD) and C. ARDVINI (Roma II, Universita, Rome, Italy) Society of Allied Weight Engineers, Annual Conference, 44th, Arlington, TX, May 20-22, 1985. 26 p. (SAWE PAPER 1668)

In the primary experiment of the spin stabilized San Marco D/L spacecraft, the drag effects on a light spherical shell coupled to a relatively massive center body will be measured. To achieve the precise mass property control, the centroids of both the shell and the center body must coincide with each other and with the center of pressure of the shell. Precise spin balancing is needed for launch and orbital stability, and the deployable antennas need

accurate alignment. Corrective measures, developed after the preliminary mass measurements showed flaws in the mass property control, are described in detail. Inertia booms and a yo-yo despin system were developed as add-on units, spin balance measurements about all three geometric axes were used to define weight minimized correction within the outer shell envelope, and boom tip mass differentials were optimized for the most favorable inertia ratio margin achievable within the mission weight constraints. The weight versus orbital lifetime trade-offs were also considered.

**A86-35333\*** Jet Propulsion Lab., California Inst. of Tech., Pasadena.

### AN INVESTIGATION OF ADAPTIVE CONTROL TECHNIQUES FOR SPACE STATIONS

C.-H. C. IH, S. J. WANG (California Institute of Technology, Jet Propulsion Laboratory, Pasadena), and C. T. LEONDES (California, University, Los Angeles) IN: 1985 American Control Conference, 4th, Boston, MA, June 19-21, 1985, Proceedings. Volume 1. New York, Institute of Electrical and Electronics Engineers, 1985, p. 81-94. NASA-supported research.

The present paper is concerned with control problems which arise in connection with the establishment and maintenance of space stations. Some of the arising problems are related to great changes in mass and an intensive shock load accompanying Shuttle docking. Such problems can be solved by making use of a robust adaptive control system. Space station configurations developed by NASA and the corresponding mass properties are discussed along with dynamic models for space stations, aspects of problem formulation and control architecture, adaptive control algorithms, a performance analysis, and practical considerations. Attention is given to adaptive regulator control with initial transient, adaptive control during Shuttle docking, and cases involving Shuttle hard docking with model switching and disturbance modeling. G.R.

**A86-35390\*** National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

### TESTING OF A FAILURE ACCOMMODATION SYSTEM ON A HIGHLY FLEXIBLE GRID

R. C. MONTGOMERY and J. P. WILLIAMS (NASA, Langley Research Center, Hampton, VA) IN: 1985 American Control Conference, 4th, Boston, MA, June 19-21, 1985, Proceedings. Volume 2. New York, Institute of Electrical and Electronics Engineers, 1985, p. 984-989. refs

This paper presents a scheme for on-line failure detection in systems with appreciable structural dynamics. The design is suboptimal because of extensive computational requirements of optimal schemes. To accomplish failure detection, the innovations sequence of a finite order Kalman filter is examined. Because of the heavy dependence of the system on the zero-mean character of the innovations sequence of the filter much attention has been given to the design and evaluation of the Kalman filters used. The filter designs are based on modal models of the structural dynamics. Two modal models were considered, one based on an analytic finite element model and the other based on empirically derived frequency and damping. Experiments using a grid structure are presented which illustrate operation and performance of the filter designs based on these models. The general character of the results presented is that appreciable errors exist in the filter design based on the finite element model. Substantial improvement results if the design model is modified to include empirically derived frequency and damping.

**A86-36074\*** National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

STABILITY OF MULTILOOP LQ REGULATORS WITH NONLINEARITIES. I - REGIONS OF ATTRACTION. II - REGIONS OF ULTIMATE BOUNDEDNESS

S. M. JOSHI (NASA, Langley Research Center, Hampton, VA) IEEE Transactions on Automatic Control (ISSN 0018-9286), vol. AC-31, April 1986, p. 364-370. refs

An investigation is conducted for the closed loop stability of linear time-invariant systems controlled by linear quadratic (LQ)

regulators, in cases where nonlinearities exist in the control channels lying outside the stability sector in regions away from the origin. The estimate of the region of attraction thus obtained furnishes methods for the selection of performance function weights for more robust LQ designs. Attention is then given to the closed loop stability of linear time-invariant systems controlled by the LQ regulators when the nonlinearities in the loops escape the stability sector in a bounded region containing the origin.

#### A86-36216

### AN ORTHOGONAL DECOMPOSITION APPROACH TO MODAL SYNTHESIS

H. FLASHNER (Southern California, University, Los Angeles, CA) International Journal for Numerical Methods in Engineering (ISSN 0029-5981), vol. 23, March 1986, p. 471-493. refs

Modal synthesis is a method of formulating the equations of motion for complex vibratory systems. This approach has many advantages in modelling systems that consist of an assembly of linear dynamic elements whose modal characteristics are given. Presented in the paper is a procedure for synthesizing linear dynamic models into one dynamic description in a numerically stable way. This task is achieved by an orthogonal co-ordinate transformation replacing the matrix inversions required when other procedures are used. The modal synthesis is formulated as a problem of finding the equations of motion for a linear system subject to a set of linear constraints. The numerical procedure to generate the equations of motion in terms of independent co-ordinates is presented. The paper concludes with several examples that demonstrate the properties of the proposed method and its application to the modeling of vibratory systems.

**A86-37060\*#** National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

### CONSTRUCTION AND CONTROL OF LARGE SPACE STRUCTURES

M. F. CARD, W. L. HEARD, JR. (NASA, Langley Research Center, Hampton, VA), and D. L. AKIN (MIT, Cambridge, MA) Israel Annual Conference on Aviation and Astronautics, 28th, Tel Aviv and Haifa, Israel, Feb. 19, 20, 1986, Paper. 21 p. refs

Recent NASA research efforts on space construction are reviewed. Preliminary results of the EASE/ACCESS Shuttle experiments are discussed. A 45-foot beam was constructed on orbit in 30 minutes using a manual assembly technique at a work station. A large tetrahedron was constructed several times using a free floating technique. The capability of repair, utilities installation, and handling the structures using a mobile foot restraint on the RMS was also demonstrated. Implications of the experiments for Space Station are presented. Models of 5-meter Space Station structure together with neutral buoyancy simulations suggest manual assembly techniques are feasible. Selected research on control of flexible structures is discussed. To support planned flight experiments, studies of the design and optimal placement of distributed active dampers are underway.

**A86-37186\*** Jet Propulsion Lab., California Inst. of Tech., Pasadena.

### SPACE STATION DYNAMIC MODELING, CONTROL AND SIMULATION

C.-H. C. IH, S. J. WANG, and Y.-H. LIN (California Institute of Technology, Jet Propulsion Laboratory, Pasadena) IN: Aerospace simulation II; Proceedings of the Second Conference, San Diego, CA, January 23-25, 1986 . San Diego, CA, Society for Computer Simulation, 1986, p. 109-142. NASA-supported research. refs

Dynamic disturbances of many orders of magnitude greater than those of conventional spacecraft will be routine for the Space Station. Accurate knowledge of inflight structural dynamics and disturbances will be lacking. System identification will reduce uncertainties. To deal with the remaining model errors and time-varying elements, adaptive control may be required. Dynamic models for two Space Station configurations are derived. A direct model reference adaptive control algorithm is synthesized and evaluated with respect to the station model parameter errors and plant dynamics truncations. Both the rigid body and the flexible

modes are treated. Simulation results show that convergence of the adaptive algorithm can be achieved in 100 to about 300 seconds with reasonable performance even during Shuttle hard docking operations in which station mass and inertia are instantaneously changed by more than 100 percent.

Author

#### A86-38542

### A GLOBAL TECHNIQUE FOR ESTIMATION OF MODAL PARAMETERS FROM MEASURED DATA

R. N. COPPOLINO (MacNeal-Schwendler Corp., Los Angeles, CA) and R. C. STROUD (Synergistic Technology, Inc., Cupertino, CA) IN: Structural dynamic testing and analysis; Aerospace Technology Conference and Exposition, Long Beach, CA, October 14-17, 1985, Technical Papers . Warrendale, PA, Society of Automotive Engineers, Inc., 1986, p. 15-23. refs (SAE PAPER 851926)

An automated method for estimation of structural vibration modes from measured frequency response data is described. The technique simultaneously treats an ensemble of measured responses and identifies a set of linearly independent displacement patterns exhibited by the data. In addition, generalized frequency response functions associated with the independent displacement patterns are identified. An effective dynamic system described by the generalized frequency responses is deduced from least squares considerations, from which modal parameters of the structure are estimated.

Author

A86-38546\* Jet Propulsion Lab., California Inst. of Tech., Pasadena.

### MULTIPLE BOUNDARY CONDITION TEST (MBCT) APPROACH TO UPDATE MATHEMATICAL MODELS OF LARGE FLEXIBLE STRUCTURES

B. K. WADA, C.-P. KUO, and R. J. GLASER (California Institute of Technology, Jet Propulsion Laboratory, Pasadena) IN: Structural dynamic testing and analysis; Aerospace Technology Conference and Exposition, Long Beach, CA, October 14-17, 1985, Technical Papers . Warrendale, PA, Society of Automotive Engineers, Inc., 1986, p. 75-82. NASA-supported research. refs (SAE PAPER 851933)

A major challenge to the structural dynamicist is to validate mathematical models of large space structures which cannot be ground tested because of its size and/or flexibility. The paper presents a Multiple Boundary Condition Test (MBCT) approach which allows a systematic validation of the mathematical model by performing a number of ground tests on a large structure with variable boundary conditions. A numerical simulation is presented which illustrates the validity of the MBCT including some of the potential limitations.

### A86-38548

### SYNTHESIS OF DISCRETE PASSIVE VIBRATION DAMPERS

S. S. SIMONIAN (TRW, Inc., TRW Space and Technology Group, Redondo Beach, CA) IN: Structural dynamic testing and analysis; Aerospace Technology Conference and Exposition, Long Beach, CA, October 14-17, 1985, Technical Papers . Warrendale, PA, Society of Automotive Engineers, Inc., 1986, p. 97-109. (SAE PAPER 851935)

The present study is a continuation of the effort in the application of viscoelastic (VE) damping to large and flexible space systems design. In particular, this work extends the analytical passive damping predictions reported previously. The analytical study completed here relates the number of discrete joint VE dampers, in typical large and flexible space optical systems, to the overall damping of the structure. This data is crucial for the optimal blending of passive damping and active control technologies in space systems design.

#### A86-38812#

### SPACE FRAME OPTIMIZATION SUBJECT TO FREQUENCY **CONSTRAINTS**

T. H. WOO (TRW, Inc., TRW Space and Technology Group, Redondo Beach, CA) IN: Structures, Structural Dynamics and Materials Conference, 27th, San Antonio, TX, May 19-21, 1986, Technical Papers. Part 1. New York, American Institute of Aeronautics and Astronautics, 1986, p. 103-115. Research supported by TRW Independent Research and Development Program. refs

(AIAA PAPER 86-0877)

An efficient structural optimization methodology is presented for the design of minimum weight space frames subject to multiple natural frequency constraints. A powerful class of generalized hybrid constraint approximations which require only the first order constraint function derivatives have been developed to overcome inherent nonlinearity of the frequency constraint. The generalized hybrid constraint functions are shown to be relatively conservative, separable and convex in the region bounded by the move limits based on the formula described in this paper. The optimization methodology is implemented in an automated structural optimization system which has been applied to solve a variety of space frame optimization problems. Numerical results obtained for three example problems indicate that the optimization methodology requires fewer than 10 complete normal modes analyses to generate a near optimum solution.

#### A86-38827\*# State Univ. of New York, Buffalo. MICROPROCESSOR CONTROLLED FORCE ACTUATOR

D. C. ZIMMERMAN, D. J. INMAN (New York, State University, Buffalo), and G. C. HORNER (NASA, Langley Research Center, Hampton, VA) IN: Structures, Structural Dynamics and Materials Conference, 27th, San Antonio, TX, May 19-21, 1986, Technical Papers. Part 1. New York, American Institute of Aeronautics and Astronautics, 1986, p. 243-251. refs (Contract NGT-33-183-801)

(AIAA PAPER 86-0916)

The mechanical and electrical design of a prototype force actuator for vibration control of large space structures (LSS) is described. The force actuator is an electromagnetic system that produces a force by reacting against a proof-mass. The actuator has two colocated sensors, a digital microcontroller, and a power amplifier. The total weight of actuator is .998 kg. The actuator has a steady state force output of approximately 2.75 N from approximately 2 Hz to well beyond 1000 Hz.

#### A86-38844#

### SYNTHESIS OF STRUCTURES WITH MULTIPLE FREQUENCY

B. P. WANG (Texas, University, Arlington) IN: Structures, Structural Dynamics and Materials Conference, 27th, San Antonio, TX, May 19-21, 1986, Technical Papers. Part 1 . New York, American Institute of Aeronautics and Astronautics, 1986, p. 394-397. refs (AIAA PAPER 86-0951)

The problem of minimum weight design with several natural frequency constraints is considered in this paper. The problem is solved using a combined finite element-sequential linear programming (SCP) formulation. The unique features of the current approach include the use of assumed mode reanalysis formulation for repeated eigensolution and the associated sensitivity analysis. Additionally, a simple adaptive move limit strategy is developed to stabilize the SLP solutions. The present approach has been implemented with general purpose finite element programs (MSC/NASTRAN and a version of SAP4) and applied to several design problems. Author

National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

#### DYNAMIC ANALYSIS AND EXPERIMENT METHODS FOR A GENERIC SPACE STATION MODEL

W. K. BELVIN (NASA, Langley Research Center, Hampton, VA) and H. H. EDIGHOFFER (Edighoffer, Inc., Newport News, VA) IN: Structures, Structural Dynamics and Materials Conference, 27th, San Antonio, TX, May 19-21, 1986, Technical Papers. Part 2. New York, American Institute of Aeronautics and Astronautics, 1986, p. 10-18. refs (AIAA PAPER 86-0838)

Modal vibration tests in conjunction with finite element analysis were used to characterize a generic dynamic model. The model consists of five substructures to simulate the multi-body, low frequency nature of large space structures. Static tests were used to refine the substructure analytical models prior to full assemblage analysis. The effects of a cable suspension system are analyzed using prestressed vibration analysis. Coupling between a cable suspension mode and model bending mode is shown to be influenced by the distance from the model center of gravity to the cable-to-model attachment location. A damping characterization method using noncontacting exciters was used to measure amplitude dependent damping. Frequency and damping measurements in ambient air and at near-vacuum conditions are presented.

A86-38887\*# Jet Propulsion Lab., California Inst. of Tech.,

### CHARACTERISTIC WAVE APPROACH IN CONTROLLED LARGE SPACE STRUCTURES

M. ZAK (California Institute of Technology, Jet Propulsion Laboratory, Pasadena) IN: Structures, Structural Dynamics and Materials Conference, 27th, San Antonio, TX, May 19-21, 1986, Technical Papers. Part 2. New York, American Institute of Aeronautics and Astronautics, 1986, p. 19-22. USAF-sponsored research, refs

(Contract NAS7-918)

(AIAA PAPER 86-0839)

The modal approach in structural dynamics usually implies a truncation technique in the course of which the contribution of high frequencies is lost. This can lead to significant error in the case of impulsive loads. As an alternative to modal (or spectral) methods, the characteristic wave approach is developed. It appears that the application of this approach is most beneficial in the domains where spectral methods fail. That is why it can be used as a supplement to modal methods when the loads contain impulsive components. Author

### A86-38888#

#### STRUCTURE CONTROL SYSTEM VARIABLE (VSCS) MANEUVERING OF FLEXIBLE SPACECRAFT

H. OZ (Ohio State University, Columbus) and O. MOSTAFA IN: Structures, Structural Dynamics and Materials Conference, 27th, San Antonio, TX, May 19-21, 1986, Technical Papers. Part 2 New York, American Institute of Aeronautics and Astronautics, 1986, p. 23-34. refs

(AIAA PAPER 86-0840)

Variable Structure Control Systems (VSCS) are a class of nonlinear systems which change the structure of the controls when a set of prescribed hypersurfaces are reached in the phase space. The VSCS theory has desirable insensitivity properties under parameter uncertainties, nonlinear effects and disturbances. The theory represents a real-time implementable approach to control in contrast to algorithmic approaches, and therefore eliminates the computational burden. This paper applies the VSCS theory to maneuvering of flexible spacecraft. General nonlinear equations of motion are presented for a single axis maneuver. Three methods are presented for designing variable structure control logics. The theory is demonstrated for set point regulation, tracking, disturbance accommodation, spin-up, and robust maneuvers of a specific spacecraft configuration. Author A86-38889#

A SINGULAR-SOLUTION APPROACH FOR CONTROLLING THE NONLINEAR RESPONSE OF A CONTINUUM MODEL OF A LARGE SPACE STRUCTURE

P. E. ODONOGHUE (Southwest Research Institute, San Antonio, TX) and S. N. ATLURI (Georgia Institute of Technology, Atlanta) IN: Structures, Structural Dynamics and Materials Conference, 27th, San Antonio, TX, May 19-21, 1986, Technical Papers. Part 2. New York, American Institute of Aeronautics and Astronautics, 1986, p. 35-42. refs

(Contract AF-AFOSR-85-0020)

(AIAA PAPER 86-0841)

The topic of vibration control of large space structures which, in this instance are modeled by equivalent continua, is addressed here. A 'singular (or fundamental) solution' approach is utilized and the control algorithm is based on a fully coupled nodal system of equations which permits the effects of non-proportional damping to be monitored. Additionally, the structure will be allowed to undergo large deformations which will necessitate the implementation of a nonlinear control algorithm. In the scheme proposed here, the calculation of the feedback control forces will be based on the feedback gain matrix obtained from a solution of the linear optimal control problem. Examples will be presented to illustrate the controllability of the vibrations in both the linear and nonlinear cases.

A86-38907\*# Purdue Univ., West Lafayette, Ind.
A GLOBAL-LOCAL APPROACH TO SOLVING VIBRATION OF LARGE TRUSS STRUCTURES

C. T. SUN and S. W. LIEBBE (Purdue University, West Lafayette, IN) IN: Structures, Structural Dynamics and Materials Conference, 27th, San Antonio, TX, May 19-21, 1986, Technical Papers. Part 2. New York, American Institute of Aeronautics and Astronautics, 1986, p. 248-255. refs (Contract NAG1-581) (AIAA PAPER 86-0872)

A global-local approach was proposed to solve dynamic problems involving truss beams. A continuum Timoshenko beam was used to model sections of truss beams wherever possible and accurate. Near applied loads the continuum model was not adequate and detailed truss finite elements (discrete model) were employed. This approach was also proven efficient for an odd-shaped truss structure connected to a truss beam. Between the continuum model and the discrete model, compatibility conditions were derived.

# A86-38914# MODE LOCALIZATION PHENOMENA IN LARGE SPACE STRUCTURES

O. O. BENDIKSEN (Princeton University, NJ) IN: Structures, Structural Dynamics and Materials Conference, 27th, San Antonio, TX, May 19-21, 1986, Technical Papers. Part 2. New York, American Institute of Aeronautics and Astronautics, 1986, p. 325-335. refs

(AIAA PAPER 86-0903)

An analytical and numerical study is presented which investigates the possibility of localization or confinement of vibratory modes in large space structures. These structures belong to a class of periodic structures which have recently been shown to be sensitive to periodicity-breaking disorder or imperfections. When localization occurs, the modal amplitude of a global mode becomes confined to a local region of the structure, with serious implications for the control problem. The results of this study show that mode localization is most likely to occur in structures consisting of a large number of weakly coupled substructures. Certain large space structures with high modal densities fall in this category, and it is therefore important to include the effect of structural imperfections and disorder when designing control systems for shape or directional control of such structures.

A86-38915\*# Jet Propulsion Lab., California Inst. of Tech., Pasadena.

MULTIPLE BOUNDARY CONDITION TESTS (MBCT) FOR VERIFICATION OF LARGE SPACE STRUCTURES

B. K. WADA, C. P. KUO, and R. J. GLASER (California Institute of Technology, Jet Propulsion Laboratory, Pasadena) IN: Structures, Structural Dynamics and Materials Conference, 27th, San Antonio, TX, May 19-21, 1986, Technical Papers. Part 2. New York, American Institute of Aeronautics and Astronautics, 1986, p. 336-341. NASA-supported research. refs (AIAA PAPER 86-0905)

The Multiple Boundary Condition Tests (MBCT) approach is evaluated and recent modifications are described. For the application of MBCT, 12 different boundary conditions are selected and the results of applying MBCT in conjunction with a nonlinear formulation are indicated schematically. It is concluded that the nonlinear formulation enhances the ability to implement the MBCT test approach on large space structures which cannot be ground tested without the artificial boundary conditions incorporated in MBCT. In addition, it leads to significant improvements in the convergence to the correct solution.

A86-38916\*# Virginia Polytechnic Inst. and State Univ., Blacksburg.

### EQUATIONS FOR THE VIBRATION OF A SLEWING FLEXIBLE SPACECRAFT

R. D. QUINN and L. MEIROVITCH (Virginia Polytechnic Institute and State University, Blacksburg) IN: Structures, Structural Dynamics and Materials Conference, 27th, San Antonio, TX, May 19-21, 1986, Technical Papers. Part 2. New York, American Institute of Aeronautics and Astronautics, 1986, p. 342-354. refs (Contract NAG1-225)

(AIAA PAPER 86-0906)

The derivation of the equations describing the vibration of a flexible spacecraft is presented in the context of a perturbation method permitting a maneuver strategy independent of the vibration control. A straightforward open-loop minimum-time rotational maneuver strategy is developed for the spacecraft regarded as a rigid body. Actuator dynamics are considered in the formulation. A maneuver force distribution is developed which excites the least amount of elastic deformation of the flexible parts of the spacecraft. An efficient technique for simulating structural vibrations during a maneuver is presented. Numerical results demonstrate the maneuver strategy and highlight the vibration caused by rotational maneuvers.

A86-38917\*# Jet Propulsion Lab., California Inst. of Tech., Pasadena.

### VIBRATION OF A LARGE SPACE BEAM UNDER GRAVITY EFFECT

C.-F. SHIH (California Institute of Technology, Jet Propulsion Laboratory, Pasadena) IN: Structures, Structural Dynamics and Materials Conference, 27th, San Antonio, TX, May 19-21, 1986, Technical Papers. Part 2. New York, American Institute of Aeronautics and Astronautics, 1986, p. 355-361. NASA-supported research.

(AIAA PAPER 86-0907)

The structural characteristics of a large simply supported beam subjected to gravity are described. The nonlinear governing equations for both the static and the dynamic response are derived and solved analytically. The results show the feasibility of verifying the on-orbit dynamic characteristics of a large space beam by utilizing ground test data of such a structure. It is noted that the gravity effect interacts mostly with the first vibration mode. It was also found that the system of a large space beam subjected to its own weight is a hardening system. The differential equation for the asymmetric mode is a Duffing type equation. However, the governing equation for the symmetric mode has an additional quadratic term. It is this term that causes the maximum vibration amplitudes at different phases to be non-identical.

#### A86-38918#

### SOME CONSIDERATIONS ON EARTHBOUND DYNAMIC **TESTING OF LARGE SPACE STRUCTURES**

H. ASHLEY (Stanford University, CA) IN: Structures, Structural Dynamics and Materials Conference, 27th, San Antonio, TX, May 19-21, 1986, Technical Papers. Part 2 . New York, American Institute of Aeronautics and Astronautics, 1986, p. 362-375. refs (Contract AF-AFOSR-82-0062) (AIAA PAPER 86-0908)

Several issues are discussed which relate to the scale-model testing, in ground facilities, of large space structures composed of beam-like elements. A comparison is made with similar tests on aeroelastic models of aircraft. With special reference to the roles of gravity, control systems and damping, it is concluded that use of large replica models will often prove infeasible. It is proposed that low-frequency beam structures under active control can furnish useful verification of design methods. This leads into various analyses of a very flexible beam hanging in gravity and of simplified models of a suspended lattice with a counterweight. By means of the latter quite low frequencies seem attainable. A mathematical appendix gives details of some of the solutions.

A86-38933\*# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

MULTIDISCIPLINARY CAPABILITY FOR ANALYSIS OF THE **DYNAMICS** AND CONTROL OF FLEXIBLE **STRUCTURES** 

P. A. COOPER, M. S. LAKE, J. W. YOUNG (NASA, Langley Research Center, Hampton, VA), and T. R. SUTTER (PRC-Kentron, IN: Structures, Structural Dynamics and Inc., Hampton, VA) Materials Conference, 27th, San Antonio, TX, May 19-21, 1986, Technical Papers. Part 2 New York, American Institute of Aeronautics and Astronautics, 1986, p. 525-532. refs (AIAA PAPER 86-0961)

The paper describes a computerized data distribution capability, IMAT, in place at the NASA Langley Research Center for the multidisciplinary analysis of the dynamics and control of large flexible space structures. The paper includes results obtained in using IMAT to investigate the influence of the structural response of the space station framework on the control of a 300kw class, solar-dynamic-powered, dual-keel space station during an orbital reboost maneuver. The method of control, using an unfiltered proportional-plus-differential control law, led to a stable control system even with local flexible response measured at the control sensor location included as a part of the control error signal. The flexible response at the outboard solar dynamic system sun-line axis was close to the maximum rotation allowed for efficient operation; thus, active local control of each solar dynamic system may be necessary to limit sun-line axis rotations effectively during a reboost maneuver.

A86-38951\*# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

STRUCTURAL DYNAMIC **ANALYSIS** OF THE LARGE **DEPLOYABLE REFLECTOR** 

G. C. ANDERSEN and A. D. SCOTT (NASA, Langley Research Center, Hampton, VA) AIAA, ASME, ASCE, and AHS, Structures, Structural Dynamics, and Materials Conference, 27th, San Antonio, TX, May 19-21, 1986. 8 p. refs (AIAA PAPER 86-0004)

The dynamic performance of the primary mirror of the Large Deployable Reflector (LDR) is analyzed under conditions of typical external disturbances that would be encountered during normal space operation. The performance assessment is based upon the difference between the figure distortion errors of the incomina image and the mission figure tolerance requirements (rms surface accuracy error and jitter). The need for additional figure control of the incoming image is assessed, and other alternatives for figure control are presented, such as increased structural damping effects due to the uncertainty in the real damping characteristics.

A86-39035#

THE **OPTIMAL PROJECTION EQUATIONS** REDUCED-ORDER, DISCRETE-TIME MODELING, ESTIMATION,

D. S. BERNSTEIN, L. D. DAVIS, and D. C. HYLAND (Harris Corp., Melbourne, FL) Journal of Guidance, Control, and Dynamics (ISSN 0731-5090), vol. 9, May-June 1986, p. 288-293. refs

The optimal projection equations derived previously for reduced-order, continuous-time modeling, estimation, and control are developed for the discrete-time case. The design equations are presented in a concise, unified manner to facilitate their accessibility for the development of numerical algorithms for practical applications. As in the continuous-time case, the standard Kalman filter and linear-quadratic-Gaussian results are immediately obtained as special cases of the estimation and control results.

Author

A86-39036\*# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

EFFECTS OF NOISE ON MODAL PARAMETERS IDENTIFIED BY THE EIGENSYSTEM REALIZATION ALGORITHM

J.-N. JUANG and R. S. PAPPA (NASA, Langley Research Center, Hampton, VA) Journal of Guidance, Control, and Dynamics (ISSN 0731-5090), vol. 9, May-June 1986, p. 294-303. refs

The basic concept of the Eigensystem Realization Algorithm for modal parameter identification and model reduction is extended to minimize the distortion of the identified parameters caused by noise. The mathematical foundation for the properties of accuracy indicators, such as the singular values of the data matrix and modal amplitude coherence, is provided, based on knowledge of noise characteristics. These indicators quantitatively discriminate noise from system information and are used to reduce the realized system model to a better approximation of the true model. Monte Carlo Simulations are included to support the analytical studies.

### A86-39037\*# Brown Univ., Providence, R. I. SPLINE-BASED DISTRIBUTED SYSTEM IDENTIFICATION WITH **APPLICATION TO LARGE SPACE ANTENNAS**

H. T. BANKS (Brown University, Providence, RI), P. K. LAMM (Southern Methodist University, Dallas, TX), and E. S. ARMSTRONG (NASA, Langley Research Center, Hampton, VA) Journal of Guidance, Control, and Dynamics (ISSN 0731-5090). vol. 9, May-June 1986, p. 304-311. refs (Contract NAG1-258; NSF MCS-82-05355; AF-AFOSR-81-0198;

NSF MCS-82-00883; NAS1-15810; NAS1-16394)

A parameter and state estimation technique for distributed models is demonstrated through the solution of a problem generic to large space antenna system identification. Assuming the position of the reflective surface of the maypole (hoop/column) antenna two-dimensional, approximated by static to be the equation stretched-membrane partial differential variable-stiffness coefficient functions. spline-based а approximation procedure is described that estimates the shape and stiffness functions from data set observations. For given stiffness functions, the Galerkin projection with linear spline-based functions is applied to project the distributed problem onto a finite-dimensional subspace wherein algebraic equations exist for determining a static shape (state) prediction. The stiffness functions are then parameterized by cubic splines and the parameters estimated by an output error technique. Numerical results are presented for data descriptive of a 100-m-diameter maypole antenna Author

### A86-39478#

### IDENTIFICATION OF A DAMPING MATRIX FROM MODEL

W. L. HENDRICKSON and D. J. INMAN (New York, State University, Buffalo) IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985. Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 19-26. refs

In modeling structures, the dissipation in the system is usually the most difficult element to model. This is especially true in complex arrangements such as large flexible space structures and composite materials. The work presented here examines a method of modeling the dissipation in a structure from experimental data combined with accepted nondissipation finite element data. The result of the described procedure is a linear nonconservative multiple degree of freedom model of a test structure that correctly predicts the transient response of the structure to arbitrary inputs. Author

#### A86-39479#

### STRUCTURAL PARAMETER IDENTIFICATION USING MODAL **RESPONSE DATA**

N. G. CREAMER and S. L. HENDRICKS (Virginia Polytechnic Institute and State University, Blacksburg) IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985 . Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 27-38.

The identification of a set of physical structural parameters using simulated measurements of natural frequencies has been investigated to determine the minimum amount of apriori structural information required and the effects of closely spaced frequencies and model symmetry on the identification process. A necessary condition for identification is the knowledge of a mass and length scale; however, this is not always a sufficient condition. If symmetry exists in the structure, additional apriori knowledge is required. To identify the parameters of a large space structure with equal appendages using the proposed method, a sufficient condition is the knowledge of a mass and length scale for each appendage.

Author

### A86-39481#

### **NEUMANN SERIES APPROACH TO RANDOM VIBRATIONS**

H. BENAROYA and M. REHAK (Weidlinger Associates, New York) IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985 . Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 61-76. refs

(Contract F49620-84-C-0009)

Linear, random differential equations are studied with the purpose of understanding the effects of parameter uncertainties on the random vibration of structures. In particular, a single degree-of-freedom oscillator is considered with random (stationary) stiffness and input, with deterministic, constant mass and damping. The method utilized is known as the Born expansion in physics. The mathematical formalism is based on an iterative method. The solution is of the Neumann series form. While no priori smallness assumptions are made, it becomes evident that there are restrictions in application. The restriction comes in the form of an upper bound on the variance of the stiffness parameter, i.e., its dispersion or randomness. It is demonstrated that parameter uncertainties can have an appreciable effect on the output process spectral density. The method used is complex and cumbersome. but the information derived is believed to be not otherwise available in analytic form. This framework appears useful for an initial study of random parameter systems. Author

A86-39482\*# Howard Univ., Washington, D. C.

#### EVALUATION OF PERFORMANCE CHARACTERISTICS FOR A SPACE ANTENNA SYSTEM SUBJECTED TO STOCHASTIC **DISTURBANCES**

S. ANANTHAKRISHNAN, P. M. BAINUM, and A. S. S. R. REDDY (Howard University, Washington, DC) IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985 . Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 77-91. Research supported by Howard University. refs (Contract NSG-1414)

Control system synthesis for a large space antenna system is investigated based on stochastic linear optimal control techniques and the minimization of a quadratic Gaussian performance index. Parametric studies indicate that suitable combinations of plant and sensor noise characteristics, and state weighting matrices, can be found to meet the mission RMS pointing requirements. Using a combination of the Kalman filter and linear feedback, an optimal control law for the finite element model of the Hoop/Column structural system without damping is obtained. Removing the hoop-mounted actuator resulted in an increase in the RMS errors. an increased control effort, and an increase in the least damped modal time constant. Removing the hoop-mounted sensor resulted in an RMS error increase and estimator performance degradation, with less system RMS performance degradation than noted for removal of the hoop-mounted actuator. R.R.

### A86-39483#

### STABLE DIRECT ADAPTIVE CONTROL IN HILBERT SPACE

J. WEN and M. J. BALAS (Rensselaer Polytechnic Institute, Troy, NY) IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985. Blacksburg, VA, Virginia Polytechnic Institute and State University. 1985, p. 93-108. refs

Model Reference Adaptive Control using the command generator tracker approach has been applied successfully to some finite-dimensional systems. The same approach has also been used for adaptive regulation. The present method differs from other adaptive control algorithms in that it has potential application to infinite-dimensional systems. Four main technical difficulties for such application are discussed in this paper: coercivity of the P operator in Lyapunov Equation, the strict positive realness condition, application of the LaSalle's invariance principle in infinite dimension and the existence and the uniqueness of solution. Some of the ramifications and the remedies of these issues are investigated. Author

#### A86-39484#

### IN SEARCH OF THE OPTIMAL QUADRATIC REGULATOR

D. W. REW (Virginia Polytechnic Institute and State University, Blacksburg) and J. L. JUNKINS (Texas A & M University, College Station) IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985. Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 109-123. refs

A mathematical formulation and associated algorithm is presented which can be used to tune the weight matrices in an optimal quadratic regulator to impose constraints and eigenspace optimality criteria upon closed loop systems eigenvalues. The algorithm is found to be efficiently applicable to moderately high dimensioned problems; reliable convergence has been routinely demonstrated with over one hundred and fifty weight matrix elements being optimized to place eigenvalues in a dynamical system of order fourteen. These results provide a basis for optimism that the approach is applicable to a significant family of problems.

**Author** 

A86-39485\*# Duke Univ., Durham, N. C.

FREQUENCY DOMAIN SOLUTIONS TO MULTI-DEGREE-OF-FREEDOM, DRY FRICTION DAMPED SYSTEMS UNDER PERI-ODIC EXCITATION

A. A. FERRI and E. H. DOWELL (Duke University, Durham, NC) IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985. Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 125-144. refs

(Contract AF-AFOSR-83-0346; NAG3-516)

The anticipated low damping level in large space structures (LSS) has been a major concern for the designers of these structures. Low damping degrades the free response and complicates the design of shape and attitude controllers for flexible spacecraft. Dry friction damping has been considered as a means of increasing the passive damping of LSS, by placing it in the joints and connecting junctures of structures. However, dry friction is highly nonlinear and, hence, analytical investigations are difficult to perform. Here, a multi-harmonic, frequency domain solution technique is developed and applied to a multi-DOF, dry friction damped system. It is seen that the multi-harmonic method is much more accurate than traditional, one harmonic solution methods. The method also compares well with time integration. Finally, comparisons are made with experimental results.

### A86-39486# UNIFORM DAMPING CONTROL OF SPACECRAFT

L. M. SILVERBERG (North Carolina State University, Raleigh) IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985. Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 145-161. refs

This paper describes the uniform damping control of flexible spacecraft. The dynamic characteristics of spacecraft are reviewed and a criterion for a dynamic performance is described by a uniform damping control which exhibits three distinctly attractive features. It is shown that (1) the associated uniform damping control law is independent of the spacecraft stiffness, (2) the associated control forces are proportional to the spacecraft mass density and (3) the uniform damping control law is decentralized. The uniform damping control solution is shown to represent a first-order approximation to a special globally optimal control problem. The implementation of uniform damping control is considered using discrete (in space) actuation and sensing type devices. Robustness in the presence of errors due to implementing the control using discrete components is characterized.

# A86-39487# CONTROL OF TRAVELING WAVES IN FLEXIBLE STRUCTURES

L. MEIROVITCH and J. K. BENNIGHOF (Virginia Polytechnic Institute and State University, Blacksburg) IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985. Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 163-182. (Contract AF-AFOSR-83-0017)

This paper is concerned with the control of a traveling wave in a structure by the independent modal-space control method. It is demonstrated that the control forces tend to concentrate in the immediate vicinity of the disturbance, and there are virtually no control forces acting at any point of the structure before the arrival of the disturbance. Two numerical examples are included, one for a string in transverse vibration and one for a beam in bending. Satisfactory control was achieved in spite of the fact that only a finite number of modes was retained for control.

Author

### A86-39488#

### DEMONSTRATION OF VIBRATION CONTROL OF A FLEXIBLE TRUSS STRUCTURE

C. S. MAJOR and E. B. SHAIN (TRW, Inc., TRW Space and Technology Group, Redondo Beach, CA) IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985. Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 183-190.

A noncolocated multivariable controller for a large flexible truss structure is used to demonstrate large space structure control techniques. The structure resembles a typical optics structure single cell and supports a massive plate, representing a mirror, to which disturbances are applied using momentum exchange devices. Optical sensors detect plate motion, and linear actuators in four truss members provide control forces. A robust digital control system was designed using frequency-domain methods, and characteristic gains are used to tailor the performance characteristics. Gain margin can be predicted in spite of nonlinearities. Results demonstrate top plate disturbance reduction by a factor of 18 (25 dB) without parameter estimation, and modeling error and actuator bearing stiction are found to be the most significant performance limitation factors.

### A86-39489#

### FLEXIBILITY FORMULATION IN STRUCTURAL CONTROL

H. OZ (Ohio State University, Columbus) IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985 . Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 207-229. refs (Contract NSF MEA-82-04920)

Structural Control is studied within the framework of 'Flexibility Formulation'. Approximate methods of structural dynamics, specifically Galerkin method, minimum quadratic equation error, point-control and collocation techniques are applied to design compatible load distribution fields for desired displacement fields. Open-loop and closed-loop derivations are presented for desired modal model behavior of the structure. It is shown that continuously distributed proportional damping and stiffness control can be affected by a finite number of point-inputs. In this regard, 'spatial modal input-distributors' are introduced as dual in control of spatial modal filters. Effects of spillover and/or spatially discrete inputs are evaluated on the basis of control design model without explicit knowledge of residual dynamics. Practical implementation is discussed and examples of feedback control are given.

#### A86-39491#

### BALANCED AUGMENTED CONTROLLER REDUCTION

K. A. CARROLL and P. C. HUGHES (Toronto, University, Canada) IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985. Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 245-260. refs

The problem of reducing the order of dynamic controllers is examined. An earlier method due to Yousuff and Skelton called Balanced Controller Reduction is reviewed. Their method is extended to the case where the control loop is closed. The resulting method is called Balanced Augmented Controller Reduction. Both methods are applied to the controller of a large, flexible spacecraft, ZSAT. Reduced order controllers are produced and their relative performance studied. The new method is found to perform slightly better, and applies to a larger class of controllers, than does the old method.

#### A86-39492#

# FINITE DIMENSIONAL STABILIZATION OF LINEAR DISTRIBUTED PARAMETER SYSTEMS VIA GALERKIN'S TECHNIQUE

J. G. HSIEH and M. J. BALAS (Rensselaer Polytechnic Institute, Troy, NY) IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985 . Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 261-273. refs

Control of the Distributed Parameter Systems (DPS) involves dynamical descriptions on infinite-dimensional Hilbert or Banach spaces of functions. Generally, it is not possible to implement an infinite-dimensional controller for the DPS. Consequently, the reduced order modeling of DPS becomes extremely crucial for design of the finite-dimensional feedback controllers. In this paper, Galerkin (or finite element) methods are presented as a way to develop finite-dimensional controllers for linear DPS. The behavior of Galerkin methods is examined, the existence of a finite-dimensional stabilizing controller for a given linear DPS is shown, and its order is specified.

### A86-39493#

### CLOSED-LOOP STABILITY OF LARGE SPACE STRUCTURES WITH REDUCED-ORDER CONTROLLERS

M. AHMADIAN (Clemson University, SC) and D. J. INMAN (New York, State University, Buffalo) IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985. Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 275-289. refs

Modal truncation in the dynamic models of large space structures can cause well-known stability problems when these models are used as the design basis for active structural control. In other words, the asymptotic stability of a full-order closed-loop system cannot necessarily be ensured by the asymptotic stability of the reduced-order model. The main goal of the present study is to develop conditions which will ensure asymptotic stability of the full-order closed-loop system, when the reduced-order closed-loop system is asymptotically stable. A finite dimension model of large space structures is exploited here to provide such conditions. These conditions are in terms of submatrices of the coefficient matrices as they are partitioned according to the modeled and residual modes. This may serve as a means of improving, or guiding, the design of a reduced-order controller.

Author

### A86-39494#

### **DYNAMICS OF GYROELASTIC VEHICLES**

G. M. T. DELEUTERIO (Toronto, University, Downsview, Canada) IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985. Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 291-306. NSERC-supported research.

A model for a flexible spacecraft having a distribution of control moment gyros and/or momentum wheels is presented. The model treats the spacecraft as a continuum in mass, stiffness and gyricity (stored angular momentum). Internal rigid-body degrees of freedom are permitted in the analysis. The equation of motion for the spacecraft is derived in operator form. Orthogonality conditions among the vibration modes are shown and the general motion is expanded in terms of these modes. As demonstrated with the aid of a simple example, the modes of gyroelastic vehicles undergo a metamorphosis of certain critical levels of gyricity. Moreover, a gyroelastic vehicle generally exhibits scleromorphic modes in which the vehicle, or part thereof (if internal rigid-body degrees of freedom are present), rotates uniformly in a deformed state. In the absence of gyricity, these modes would be uniform rotations with the vehicle undeformed.

#### A86-39495#

### HOMOGENIZATION AND CONTROL OF LATTICE STRUCTURES

G. L. BLANKENSHIP (Maryland, University, College Park) IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985. Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 307-324. refs (Contract F49620-84-C-0118)

Under certain natural conditions, the dynamics of large, low-mass lattice structures with a regular infrastructure are well approximated by the dynamics of continua, e.g., trusses may be modeled by beam equations. Using a technique from the mathematics of asymptotic analysis called homogenization, it is shown how such approximations may be derived in a systematic way which avoids errors made using 'direct' averaging methods. A model is also developed for the combined problem of homogenization and control of vibrations in lattice structures, and a preliminary analysis of this problem is presented.

#### A86-39496#

### A MATRIX APPROACH TO DYNAMICS FORMULATION OF COMPLEX SPACE STRUCTURES

Y. OHKAMI, O. OKAMOTO, T. KIDA, I. YAMAGUCHI, and K. MATSUMOTO (National Aerospace Laboratory, Tokyo, Japan) IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985. Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 325-340. refs

A unified matrix approach for the formulation of complex space structure dynamical equations is proposed. The major advantage of the approach developed lies in its basic simplicity in solving constrained dynamical equations. It is essentially based on the formulation of a matrix algebraic equation of the form A X=B, to be solved for the variable X, whose elements consist of the time-derivatives of nonholonomic angular and linear momenta, followed by integration routines. The matrix A has a simple structure clarifying the characteristics of the system topology and the constraining conditions. Some examples are shown to illustrate the features of the approach, and numerical results obtained by a general-purpose computer program are presented.

#### A86-39497#

### THE EFFECTS OF STRUCTURAL PERTURBATIONS ON MODAL SUPPRESSION

R. A. CALICO and S. MOORE (USAF, Institute of Technology, Wright-Patterson AFB, OH)
 IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985.
 Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 341-351.
 The sensitivity of modal suppression to structural perturbations

The sensitivity of modal suppression to structural perturbations is considered. The stiffness matrix for the CSDL 1 model is perturbed by changing the areas of its rod members. A LQR controller, with modal suppression is designed for the nominal system. The controller is used on the perturbed systems and the effects on modal suppression are noted. The spillover into the suppressed modes due to perturbations is also quantified in terms of the change in the column space of the observation matrix.

Author

### A86-39498#

### LINEAR REGULATOR CONTROL OF THE HOOP-COLUMN

A. K. CHOUDHURY, P. BOFAH, and A. R. GUMASTAS (Howard University, Washington, DC)
 IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985. Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 353-363. refs
 This paper considers the problem of linear quadratic regulator

This paper considers the problem of linear quadratic regulator optimal control law design for a proposed deployable large space structure, the hoop-column (may-pole) antenna. A 100-meter point design hoop-column antenna is modelled as a flexible circular membrane with multiple boundary and initial conditions. Analysis

is based on near-earth equatorial circular orbit at constant angular rate. The linearised equations of motion consist of coupled rotational and generic modes. A reduced order model (using three generic modes) is used for the control law design. The main forces considered on the body are structural (which depend on the eigenfrequencies and the eigenmodes) and the earth's gravitational potential. The antenna is considered to be a linear deterministic noise-free plant. Torque actuators are designed to control the antenna shape and orientation.

#### A86-39499#

### TRANSIENT DYNAMICS DURING THE EXTENSION OF FLEXIBLE MEMBERS

V. J. MODI and A. M. IBRAHIM (British Columbia, University, Vancouver, Canada) IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985. Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 365-380. refs (Contract NSERC-67-1547)

Using a rather general formulation of the problem representing a large class of space platforms with flexible, extensible members, the paper attempts to study complex interactions between deployment, attitude dynamics and flexural rigidity. The governing nonlinear, nonautonomous and coupled equations of motion are extremely difficult to solve even with the help of a computer, not to mention the cost involved. The procedure is used to study dynamics during the NASA/Lockheed Solar Array Flight Experiment (SAFE). Response of the hybrid system is obtained over a range of physical parameters and external disturbances. Both transient as well as post-deployment phases are considered. Results suggest significant influence of flexibility, inertia, deployment time history and orbital parameters on the system stability. The presence of free molecular and solar radiation induced environmental forces may further accentuate this tendency.

### A86-39500\*# California Univ., Los Angeles.

# A ROBUST NONLINEAR ATTITUDE CONTROL LAW FOR SPACE STATIONS WITH FLEXIBLE STRUCTURAL COMPONENTS

P. K. C. WANG (California, University, Los Angeles) IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985. Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 381-398. NASA-supported research.

In this paper, a nonlinear attitude control law for space stations with flexible structural components is derived using a rigid-body model. This control law, depending on the Cayley-Rodriguez parameters, globally stabilizes the equilibrium of the rigid-body model. The effect of elastic deformations of the flexible structural components on the resulting feedback system dynamics is analyzed. It is found that the system's stability property is highly robust with respect to structural vibrations and inertial variations. The time-domain behavior of the feedback system is studied numerically using a model of a typical space station with flexible solar panels.

### A86-39501#

### MODELLING OF THE HOOP-COLUMN ANTENNA AND DESIGN OF NONLINEAR CONTROL LAW IN ORBIT

P. BOFAH and A. K. CHOUDHURY (Howard University, Washington, DC) IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985 . Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 399-412. refs

University, 1985, p. 399-412. refs
This paper considers the problem of modeling and design of a nonlinear control law for the hoop-column antenna in orbit. A 100-meter diameter reflector antenna is studied as a flexible body in a near-earth orbit. The dynamics of the body involve nonlinear coupled equations of rotational and generic modes. The generic modes involve the eigenfrequencies of the body. The main disturbances considered on the body are those due to the earth's gravity gradient and vibration modes. A nonlinear control law (the receding horizon concept) is used to stabilize the antenna using

linearized version of the equations of motion by retaining a finite number of truncated modes. The nonlinear control law design is compared with linear quadratic regulator controller. Author

#### A86-39504#

### ACTIVE VIBRATION DAMPING EXPERIMENTS AT VPI & SU-OVERVIEW AND RECENT RESULTS

W. L. HALLAUER, JR. and G. R. SKIDMORE (Virginia Polytechnic Institute and State University, Blacksburg) IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985. Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 437-454. USAF-sponsored research.

This paper describes many details of the development of a laboratory for experimental research into the dynamics and active damping of highly flexible structures. Among the topics discussed are: the data acquisition-analysis system; the laboratory structures used for active damping experiments; and the control hardware, including analog circuits, a digital controller, velocity sensors, and force actuators. The active damping techniques that have been implemented are based on velocity feedback. Very recent experimental results are presented for active damping of a two-dimensional structure with the use of five dual (colocated) sensor-actuator pairs. The results consist of frequency response functions measured over 0-10 Hz, encompassing the first thirteen modes of the structure.

# A86-39505\*# State Univ. of New York at Buffalo, Amherst. VIBRATION CONTROL OF FLEXIBLE BEAMS USING AN ACTIVE HINGE

H. H. CUDNEY, JR., D. J. INMAN (New York, State University, Amherst), and G. C. HORNER (NASA, Langley Research Center, Hampton, VA)

IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985. Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 455-470. refs (Contract NGT-33-183-802)

The use of an active hinge to attenuate the transverse vibrations of a flexible beam is examined. A slender aluminum beam is suspended vertically, cantilevered at the top. An active hinge is placed at the node of the second vibration mode. The active hinge consists of a torque motor, strain gauge, and tachometer. A control law is implemented using both beam-bending strain and the relative angular velocity measured at this hinge, thereby configuring the hinge to act as an active damper. Results from implementing this control law show little improvement in the first mode damping ratio, 130 percent increase in the second mode damping ratio, and 180 percent increase in the third mode damping ratio. The merits of using a motor with a gearbox are discussed.

Author

#### A86-39506#

### ACTIVE STRUCTURAL CONTROL WITH DECENTRALIZED AND COLOCATED CONTROL UNITS

A. ERCOLI FINZI, M. LANZ, and P. MANTEGAZZA (Milano, Politecnico, Milan, Italy) IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985. Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 487-501. refs

The paper presents an approach to the active control design of large space structures that is based on the adoption of decentralized control units. These control units use colocated sensors and actuators and adopt a control law that generate forces proportional to local motions in order to emulate real structural elements, discrete tuning masses and grounding spring-damper combinations. A modal reduced order model is used to design the control law on the base of the numerical minimization of a multimodel quadratic performance index related to the response and feedback forces following a perturbation of the initial conditions and/or the application of step inputs. It is shown how the use of this type of control units allow the development of an intrinsic 'fail-safe' design. The results obtained with the application of the concepts developed in this paper are demonstrated by their

application to an experiment in which a thin beam, suspended from the ceiling, is controlled by different combinations of the independent analog control units making use of a velocity transducer, an integrator and an electrodynamic actuator. Author

A86-39507#

### ACTUATOR FAILURE DETECTION IN THE CONTROL OF DISTRIBUTED SYSTEMS

H. BARUH (Rutgers University, New Brunswick, NJ) IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985. Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 503-523. refs

A method is presented for the detection of actuator failures in the control of distributed-parameter systems. The method can be used with any control scheme, and is based on identifying the actuators input from the system response by modal analysis. First, the modal excitations are identified. Estimates of the external forces are then synthesized as a linear combination of the modal forces. The identified external forces are compared with the actuator commands to detect failure and isolate the faulty component(s). The effects of actuator failure on the performance of control systems are investigated, as well as factors that affect the reliability of the failure detection, such as measurement noise and observation spillover. A guideline is proposed to locate the actuators in a way to aid the failure detection process.

A86-39508\*# Virginia Polytechnic Inst. and State Univ., Blacksburg.

### MANEUVERING OF FLEXIBLE SPACECRAFT WITH APPLICATION TO SCOLE

L. MEIROVITCH, R. D. QUINN, and M. A. NORRIS (Virginia Polytechnic Institute and State University, Blacksburg) IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985. Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 525-545.

(Contract NAG1-225)

This paper is concerned with the derivation of the equations of motion for the Spacecraft Control Laboratory Experiment (SCOLE). For future reference, the equations of motion of a similar structure orbiting the earth are also derived. The structure is assumed to undergo large rigid-body maneuvers and small elastic deformations. A perturbation approach is presented where the quantities defining the rigid-body maneuver are assumed to be relatively large, with the elastic deformations and deviations from the rigid-body maneuver being relatively small. The perturbation equations have the form of linear, non-self-adjoint equations with time-dependent coefficients. An active control technique can then be formulated to permit maneuvering of the spacecraft and simultaneously suppressing the elastic vibration.

**A86-39509\***# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

### A SLEWING CONTROL EXPERIMENT FOR FLEXIBLE STRUCTURES

J.-N. JUANG, L. G. HORTA (NASA, Langley Research Center, Hampton, VA), and H. H. ROBERTSHAW (Virginia Polytechnic Institute and State University, Blacksburg) IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985. Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 547-570. refs

A hardware set-up has been developed to study slewing control for flexible structures including a steel beam and a solar panel. The linear optimal terminal control law is used to design active controllers which are implemented in an analog computer. The objective of this experiment is to demonstrate and verify the dynamics and optimal terminal control laws as applied to flexible structures for large angle maneuver. Actuation is provided by an electric motor while sensing is given by strain gages and angle potentiometer. Experimental measurements are compared with analytical predictions in terms of modal parameters of the system stability matrix and sufficient agreement is achieved to validate the theory.

A86-39510\*# Illinois Univ., Urbana.

### SINGLE STEP OPTIMIZATION STRATEGIES FOR CONSTRAINED RETARGETING MANEUVERS

T. A. W. DWYER, III (Illinois, University, Urbana) and M. S. FADALI (Nevada, University, Reno) IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985. Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 571-583. refs (Contract NAG1-436; NSF ECS-83-04968)

The present consideration of recent advancements in the nonlinear guidance of spacecraft, using feedback linearization and decoupling to generate exact nominal commands, gives attention to the correction of saturation effects and oscillation prevention in saturated operating regimes. In the case of spacecraft maneuvered by momentum-transfer devices, real time command generation is possible by means of pointwise minimization of the sum of the squares of the norms of the 'next state error' for the equivalent system and the linear system input. It is also possible to track a nominal trajectory, such as a critically damped harmonic oscillator response, by minimizing the square of the norm of the error between the actual and the tracked states.

A86-39511#

# IMPLEMENTATION PROBLEMS ASSOCIATED WITH SIMULTANEOUS MANEUVER AND VIBRATION SUPPRESSION OF FLEXIBLE SPACECRAFT

H. BARUH (Rutgers University, New Brunswick, NJ) and L. M. SILVERBERG (North Carolina State University, Raleigh) IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985. Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 585-599. refs

Considerations associated with simultaneous large angle maneuver and vibration suppression of flexible spacecraft are discussed. The spacecraft undergoes nonlinear rigid-body motion and linear elastic motion. The associated modal equations of motion reveal three terms coupling the rigid-body motion and the elastic motion. These terms are due to angular accelerations of the body-fixed axes, centrifugal accelerations, and Coriolis effects. It is shown that vibration can be suppressed without distorting the maneuver using either linear optimal controls or natural controls. However, the maneuver will excite the flexible motion. Modal filters can be used to extract the modal coordinates. It is also shown that parameter uncertainties and errors in sensor measurements needed for vibration suppression will not effect the maneuver although the noise in the control forces and moments will distort the maneuver.

A86-39569#

### ROBUST CONTROL OF A FLEXIBLE NON-SYMMETRICAL SPACECRAFT

J. S.-C. YUAN (Spar Aerospace, Ltd., Toronto, Canada) (CASI, Canadian Conference on Astronautics, 3rd, Ottawa, Canada, Apr. 23, 24, 1985) Canadian Aeronautics and Space Journal (ISSN 0008-2821), vol. 32, March 1986, p. 62-74. Sponsorship: Department of Supply and Services. refs (Contract DSS-06ST-36001-3-2484)

This paper presents a method of simultaneous beam-pointing and attitude control of a flexible spacecraft. The latter represents a candidate concept for the next generation of large communications satellites (e.g. MSAT) which contains many flexible structural elements and are highly non-symmetrical in their overall configurations. The dynamic compensator is of the classical proportional-integral type augmented by a Kalman filter. The results demonstrate how an estimator-based compensator could be designed to retain the robustness properties with regard to parametric variation and spillover from unmodelled dynamics.

Author

A86-40607\*# Houston Univ., Clear Lake, Tex.

A LINEAR QUADRATIC TRACKER FOR CONTROL MOMENT GYRO BASED ATTITUDE CONTROL OF THE SPACE STATION J. T. KAIDY (Houston, University, Clear Lake; Rockwell International Corp., Houston, TX) IN: Space Systems Technology Conference, San Diego, CA, June 9-12, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 239-244. refs

(Contract NAS9-16715; NAS9-18000)

(AIAA PAPER 86-1194)

The paper discusses a design for an attitude control system for the Space Station which produces fast response, with minimal overshoot and cross-coupling with the use of Control Moment Gyros (CMG). The rigid body equations of motion are linearized and discretized and a Linear Quadratic Regulator (LQR) design and analysis study is performed. The resulting design is then modified such that integral and differential terms are added to the state equations to enhance response characteristics. Methods for reduction of computation time through channelization are discussed as well as the reduction of initial torque requirements.

#### A86-40769

#### AND STATE SIMULTANEOUS PLANT PARAMETER ESTIMATION BY A SUCCESSIVE STATES METHOD

S. J. DODDS (North East London Polytechnic, England) Control 85; Proceedings of the International Conference, Cambridge, England, July 9-11, 1985. Volume 2 . London/New York, Institution of Electrical Engineers/IEE Inspec, 1985, p. 452-457. Research supported by the Royal Establishment. refs

A method is presented for automatic estimation of the plant matrices (state transition matrix and discrete time drive matrix) together with the state vector of a time invariant linear plant. It is assumed that the number of variables available for measurement is less than the plant order. The method is first illustrated by means of a simple, second order example and then by means of computer simulations of an application to the attitude control of a space satellite containing a flexure mode in the rotational dynamics, the frequency of which is known only approximately prior to Author

National Aeronautics and Space Administration. A86-40843\* Langley Research Center, Hampton, Va.

SPLINE-BASED RAYLEIGH-RITZ METHODS FOR THE APPROXIMATION OF THE NATURAL MODES OF VIBRATION FOR FLEXIBLE BEAMS WITH TIP BODIES

I. G. ROSEN (NASA, Langley Research Center, Hampton, VA; Southern California, University, Los Angeles) Quarterly of Applied Mathematics (ISSN 0033-569X), vol. 44, April 1986, p. 169-185. Previously announced in STAR as N85-23100. refs (Contract AF-AFOSR-84-0393; NAS1-17070)

Rayleigh-Ritz methods for the approximation of the natural modes for a class of vibration problems involving flexible beams with tip bodies using subspaces of piecewise polynomial spline functions are developed. An abstract operator-theoretic formulation of the eigenvalue problem is derived and spectral properties investigated. The existing theory for spline-based Rayleigh-Ritz methods applied to elliptic differential operators and the approximation properties of interpolatory splines are used to argue convergence and establish rates of convergence. An example and numerical results are discussed.

A86-41739\*# Jet Propulsion Lab., California Inst. of Tech., Pasadena.

### MATERIAL DAMPING OF SIMPLE STRUCTURES IN A SIMULATED SPACE ENVIRONMENT

D. L. EDBERG (California Institute of Technology, Jet Propulsion Laboratory, Pasadena, Stanford, University, CA) Journal of Spacecraft and Rockets (ISSN 0022-4650), vol. 23, May-June 1986, p. 288-296. refs (Contract AF-AFOSR-82-0062)

The need for accurate, quantitative knowledge of the vibration dissipation of large space structures is explained. The sources of

experimental error in vibrational measurements are detailed. A new method for such testing based on the use of a miniature telemetry system is presented, which allows the testing of structures in a simulated space environment consisting of free-fall inside of a vacuum chamber. Theoretical relations are given for the damping ratios of metals and composites. Measured damping ratios for both aluminum and composite beams and plates, and aluminum planar trusses, are presented. Experimental results are used to evaluate the theoretical damping relations.

A86-41741\*# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

### DYNAMIC CHARACTERISTICS OF STATICALLY DETERMINATE SPACE-TRUSS PLATFORMS

M. S. ANDERSON (NASA, Langley Research Center, Hampton, VA) and N. A. NIMMO (Structures, Structural Dynamics, and Materials Conference, 26th, Orlando, FL, April 15-17, 1985, Technical Papers. Part 2, p. 723-728) Journal of Spacecraft and Rockets (ISSN 0022-4650), vol. 23, May-June 1986, p. 303-307. Previously cited in issue 13, p. 1855, Accession no. A85-30401.

#### A86-42855

### SINGULAR PERTURBATION METHODS FOR DISCRETE TIME

E. C. BEKIR (Rockwell International Corp., Rocketdyne Div., Canoga Park, CA) IN: Conference on Decision and Control, 24th, Fort Lauderdale, FL, December 11-13, 1985, Proceedings. Volume 1. New York, Institute of Electrical and Electronics Engineers, Inc., 1985, p. 86-94. refs

Some problems associated with applications of the singular perturbation method to the two-time scale discretized time systems are addressed. In practice, the small parameter of the fast time system is often implicit or unknown. A redefinition of the two-time scale property is proposed to resolve this and other related problems. Application to optimal regulators, design tradeoffs, and performance evaluation are also discussed. A practical example of a large space structure system is used to demonstrate the design procedure for implementing the singular perturbation techniques. Author

### A86-42909

### MODELLING AND DESIGN OF NONLINEAR FEEDBACK CONTROL LAW FOR A LARGE SPACE HOOP-COLUMN **ANTENNA**

BOFAH and A. K. CHOUDHURY (Howard University, Washington, DC) IN: Conference on Decision and Control, 24th. Fort Lauderdale, FL, December 11-13, 1985, Proceedings. Volume 1 . New York, Institute of Electrical and Electronics Engineers. Inc., 1985, p. 637-641. refs

The problem of modelling and design of a nonlinear control law for the hoop-column antenna in orbit is presented. A 100-meter diameter reflector antenna is studied as a flexible body in a near-earth equatorial circular orbit. The dynamics of the body involve nonlinear coupled equations of rotational and generic modes. The generic modes involve the eigenfrequencies of the body. The main disturbances considered on the body are those due to the earth's gravity gradient and vibration modes. A nonlinear control law (the receding horizon concept) is used to stabilize the antenna using linearized version of the equations of motion by retaining a finite number of truncated modes. The nonlinear control law design is compared with linear quadratic regulator controller Author implementation.

#### A86-42921

### CONTROL OF SYMMETRIZABLE DISTRIBUTED PARAMETER SYSTEMS

D. J. INMAN (New York, State University, Buffalo) IN: Conference on Decision and Control, 24th, Fort Lauderdale, FL, December 11-13, 1985, Proceedings. Volume 2. New York, Institute of Electrical and Electronics Engineers, Inc., 1985, p. 729-731. (Contract AF-AFOSR-82-0242)

Attention is given to a subclass of nonself-adjoint distributed parameter systems (NDPSs) described by partial differential equations which are second order in time. This subclass includes those systems which have coefficients that lie in a class of symmetrizable operators. The control problem considered is that of the validity of using a finite dimensional model in designing a control law for such systems. This involves a straightforward application of the results of Gibson (1981) and Sakawa (1984) to a class of symmetrizable systems. A class of NDPSs is indicated that can be controlled by finite dimensional control laws without introducing instabilities into the closed loop system. The results are applicable to large flexible space structures.

**A86-42938\*#** National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

# FAILURE DETECTION AND ACCOMMODATION IN STRUCTURAL DYNAMICS SYSTEMS USING ANALYTIC REDUNDANCY

J. P. WILLIAMS and R. C. MONTGOMERY (NASA, Langley Research Center, Hampton, VA) IN: Conference on Decision and Control, 24th, Fort Lauderdale, FL, December 11-13, 1985, Proceedings. Volume 2. New York, Institute of Electrical and Electronics Engineers, Inc., 1985, p. 906-910. refs

The concept of analytic redundancy is extended to identify nonzero constant output failures in large spacecraft active control sensors and actuators, using a set of distributed sensors which do not nominally produce equivalent signals but are related through the structural dynamics of the system. The suboptimal technique uses a Sequential Probability Ratio Test on the residual sequence of a Kalman filter based on a modal structure model, to determine failure of a component based on an assumed failure hypothesis. The specific failure is identified and then the Kalman filter gains are reconfigured for the identified remaining working sensor set. Experimental data using an apparatus whose dynamics are representative of a large spacecraft show the nominal filter performance under failed and unfailed conditions.

#### A86-42939

### INTEGRATION OF STRUCTURES AND CONTROLS - SOME COMPUTATIONAL ISSUES

D. F. MILLER (Wright State University, Dayton, OH), V. B. VENKAYYA, and V. A. TISCHLER (USAF, Wright Aeronautical Laboratories, Wright-Patterson AFB, OH) IN: Conference on Decision and Control, 24th, Fort Lauderdale, FL, December 11-13, 1985, Proceedings. Volume 2. New York, Institute of Electrical and Electronics Engineers, Inc., 1985, p. 924-931. refs

This paper discusses issues related to the integration of the structural and control design processes for large scale structural systems. These issues are discussed in the context of vibration suppression for large space structures using linear regulator theory. The controlled system is modeled, via finite element analysis, as a system of linear differential equations in modal space. Attention is focused upon the specification of meaningful weighting matrices for the quadratic performance index, reduced order model selection and control design, and the combined optimization of structural and control designs. Numerical simulations for two and three bay trusses illustrate the concepts presented.

#### Δ86-42941

### VIBRATION CONTROL OF FLEXIBLE STRUCTURES USING MEMBER DAMPERS

N. H. MCCLAMROCH (Michigan, University, Ann Arbor) IN: Conference on Decision and Control, 24th, Fort Lauderdale, FL, December 11-13, 1985, Proceedings. Volume 2. New York, Institute of Electrical and Electronics Engineers, Inc., 1985, p. 936-939. refs

Mathematical models of electromechanical-damper-controlled flexible-membered structures are developed and used to design simple hierarchical vibration controls. The models account for the dynamic effects of electromechanical interactions, of control force and moment transmission to the structure, and of the structure itself. The hierarchical control developed theoretically is spatially decentralized, and its closed-loop stability is found to depend on the gain matrices. The implications of these findings for the design of actuator vibration controllers for lightly damped structures such as flexible spacecraft are considered, and the need to take actuator dynamics into account is stressed.

### A86-42960

### ESTIMATION OF FREQUENCIES OF VIBRATION USING LATTICES

D. M. WIBERG and J. T. GILLIS (Aerospace Corp., Los Angeles, CA) IN: Conference on Decision and Control, 24th, Fort Lauderdale, FL, December 11-13, 1985, Proceedings. Volume 2. New York, Institute of Electrical and Electronics Engineers, Inc., 1985, p. 1157-1162. Research supported by the Aerospace Corp. refs.

On-line structural identification by use of lattice-form linear least-square algorithms is discussed. Some background is given concerning lattices and their uses in structural identification. The collapsed form of the lattice (vibration lattice) is compared with the usual lattice using simulated data from the ACOSS II (Active Control of Space Structures) model. Methods for extracting natural frequencies from parameters determined by the lattices are discussed, and the inverse system for multiple inputs and multiple outputs is derived. Problems concerning extending the vibration lattice to the known input case are addressed. It is concluded that the vibration lattice is numerically superior to, and faster converging than, the usual lattice for the case of free vibration with no noise, especially when many sensors are used.

### A86-42965

### **IDENTIFICATION OF SPACE STATION DYNAMICS**

B. SRIDHAR (Lockheed Research Laboratories, Palo Alto, CA) IN: Conference on Decision and Control, 24th, Fort Lauderdale, FL, December 11-13, 1985, Proceedings. Volume 2. New York, Institute of Electrical and Electronics Engineers, Inc., 1985, p. 1264, 1265

The dynamic parameters of the Space Station (SS) for the early 1990s are identified by applying the maximum likelihood estimation (MLE) method in a finite element model of the SS configuration as chosen by NASA. The amount of computation in the MLE approach is reduced by using the method of successive approximation. The finite element analysis uses 19 modes and the initial operational capability (IOC) shows a 75 KW configuration. Numerical results based on simulated data are presented. B.A.

### A86-42989

### A NONLINEAR ATTITUDE CONTROL LAW FOR A SATELLITE WITH FLEXIBLE APPENDAGES

S. MONACO (Roma, Universita, Rome, Italy) and S. STORNELLI (Telespazio S.p.A., Rome, Italy) IN: Conference on Decision and Control, 24th, Fort Lauderdale, FL, December 11-13, 1985, Proceedings. Volume 3. New York, Institute of Electrical and Electronics Engineers, Inc., 1985, p. 1654-1659. Research supported by Telespazio S.p.A. refs

The wide-angle attitude-control problem for a satellite with flexible appendages is considered. On the basis of the model specified by the kinematic equations (in the unitary quaternions parametrization) and by the dynamical equations (from the hybrid coordinates approach), a static-state feedback control law is

proposed. The simulations are characterized by the effort of overcoming some obvious problems which arise in the practical implementation of the proposed control law. Author

A86-42995

#### REDUCED ORDER COMPENSATOR DESIGN FOR **EXPERIMENTAL LARGE FLEXIBLE STRUCTURE**

C. PH. OPDENACKER, E. A. JONCKHEERE, and M. G. SAFONOV (Southern California, University, Los Angeles, CA) IN: Conference on Decision and Control, 24th, Fort Lauderdale, FL, December 11-13, 1985, Proceedings. Volume 3. New York, Institute of Electrical and Electronics Engineers, Inc., 1985, p. 1799-1805.

(Contract NSF ECS-82-12479)

A low-order controller is designed for the experimental truss structure described by Major and Simonian (1984). The objective is to achieve good disturbance attenuation while preserving good stability margin and other robustness properties. The method used as a first cut is LQG with frequency-dependent weights and colored noises. Controller reduction is accomplished through the open-loop balancing scheme of Moore (1981), applied to the full-order compensator. A typical result shows that it is possible to obtain a very low-order design which meets the above specification.

Author

A86-43003

### TRANSFER OF ALIGNMENT AND CALIBRATION OF MULTIPLE SENSORS IN FLEXIBLE SYSTEMS

H. C. SALZWEDEL and K. M. KESSLER (Systems Control Technology, Inc., Palo Alto, CA) IN: Conference on Decision and Control, 24th, Fort Lauderdale, FL, December 11-13, 1985, Proceedings. Volume 3 . New York, Institute of Electrical and Electronics Engineers, Inc., 1985, p. 1932-1937. refs

A method for the transfer aligment and calibration of sensors in flexible systems is presented. Flexible systems are represented by high order differential equations and reduced in dimension by model order reduction techniques. Both disturbability of alignment errors by control and disturbance inputs are considered. The reduced order model is decomposed by non-symmetric Riccati decomposition into states that directly and indirectly affect alignment errors. A transfer alignment and calibration filter with control feedthrough is developed and demonstrated for the example of a large flexible aircraft model in turbulence. Author

A86-43005

### A MATHEMATICAL FORMULATION OF A LARGE SPACE STRUCTURE CONTROL PROBLEM

A. V. BALAKRISHNAN (California, University, Los Angeles) Conference on Decision and Control, 24th, Fort Lauderdale, FL, December 11-13, 1985, Proceedings. Volume 3. New York, Institute of Electrical and Electronics Engineers, Inc., 1985, p. 1989-1993.

(Contract AF-AFOSR-83-0318)

An abstract mathematical formulation is presented of a Large Space Structure Control Problem experiment being conducted by the Space Controls Branch at the NASA Langley Research Center. The physical apparatus consists of a softly supported antenna attached to the Space Shuttle by a flexible beam-like truss. The control objective is to slew the antenna on command within the given accuracy while maintaining stability based on noisy sensor data and limited control authority. The beam motion is modelled by partial differential equations, starting with the equations of motion as derived by Taylor and Balakrishnan (1984). The abstract formulation as a nonlinear wave equation in a Hilbert space is given, and existence and uniqueness theory is addressed. Basic controllability results are reported, and the stabilizability results are given. The time-optimal control problem is briefly considered.

A86-43208\* Jet Propulsion Lab., California Inst. of Tech., Pasadena.

### A THREE-DIMENSIONAL DYNAMIC ANALYSIS AND LIBRATION STUDY OF A TETHERED SATELLITES SYSTEM

C. C. H. TANG (California Institute of Technology, Jet Propulsion Laboratory, Pasadena) and B. C. BARISH (California Institute of Technology, Pasadena) IN: Astrodynamics 1985; Proceedings of the Conference, Vail, CO, August 12-15, 1985. Part 1 . San Diego, CA, Univelt, Inc., 1986, p. 109-131. NASA-supported research. refs

(AAS PAPER 85-340)

By a three-dimensional Lagrangian formulation, an exact set of ten coupled nonlinear second-order differential equations has been derived for a system with an extensible tether connecting two end satellites of distributed mass. The effects of tether mass, small orbital eccentricity, central body oblateness, aerodynamic drag force, and solar radiation pressure are also included in the formulation. By linearizing the exact differential equations, the in-plane (orbital plane) differential equations are found to be decoupled from the out-of-plane ones. The characteristic equation of the in-plane differential equations is derived and some associated stability constraints are shown.

A86-43213

### A MULTIBODY DYNAMICS EQUATION FORMULATION BY **MOMENTUM PRINCIPLE**

M. TONG (Aerospace Corp., Control Analysis Dept., Los Angeles. IN: Astrodynamics 1985; Proceedings of the Conference, Vail, CO, August 12-15, 1985. Part 1 . San Diego, CA, Univelt, Inc., 1986, p. 219-238. refs (Contract F04701-83-C-0084)

(AAS PAPER 85-391)

Equations of motion are obtained using the momentum principle for an arbitrary collection of N rigid bodies that are interconnected by hinges in a tree configuration. Rotational and translational motions are permitted at the hinges. The derived equations are a set of first order nonlinear differential equations in Hamiltonian form, in that the system states are the generalized coordinates and the generalized momenta of the system. Also presented in this paper are the treatment of the equations of motion with constraints, and the computer implementation of the derived equations for multibody dynamics simulations.

A86-43214

### ON THE DYNAMICS OF BEAM TYPE STRUCTURAL MEMBERS **DURING DEPLOYMENT**

A. M. IBRAHIM and V. J. MODI (British Columbia, University, Vancouver, Canada) IN: Astrodynamics 1985: Proceedings of the Conference, Vail, CO, August 12-15, 1985. Part 1 . San Diego, CA, Univelt, Inc., 1986, p. 239-256. refs (Contract NSERC-G-1547)

(AAS PAPER 85-392)

Using a rather general formulation of the problem representing a large class of space platforms with flexible, extensible members. the paper attempts to study complex interactions between deployment, attitude dynamics and flexural rigidity. The governing nonlinear, nonautonomous and coupled equations of motion are extremely difficult to solve even with the help of a computer, not to mention the cost involved. Effectiveness of the versatile formulation is demonstrated through its application to dynamical situations of practical interest involving beam-type appendages. Response of the hybrid systems is obtained over a range of physical parameters and external disturbances. Both transient as well as postdeployment phases are considered. Results suggest significant influence of flexibility, inertia, deployment time history and orbital parameters on the system stability. The presence of free molecular and solar radiation induced environmental forces may further accentuate this tendency. The study represents a necessary first step towards development of a suitable control strategy.

#### A86-43215

### ON MODELING THE DYNAMICS OF LARGE SPACE **MANIPULATORS**

A. K. MISRA (McGill University, Montreal, Canada) and X. CYRIL IN: Astrodynamics 1985; Proceedings of the Conference, Vail, CO, August 12-15, 1985. Part 1. San Diego, CA, Univelt, Inc., 1986, p. 257-275. refs

(AAS PAPER 85-393)

A space manipulator composed of N flexible links connected in a chain by pinned joints is considered. Each link is assumed to be a slender rod. At the end of each link a concentrated mass representing the joint (including the servomotor) is attached. The payload is attached at the end of the Nth link. A Lagrangian formulation is carried out using the 4 x 4 homogeneous transformation matrices. Use is made of the fact that the nondimensionalized modal coordinates are small. This makes it possible to study the structural oscillations in a perturbative manner. An example is considered and it is noticed that the position error of the end effector can be significant even though the structural Author translatory deflections are not large.

### A86-43217\* Howard Univ., Washington, D. C. THE DEVELOPMENT OF OPTIMAL CONTROL LAWS FOR ORBITING TETHERED PLATFORM SYSTEMS

P. M. BAINUM, S. WOODARD (Howard University, Washington, DC), and J.-N. JUANG (NASA, Langley Research Center, Hampton, IN: Astrodynamics 1985; Proceedings of the Conference, Vail, CO, August 12-15, 1985. Part 1. San Diego, CA, Univelt, Inc., 1986, p. 291-314. Research supported by NASA and Howard University, refs (AAS PAPER 85-360)

A mathematical model of the open and closed loop in-orbit plane dynamics of a space platform-tethered-subsatellite system is developed. The system consists of a rigid platform from which an (assumed massless) tether is deploying (retrieving) a subsatellite from an attachment point which is, in general, offset from the platform's mass center. A Lagrangian formulation yields equations describing platform pitch, subsatellite tether-line swing, and varying tether length motions. These equations are linearized about the nominal station keeping motion. Control can be provided by both modulation of the tether tension level and by a momentum type platform-mounted device; system controllability depends on the presence of both control inputs. Stability criteria are developed in terms of the control law gains, the platform inertia ratio, and tether offset parameter. Control law gains are obtained based on linear quadratic regulator techniques. Typical transient responses of both the state and required control effort are presented.

### AN ASYMPTOTIC PERTURBATION METHOD FOR NONLINEAR **OPTIMAL CONTROL PROBLEMS**

J. L. JUNKINS (Texas A & M University, College Station) and R. C. THOMPSON (Virginia Polytechnic Institute and State University, Blacksburg) IN: Astrodynamics 1985; Proceedings of the Conference, Vail, CO, August 12-15, 1985. Part 1 . San Diego, CA, Univelt, Inc., 1986, p. 333-348. refs (Contract F49620-83-K-0032)

(AAS PAPER 85-364)

A quasi-analytical method is presented for solving nonlinear, open-loop, optimal control problems. The approach combines a simple analytical, straightforward expansion from perturbation methods with powerful numerical algorithms (due to Ward and Van Loan) to solve a series of nonhomogeneous, linear, optimal control problems. In the past, the only recourse for solving such nonlinear problems relied almost exclusively on iterative numerical methods whereas the asymptotic perturbation approach may produce accurate solutions to nonlinear problems without iteration. The nonlinear state and costate equations are derived from the optimal control formulation and expanded in a power series in terms of a small parameter contained either explicitly in the equations or implicitly in the boundary conditions. Each order of the expansion is shown to be governed by a nonhomogeneous, ordinary differential equation. Representing the generally

nonintegrable, nonhomogeneous terms by a finite Fourier series, efficient matrix exponential algorithms are then used to solve the system at each order, where the order of the expansion is extended to achieve the appropriate precision. The asymptotic perturbation method is broadly applicable to weakly nonlinear optimal control problems, including higher order systems frequently encountered in aerospace vehicle dynamics and control. A number of numerical examples demonstrating the perturbation approach are included.

#### A86-43220

### DYNAMICS AND CONTROL CHARACTERISTICS FOR THE WISP 300 M DIPOLE ANTENNA/SHUTTLE CONFIGURATION

K. W. LIPS, W. B. GRAHAM, F. R. VIGNERON, and D. G. HUNTER (Canadian Department of Communications, Communications Research Centre, Ottawa, Canada) IN: Astrodynamics 1985; Proceedings of the Conference, Vail, CO, August 12-15, 1985. Part 1 . San Diego, CA, Univelt, Inc., 1986, p. 349-369. refs (AAS PAPER 85-365)

The joint Canada/U.S. Waves in Space Plasmas (WISP) program, scheduled for a 1990 launch, calls for two long flexible booms to be deployed from the Shuttle Orbiter to form a dipole antenna of variable lengths up to 300 m tip-to-tip. This paper examines the fundamental character of the response of the configuration to vernier thruster torque and to constant spin rate. It is found, for example, that firing of a single yaw-inducing thruster pulse of longer than 10 s duration will result in excessively large tip deflections. At steady state spin rates larger than 0.25 rpm, centrifugal forces induce excessive tip deflections. As well, a preliminary assessment suggests that antenna deployment and solar-induced heating can contribute significant deflections and require further study. Vibration control is demonstrated using an open-loop Half-Period-Pulsing strategy and an optimal control strategy. The combined effect of large deflections together with a long period associated with the response will likely restrict the degree of maneuverability of the 300 m Shuttle/WISP Author configuration.

#### A86-43221

### STRUCTURAL CONTROL REQUIREMENTS FOR THE 1990S

R. D. AGLER (Martin Marietta Corp., Denver, CO) Astrodynamics 1985; Proceedings of the Conference, Vail, CO, August 12-15, 1985. Part 1 . San Diego, CA, Univelt, Inc., 1986, p. 375-384.

(AAS PAPER 85-420)

Design goals and restrictions for future aerospace structural control systems are examined. The retargeting control for the system must rapidly reorient the payload from one target to the next without disturbing the line-of-sight (LOS); a large actuator/isolator between the payload and the aft body is utilized to provide the retargeting torques and forces. Approaches for retargeting control such as polynomial profiles, variable pivot point, and optimal slew algorithms are discussed. The capabilities of the isolation controller which works in combination with the retargeting controller to eliminate the broadband disturbance transmission paths between the aft body and the payload are analyzed. The fine-pointing and alignment control system for improving the LOS response to disturbance inputs is studied. The vibration suppression control system is employed to reduce the amplitude vibration over a broad band, which is necessary to accelerate the transient settling time for the structure. Two procedures for expanding the bandwidth controlled by the vibration suppression system are described. The interrelationships between the subsystems are considered. An example of an aerospace control system is presented.

**A86-43222\*** National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

### EFFECTS OF NOISE ON ERA-IDENTIFIED MODAL PARAMETERS

J.-N. JUANG and R. S. PAPPA (NASA, Langley Research Center, Hampton, VA) IN: Astrodynamics 1985; Proceedings of the Conference, Vail, CO, August 12-15, 1985. Part 1 . San Diego, CA, Univelt, Inc., 1986, p. 385-407. refs (AAS PAPER 85-422)

The basic concept of the Eigensystem Realization Algorithm (ERA) for modal parameter identification and model reduction is extended to minimize the distortion of the identified parameters caused by noise. The mathematical foundation for the properties of accuracy indicators such as the singular values of the data matrix and modal amplitude coherence is provided based on knowledge of the noise characteristics. These indicators quantitatively discriminate noise from system information and are used to reduce the realized system model to a better approximation of the true model. Monte Carlo simulations are included to support the analytical studies.

#### A86-43224

### ROBUST ATTITUDE AND SHAPE CONTROL OF THIRD GENERATION SPACECRAFT

E. J. DAVISON (Toronto, University, Canada) and W. GESING (Honeywell, Ltd., Toronto, Canada) IN: Astrodynamics 1985; Proceedings of the Conference, Vail, CO, August 12-15, 1985. Part 1 . San Diego, CA, Univelt, Inc., 1986, p. 431-450. Research supported by the Canadian Department of Communications. refs (AAS PAPER 85-425)

The problem of finding existence conditions and a robust controller which solve the attitude and shape control problem for large flexible space structures is considered. The basis of the approach taken is to formulate the problem as a robust servomechanism problem and thence to obtain existence conditions and a controller characterization to solve the problem. An application of the results obtained to control a third-generation spacecraft, as modelled by the MSAT configuration, is made. The final controller obtained for MSAT has a distributed control configuration, and appears to be quite successful when applied to both the nominal design MSAT model and an unknown evaluation MSAT model.

### A86-43772

### CONTROL OF DYNAMIC RESPONSE OF A CONTINUUM MODEL OF A LARGE SPACE STRUCTURE

S. N. ATLURI (Georgia Institute of Technology, Atlanta) and P. E. ODONOGHUE Computers and Structures (ISSN 0045-7949), vol. 23, no. 2, 1986, p. 199-209. refs (Contract AF-AFOSR-84-0020)

The problem of active control of the transient dynamic response of large space structures, modeled as equivalent continua, is investigated here. The effects of initial stresses, in the form of in-plane stress resultants in an equivalent plate model, on the controllability of transverse dynamic response, are studied. A singular solution approach is used to derive a fully coupled set of nodal equations of motion which also include nonproportional passive damping. One approach considers a direct attack on this system of nodal equations. An alternative scheme implements a reduced-order model of coupled ordinary differential equations which are obtained in terms of the amplitudes of the pseudomodes of the nominally undamped system. Optimal control techniques are employed to develop a feedback control law. Algorithms for the efficient solution of the Riccati equation are implemented. Several examples are presented which involve the suppression of vibration of the transient dynamic response of the structure using an arbitrary number of control force actuators. Author A86-44884\*# Jet Propulsion Lab., California Inst. of Tech., Pasadena.

### VIBRATION OF A LARGE SPACE BEAM UNDER GRAVITY EFFECT

C.-F. SHIH, J. C. CHEN, and J. GARBA (California Institute of Technology, Jet Propulsion Laboratory, Pasadena) AIAA Journal (ISSN 0001-1452), vol. 24, July 1986, p. 1213-1216. NASA-supported research. refs

Future space structures will have a low mass density and high flexibility, with ground test dynamic behavior differing significantly from that in zero-G orbit. Attention is presently given to the vibration behavior of a beam deformed by its own weight; the results obtained by the differential equations for both the static and dynamic responses of a large, simply supported beam, which are derived and solved analytically, allow ground test experiment measurements to be used for orbital dynamic characteristics verification efforts.

#### A86-45423\*# Columbia Univ., New York.

### NONLINEAR RESPONSE - A TIME DOMAIN APPROACH

R. VAICAITIS (Columbia University, New York) AIAA, Aeroacoustics Conference, 10th, Seattle, WA, July 9-11, 1986. 10 p. refs

(Contract NAG1-541)

(AIAA PAPER 86-1934)

The present paper reviews the basic concepts of nonlinear response of panels to surface flow and acoustic pressures, simulation of random processes, time domain solutions and the Monte Carlo Method. Applications of this procedure to the orbit-on-demand space vehicles, acoustic fatigue and composite materials are discussed. Numerical examples are included for a variety of nonlinear problems to illustrate the applicability of this method.

#### A86-46383

# QUASI-ANALYTICAL SOLUTIONS FOR THE DYNAMICS OF A CLASS OF TETHERED SATELLITES WITH DANBY'S AERODYNAMICAL DRAG

I. BONZANI and M. G. ZAVATTARO CHIADO PIAT (Torino, Politecnico, Turin, Italy) Celestial Mechanics (ISSN 0008-8714), vol. 37, Dec. 1985, p. 371-385. Research supported by the Ministero della Pubblica Istruzione.

An analytic solution, in terms of expansion of a small parameter, for the classical two-body tethered satellite with a specific drag model (Danby, 1962) is obtained. The time of flight as well as the solution regarding the state variable of the system are expressed in terms of quadratures of the anomaly.

Author

### A86-46455#

### ESTIMATION OF DISTRIBUTED PARAMETER SYSTEMS - SOME CLOSED-FORM SOLUTIONS

D. B. SCHAECHTER (Lockheed Missiles and Space Co., Inc., Palo Alto, CA) (Guidance, Navigation and Control Conference, Snowmass, CO, August 19-21, 1985, Technical Papers, p. 453-458) Journal of Guidance, Control, and Dynamics (ISSN 0731-5090), vol. 9, July-Aug. 1986, p. 408-412. Research supported by the Lockheed Independent Research and Development Program. Previously cited in issue 22, p. 3318, Accession no. A85-45925.

A86-46462\*# Draper (Charles Stark) Lab., Inc., Cambridge, Mass.

### PREDICTIVE MOMENTUM MANAGEMENT FOR THE SPACE STATION

P. D. HATIS (Charles Stark Draper Laboratory Inc., Cambridge, MA) Journal of Guidance, Control, and Dynamics (ISSN 0731-5090), vol. 9, July-Aug. 1986, p. 454-461. refs (Contract NAS9-16023)

Space station control moment gyro momentum management is addressed by posing a deterministic optimization problem with a performance index that includes station external torque loading, gyro control torque demand, and excursions from desired reference attitudes. It is shown that a simple analytic desired attitude solution

exists for all axes with pitch prescription decoupled, but roll and yaw coupled. Continuous gyro desaturation is shown to fit neatly into the scheme. Example results for pitch axis control of the NASA power tower Space Station are shown based on predictive attitude prescription. Control effector loading is shown to be reduced by this method when compared to more conventional momentum management techniques.

# A86-46463# TRAVELING WAVE CONTROL FOR LARGE SPACECRAFT STRUCTURES

A. H. VON FLOTOW (MIT, Cambridge, MA) (Structures, Structural Dynamics, and Materials Conference, 26th, Orlando, FL, April 15-17, 1985, Technical Papers. Part 2, p. 152-160) Journal of Guidance, Control, and Dynamics (ISSN 0731-5090), vol. 9, July-Aug. 1986, p. 462-468. USAF-supported research. Previously cited in issue 13, p. 1854, Accession no. A85-30337. refs

**A86-46464\***# Jet Propulsion Lab., California Inst. of Tech., Pasadena.

### FUTURE PAYLOAD ISOLATION AND POINTING SYSTEM TECHNOLOGY

R. A. LASKIN and S. W. SIRLIN (California Institute of Technology, Jet Propulsion Laboratory, Pasadena) Journal of Guidance, Control, and Dynamics (ISSN 0731-5090), vol. 9, July-Aug. 1986, p. 469-477. NASA-supported research.

An overview is presented of the technology associated with the precision pointing of future spaceborne science instruments. High-level architectural options for dealing with the precision pointing problem are considered, and a representative NASA mission set for the 1990s is given. Pointing accuracy and stability requirements are extracted from the mission requirements, with the sub-0.1 arcsec stability requirement emerging as the primary driver. The state of the art of current technology is assessed, including an evaluation of gimbal systems, suspension systems, and actuator and sensor component technology. Areas where the technology needs to be pushed to satisfy future requirements are identified, and some promising design options are proposed.

C.D.

### A86-46470#

### ON-OFF ATTITUDE CONTROL OF FLEXIBLE SATELLITES

S. B. SKAAR (lowa State University of Science and Technology, Ames), L. TANG, and I. YALDA-MOOSHABAD Journal of Guidance, Control, and Dynamics (ISSN 0731-5090), vol. 9, July-Aug. 1986, p. 507-510. refs (Contract NSF MEA-83-18867)

The relationship between postmaneuver elastic energy and switch time selection is studied in the context of a simple satellite model. The control is restricted in that only three switching times can be selected: the duration of the first thrust interval, the time at which a braking interval begins, and the time at which the braking interval ends. The results show that impulse response functions are potentially useful tools for the selection of control switch times in the bang-bang attitude control of linear, elastic, slewing satellites. Experimentally acquired impulse responses may be suitable for this purpose. The adverse effects of actuation error upon postmaneuver elastic energy levels can be reduced if longer control bursts associated with switch times closer to the minimum-time rigid-body solution are favored over shorter bursts near the minimum-fuel solution.

A86-47088\* Jet Propulsion Lab., California Inst. of Tech., Pasadena.

### VERIFICATION OF LARGE SPACE STRUCTURES USING SCALE MODELLING LAWS

J.-C. CHEN, J. A. GARBA (California Institute of Technology, Jet Propulsion Laboratory, Pasadena), and L. A. DEMSETZ IN: International Modal Analysis Conference, 3rd, Orlando, FL, January 28-31, 1985, Proceedings. Volume 1. Schenectady, NY, Union College, 1985, p. 31-36. NASA-supported research.

The feasibility of testing large space structures in 1-g environment for the purpose of verifying its performance

requirement is considered. Because of the difference in test objectives as compared to the conventional structural systems, the scale modelling laws are examined. The investigation is performed on a generic structural element, a space beam. A preliminary conclusion is obtained based on the results.

### A86-47403#

### MODEL REFERENCE ADAPTIVE CONTROL UNDER UNCERTAINTY OF NONLINEAR FLEXIBLE MANIPULATORS

J. M. SKOWRONSKI (Queensland, University, Brisbane, Australia) IN: Guidance, Navigation and Control Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 11-18. refs (AIAA PAPER 86-1976)

The manipulator is modelled as an open chain with n DOF, highly nonlinear characteristics and coupling, with elastic links, subject to uncertain gravity and payload and driven by n actuators collocated with joints. It is made to follow a compatible nonlinear but simple rigid model within prescribed accuracy of convergence and in real time, by the introduced signal adaptive feedbac controller and subject to specified adaptive laws. The state for the controller is supplied not by time consuming solving of the hybrid state equations but by a much simpler observer integrable in closed form, allowing the control to be implemented by small on-board computer.

#### A86-47411#

### CONCEPTUAL DESIGN OF POINTING CONTROL SYSTEMS FOR SPACE STATION GIMBALLED PAYLOADS

R. O. HUGHES (General Electric Co., Space Div., Philadelphia, PA) IN: Guidance, Navigation and Control Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 78-87. refs

(AIAA PAPER 86-1986)

A conceptual design of the control system for Payload Pointing Systems (PPS) is developed using classic Proportional-Integral-Derivative (PID) techniques. The major source of system pointing error is due to the disturbance-rich environment of the Space Station in the form of gimbal baseplate motions. These baseplate vibrations are characterized using Fast Fourier Transform (FFT) techniques. Both time domain and frequency domain dynamic models are developed to assess control system performance. Three basic methods exist for the improvement of PPS pointing performance: increase control system bandwidth, add Image Motion Compensation, and/or reduce (or change) the baseplate disturbance environment.

### A86-47412\*# Illinois Univ., Urbana.

### VARIABLE STRUCTURE CONTROL OF SPACECRAFT REORIENTATION MANEUVERS

H. SIRA-RAMIREZ and T. A. W. DWYER, III (Illinois, University, Urbana) IN: Guidance, Navigation and Control Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 88-96.

(Contract N00014-84-C-0149; NAG1-436; NSF ECS-85-16445) (AIAA PAPER 86-1987)

A Variable Structure Control (VSC) approach is presented for multi-axial spacecraft reorientation maneuvers. A nonlinear sliding surface is proposed which results in an asymptotically stable, ideal linear sliding motion of Cayley-Rodriques attitude parameters. By imposing a desired equivalent dynamics on the attitude parameters, the approach is devoid of optimal control considerations. The single axis case provides a design scheme for the multiple axes design problem. Illustrative examples are presented.

# A86-47414\*# Control Research Corp., Lexington, Mass. RAPID TORQUE-LIMITED LINE-OF-SIGHT POINTING OF SCOLE (SPACECRAFT CONTROL LABORATORY EXPERIMENT) CONFIGURATION

J. G. LIN (Control Research Corp., Lexington, MA) IN: Guidance, Navigation and Control Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 106-114. refs (Contract NAG1-386) (AIAA PAPER 86-1991)

The design concept of a control for rapid torque-limited slewing of a rigid-mast version of the NASA SCOLE configuration is presented and demonstrated by means of numerical simulation. The time-optimal control problem for the system is decomposed into separate single-axis problems, expanding analytically the implicit nonlinear transcendental expression for the SCOLE line-of-sight error, and the final Euler attitude angles and slew angles are determined. The simulation results are presented in tables and graphs, and it is found that bang-bang or bang-pause-bang slew maneuvers with control moment applied to the Shuttle and control force applied to the reflector, and with a 5-deg/s slew-rate limit, produce the best pointing accuracy and the shortest slew times, although the specified line-of-sight error of 0.02 deg cannot be achieved using such open-loop single-axis maneuvers.

**A86-47415\***# Virginia Polytechnic Inst. and State Univ., Blacksburg.

### MANEUVER AND VIBRATION CONTROL OF SCOLE

R. D. QUINN and L. MEIROVITCH (Virginia Polytechnic Institute and State University, Blacksburg) IN: Guidance, Navigation and Control Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 115-129. refs (Contract NAG1-225) (AIAA PAPER 86-1993)

This paper is concerned with the simultaneous maneuver and vibration control of the Spacecraft Control Laboratory Experiment (SCOLE). Summaries of the derivation of the equations of motion and of a perturbation method permitting a maneuver strategy independent of the vibration control are presented. Some of the problems encountered in dynamical modeling of a flexible spacecraft in an earth-based laboratory are high-lighted and solved. Numerical results demonstrating rotational maneuvers of the SCOLE model are included.

## A86-47430# MOMENTUM MANAGEMENT CONCEPTS FOR A SPACE STATION

H. H. WOO, H. D. MORGAN, and E. T. FALANGAS (Rockwell International Corp., Downey, CA) IN: Guidance, Navigation and Control Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 277-286. Research sponsored by Rockwell International Corp. refs (AIAA PAPER 86-2047)

A momentum management concept applicable to the dual-keel configuration of the Space Station is presented. The system dynamic equation is given, and the dominant environmental disturbances, gravity-gradient torque and aerodynamic torques, are discussed. Induced dynamic disturbances, including both unscheduled and scheduled disturbances as well as disturbances that exceed control moment gyro (CMG) capability are specified. including their magnitude and direction. The sizing of CMG momentum storage is briefly addressed, as are unscheduled and scheduled momentum requirements. The integrated momentum management concept for transition and steady-state operation is then identified and developed for keeping torque equilibrium attitude maneuvers to a minimum in order to provide a stable environment for experiments. For more dynamic conditions, a logic is developed for handling the situation responsively while maintaining the momentum within bounds.

**A86-47431\***# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

### AN EIGENSYSTEM REALIZATION ALGORITHM IN FREQUENCY DOMAIN FOR MODAL PARAMETER IDENTIFICATION

J.-N. JUANG and H. SUZUKI (NASA, Langley Research Center, Hampton, VA) IN: Guidance, Navigation and Control Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 287-295. refs (AIAA PAPER 86-2048)

This paper demonstrates the close conceptual relationships between time domain and frequency domain approaches to identification of modal parameters for linear systems. A frequency domain eigensystem realization algorithm, via transfer functions, is developed using a known procedure formulated for a time domain eigensystem realization algorithm, via free decay measurement data. An important feature is the capability of windowing to concentrate analysis on the frequency range of interest. The procedure of overlap averaging is used to produce smoother spectra to reduce the effect of noise on identified modal parameters. Examples from simulation and experiments are given to illustrate the validity of formulations derived in the paper.

Author

### A86-47432#

### A SQUARE ROOT METHOD FOR THE IDENTIFICATION OF LARGE SPACE STRUCTURES

T. WILLIAMS (Kingston Polytechnic, Kingston upon Thames, England) IN: Guidance, Navigation and Control Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 296-302. SERC-supported research. refs (AIAA PAPER 86-2049)

A new algorithm for identifying the dynamics of a flexible large space structure from in-flight vibration measurements is presented. The novel aspect of this method is that it directly identifies a square root of the mass matrix rather than the matrix itself, resulting in all the well-documented accuracy improvements typical of algorithms based on matrix factorization techniques. The properties of this algorithm are analyzed in detail and illustrated with examples.

### A86-47433#

### DESIGN OF DYNAMIC OUTPUT FEEDBACK CONTROLLERS WITH PARAMETER VARIATION INSENSITIVITY

Z.-Q. GU and R. W. LONGMAN (Columbia University, New York) IN: Guidance, Navigation and Control Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 303-313. refs (AIAA PAPER 86-2050)

Two fundamental contributions of modern control theory are the Linear-Quadratic and pole placement design methods. Since it is often impractical to measure the full state vector, both these methods can suffer from controller dimension problems and from robustness problems when parameter uncertainties are present. These difficulties are addressed here for both approaches. Necessary conditions for optimality are derived, and a steepest descent algorithm is generated, to design fixed-order controllers that are optimal with respect to a quadratic performance index which includes quadratic penalties on the performance sensitivity with respect to parameter variation. A second algorithm is developed to accomplish pole placement with fixed order controllers where the freedom remaining after pole placement is used to minimize the eigenvalue sensitivities. Both steepest descent algorithms are shown to be effective design methods in worked Author examples.

A86-47434\*# California Univ., Los Angeles.
MODIFIED LTR ROBUST CONTROL FOR FLEXIBLE
STRUCTURES

P. A. BLELLOCH and D. L. MINGORI (California, University, Los Angeles) IN: Guidance, Navigation and Control Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 314-318. refs

(Contract NAS7-918)

(AIAA PAPER 86-2051)

A procedure is developed for dealing with performance and robustness issues in the design of multi-input multi-output compensators for lightly damped flexible structures. The procedure is based upon representing errors in the plant design model as structured uncertainties, and applying a modified version of the Loop Transfer Recovery (LTR) design method. Real parameter errors, such as frequency errors, damping errors or modal displacement errors can be treated. The approach involves adjusting the cost function in the regulator problem and the process noise model in the estimator problem in a particular manner which reflects the assumed structure of the modeling errors. Numerical examples dealing with the control of a large flexible space antenna with uncertain frequencies demonstrate a considerable improvement over standard LTR methods. Convenient design parameters can be varied until a satisfactory compromise is achieved between performance and robustness.

A86-47435#

ROBUST REDUCED-ORDER CONTROL OF FLEXIBLE STRUCTURES USING THE OPTIMAL PROJECTION/MAXIMUM ENTROPY DESIGN METHODOLOGY

A. GRUZEN (Charles Stark Draper Laboratory, Inc., Cambridge, MA) and W. E. VANDER VELDE (MIT, Cambridge, MA) IN: Guidance, Navigation and Control Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 319-327. refs (Contract F04611-85-K-0051) (AIAA PAPER 86-2052)

This paper describes the capabilities of the Optimal Projection/Maximum Entropy (OP/ME) design methodology for the development of an active vibration damper. A full-state LQG compensator was generated to provide a reference design for both robustification and order reduction studies. The compensator is shown to be sensitive to presumed variations in plant parameters through application to a set of perturbed plants. The LQG compensator displays degraded performance over the set of plants and in some cases results in closed-loop instability. Subsequently, reduced-order compensators were designed, illustrating the capabilities of the optimal projection design approach. The maximum entropy methodology is envoked to robustify the compensators, and the resulting designs are shown to be tolerant of all postulated modeling errors.

A86-47436#

A PARAMETRIC EXAMINATION OF THE STABILITY ROBUSTNESS CHARACTERISTICS OF TWO DECOUPLED CONTROLLERS DESIGNED FOR LARGE SPACE STRUCTURE CONTROL

J. W. HESS (U.S. Air Force Academy, Colorado Springs, CO) IN: Guidance, Navigation and Control Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 328-337. refs (AIAA PAPER 86-2053)

The system model for a large space structure is developed, and some of the destabilizing spillovers are presented. Two controllers are designed, one with an observer and one which uses direct output feedback, which eliminate the destabilizing spillover by decoupling their several reduced order sub-controllers. An error model is then developed which uses the structure of the model to determine the potentially most destabilizing directions. Reasonable errors are then examined to determine which lie in the most critical directions. Armed with this reasonable set of potentially destabilizing errors, perturbed models are then

determined. The decoupled control design for the nominal case is then applied to the perturbed models and the system eigenvalues are examined for instabilities. The results indicate that the two control designs have different robustness characteristics, but one design is not necessarily more robust than the other. Finally, all of the information gleaned in determining the robustness of the two designs is used to design a more robust controller. Author

A86-47451#

MODEL REDUCTION AND MODAL ASSIGNMENT IN DECOUPLED CONTROL

R. A. CALICO (USAF, Institute of Technology, Wright-Patterson, AFB, OH) and D. VARHOLA IN: Guidance, Navigation and Control Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 461-468. refs (AIAA PAPER 86-2137)

The control of both the CSDL I and II spacecraft models is considered. Decoupled control using two or more subcontrollers was implemented. Model truncation effects were considered by comparing results for internally balanced models with those for models formed by truncating higher frequency modes. The effect of modal assignments to the various sub controllers in the decoupled design is also shown.

A86-47452\*# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

ATTITUDE CONTROL SYSTEM SYNTHESIS FOR THE HOOP/COLUMN ANTENNA USING THE LQG/LTR METHOD N. SUNDARARAJAN, S. M. JOSHI, and E. S. ARMSTRONG (NASA,

Langley Research Center, Hampton, VA) IN: Guidance, Navigation and Control Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 469-478. refs (AIAA PAPER 86-2139)

application paper investigates the of This linear-quadratic-Gaussian (LQG)/loop transfer recovery (LTR) method to the problem of synthesizing a fine-pointing control system for a large flexible space anenna. The study is based on an antenna, which consists of three rigid-body rotational modes and the first ten elastic modes. A robust compensator design for achieving the required pointing performance in the presence of modeling uncertainties is obtained using the LQG/LTR method. For the Hoop/Column antenna, a satisfactory controller design meeting a desired bandwidth of .1 rad/sec and ensuring stability with unmodelled high frequency modes is obtained using only a collocated pair of 3-axis attitude sensors and torque actuators. This study also indicates that to achieve the desired performance bandwidth of 0.1 rad/sec. and to ensure stability in the presence of higher frequency elastic modes, the design model should include at least the first three flexible modes together with the rigid body modes

A86-47454\*# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.
CONTROL EFFECTIVENESS CHARACTERIZATION FOR STATE

ESTIMATION AND CONTROL ON A HIGHLY FLEXIBLE GRID R. C. MONTGOMERY, J. P. WILLIAMS, T. L. LAZARUS, and P. E. NELSON (NASA, Langley Research Center, Hampton, VA) IN: Guidance, Navigation and Control Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 488-492. refs

(AIAA PAPER 86-2142)

Control effectiveness tests of reaction wheel actuators on a highly flexible grid are reported herein. Analytic determination of actuator control effectiveness is accomplished with finite element modelling. Experimental determination is done with two algorithms. The first is an equation error parameter identification scheme which estimates the control coefficients of the second order difference equation model of each vibration mode. The second is a least square error algorithm using the same model. For both methods there is a lack of agreement with analytic prediction.

# A86-47471# CONTROL-MOTIVATED DYNAMIC TAILORING OF TRUSS-WORK STRUCTURES

A. H. VON FLOTOW (MIT, Cambridge, MA) IN: Guidance, Navigation and Control Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 622-628. USAF-supported research. refs

(AIAA PAPER 86-2190)

This paper reviews past approaches to control-motivated dynamic tailoring and their impact upon the problem of active control of structural dynamics. The costs and benefits of passive damping augmentation are estimated; the conclusion is drawn that the optimum structural design will be in the 'left-half s-plane'. New results on dynamic tailoring of truss-work structures are presented. The proposed techniques exploit inherent characteristics of such structures to reduce the mass penalty associated with passive damping augmentation.

#### A86-47472#

### DYNAMICS AND CONTROL OF SLEW MANEUVER OF LARGE FLEXIBLE SPACECRAFT

Y. P. KAKAD (North Carolina, University, Charlotte) IN: Guidance, Navigation and Control Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 629-634. refs (AIAA PAPER 86-2192)

In this paper, the dynamics and control of slewing maneuvers of a large flexible spacecraft namely, NASA-Spacecraft Control Laboratory Experiment (SCOLE) test article are studied. The dynamical equations obtained for slewing maneuvers are highly nonlinear and coupled. The maneuver is expressed in terms of four Euler parameters and is specified as the angular displacement about an arbitrary axis. The slew maneuver control problem is developed in terms of rigid-body slewing and suppression of two elastic modes is analyzed using the method of nonlinear decoupling.

#### A86-47473#

### MANEUVERING OF FLEXIBLE SPACECRAFT

H. OZ (Ohio State University, Columbus) and O. MOSTAFA IN: Guidance, Navigation and Control Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 635-643. refs (AIAA PAPER 86-2193)

Variable Structure Control Systems (VSCS) are a class of nonlinear systems which change the structure of the controls when a set of prescribed hypersurfaces are reached in the phase space. The VSCS theory has, desirable insensitivity properties under parameter uncertainties, nonlinear effects, and external disturbances. The theory represents a real-time implementable approach to control in contrast to algorithmic approaches, and therefore eliminates the computational burden. However, a practical problem in the implementation of VSC theory is the possibility of chatter about hypersurfaces known as 'sliding regimes'. This paper extends the previous applications by the authors of VSCS theory to maneuvering of flexible spacecraft. Three methods of chatter alleviation are introduced. Specifically, the methods are: a boundary layer approach, asymptotic reaching of sliding regimes, and digital input prefiltering. Illustrative examples are given for a single-axis rest-to-rest maneuver of a flexible spacecraft, demonstrating the success of the three methods in alleviating the chatter phenomenon. In association, robustness to parameter uncertainties is also illustrated.

#### A86-47474#

# DYNAMICS OF A DEFORMABLE POINTING SPACECRAFT BY KANE'S METHOD, AND TELESCOPE'S IMAGE-STABILITY EVALUATION

H. B. HABLANI (Rockwell International Corp., Satellite Systems Div., Seal Beach, CA) IN: Guidance, Navigation and Control Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 644-656. refs (AIAA PAPER 86-2194)

This paper has a twofold objective. First it shows a novel way of applying Kane's technique to formulate dynamics of a spacecraft with a hinged elastic continuum. This approach is then employed to develop motion equations of a generic four-body deformable spacecraft with a telescope and a solar array. The approach in this paper is different from the previous efforts in that (1) a clear separation between discrete and deformational variables is maintained, (2) the discretized equations are reduced to their simplest, minimum dimension form, and (3) the deformational field is discretized by using constrained modes. These differences bring in an otherwise unattainable lucidity in the analysis. The second part of the paper introduces and formulates a new concept called Clutter Leakage Metric, which evaluates image stability of a precision pointing telescope. When a telescope is amidst severe structural vibration of a neighboring articulated body, the telescope may yield cluttered image of a target. To minimize this clutter, electrooptic signals from successive frames are subtracted. Some clutter may still leak into the final image, which then can be measured by the proposed metrics. The metrics involve Fourier spectrum of pointing error, an aspect scantly addressed in the established definition of pointing stability.

# A86-47478# MULTI-CRITERION APPROACHES TO OPTIMIZATION OF LINEAR REGULATORS

D. W. REW (Virginia Polytechnic Institute and State University, Blacksburg) and J. L. JUNKINS (Texas A & M University, College Station) IN: Guidance, Navigation and Control Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 681-690. refs

(AIAA PAPER 86-2198)

The problem of designing structural control systems is addressed, considering multiple design objectives: state error energy, control energy, and stability robustness. The relationships among the selected design objectives is investigated by solving objective optimization problems, which require parameterizations of feedback gain matrices directly or indirectly. Considered are three types of state feedback design algorithms, including a new one developed in this study: (1) generalized LQR design, (2) modified LQR design based on Lyapunov equation and (3) feedback design using Sylvester's equation. The results of these design schemes are compared by generating trade-off surfaces of the multiple performance objectives. A nonlinear programming method based upon minimum norm correction strategy is utilized in conjunction with a homotopy technique. The nonlinear programming algorithm is found to be very reliable. The paper offers a new approach to multidimensional tuning of each feedback design. Author

### A86-47510# Emulating structural motion by array Processors

E. K. PARSONS and P. J. RESHATOFF (Lockheed Research Laboratories, Palo Alto, CA) AIAA, Guidance, Navigation and Control Conference, Williamsburg, VA, Aug. 18-20, 1986. 10 p. refs

(AIAA PAPER 86-1988)

This paper describes the use of an array processor to simulate the motion of flexible structures in real time. The array processors is fast enough to emulate hundreds of modes less than 20 Hz, or a single mode up to 2.5 KHz. This method makes it possible to design and test real control hardware when the real flexible system

is unavailable or too fragile. For example, this technique can benefit optical systems whose performance critically depends upon flexibility. As an illustration, the paper describes the emulation of a steering mirror with four bending modes, the two highest at 950 Hz. The main result is the demonstrated ability to isolate errors in either the dynamic model or the control hardware. Sampling rate and proper smoothing of the outputs of the D/A convertors limit the use of this method. To address these problems, special techniques are presented for programming the AP and carrying out the emulation.

# A86-47515# ISSUES OF ORDER REDUCTION IN ACTIVE CONTROL SYSTEM DESIGN

C. O. PARRY and V. B. VENKAYYA (USAF, Wright Aeronautical Laboratories, Wright-Patterson AFB, OH) AlAA, Guidance, Navigation and Control Conference, Williamsburg, VA, Aug. 18-20, 1986. 8 p. refs

(AIAA PAPER 86-2138)

Vibration suppression and shape control of large space structures through the application of linear optimal control theory is addressed in this paper. Specifically, a new method of obtaining reduced order models for large structural systems using LQG synthesis techniques is investigated and compared to some existing model reduction methods. Results are presented for the control of a two-dimensional truss structure using the reduced-order control system.

### A86-47518#

### OPTIMUM DETUMBLING OF SPACE PLATFORMS VIA A DYNAMIC PROGRAMMING ALGORITHM

R. G. MELTON (Pennsylvania State University, University Park), D. S. RUBENSTEIN, and H. L. FISHER AIAA, Guidance, Navigation and Control Conference, Williamsburg, VA, Aug. 18-20, 1986. 9 p. Research supported by Pennsylvania State University. refs

(AIAA PAPER 86-2154)

A method for determining the optimum detumbling control for a space platform is described which uses internal motions to dissipate kinetic energy, thereby converting the tumble into a simple spin about the major inertia axis. Dynamic programming to automatically generate embedded solutions makes optimum closed-loop control possible. A moveable mass controller is employed.

### A86-47925#

### ROBUST MULTIVARIABLE CONTROL OF LARGE SPACE STRUCTURES USING POSITIVITY

G. L. SLATER (Cincinnati, University, OH) and M. D. MCLAREN IN: Astrodynamics Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 250-259. refs (AIAA PAPER 86-2125)

This paper examines the robust, multivariable control of large space structures by controllers designed on a reduced-order model using positivity concepts. Controllers are designed using the DRAPER I and DRAPER II structures. Three different controller methodologies are compared: the familiar multivariable control, individual mode control, and individual sensor control. Controller robustness is measured qualitatively from the plots of the minimum singular value of the return difference matrix as a function of the frequency. All controllers, when designed to give the same total average control cost, have a very similar line-of-sight (LOS) response. All controlled systems have guaranteed asymptotic stability even in the presence of actuator and/or sensor failures.

Author

# A86-47940\*# California Univ., Los Angeles. NUTATIONAL STABILITY OF A SPINNING SPACECRAFT WITH INTERNAL MASS MOTION AND AXIAL THRUST

D. L. MINGORI (California, University, Los Angeles) and Y. YAM (California Institute of Technology, Jet Propulsion Laboratory, Pasadena) IN: Astrodynamics Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 367-375. Research supported by the Aerospace Corp. refs (AIAA PAPER 86-2271)

Stability conditions are developed for a spinning spacecraft with internal mass motion and axial thrust. The results show that rapid cone angle growth is possible if the thrust magnitude is sufficiently large and the moving mass is aft of the system mass center. The instability does not rely on internal or external dissipation.

Author

#### A86-47942#

### FREQUENCIES OF LONGITUDINAL OSCILLATIONS OF TETHERED SATELLITE SYSTEMS

A. K. MISRA (McGill University, Montreal, Canada) and V. J. MODI (British Columbia, University, Vancouver, Canada) IN: Astrodynamics Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 386-393. refs (Contract NSERC-A-0967; NSERC-A-2181) (AIAA PAPER 86-2274)

Longitudinal vibrations of tethered satellite systems are investigated taking into account the role played by the undeployed part of the tether wrapped around the reel. Three cases are considered: the 'no slip' case, when the friction is sufficient to prevent any motion of the wrapped tether; the 'total slip' case, when there is no friction at all and the entire wrapped portion of the tether is free to move; and the 'partial slip' case, when a part of the undeployed tether has extensional oscillations. An analytical solution is presented for the first case, while Rayleigh-Ritz solutions are obtained for the latter two cases. The variation of the frequencies with the system parameters are studied. It is noted that even for moderate friction the frequencies of oscillation in the 'partial slip' case are quite close to those in the 'no slip' case, for which an analytical solution is available.

#### A86-47955#

### SOME CONSIDERATIONS OF ACTUATOR DYNAMICS IN THE ATTITUDE CONTROL OF A FLEXIBLE BEAM

K. C. HOWELL and M. J. BAXTER (Purdue University, West Lafayette, IN) AIAA and AAS, Astrodynamics Conference, Williamsburg, VA, Aug. 18-20, 1986. 25 p. refs (Contract F49620-82-C-0035) (AIAA PAPER 86-2124)

In the control system design for large, flexible structures, it is usually assumed that any actuating and sensing devices are of infinite bandwidth, and their dynamic characteristics are not included as part of the system model. Actual sensors and actuators do not respond ideally and different types of devices have different dynamics. This study considers the effects of some finite actuator dynamics in the model of a flexible beam in earth orbit. From some initial attitude disturbance, the system is to be returned to its nominal state using a prescribed set of actuators along the beam. The results of including actuator dynamics are observed in the effects on the actuator placement design and dynamic response in simulation. Initially, a quadratic cost decomposition algorithm is used to determine actuator effectiveness which in turn determines the most effective actuator locations among a finite number of positions available. Controlled simulations are used to study the system response with different linear actuator models. Finally, simulations are also done with a controller which utilizes on/off thrusters and which includes linear actuator dynamics.

A86-49094\*# Purdue Univ., West Lafayette, Ind.
INTEGRATED STRUCTURE/CONTROL DESIGN - PRESENT
METHODOLOGY AND FUTURE OPPORTUNITIES

T. A. WEISSHAAR (Purdue University, West Lafayette, IN), J. R. NEWSOM (NASA, Langley Research Center, Hampton, VA), T. A. ZEILER, and M. G. GILBERT (PRC Kentron, Inc., Hampton, VA) IN: ICAS, Congress, 15th, London, England, September 7-12, 1986, Proceedings. Volume 2. New York, American Institute of Aeronautics and Astronautics, Inc., 1986, p. 1119-1128. refs

Attention is given to current methodology applied to the integration of the optimal design process for structures and controls. Multilevel linear decomposition techniques proved to be most effective in organizing the computational efforts necessary for ISCD (integrated structures and control design) tasks. With the development of large orbiting space structures and actively controlled, high performance aircraft, there will be more situations in which this concept can be applied.

**N86-22631**# MATRA Espace, Paris-Velizy (France). Espace Produits et Technologie.

KEY DESIGN PARAMETERS FOR A VERY LOW GRAVITY IN-ORBIT FACILITY Final Report

J. C. AMIEUX, C. FOURNIER, R. STRITTMATTER (Dornier-Werke GmbH, Friedrichshafen, West Germany), M. BAIER (Dornier-Werke GmbH, Friedrichshafen, West Germany), D. SCHMITT (ONERA, Paris, France), and J. MERLET (Intespace) Paris ESA Apr. 1985 372 p refs

(Contract ESTEC-5292/82-NL-PP(SC))

(MATRA-EPT/DT/VT068/098; ESA-CR(P)-2144) Avail: NTIS HC A16/MF A01

Vibration generation and propagation in orbital platforms, including Spacelab and EURECA, were analyzed. Attitude and orbit control subsystem vibration generators; vibrations induced by thermal control subsystems; measurement techniques and experimental aspects for a microgravity environment; vibration induced by microgravity-oriented payloads; and vibration reduction techniques were studied. Dynamic synthesis of a microgravity platform is discussed.

Author (ESA)

**N86-22997\*#** National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

EXPERIMENTAL AND ANALYTICAL GENERIC SPACE STATION DYNAMIC MODELS

W. K. BELVIN and H. H. EDIGHOFFER (Edighoffer, Inc.) Mar. 1986 90 p refs

(NASA-TM-87696; NAS 1.15:87696) Avail: NTIS HC A05/MF A01 CSCL 20K

A dynamic model used for verification of analytical and experimental methods is documented. The model consists of five substructures to simulate the multibody, low frequency nature of large space structures. Design considerations which led to a fundamental vibration frequency of less than one Hz are described. Finite element analysis used to predict the vibration modes and frequencies of the experimental model is presented. In addition, modeling of cable suspension effects using prestressed vibration analysis is described. Details of the experimental and analytical models are included to permit replication of the study. Results of the modal vibration tests and analysis are presented in a separate document.

N86-23343\*# Scientific Systems, Inc., Cambridge, Mass.
FAULT-TOLERANT CONTROL OF LARGE SPACE
STRUCTURES USING THE STABLE FACTORIZATION
APPROACH Final Report

H. C. RAZAVI, R. K. MEHRA, and M. VIDYASAGAR (Waterloo Univ., Ontario) Washington NASA Mar. 1986 38 p refs (Contract NAS1-17946)

(NASA-CR-3964; NAS 1.26:3964; SSI-1103) Avail: NTIS HC A03/MF A01 CSCL 09B

Large space structures are characterized by the following features: they are in general infinite-dimensional systems, and have large numbers of undamped or lightly damped poles. Any attempt to apply linear control theory to large space structures must

therefore take into account these features. Phase I consisted of an attempt to apply the recently developed Stable Factorization (SF) design philosophy to problems of large space structures, with particular attention to the aspects of robustness and fault tolerance. The final report on the Phase I effort consists of four sections, each devoted to one task. The first three sections report theoretical results, while the last consists of a design example. Significant results were obtained in all four tasks of the project. More specifically, an innovative approach to order reduction was obtained, stabilizing controller structures for plants with an infinite number of unstable poles were determined under some conditions, conditions for simultaneous stabilizability of an infinite number of plants were explored, and a fault tolerance controller design that stabilizes a flexible structure model was obtained which is robust against one failure condition.

**N86-23629\***# Smithsonian Astrophysical Observatory, Cambridge, Mass.

ANALYTICAL INVESTIGATION OF THE DYNAMICS OF TETHERED CONSTELLATIONS IN EARTH ORBIT, PHASE 2 Quarterly Report, 22 Sep. - 21 Dec. 1985

E. LORENZINI, D. A. ARNOLD, M. D. GROSSI, and G. E. GULLAHORN Feb. 1986 53 p

(Contract NAS8-36606)

(NASA-CR-178754; NAS 1.26:178754; QR-3) Avail: NTIS HC A04/MF A01 CSCL 22A

The development of a two dimensional analytical model that describes the dynamics of an n-mass vertical tethered system is reported. Two different approaches are described: in the first one the control quantities are the independent variables while in the second one the Cartesian coordinates of each mass expressed in the orbiting reference frame are the independent variables. The latter model was used in the 3-mass version to simulate the dynamics of the tethered system in applications involving the displacement of the middle mass along the tether. In particular, issues related to reproducing predetermined acceleration profiles and g-tuning are reported.

N86-24717# Air Force Inst. of Tech., Wright-Patterson AFB, Ohio. School of Engineering.

THE DETUMBLING OF AN AXIALLY SYMMETRIC SATELLITE WITH AN ORBITAL MANEUVERING VEHICLE BY NONLINEAR FEEDBACK CONTROL M.S. Thesis

K. R. FLEMING 13 Dec. 1985 61 p refs (AD-A163989; AFIT/GA/AA/85D-5) Avail: NTIS HC A04/MF A01 CSCL 22B

The problem of detumbling a freely spinning and precessing axisymmetric satellite is considered. Detumbling is achieved with another axisymmetric orbital maneuvering vehicle (OMV) joined to the target satellite with a universal joint. The joint provides two rotational degrees of freedom and is translated across the surface of the OMV during the detumbling process. The target satellite and the OMV with its three momentum wheels are modelled as a five body system using Eulerian-based equations of motion developed by Hooker and Margulies. A Liapunov technique is applied to derive a nonlinear feedback control law which drives the system asymptotically to a final spin-stabilized state. State and control histories are presented and indicate that the detumbling process is benign. Constraint force and moment loads at the connection between the OMV and target satellites are also presented, and indicate that no extreme loads are encountered during the despinning and detumbling process. Author (GRA)

N86-24739# Air Force Inst. of Tech., Wright-Patterson AFB, Ohio. School of Engineering.

THE EFFECT OF ENERGY DISSIPATION DUE TO FRICTION AT THE JOINT OF A SIMPLE BEAM STRUCTURE M.S. Thesis R. P. DONNELLY, JR. Dec. 1985 81 p refs

(AD-A163975; AFIT/GAE/AA/85D-5) Avail: NTIS HC A05/MF A01 CSCL 22B

The Strategic Defense Initiative has generated new interest in the development of more stable space structures. This interest has increased the need for more detailed knowledge of the behavior of engineering structures under dynamic loading. Interests lie in decreasing the amount of vibration by both passively and actively damping the structure. A means exists to passively damp structures by friction damping resulting from relative slip between joint interfaces. It may be feasible to increase the damping in a structure by allowing more friction damping than is normal and thereby controlling the vibration response. This thesis incorporates friction damping in a one-dimensional model. Finite element techniques are used to accomplish the numerical analysis. A clamped-clamped beam is used as the physical model. The mid-point of the two element beam is allowed to slip in rotation, but not in translation. Because the one-dimensional program cannot handle rotations at continuous nodes, the beam is modeled by symmetry about the joint and a cantilever beam with an applied end moment is studied. Results for the response of a beam in vibration are presented showing displacement of the joint, relative rotation at the joint, and relative angular velocity at the joint; all versus time. Various clamping pressures and initial loads are explored. Diagrams of the beam shape versus time show the shape the beam takes on when slip occurs at the joint.

N86-24740# Air Force Inst. of Tech., Wright-Patterson AFB, Ohio. School of Engineering.

MOVING-BANK MULTIPLE MODEL ADAPTIVE ALGORITHMS APPLIED TO FLEXIBLE SPACECRAFT CONTROL M.S. Thesis P. G. FILIOS Dec. 1985 182 p refs (AD-A164016; AFIT/GE/ENG/85D-14) Avail: NTIS HC A09/MF

Critical to the performance of the moving-bank multiple model adaptive estimator is the decision logic used to determine which elemental filters are implemented in the bank, and when to change this decision. The decision logics discussed focus on three situations: initial acquisition of the unknown parameter values through reducing bank discretization; tracking the unknown parameter values through bank movement; and reacquisition of the unknown parameters following a large jump change in their values through expanding bank discretization. Ambiguity function analysis is used to predict performance in these situations. The system to be controlled is a simplified model of a large scale space structure. Its equations of motion are developed and placed in state space form, the states being the positions and velocities of the rigid body mode and the second and fourth bending modes. The state space matrices describing the system are computed based on nominal values for all physical parameters with the exception of the mass density of the structure arms and their modulus of elasticity.

N86-25019\*# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

MATHEMATICAL CORRELATION OF MODAL PARAMETER IDENTIFICATION METHODS VIA SYSTEM REALIZATION THEORY

J. N. JUANG Apr. 1986 47 p refs (NASA-TM-87720; NAS 1.15:87720) Avail: NTIS HC A03/MF A01 CSCL 20K

A unified approach is introduced using system realization theory to derive and correlate modal parameter identification methods for flexible structures. Several different time-domain and frequency-domain methods are analyzed and treated. A basic mathematical foundation is presented which provides insight into the field of modal parameter identification for comparison and evaluation. The relation among various existing methods is established and discussed. This report serves as a starting point to stimulate additional research towards the unification of the many possible approaches for modal parameter identification.

N86-25402# Air Force Inst. of Tech., Wright-Patterson AFB,

N86-25402# All 10100 ......
Ohio. School of Engineering.

CODAL ASSIGNMENT EFFECTS ON DECENTRALIZED

CODAL ASSIGNMENT EFFECTS ON DECENTRALIZED

J. B. SUMNER Dec. 1985 158 p refs

(AD-A163977; AFIT/GA/AA/85D-9) Avail: NTIS HC A08/MF A01 CSCL 22B

The more modes a designer can keep in the model of the system/space structure, the less inaccurate it will be. But the computational burden to an online computer, functioning as the controller, grows also. The thrust of this thesis is to implement time response output for the nontrivial model and investigate the effect on time response of certain modal assignments by fixed groups to any of the three controllers with another fixed group assigned as residuals. The inclusion of residuals provides in a limited sense a truth model for the analysis of stability and performance. There may be significant differences in time response caused by the fact that a controller is known to provide more relative controllability and less observability, or vice versa for its assigned modes. The investigation will involve initially the fixing of certain baseline parameters to allow a parallel comparison of reasonable results. Then line-of-sight pointing and defocus performance will be generated for comparison among various cases. The simulation model is a version of the so-called Draper-2 space structure model. The next section describes the selected model configuration and discusses its finite element representation. Then the modal control and matrix transformation methods will be explained. The implementation of the simulation program will be discussed. The last sections will detail the investigation, results, conclusions and recommendations. GRA

N86-26074# Stevens Inst. of Tech., Hoboken, N. J. Dept. of Mechanical Engineering.

TIME DOMAIN DESIGN OF ROBUST CONTROLLERS FOR LQG (LINEAR QUADRATIC GAUSSIAN); APPLICATION TO LARGE SPACE STRUCTURES Final Report, May 1984 - Aug. 1985 R. K. YEDAVALLI Dec. 1985 104 p

(Contract F33615-84-K-3606) (AD-A163635; AFWAL-TR-85-3093) Avail: NTIS HC A06/MF À01 CSCL 20K

The aspect of Robustness for linear multivariable systems in time domain is the central theme of the research under the present contract. Upper bonds on the linear, structured, time varying perturbation of an asymptotically stable linear time invariant regulator are obtained to maintain both stability and acceptable regulation, using Lyapunov approach. Improvement of the proposed measures over existing measures is illustrated with the help of examples. It is shown that by employing a scaling transformation on the nominal system, it is possible to further improve the upper bound. The proposed Perturbation Round Analysis is used to design robust controllers for Linear Quadratic Regulators with structured uncertainity. Introducing quantitative measures called Stability Robustness Index and Performance Robustness Index, design algorithms are presented by which one can achieve a trade off nominal performance, stability robustness performance robustness. Applications considered include aircraft control problems, large space structure control problems having uncertain modal data and mode truncation as the perturbations.

N86-26222# Massachusetts Inst. of Tech., Cambridge. FEEDFORWARD CONTROL OF WAVES IN LATTICE ELEMENTS Technical Report, 1 Feb. - 1 Aug. 1985
J. H. WILLIAMS, JR., G. A. NORRIS, and S. S. LEE

1985 74 p refs

(Contract F49620-83-C-0092)

(AD-A164009; AFOSR-85-1233TR) Avail: NTIS HC A04/MF

The motion in a lattice substructural element, within which longitudinal stress waves propagate nondispersively and without attenuation, is assumed to be governed by the classical wave equation. A feedforward controller configuration is proposed to isolate a portion of the substructure from longitudinal wave disturbances. The governing equations for the propagation of incoming and controller-generated stress waves in the substructure are determined. To prevent instability, the controller must respond to incoming stress waves only, disregarding self-generated outgoing waves. The transfer function for the controlled substructure system is derived. The dependence of the transfer function magnitude on the input waveform frequency as well as on controller error parameters is demonstrated. The ranges of acceptable controller error are determined for the operational goals of disturbance cancellation and disturbance amplitude attenuation.

N86-26357\*# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

DYNAMIC CHARACTERISTICS OF POWER-TOWER SPACE STATIONS WITH 15-FOOT TRUSS BAYS

J. T. DORSEY Jul. 1986 72 p

(NASA-TM-87684; L-16094; NAS 1.15:87684) Avail: NTIS HC A04/MF A01 CSCL 22B

A power tower space station concept which generates power with photovoltaic arrays and where the truss structure has a bay size of 15 ft is described. Rigid body and flexible body dynamic characteristics are presented for a 75-kW Initial Operating Capability (IOC) and 150-kW and 300-kW growth stations. The transient response of the IOC and 300-kW growth stations to shuttle dock, orbit reboost, and mobile remote manipulator system translation loads are studied. Displacements, accelerations, and bending moments at various locations on the IOC and 300-kW growth stations are presented.

Author

N86-26367# National Aerospace Lab., Amsterdam (Netherlands). Space Div.

MATHEMATICAL MODELS OF FLEXIBLE SPACECRAFT DYNAMICS: A SURVEY OF ORDER REDUCTION APPROACHES Annual Report, 1984

P. T. L. M. VANWOERKOM 21 Jan. 1985 13 p Presented at 10th IFAC Symp. on Automatic Control in Space, Toulouse, France, 25-29 Jun. 1985

(Contract NIVR-1910)

(NLR-MP-85004-U; B8578426; ETN-86-96974; AD-B098585L) Avail: NTIS HC A02/MF A01

The usefulness of open loop model order reduction techniques for application of flexible spacecraft dynamics models was assessed. Approaches identified involve parameter optimization; aggregation; singular perturbation; modal dominance; component cost analysis; and internal balancing. The latter three approaches appear to be most meaningful, and convenient in applications. The problem of model order reduction is reviewed, and each of the six approaches is discussed. The latter three approaches are applied to the case of a long, flexible beam in space, controlled with two line torquers.

N86-27359# Technische Univ., Brunswick (West Germany). Inst. fuer Angewandte Mechanik.

CONTROL OF FLEXIBLE STRUCTURES WITH RESPECT TO INFINITY

P. RUGE In ESA Second European Space Mechanisms and Tribology Symposium p 35-39 Dec. 1985

Avail: NTIS HC A15/MF A01; ESA, Paris FF 150 or \$18 Member States, AU, CN, NO (+20% others)

The transfer matrix method is recommended for studying the stability of linear feedback controlled systems continuous in space and time. The system matrix can be assembled as it is used from finite element methods separately for each continuous member and each joint including control elements. Distributed transfer matrices for the continuous members which contain information up to infinity without poles and truncation errors are used. The calculation of as many eigenvalues as wanted is carried out by trace theorems.

**N86-27360**# Societe Nationale Industrielle Aerospatiale, Cannes (France). Div. des Systemes Balistiques et Spatiaux.

SOLAR ARRAY DEPLOYMENT SIMULATION USING ADAMS SOFTWARE

C. ROUX and P. FLAMENT In ESA Second European Space Mechanisms and Tribology Symposium p 41-46 Dec. 1985 Avail: NTIS HC A15/MF A01; ESA, Paris FF 150 or \$18 Member States, AU, CN, NO (+20% others)

The use of ADAMS program to predict dynamic phenomena during deployment of satellite solar arrays is reviewed. The program increases understanding of influences of constituent flexibility during deployment. The program contributes to optimization of the mechanism as to mechanical strength under deployment loads and latching shocks; motorization factor; and layout on the solar array. Prediction of all in orbit deployment cases (including possible failure cases) in order to be sure that no unexpected phenomenon perturb the space flight is also improved. The improved accuracy using ADAMS is verified by test prediction correlation.

N86-27361# Societe Europeenne de Propulsion, Vernon (France).

GIOTTÓ DESPIN MECHANISM SUBSYSTEM: GENERAL LOOP DESIGN AND POINTING ASPECTS

G. TURIN *In* ESA Second European Space Mechanisms and Tribology Symposium p 47-52 Dec. 1985

Avail: NTIS HC A15/MF A01; ESA, Paris FF 150 or \$18 Member States, AU, CN, NO (+20% others)

The Giotto spacecraft despin antenna subsystem used to orient the high gain antenna towards the far Earth, while the satellite is spin stabilized at 15 rpm is described. The despin antenna subsystem control loop behavior in environmental tests and in flight is summarized. The subsystem was launched, unlocked, and put in rotation succesfully. The precision is within the deadband, better than +/- 0.022 degrees (better than half specification). This shows that the concept of a stepper motor in open loop is safe, although an alternative is to increase the damping ratio; simulations show that 1% is sufficient. Strong control on the potential perturbation is also necessary. For example, the least correction must be lower than calculated for a normal linear system. The results from calculation assuming a linear system are optimistic.

N86-27401\*# Old Dominion Univ., Norfolk, Va. Dept. of Mechanical Engineering and Mechanics.

ADAPTIVE CONTROL OF LARGE SPACE STRUCTURES USING RECURSIVE LATTICE FILTERS Final Report

N. SUNDARARAJAN and G. L. GOGLIA Dec. 1985 80 p (Contract NAG1-429)

(NASA-CR-177270; NAS 1.26:177270) Avail: NTIS HC A05/MF A01 CSCL 22B

The use of recursive lattice filters for identification and adaptive control of large space structures is studied. Lattice filters were used to identify the structural dynamics model of the flexible structures. This identification model is then used for adaptive control. Before the identified model and control laws are integrated, the identified model is passed through a series of validation procedures and only when the model passes these validation procedures is control engaged. This type of validation scheme prevents instability when the overall loop is closed. Another important area of research, namely that of robust controller synthesis, was investigated using frequency domain multivariable controller synthesis methods. The method uses the Linear Quadratic Guassian/Loop Transfer Recovery (LQG/LTR) approach to ensure stability against unmodeled higher frequency modes and achieves the desired performance.

**N86-27650\***# Smithsonian Astrophysical Observatory, Cambridge, Mass

### DYNAMICS OF TETHERED CONSTELLATIONS IN EARTH ORBIT

E. LORENZINI *In* NASA, Washington Applications of Tethers in Space: Workshop Proceedings, Vol. 2 p 167-203 Jun. 1986 (Contract NAS8-35497; NAS8-36606; RH4-394019)

Avail: NTIS HC A23/MF A01 CSCL 13I

Topics covered include station keeping of single-axis and two-axis constellations; single-axis vertical constellations with low-g platform; single-axis vertical constellations with three masses; deployment strategy; and damping of vibrational modes.

N86-27655\*# Howard Univ., Washington, D. C. Dept. of Mechanical Engineering.

### THE DEVELOPMENT OF OPTIMAL CONTROL LAWS FOR ORBITING TETHERED PLATFORM SYSTEMS

P. M. BAINUM *In* NASA, Washington Applications of Tethers in Space: Workshop Proceedings, Vol. 2 p 325-355 Jun. 1986 Avail: NTIS HC A23/MF A01 CSCL 13I

A mathematical model of the open and closed loop in orbit plane dynamics of a space platform-tethered-subsatellite system is developed. The system consists of a rigid platform from which an (assumed massless) tether is deploying (retrieving) a subsatellite from an attachment point which is, in general, offset from the platform's mass center. A Langrangian formulation yields equations describing platform pitch, subsatellite tetherline swing, and varying tether length motions. These equations are linearized about the nominal station keeping motion. Control can be provided by both modulation of the tether tension level and by a momentum type platform-mounted device; system controllability depends on the presence of both control inputs. Stability criteria are developed in terms of the control law gains, the platform inertia ratio, and tether offset parameter. Control law gains are obtained based on linear quadratic regulator techniques. Typical transient responses of both the state and required control effort are presented.

# N86-27656\*# British Columbia Univ., Vancouver. EFFECTS OF DAMPING ON THE CONTROL DYNAMICS OF THE SPACE SHUTTLE BASED ON TETHERED SYSTEMS

V. J. MODI In NASA, Washington Applications of Tethers in Space: Workshop Proceedings, Vol. 2 p 357-382 Jun. 1986 Avail: NTIS HC A23/MF A01 CSCL 13I

The analysis of the effects of damping on the control dynamics of the space shuttle based on tethered systems suggest that a relatively simple point mass model can provide useful information concering librational dynamics during development and retrieval of the tethered satellites. The results show that a nonlinear tension control strategy in conjunction with a suitable choice of gains and realistic damping can lead to stable retrieval maneuver with amplitudes in pitch and roll limited to acceptable values. Longitudinal and lateral vibrations of the tether are strongly coupled and can lead to the slackening of the tether. Tether vibrations can be controlled quite effectively by speeding up the retrieval at smaller tether length and/or using thruster.

N86-28113\*# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

### CONTROL/STRUCTURES INTERACTION STUDY OF TWO 300 KW DUAL-KEEL SPACE STATION CONCEPTS

J. W. YOUNG, F. J. LALLMAN, P. A. COOPER, and D. P. GIESY (PRC Kentron, Inc., Hampton, Va.) May 1986 61 p (NASA-TM-87679; NAS 1.15:87679) Avail: NTIS HC A04/MF A01 CSCL 22B

The results of an investigation of the influence of structural stiffness of the space station framework on the controllability of two 300 kw class, solar dynamic powered, dual-keel space station designs are presented. The two design concepts differed only in the truss bay dimensions of the structural framework of the stations. Two control studies were made: (1) A study of the interaction of the framework structural response with the reaction control system used for attitude control during an orbital reboost maneuver; and (2) A study of the stability of the space station attitude control

system with sensors influenced by the elastic deformations of the station framework. Although both configurations had acceptable control characteristics, the configuration with the larger truss bay dimension and its increased structural stiffness had more attractive characteristics for pointing control of the solar dynamic system during reboost and for attitude control during normal in-orbit operations.

Author

N86-28114\*# Smithsonian Astrophysical Observatory, Cambridge, Mass.

### ANALYTICAL INVESTIGATION OF THE DYNAMICS OF TETHERED CONSTELLATIONS IN EARTH ORBIT, PHASE 2 Quarterly Report, 22 Dec. 1985 - 21 Mar. 1986

E. C. LORENZINI, D. A. ARNOLD, M. D. GROSSI, and G. E. GULLAHORN Mar. 1986 29 p (Contract NAS8-36606)

(NASA-CR-178846; NAS 1.26:178846; QR-4) Avail: NTIS HC A03/MF A01 CSCL 22B

The g-tuning maneuvers of a 3-mass, vertical tethered system are considered. In particular, the case of reaching a zero-g acceleration level on board the middle mass from a non-zero initial condition is analyzed. A control law that provides a satisfactory transient response is derived. The constellation dynamics in the case of the middle mass travelling from one tether tip to the other is also investigated. Instabilities that take place at the end of the maneuver are analyzed and accommodated by devising suitable damping algorithms.

M.G.

# N86-28116# Consulenze Generali Roma (Italy). NUMERICAL EXPERIMENTS ON A CONTROLLED FLEXIBLE STRUCTURE USING DCAF Final Report

F. GRAZIANI and C. ARDUINI Nov. 1984 264 p

(ESA-CR(P)-2159; ETN-86-96861) Avail: NTIS HC A12/MF A01
The Deficiency Corrective Action Program (DCAP) code was used to simulate analog and digital control of a flexible spacecraft for the case of only in-plane motion, without spinning. For analog control, a simple PD scheme with sensors and actuators on the main rigidbody, with control relying on separation between control bandwidth and the lowest elastic frequency, and fully flexible modal control based on LQG programs are studied. For digital control, a problem for sampled sensor signal (at constant sample interval) digital logic and actuation is formulated by a zero order sample and hold device (at constant sample rate).

# N86-28411\*# Padua Univ. (Italy). Inst. of Applied Mechanics. A REVIEW OF TETHER INDUCED DYNAMICAL FEATURES S. BERGAMASCHI In NASA, Washington Applications of Tethers

in Space: Workshop Proceedings, Volume 1 p 103-116 Jun 1986

Avail: NTIS HC A25/MF A01 CSCL 13I

The simplest mathematical model used for the simulation of TSS motion is considered in order to review the dynamics of tethers. This model is discussed. Also reviewed are elasticity effects, perturbation sources, orbit eccentricity and natural frequencies. Tethered systems provide a unique opportunity for skilled measurement activities in space. Some of the experiments envisaged require the measurement of very small mechanical quantities. This implies that the level of dynamical noise on instruments output be low or that system response to excitation, either external or internal, be sufficiently known. In this respect, the first TSS flights will be very useful, but much work will be needed in order to have reliable estimates of structural damping in different future systems.

N86-28981\*# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

### NONLINEAR DYNAMIC ANALYSIS OF DEPLOYING FLEXIBLE SPACE BOOMS

P. E. MCGOWAN and J. M. HOUSNER Sep. 1985 34 p (NASA-TM-87617; NAS 1.15:87617) Avail: NTIS HC A03/MF A01 CSCL 22B

A fundamental investigation of the planar deployment and lock-up of two flexible boom type appendages which have attached

tip masses and are connected to a central rigid body through a rotational spring is presented. Nondimensional parameters are identified and it is shown that, in general, the solution depends only on two mass ratios and one nondimensional stiffness parameter. Results are presented for boom tip deflections, deployment time and root moments at lock-up. A threshold value of the nondimensional stiffness parameter is identified beyond which boom deflections become large. Also, a thorough examination of the effect of nonlinear terms in the equations governing the deployment phase is performed. Nonlinear terms in the deployment equations due to kinematics and structural deformation are required to predict more accurately boom deflections, but retention of an inconsistent set of nonlinear terms leads to erroneous results. In particular, retaining nonlinear kinematic terms while neglecting nonlinear structural terms can produce inaccurate results even below the threshold stiffness

N86-28983\*# North Carolina Univ., Charlotte. Dept. of Electrical Engineering.

DYNAMICS AND CONTROL OF FLEXIBLE SPACECRAFT DURING AND AFTER SLEWING MANEUVERS Semiannual Progress Report, 1 Nov. 1985 - 30 Apr. 1986

Y. P. KAKAD 30 Apr. 1986 25 p

(Contract NAG1-535)

(NASA-CR-177027; NAS 1.26:177027) Avail: NTIS HC A02/MF A01 CSCL 22B

The dynamics and control of slewing maneuvers of a large flexible spacecraft, namely, NASA Spacecraft Control Laboratory Experiment (SCOLE) test article are studied. The dynamical equations obtained for slewing maneuvers are highly nonlinear and coupled. The maneuver is expressed in terms of four Euler parameters and is specified as the angular displacement about an arbitrary axis. The slew maneuver control problem is developed in terms of rigid-body slewing and suppression of two elastic modes is analyzed using the method of nonlinear decoupling.

N86-28985# Control Dynamics Co., Huntsville, Ala.
ASCOT (ADVANCED STRUCTURAL CONTROL TECHNIQUES)
Final Report, Nov. 1983 - Jan. 1985

S. M. SELTZER, D. K. TOLLISON, T. G. HOWSMAN, R. D. IRWIN, and W. P. MAGGARD Sep. 1985 164 p (Contract F30602-84-C-0012; ARPA ORDER 4828; DA PROJ. D82-8)

(AD-A165917; CDC-223-1284-FR-ASC; RADC-TR-85-166) Avail: NTIS HC A08/MF A01 CSCL 09B

This is the Control Dynamics Company final technical report on Advanced Structural Control Techniques (ASCOT). Included is the description and application of a novel technique for the design of low order digital controllers for very high order system models. Also included is an investigation of a digital prefiltering technique which incorporates non-uniform rate sampling.

N86-29272\*# Stanford Univ., Calif. Guidance and Control Lab.
THEORETICAL AND EXPERIMENTAL INVESTIGATIONS OF
SENSOR LOCATION FOR OPTIMAL AEROELASTIC SYSTEM
STATE ESTIMATION Final Report

G. LIU Sep. 1985 182 p (Contract NSG-4002)

(NASA-CR-177115; NAS 1.26:177115; SU-SUDAAR-552) Avail: NTIS HC A09/MF A01 CSCL 20K

One of the major concerns in the design of an active control system is obtaining the information needed for effective feedback. This involves the combination of sensing and estimation. A sensor location index is defined as the weighted sum of the mean square estimation errors in which the sensor locations can be regarded as estimator design parameters. The design goal is to choose these locations to minimize the sensor location index. The choice of the number of sensors is a tradeoff between the estimation quality based upon the same performance index and the total costs of installing and maintaining extra sensors. An experimental study for choosing the sensor location was conducted on an aeroelastic system. The system modeling which includes the

unsteady aerodynamics model developed by Stephen Rock was improved. Experimental results verify the trend of the theoretical predictions of the sensor location index for different sensor locations at various wind speeds.

Author

N86-29890# Draper (Charles Stark) Lab., Inc., Cambridge, Mass.

ACOSS ELEVEN (ACTIVE CONTROL OF SPACE STRUCTURES) S Final Report, Oct. 1983 - Jul. 1984

D. R. HEGĞ, G. J. KISSEL, N. H. MCCLAMROCH, M. J. VILLALBA, and I. G. ROSEN Sep. 1985 286 p (Contract F30602-81-C-0180; ARPA ORDER 3655; AF PROJ. C65-5)

(AD-A165864; CSDL-R-1721; RADC-TR-85-165) Avail: NTIS HC A13/MF A01 CSCL 15D

The main lines of effort in flexible structure control have been: (1)synthesis of reduced order control for vibration suppression; (2) system identification, with special attention to the resolution of closely spaced modes; and (3)generation of smooth large angle slew control. Highlights of current results are as follows. A final account is given of insights obtained during a systematic investigation of mutual interactions within the overall active control systhesis process between reduced order modeling, actuator and sensor selection, and controller feedback strategy determination. Using linear multivariate loop transfer recovery, full order stability robustness to unmodeled high frequency dynamics in the presence of wideband disturbances is demonstrated on ACOSS model no. 2. A perspective on electromechanical actuator dynamics modeling is presented. Interface constraints with the controller synthesis process associated with the use of high resolution spectrum estimation for reduced order modeling are analyzed. Parametric use of the data sampling period to assist in the resolution of closely spaced modes is discussed or demonstrated. An improved technique for parameter estimation in distributed parameter systems is generated. Author

N86-29891# Massachusetts Inst. of Tech., Cambridge.
WAVE PROPAGATION MEASUREMENTS ON TWO-DIMENSIONAL LATTICE Technical Report, 1 Feb. - 15 Sep. 1985
Sep. 1985

J. H. WILLIAMS, JR., J. J. ZHANG, and S. S. LEE 15 Sep. 1985 32 p

(Contract F49620-83-C-0092)

(AD-A166207; AFOSR-86-0095TR) Avail: NTIS HC A03/MF A01 CSCL 22B

Wave propagation characteristics of large space structures (LSS) affect their performance, integrity and the ability to nondestructively assess their integrity. In this study, wave propagation characteristics of a periodic lattice structure are determined experimentally. The structure considered is an aluminum multi-bay planar lattice. Two ultrasonic piezoceramic longitudinal transducers are mounted at various locations on the structure. Wave measurements are obtained by injecting an impulsive load via the transmitting transducer and recording the response via the receiving transducer. The waves injected into the structure are longitudinal waves, transverse to the surface, although a complex stress distribution which may be described by directivity functions is actually realized. The impulsive loading signal has a broad frequency spectrum containing frequencies greater than 0.5 MHz. This preliminary experimental study demonstrates that wave propagation characteristics of a lattice structure can be obtained. In particular, the wave speed, the frequency at the maximum amplitude of the output spectrum, and the attenuation of the maximum amplitude of the output spectrum per lattice bay traversed appear to be useful parameters in the characterization of wave propagation properties of LSS. Further study should investigate the effects of boundaries, lattice member connectivities, and structural defects on these parameters.

N86-29892# Massachusetts Inst. of Tech., Cambridge.
FAILURE PROPAGATION IN CONTINUUM MODELS OF LSS
(LARGE SPACE STRUCTURES), PART 1 Technical Report, 1
Sep. - 1 Nov. 1985

J. H. WILLIAMS, JR. and S. S. LEE 1 Nov. 1985 30 p (Contract F49620-85-C-0148)

(AD-A166208; AFOSR-86-0094TR-PT-1) Avail: NTIS HC A03/MF A01 CSCL 13M

Large space structures (LSS) can often be modelled adequately as equivalent anisotropic continua. In this study concepts in failure mechanics and wave propagation are applied to analyze the dynamic failure (fracture, buckling, joint disassembly, etc.) and failure arrest behavior of such an equivalent continuum. For simplicity, the equivalent continuum is assumed to be orthotropic. Furthermore, the transverse shear deformation of the equivalent continuum is assumed to dominate. Double cantilever beam models are well established fracture mechanics models in the study of crack propagation in a continuum. An orthotropic double cantilever shear beam (DCSB) model is adopted here to study Mode I dynamic failure (which for convenience is assumed to be fracture) and arrest in continuum models of lattice structures. The orthotropic DCSB model consists of both a primary material and a finite width arrester section. The DCSB model has predicted that under the proper conditions the crack may arrest when any of the following conditions is satisfied: 1) When the initial reflected disturbance catches the crack tip, before the crack tip reaches the arrester section; 2) When the crack tip enters the arrester section; 3) When the crack tip exits the arrester section; or 4) When the initial reflected disturbance catches the crack tip, after the crack tip has exited from the arrester section. It is shown that condition (1) is absolute, meaning that the crack is always arrested.

N86-30652\*# Jet Propulsion Lab., California Inst. of Tech., Pasadena.

### STIFFNESS CONTROL OF LARGE SPACE STRUCTURES

 J. C. CHEN and J. L. FANSON In DGLR The 2nd International Symposium on Aeroelasticity and Structural Dynamics p 368-373
 1985 Sponsored by NASA

Avail: NTIS HC A99/MF E03 CSCL 01B

A method of using internal force producing dual element/actuators for vibration suppression of large space structures is proposed. The technique is applied to a vibrating string and to a low order system. Response feedback control for the vibrating string and selected modal control are used for achieving the modal damping. The actuators may be electrically powered and are suitable for structures with extremely low rigidity.

N86-30653# Dornier-Werke G.m.b.H., Friedrichshafen (West Germany).

ASPECTS OF ACTIVE ISOLATION AS APPLIED TO A SATELLITE STRUCTURE WITH SHAPE PRECISION PAYLOAD W. CHARON In DGLR The 2nd International Symposium on Aeroelasticity and Structural Dynamics p 374-380 1985

(Contract ESTEC-5326/83-NL-PB(SC)) Avail: NTIS HC A99/MF E03

Active vibration control of flexible spacecraft is discussed. The satellite structure is divided into two rigid modules: the shape precision payload and a vibrating equipment module containing the attitude sensors and the attitude actuators. The two modules are connected by six spring-force actuator devices considered together to determine the isolation control forces. These connections transmit the low-frequency attitude control to the precision payload but attenuate the higher-frequency disturbances whose shape and magnitude are unknown to the isolation control system.

N86-30682\*# Jet Propulsion Lab., California Inst. of Tech., Pasadena.

### TEST AND ANALYSIS CORRELATION FOR STRUCTURAL DYNAMIC SYSTEMS

B. K. WADA and J. C. CHEN *In* DGLR The 2nd International Symposium on Aeroelasticity and Structural Dynamics p 632-647 1985 Sponsored by NASA

Avail: NTIS HC A99/MF E03 CSCL 01B

Activities in modifying a structural mathematical model to correlate with its modal test results are summarized. Results from the Viking and Galileo spacecraft, and developments in the parameter estimation of structural mathematical models of large flexible structures using multiple boundary condition tests are presented.

N86-30683\*# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

### DYNAMIC VERIFICATION OF VERY LARGE SPACE STRUCTURES

B. R. HANKS In DGLR The 2nd International Symposium on Aeroelasticity and Structural Dynamics p 648-655 1985
Avail: NTIS HC A99/MF E03 CSCL 01B

A research program in spacecraft structures, structural dynamics, and controls verification using a relatively large, flexible beam as a focus is introduced. This research effort addresses fundamental problems applicable to the verification of large, flexible space structures and combines ground tests, flight behavior prediction, and instrumented orbital tests. The program is expected to produce quantitative results for use in improving the validity of ground tests for verifying flight performance analyses.

N86-30684# Technische Hochschule, Aachen (West Germany). Inst. fuer Leichtbau.

### RECONSTRUCTION OF FORCING FUNCTIONS BASED ON MEASURED STRUCTURAL RESPONSES

H. OERY, H. GLASER, and D. HOLZDEPPE In DGLR The 2nd International Symposium on Aeroelasticity and Structural Dynamics p 656-668 1985 Sponsored by Deutsche Forschungsgemeinschaft, ESA. and MBB/Erno G.m.b.H.

Avail: NTIS HC A99/MF E03

A structural analysis procedure to reconstruct the significant parts of the forcing function time-histories based on a restricted number of test records is presented. Use of the inverse application of the phase-plane method and Williams' method is proposed. The procedure is based on the fact that very slowly varying loads induce deformations, which can be determined using the stiffness matrix only. It can be applied to aerospace structures and to earthquake engineering.

N86-30687# Department of Communications, Ottawa (Ontario). David Florida Lab.

### VIBRATION QUALIFICATION AT THE DAVID FLORIDA LABORATORY

R. MAMEN In DGLR The 2nd International Symposium on Aeroelasticity and Structural Dynamics p 683-688 1985 Avail: NTIS HC A99/MF E03

A facility for spacecraft integration and environmental tests to qualify flight hardware is presented. Its thermal vacuum, mass properties, radio frequency, and vibration testing services are used for programs ranging from black box level to complete spacecraft and space systems. Its comprehensive structural qualification capabilities were selected for the Remote Manipulator System, ANIK-D, Brazilsat, and L-Sat.

N86-30800\*# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

APPLICATION OF THE LQG/LTR TECHNIQUE TO ROBUST CONTROLLER SYNTHESIS FOR A LARGE FLEXIBLE SPACE

S. M. JOSHI, E. S. ARMSTRONG, and N. SUNDARARAJAN (Old Dominion Univ., Norfolk, Va.) Sep. 1986 64 p (NASA-TP-2560; L-16076; NAS 1.60:2560) Avail: NTIS HC A04/MF A01 CSCL 22B

The problem of synthesizing a robust controller is considered for a large, flexible space-based antenna by using the linear-quadratic-Gaussian (LQG)/loop transfer recovery (LTR) method. The study is based on a finite-element model of the 122-m hoop/column antenna, which consists of three rigid-body rotational modes and the first 10 elastic modes. A robust compensator design for achieving the required performance bandwidth in the presence of modeling uncertainties is obtained using the LQG/LTR method for loop-shaping in the frequency domain. Different sensor actuator locations are analyzed in terms of the pole/zero locations of the multivariable systems and possible best locations are indicated. The computations are performed by using the LQG design package ORACLS augmented with frequency domain singular value analysis software.

N86-30801\*# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

EFFECTS OF MODEL ERROR ON CONTROL OF LARGE FLEXIBLE SPACE ANTENNA WITH COMPARISONS OF DECOUPLED AND LINEAR QUADRATIC REGULATOR **CONTROL PROCEDURES** 

H. A. HAMER and K. G. JOHNSON Sep. 1986 52 p (NASA-TP-2604; L-16114; NAS 1.60:2604) Avail: NTIS HC A04/MF A01 CSCL 22B

An analysis was performed to determine the effects of model error on the control of a large flexible space antenna. Control was achieved by employing two three-axis control-moment gyros (CMG's) located on the antenna column. State variables were estimated by including an observer in the control loop that used attitude and attitude-rate sensors on the column. Errors were assumed to exist in the individual model parameters: modal frequency, modal damping, mode slope (control-influence coefficients), and moment of inertia. Their effects on control-system performance were analyzed either for (1) nulling initial disturbances in the rigid-body modes, or (2) nulling initial disturbances in the first three flexible modes. The study includes the effects on stability, time to null, and control requirements (defined as maximum torque and total momentum), as well as on the accuracy of obtaining initial estimates of the disturbances. The effects on the transients of the undisturbed modes are also included. The results, which are compared for decoupled and linear quadratic regulator (LQR) control procedures, are shown in tabular form, parametric plots, and as sample time histories of modal-amplitude and control responses. Results of the analysis showed that the effects of model errors on the control-system performance were generally comparable for both control procedures. The effect of mode-slope error was the most serious of all model errors. Author

N86-30803# Air Force Inst. of Tech., Wright-Patterson AFB, Ohio.

CONTROL OF LARGE FLEXIBLE SYSTEMS BY SPATIAL MODAL INPUT-DISTRIBUTION CONTROL M.S. Thesis C. V. BENDORF 1985 113 p

(AD-A166912; AFIT/CI/NR-86-47T) Avail: NTIS HC A06/MF A01 CSCL 22B

A common problem in controlling a large flexible structure with a reduced order model is the excitation of the residual (non-modeled) modes by the control inputs resulting in control spillover. In this thesis a new approach to eliminate control spillover is examined. This approach, based on the independent modal-space control method, uses a finite number of spatially distributed input points to eliminate control spillover. Control of an undamped beam and a finite degree of freedom truss is accomplished through computer simulation. The results of the

seven example problems shows that this new approach does effectively eliminate control spillover.

N86-31336\*# Columbia Univ., New York. Dept. of Civil Engineering and Engineering Mechani

VIBRATION AND STRUCTUREBORNE NOISE IN SPACE STATION Progress Report, 1 Jan. - 30 Jun. 1986

R. VAICAITIS 1986 23 p

(Contract NAG1-541)

(NASA-CR-177146; NAS 1.26:177146) Avail: NTIS HC A02/MF A01 CSCL 20A

Analytical models and computer programs for structural response calculations under action of mechanical point loads were developed for single wall shells (composite or aluminum), double wall shells (composite or aluminum), and single wall or double wall circular plates (aluminum). The design configuration of the habitability modules of the space station concept are expected to be discretely stiffened cylindrical shells with truncated cone type end caps or flat but stiffened circular end plates. Analytical formulations and response calculations were performed for the case where the stiffened shell is represented by an orthotropic shell model. The natural frequencies can be calculated. For application to low frequency (below 1000Hz) vibrations and noise generation, such a model might be adequate to evaluate vibration and noise transmission characteristics of space station habitability modules. Parametric studies are now being performed to assess interior noise environment inside a habitability module to mechanically induced vibrations.

N86-31631\*# Smithsonian Astrophysical Observatory, Cambridge,

THE INVESTIGATION OF TETHERED SATELLITE SYSTEM DYNAMICS Quarterly Report, 15 Feb. - 14 May 1986

E. C. LORENZINI Jun. 1986 113 p.

(NASA-CR-178895; NAS 1.26:178895; QR-7) Avail: NTIS HC A06/MF A01 CSCL 22B

The analysis of the rotational dynamics of the satellite was focused on the rotational amplitude increase of the satellite, with respect to the tether, during retrieval. The dependence of the rotational amplitude upon the tether tension variation to the power 1/4 was thoroughly investigated. The damping of rotational oscillations achievable by reel control was also quantified while an alternative solution that makes use of a lever arm attached with a universal joint to the satellite was proposed. Comparison simulations between the Smithsonian Astrophysical Observatory and the Martin Marietta (MMA) computer code of reteival maneuvers were also carried out. The agreement between the two, completely independent, codes was extremely close, demonstrating the reliability of the models. The slack tether dynamics during reel jams was analytically investigated in order to identify the limits of applicability of the SLACK3 computer code to this particular case. Test runs with SLACK3 were also carried out.

N86-31636# National Aerospace Lab., Amsterdam (Netherlands). Spaceflight Div.

ATTITUDE CONTROL OF SPACECRAFT: AN OVERVIEW OF RECENT DEVELOPMENTS AND RESEARCH

In DUTCH; ENGLISH T. ZWARTBOL 27 Jun. 1985 24 p summary Submitted for publication

(NLR-MP-85055-U; B8664362; ETN-86-97681; AD-B101030L)

Avail: NTIS HC A02/MF A01

The application of modern control techniques for the development of spacecraft attitude estimation and control algorithms is reviewed. Control theories, and the mathematical modeling of the systems such as optical systems, flexible spacecraft, and liquid sloshing in microgravity are treated. The Modular Attitude Control System (MACS) is presented. The MACS test and simulation assembly, built for ESA, is described.

N86-31643# National Aerospace Lab., Amsterdam (Netherlands). Space Div.

# DYNAMICS OF FLEXIBLE SPACECRAFT: AN ANALYSIS OF APPROACHES TOWARDS MATHEMATICAL MODEL ORDER REDUCTION

P. T. L. M. VANWOERKOM 16 Apr. 1985 202 p

(Contract NIVR-1910)

(NLR-TR-85068-U; B8665500; ETN-86-98038) Avail: NTIS HC A10/MF A01

Reduction of the mathematical order (i.e., of the mathematical complexity) of the open loop spacecraft dynamics model with minimal loss of model accuracy is discussed. Approaches to open loop model order reduction were analyzed regarding application to dynamic models of flexible spacecraft. Parameter optimization, aggregation, singular perturbation, modal dominance, and component cost analysis were compared. The latter two approaches appear to be most meaningful and convenient amongst the five.

N86-32512\*# Massachusetts Inst. of Tech., Cambridge. Dept. of Aeronautics and Astronautics.

RELIABILITY ISSUES IN ACTIVE CONTROL OF LARGE FLEXIBLE SPACE STRUCTURES Semiannual Status Report, 16 May - 15 Nov. 1985

W. E. VANDERVELDE 4 Feb. 1986 14 p

(Contract NAG1-126)

(NASA-CR-179758; NAS 1.26:179758) Avail: NTIS HC A02/MF A01 CSCL 22B

Efforts in this reporting period were centered on four research tasks: design of failure detection filters for robust performance in the presence of modeling errors, design of generalized parity relations for robust performance in the presence of modeling errors, design of failure sensitive observers using the geometric system theory of Wonham, and computational techniques for evaluation of the performance of control systems with fault tolerance and redundancy management

N86-32513\*# Smithsonian Astrophysical Observatory, Cambridge,

### ANALYTICAL INVESTIGATION OF THE DYNAMICS OF TETHERED CONSTELLATIONS IN EARTH ORBIT, PHASE 2

E. C. LORENZINI Jul. 1986 59 p (Contract NAS8-36606)

(NASA-CR-178901; NAS 1.26:178901; QR-5) Avail: NTIS HC A04/MF A01 CSCL 22A

The analytical model and software implementation of n-mass, three dimensional tethered systems are discussed. The newly developed computer code is then used for simulating the 3-dimensional dynamics of a 4-mass tethered system. The 4-mass tethered system is designed in order to provide a micro-g environment on board the space station while variable-g experiments are performed on a laboratory moving along the upward tether segment. Extensive simulation runs illustrate both the undamped, free response and the damped dynamics response of the system. Passive longitudinal dampers and subsequently active damping algorithms, effective against the in-plane dynamics, are added to the system. Their separate effects upon the various vibrational modes are clearly shown by relevant simulation runs.

Author

N86-32516# Societe Nationale Industrielle Aerospatiale, Cannes (France)

### INFLUENCE OF STRUCTURAL PARAMETER UNCERTAINTIES ON FLEXIBLE SPACE STRUCTURAL CONTROL PERFOR-MANCES

L. PASSERON 1986 29 p Presented at American Control Conference Workshop on Identification and Control of Flexible Space Structures, San Diego, Calif., 4-8 Jun. 1984 (SNIAS-861-440-104; ETN-86-97613) Avail: NTIS HC A03/MF

A01
A geometric approach to check controllability and observability properties of light flexible space structures is presented. A matrix model of general autonomous linear systems is described. The

system properties are decoupled on each characteristic subspace of the respective matrices. Straightforward criteria expressions are given. A quantitative analysis of the system properties versus parametric uncertainties is given. The results are applied to large flexible space structures. It is shown that the method enables a thorough investigation of structural parameter uncertainties on observability and controllability properties.

### 06

### **ELECTRONICS**

Includes techniques for power and data distribution, antenna RF performance analysis, communications systems, and spacecraft charging effects.

#### A86-30714

### MILLIMETER-WAVE RANGE FOR THE QUICK EVALUATION OF LARGE REFLECTOR ANTENNAS WITH COMPLEX FEEDS

S. LAZAR (Aerospace Corp., Electronics Research Laboratory, El Segundo, CA) International Journal of Infrared and Millimeter Waves (ISSN 0195-9271), vol. 7, Feb. 1986, p. 245-250. (Contract F04701-84-C-0085)

An automated millimeter-wave antenna range capable of measuring primary-feed structure patterns and transferring this data to a mainframe computer for secondary pattern computation is described. Its applicability to the rapid evaluation of complex feed structures as used in a Cassegrain antenna is illustrated. An example of a reflector antenna is compared to a measured pattern.

Author

#### A86-31923 SOME ELECTRICAL PROPERTIES OF C.F.R.P. REFLECTOR ANTENNAS

A. G. P. BOSWELL and D. C. BREWSTER (General Electric Co., PLC, Research Laboratories, Chelmsford, England) IN: International Conference on Antennas and Propagation (ICAP 85), 4th, Coventry, England, April 16-19, 1985, Proceedings . London and New York, Institution of Electrical Engineers, 1985, p. 358-361

A surface-impedance matrix is used to analyse a carbon-fiber reinforced plastic (CFRP) reflecting surface, and the effects on cross polarized radiation from a shaped reflector using this material are discussed. Measurements were made, in the frequency range of 11.6-14.6 GHz, of the reflection coefficients of a 0.3-mm CFRP sample, and from these a surface impedance was deduced. The analysis is applied to a physical-optics computer simulation of an 11- and 14-GHz North American communication satellite antenna with a 1.2-m circular aperture front-fed offset a reflector. The effect on the cross-polar performance of the antenna was generally found to be small, however, an intrinsic cross-polar level of -45 dB was shown to have a significant effect.

### A86-35194# ALTERNATIVE SPACE POWER SYSTEMS

W. WESTPAL (Telefunken AG, Frankfurt am Main, West Germany) and G. KRUELLE (DFVLR, Cologne, West Germany) DGLR, Jahrestagung, Bonn, West Germany, Sept. 30-Oct. 2, 1985, Paper. 17 p. refs

Viable alternative primary power systems which would be operational when space power growth surpasses solar array appropriability are investigated, with reference to the development of the Space Station. An operational comparison is made between photovoltaic, solar-dynamic, and nuclear dynamic concepts with regard to weight, exposed area, safety, and reliability. Energy converters under consideration include thermodynamic cycles (Brayton, Rankine, and Stirling), the thermionic converter, the combined thermionic-Brayton system, and a thermoelectric converter. It is concluded that, as compared to a photovoltaic/battery-storage system, solar- or nuclear-dynamic

systems reach higher efficiencies, incorporate a more effective buffer storage for shadow phases, and drastically reduce the exposed collecting area. K.K.

#### A86-36671

SOLAR ENERGY CONVERSION SYSTEMS FOR POWER PLANTS IN SPACE - A COMPARATIVE ANALYSIS AND PROSPECTS FOR DEVELOPMENT [SISTEMY PREOBRAZO-VANIIA SOLNECHNOI ENERGII DLIA KOSMICHESKIKH ENERGOSTANTSII - SRAVNITEL'NYI ANALIZ I PERSPEKTIVY RAZ-VITIIA

V. A. GRILIKHES IN: Conversion of solar energy . Moscow, Izdatel'stvo Nauka, 1985, p. 60-74. In Russian. refs

Solar energy conversion methods and systems for orbital solar power plants are reviewed with reference to data in the literature. In particular, attention is given to general requirements for orbital solar energy conversion systems, their principal characteristics, principal types of solid-state photovoltaic cells, and thermoelectric conversion systems. A comparative analysis is made of the performance of photovoltaic and thermal systems, and directions of further research in this field are outlined.

A86-39480\*# Jet Propulsion Lab., California Inst. of Tech., Pasadena.

### KALMAN-LIKE ESTIMATION FOR STATIC DISTRIBUTED SYSTEMS ANTENNA SHAPE FROM RADIATION MEASURE-MENTS

G. RODRIGUEZ and R. E. SCHEID, JR. (California Institute of Technology, Jet Propulsion Laboratory, Pasadena) IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985. Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 39-60. NASA-supported research.

This paper advances an approach to the determination of shape of static distributed systems. It also illustrates the application of the approach to the problems of surface diagnosis of large parabolic reflectors. The estimation methods developed combine in an optimal sense the information from an elliptic model of the structure and from measurements of the structural deflection and of the far-field pattern changes due to the structural deformation. The estimators have a predictor-corrector structure, quite similar to that of a Kalman filter. The system model is first used to obtain a predicted estimate. A correction term is then added to the prediction to obtain the final state estimate. The relative weighting between prediction and correction terms is determined by an estimator gain. As in a Kalman filter, the estimator gain can be expressed in terms of the state estimation error covariance.

**A86-40529\*** National Aeronautics and Space Administration. Lyndon B. Johnson Space Center, Houston, Tex.

### COMMUNICATIONS AND TRACKING - THE KEYS TO SPACE STATION UTILIZATION

R. S. SAWYER, O. L. SCHMIDT, and O. L. GRAHAM (NASA, Johnson Space Center, Houston, TX) IN: Space tech; Proceedings of the Conference and Exposition, Anaheim, CA, September 23-25, 1985. Dearborn, MI, Society of Manufacturing Engineers, 1985, p. 11-1 to 11-11.

An overview of the Space Station Communications and Tracking System is presented, along with a description of its component parts and the numerous interacting control links. Emphasis is given to explaining the television and data control routing within the confines of the system. The growth expectations for the Space Station are discussed in light of the communications and tracking requirements.

#### A86-40597#

ELECTROSTATIC CHARGING AND ARC DISCHARGES ON SATELLITE DIELECTRICS SIMULATED BY ELECTRON BEAM H. FUJII, Y. SHIBUYA (Mitsubishi Electric Corp., Manufacturing Development Laboratory, Amagasaki, Japan), T. ABE, R. KASAI (Mitsubishi Electric Corp., Kamakura, Japan), and H. NISHIMOTO

(Mitsubishi Electric Corp., Kamakura, Japan), and H. NISHIMOTO (National Space Development Agency of Japan, Tsukuba Space Center, Sakura) IN: Space Systems Technology Conference, San Diego, CA, June 9-12, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 156-163. refs

(AIAA PAPER 86-1191)

This paper describes the electrostatic charging and discharge phenomena of dielectric materials for spacecraft by electron-beam irradiation simulating the hot plasma in space. Thermal control materials were used as the dielectric materials tested. Charge accumulation in the dielectric irradiated with the partially penetrating mono-energetic electron beam causes a large potential on the surface. When the large surface potential reaches a critical value, arc discharge occurs. The rate of occurrence of the discharge increases with the electron energy and the electron beam current density. The characteristics of the discharges, however, depend on the material.

#### A86-41018

THE USE OF ELECTROSTATIC NOISE TO CONTROL HIGH-VOLTAGE DIFFERENTIAL CHARGING OF SPACECRAFT D. E. HASTINGS (MIT, Cambridge, MA) Journal of Geophysical Research (ISSN 0148-0227), vol. 91, May 1, 1986, p. 5719-5724.

High differential charging is known to occur on geostationary satellites between two electrically isolated pieces of the same material. This happens because current balance with ambient space environment on each surface can be satisfied by different surface potentials. Three such potentials (two stable and one unstable) are found for the two-Maxwellian plasmas considered in this study and in the absence of photoelectron mission. Thus two isolated surfaces can have significantly different potentials leading, possibly, to electrostatic discharges. It is shown that, in an electrostatically noisy environment, one of the surface potentials is more likely to occur than the others and thus both surfaces will achieve this most probable potential independent of their previous charging history. The time for this to happen, while dependent on the characteristics of the roots, can be relatively short and may limit this type of differential charging. This effect is examined in quantitative detail for the environments measured by the ATS-5 and SCATHA satellites.

#### A86-44733

INVESTIGATION OF ARRAYS OF HIGH-Q MICROSTRIP ANTENNAS [ISSLEDOVANIE ANTENNYKH RESHETOK VYSOKODOBROTNYKH POLOSKOVYKH IZLUCHATELEI]
B. A. PANCHENKO and S. T. KNIAZEV Antenny (ISSN

0320-9601), no. 32, 1985, p. 120-123. In Russian. refs

A variational method is used to determine the impedance characteristics of high-Q microstrip antennas in large linear arrays. Numerical results are obtained and analyzed.

### A86-44906

### DECREASED CREEP FOR INCREASED SPACE POWER

J. F. MORRIS (Arizona State University, Tempe) Engineering Fracture Mechanics (ISSN 0013-7944), vol. 24, no. 1, 1986, p. 77-95. refs

Projected space needs for increased space power, higher spacecraft weights, and higher operating temperatures underline the necessity for decreased creep. Recent developments in the understanding of mechanisms contributing to or detracting from creep are discussed. Important diffusion effects on creep involve solute, additive and/or impurity segregation at lattice interruptions such as dislocations, grain boundaries, and surfaces. Pure metal creep curves depict the time trace of strain during plastic deformation caused by prolonged loading. Various creep categories and related processes are considered, and methods of

counteracting creep are discussed. A specific method for decreased creep in high-temperature low vapor pressure space ultralloys predicts improved ductility, increased recrystallization resistance and simplified processing.

#### A86-45706\*#

### PROTECTING SPACECRAFT FROM ATOMIC OXYGEN

L. J. LEGER and J. T. VISENTINE (NASA, Johnson Space Center, Houston, TX) Aerospace America (ISSN 0740-722X), vol. 24, July 1986, p. 32-35.

Findings are reported from Space Shuttle flights STS-3. 4. 5. and 8 regarding the degradation of materials exposed to atomic oxygen in low earth orbit. Atomic oxygen, a strong oxidizing agent, is present in low concentrations at such altitudes, and a spacecraft can sweep up considerable volumes of it at orbital velocities of 5 miles/s, especially if mission lifetimes are measured in years or decades. Material loss has been found to be a function of the fluence (the number of oxygen atoms striking a unit area of surface over a given period); fluence is proportional to atmospheric density, orbital velocity, surface attitude relative to velocity vector, and duration of exposure. Atmospheric density depends first on altitude and second on the phase of the 11-year solar activity cycle. Metals, in the experiments, reacted less than nonmetals. Graphs and a table are included, permitting calculation of how far a surface of various organic materials will recede on a spacecraft in low earth orbit. The limited data base on atomic oxygen interactions with materials, using both Shuttle flight experiments and ground-based facilities must be augmented. Space Station design is imminent, and the understanding of such interactions is critical to the success of that design.

#### A86-46578

A CORRECTION FOR CONTINUOUS ROTATION IN MEASUREMENTS OF THE NEAR FIELD [CORRECTION DE ROTATION CONTINUE EN MESURES DE CHAMPS PROCHES]
M. MOSTAFAVI and J.-C. BOLOMEY (Ecole Superieure d'Electricite, Gif-sur-Yvette, France) Annales des Telecommunications (ISSN 0003-4347), vol. 41, Mar.-Apr. 1986, p. 178-182. In French. refs (Contract ESA-5272/82; CNES-84-5393)

A correction factor is defined for use when obtaining meridional measurements of the near field of a rotating antenna in order to predict the radiation pattern in the far field. The technique resides on translation of the measurement data in either a spherical or a cylindrical coordinate system and Fourier transformations of the harmonic components in a time frame commensurate with the angular rotation of the antenna. A phase compensation term is thus obtained to predict the far field radiation pattern. It is noted that the method is applicable only if the measurement rate of the near field radiation exceeds the angular rate of rotation of the antenna. The factor is expected to be of use in predicting the far field radiation patterns of large space antennas.

### A86-46939#

### SPACE STATION COMMUNICATION NETWORKS

T. R. SAVAGE (TRW, Inc., Redondo Beach, CA) AIAA, Space Station in the Twenty-first Century, Meeting, Reno, NV, Sept. 3-5, 1986. 9 p. refs

(AIAA PAPER 86-2307)

The selection of a proper transmission media for Space Station communications is examined. A model for evaluating different network topologies based on complexity, robustness, connectivity, and wastefulness is developed. The usefulness of the model is studied by applying it to the analysis of dual-linear bus, single-linear bus, ring, and star network topologies. The characteristics and capabilities of a coaxial broad-band cable and a fiber optic cable are compared in terms of topological considerations. The advantages provided by the coaxial broad-band cable are described. It is noted that the coaxial broad-band cable is applicable for near-term communications on the Space Station; however, the possible future transmission of high-speed data will require the use of fiber optics.

#### A86-47335

### A NEW UNDERSTANDING OF BREAKDOWNS IN THE DAY SECTIONS OF GEOSYNCHRONOUS ORBIT

L. LEVY (ONERA, Centre d'Etudes et de Recherches de Toulouse) IN: International Aerospace and Ground Conference on Lightning and Static Electricity, 10th, and Congres International Aeronautique, 17th, Paris, France, June 10-13, 1985, Proceedings . Les Ulis, France, Les Editions de Physique, 1985, p. 467-474. refs

A unified theory for spacecraft charging is proposed whereby the satellite anomaly distribution is taken into account. The question of whether energy or intensity is the more significant worst-case environmental parameter is addressed as well as the question of where on the orbit the highest energies or intensities are encountered. It is shown that there is no unique 'worst case'. The day-side environment will be the worst-case for pure dielectrics (provided they are in the shadow) while the night side will be the worst-case for conductive dielectrics. The worst-case for the latter is the occurrence of substorms.

#### A86-47336

### STATUS OF CRITICAL ISSUES IN THE AREA OF SPACECRAFT CHARGING

J. E. NANEVICZ and R. C. ADAMO (SRI International, Menlo Park, CA) IN: International Aerospace and Ground Conference on Lightning and Static Electricity, 10th, and Congres International Aeronautique, 17th, Paris, France, June 10-13, 1985, Proceedings . Les Ulis, France, Les Editions de Physique, 1985, p. 475-484. refs

Attention is given to the major technical considerations important to spacecraft charging. These include the space environment, environmental interactions with satellite surfaces, discharge characteristics, coupling to systems and systems affected. The interference control problem is discussed and it is shown how its severity is dependent upon the properties of the source, the coupling path and the victim. Strategies for source elimination, coupling control and victim hardening are proposed. The engineering aspects of the spacecraft charging problem could benefit from the following: (1) identification of materials displaying susceptibility in orbit, (2) quantification of discharge characteristics in orbit and (3) characterization of internal noise pulse environments on typical satellites. It is concluded that a better understanding of the actual in-orbit discharge process and its characteristics is needed. This information could most accurately be obtained by taking advantage of payload opportunities so as to incorporate properly designed discharge detection and characterization instrumentation on present and future spacecraft programs. K.K.

### A86-49561#

### ELECTRICAL POWER SYSTEM INTEGRATION FOR THE SPACE STATION

R. HINNRICHS, J. WHITSETT, R. PHILLIPS, W. ALLEN, and J. CECKA (Rockwell International Corp., Rocketdyne Div., Canoga Park, CA) AIAA, Space Station in the Twenty-first Century, Meeting, Reno, NV, Sept. 3-5, 1986. 14 p. refs (AIAA PAPER 86-2351)

The design and development of the Space Station electrical power system (EPS), the complexities of which include high electrical power requirements, multiple ac and dc power sources, and diverse loads located throughout a large space structure, are discussed. A series of trade studies conducted to define the baseline EPS architecture and preliminary design implementation are described. An Initial Operating Capabilities power generation system, providing 50 kW of photovoltaic power along with a ring power-distribution architecture, has been baselined. Special attention is given to a hierarchical software/processor which provides monitoring and control functions for the EPS. Multiple block diagrams are included.

A86-50286\*# Lockheed Engineering and Management Services Co., Inc., Houston, Tex.

#### A DISTRIBUTED ARRAY ANTENNA SYSTEM

R. SHAW and J. KOVITZ (Lockheed Engineering and Management Services Co., Inc., Houston, TX) IEEE Microwave Theory and Techniques Symposium, Baltimore, MD, June 2-5, 1986, Paper. 4 p.

(Contract NAS9-15800)

The Space Station communication system will use microwave frequency radio links to carry digitized information from sender to receiver. The ability of the antenna system to meet stringent requirements on coverage zones, multiple users, and reliability will play an important part in the overall multiple access communication system. This paper will describe the configuration of a multibeam conformal phased array antenna and the individual microwave integrated components incoporated into this antenna system.

Author

## N86-23053# Sandia National Labs., Albuquerque, N. Mex. DESIGN CONSIDERATIONS FOR LARGE PHOTOVOLTAIC SYSTEMS

G. J. JONES, H. N. POST, J. W. STEVENS, and T. S. KEY 1985 19 p Presented at the 18th IEEE Photovoltaic Specialists Conference, Las Vegas, Nev., 21 Oct. 1985

(Contract DE-AC04-76DP-00789)

(DE86-002125; SAND-85-1189C; CONF-851043-14) Avail: NTIS HC A02/MF A01

The design of large photovoltaic systems has been the subject of many years of system and subsystem research. This research information can now be supplemented with data from numerous operating systems ranging in size from kilowatts to multi megawatts. The compilation of all results verify that the design process for the photovoltaic system is simple. Construction should be based on good engineering practice coupled with PV specific hardware and a few PV specific design guidelines. These guidelines include considerations related to the selection of collector type, hardware specification, array field configuration, and system installation and checkout. This paper presents a discussion of these photovoltaic specific design considerations.

**N86-24877\***# TRW Space Technology Labs., Redondo Beach, Calif. Federal Systems Div.

SATELLITE VOICE BROADCAST SYSTEM STUDY, VOLUME 2 Technical Report, 11 Apr. 1984 - 11 Jul. 1985

M. HORSTEIN Jul. 1985 335 p refs 3 Vol. (Contract NAS3-24232)

(NASA-CR-174905; NAS 1.26:174905) Avail: NTIS HC A15/MF A01 CSCL 17B

This study investigates the feasibility of providing Voice of America (VOA) broadcasts by satellite relay, rather than via terrestrial relay stations. Satellite voice broadcast systems are described for three different frequency bands: HF (26 MHz), VHF (68 MHz), and L-band (1.5 GHz). The geographical areas of interest at HF and L-band include all major land masses worldwide with the exception of the U.S., Canada, and Australia. Geostationary satellite configurations are considered for both frequency bands. In addition, a system of subsynchronous, circular satellites with an orbit period of 8 hours is developed for the HF band. VHF broadcasts, which are confined to the Soviet Union, are provied by a system of Molniya satellites. Satellites intended for HF or VHF broadcastinbg are extremely large and heavy. Satellite designs presented here are limited in size and weight to the capability of the STS/Centaur launch vehicle combination. Even so, at HF it would take 47 geostationary satellites or 20 satellites in 8-hour orbits to fully satisfy the voice-channel requirements of the broadcast schedule provided by VOA. On the other hand, three Molniya satellites suffice for the geographically restricted schedule at VHF. At L-band, only four geostationary satellites are needed to meet the requirements of the complete broadcast schedule. Moreover, these satellites are comparable in size and weight to current satellites designed for direct broadcast of video program material.

N86-24878\*# TRW, Inc., Redondo Beach, Calif.

SATELLITE VOICE BROADCAST SYSTEM STUDY. VOLUME 1: EXECUTIVE SUMMARY Contractor Report, 11 Apr. 1984 - 11 Jul. 1985

M. HORSTEIN Jul. 1985 46 p , 1-45 NOV.

(Contract NAS3-24232)

(NASA-CR-174904; NAS 1.26:174904) Avail: NTIS HC A03/MF A01 CSCL 17B

The feasibility of providing Voice of America (VOA) broadcasts by satellite relay was investigated. Satellite voice broadcast systems are described for three different frequency bands: HF, FHV, and L-band. Geostationary satellite configurations are considered for both frequency bands. A system of subsynchronous, circular satellites with an orbit period of 8 hours was developed for the HF band. The VHF broadcasts are provided by a system of Molniya satellites. The satellite designs are limited in size and weight to the capability of the STS/Centaur launch vehicle combination. At L-band, only four geostationary satellites are needed to meet the requirements of the complete broadcast schedule. These satellites are comparable in size and weight to current satellites designed for the direct broadcast of video program material.

# N86-25680# Lawrence Livermore National Lab., Calif. BEHAVIOR OF VERY LARGE SHORT PULSE ANTENNAS. REVISION 1

H. M. BUETTNER and A. J. SPERO Oct. 1985 72 p (Contract W-7405-ENG-48)

(DE86-004180; UCID-20080-REV-1) Avail: NTIS HC A04/MF A01

The electromagnetic behavior of a pulsed array of radiating elements can exhibit marked differences from standard continuous wave (CW) behavior when the physical size of the array, D, exceeds the physical pulse length, cT (speed of light times pulse duration). Herein is presented a simple analytical model and the results of computer code calculations which explain and illustrate those differences. Further elaborated is the behavior of these very large transient antennas (VLTA) using computer codes to illustrate the effects on the radiation pattern when the radiators exhibit randomness of turn-on time, phase, or amplitude. Results show that the physical space into which a linear VLTA radiates can significantly be divided into two regions by the off-axis angle THETA(sub T) identical to arcsin (cT/D). Within the near-axis region (THETA THETA(sub T)), the behavior of a coherently radiating (pulses simultaneously initiated) array is dominated by a CW antenna pattern. That is, the lobe structure found in the energy-deposition pattern is essentially that of the CW case. In the far-axis region (THETA THETA (sub T) the behavior of acoherently radiating array is dominated by transient effects. No CW-like pattern is seen; instead the energy-deposition pattern is roughly prop ortional to 1/sin (sq) THETA with only a suggestion of lobes. DOF

N86-25689\*# Smithsonian Astrophysical Observatory, Cambridge, Mass.

SYSTEM ENGINEERING STUDY OF ELECTRODYNAMIC TETHER AS A SPACEBORNE GENERATOR AND RADIATOR OF ELECTROMAGNETIC WAVES IN THE ULF/ELF FREQUENCY BAND Semiannual Report, 1 Sep. 1985 - 28 Feb. 1986

R. D. ESTES, M. D. GROSSI, and E. C. LORENZINI Mar. 1986 48 p refs

(Contract NAG8-551)

(NASA-CR-176749; NAS 1.26:176749; SAR-1) Avail: NTIS HC A03/MF A01 CSCL 20N

The transmission and generation by orbiting tethered satellite systems of information carrying electromagnetic waves in the ULF/ELF frequency band to the Earth at suitably high signal intensities was examined and the system maintaining these intensities in their orbits for long periods of time without excessive onboard power requirements was investigated. The injection quantity power into electromagnetic waves as a function of system parameters such as tether length and orbital height was estimated. The basic equations needed to evaluate alternataing current tethered systems for external energy requirements are presented.

The energy equations to tethered systems with various lengths, tether resistances, and radiation resistances, operating at different current values are applied. Radiation resistance as a function of tether length and orbital height is discussed. It is found that ULF/ELF continuously radiating systems could be maintained in orbit with moderate power requirements. The effect of tether length on the power going into electromagnetic waves and whether a single or dual tether system is preferable for the self-driven mode is discussed. It is concluded that the single tether system is preferable over the dual system.

N86-26711# AEG-Telefunken, Wedel (West Germany).
GROWTH CAPABILITIES OF EUROPEAN RETRACTABLE
SOLAR ARRAYS Final Report

G. BEHRENS Paris, France ESA Jun. 1985 89 p

(Contract ESTEC-5554/83-NL-PB(SC))

(ESA-CR(P)-2141; ETN-86-96870) Avail: NTIS HC A05/MF A01 The growth capabilities of the Advanced Rigid Array, Rigid Solar Generator, L-Sat solar array, SOLA solar array, Space Telescope solar array, and the Ultralight Panel array were assessed. Capabilities of up to 18kW are needed for the NASA manned space station. The assessment shows that each of the arrays can reach the required power range, but without taking economic factors into account, and given that only the existing application was considered, it is not possible to recommend any particular concept.

N86-27658\*# Contraves Italiana, Rome.
COMLINK PROPOSAL FOR FUTURE MISSIONS OF TETHERED SATELLITE

F. SCIARRINO In NASA, Washington Applications of Tethers in Space: Workshop Proceedings, Vol. 2 p 387-398 Jun. 1986 Avail: NTIS HC A23/MF A01 CSCL 13I

The quality of the communications links between satellites was tested. The interaction between the VLF and ELF waves, generated by the conducting tether, and the SHF and YHF electromagnetic waves, generated by the 20/30 GHz transmitters were investigated. The ionspheric electron density irregularities was measured by means of phase-coherent RF transmission between the two vehicles. The motion of the tethered satellite was observed through the Doppler link established between the shuttle and the satellite. The technology and deployment of spaceborne antennas of large diameter was tested.

N86-28414\*# Consiglio Nazionale delle Ricerche, Frascati (Italy). Ist. Fisica Spazio Interplanetario.

**ELECTRODYNAMIC INTERACTIONS** 

M. DOBROWOLNY In NASA, Washington Applications of Tethers in Space: Workshop Proceedings, Volume 1 p 153-160 Jun. 1986

Avail: NTIS HC A25/MF A01 CSCL 13I

The electrodynamic interaction of long metallic tethers with the ionosphere is introduced. Due to the tether's motion across the Earth's field, a polarization electric field is generated along the tether. In a system like the Tethered Satellite System (TSS) where the tether is coated with dielectric and the electrical contact is between its two terminations and the ionosphere, the upper end termination will collect electrons and, in a passive system, the lower end termination will collect ions. Space charge regions will develop around the two terminations of the system, which can be at considerable potential with respect to the unperturbed ionospheric plasma and the current in the tether will be most significantly determined by local processes in such space charge regions. A qualitative view of the global perturbation induced by TSS in the ionosphere is outlined. One of the applications of electrodynamic tethers is that of using them as low frequency wave generators to communicate to the Earth. This application is briefly discussed. An equivalent circuit of the tether system is described. The basic equation of the circuit is given.

N86-28973\*# Martin Marietta Corp., Denver, Colo.
NEAR-FIELD TESTING OF THE 15-METER MODEL OF THE
HOOP COLUMN ANTENNA. VOLUME 3: NEAR- AND FAR-FIELD
PLOTS FOR THE JPL FEED

J. HOOVER, N. KEFAUVER, T. CENCICH, and J. OSBORN Mar. 1986 147 p

(Contract NAS1-18016)

(NASA-CR-178061; NAS 1.26:178061; MCR-85-640-VOL-3)

Avail: NTIS HC A07/MF A01 CSCL 09C

Technical results from near-field testing of the 15-meter model of the hoop column antenna at the Martin Marietta Denver Aerospace facility are discussed. The antenna consists of a deployable central column and a 15 meter hoop, stiffened by cables into a structure with a high tolerance repeatable surface and offset feed location. The surface has been configured to have four offset parabolic apertures, each about 6 meters in diameter, and is made of gold plated molybdenum wire mesh. Pattern measurements were made with feed system radiating at frequencies of 7.73, 11.60, 2.27, 2.225, and 4.26 (all in GHz). This report (Volume 3) gives the detailed patterns measured with the JPL feed (2.225 GHz). Volume 1 covers the testing from an overall viewpoint and contains information of generalized interest for testing large antennas, including the deployment of the antenna in the Martin Facility and the measurements to determine mechanical stability and trueness of the reflector surface, the test program outline, and a synopsis of antenna electromagnetic performance. A detailed listing of the antenna patterns for the LaRC feeds (7.3, 11.60, 2.27, and 4.26 GHz) are given in Volume 2 of this report.

N86-29115\*# Martin Marietta Corp., Denver, Colo.
NEAR-FIELD TESTING OF THE 15-METER MODEL OF THE
HOOP COLUMN ANTENNA Final Report

J. HOOVER, N. KEFAUVER, T. CENCICH, J. OSBORN, and J. OSMANSKI Mar. 1986 123 p

(Contract NAS1-18016)

(NASA-CR-178059; NAS 1.26:178059; MCR-85-640) Avail: NTIS HC A06/MF A01 CSCL 20N

The technical results from near-field testing of the 15-meter model of the hoop column antenna at the Martin Marietta Denver Aerospace facility are documented. The antenna consists of a deployable central column and a 15 meter hoop, stiffened by cables into a structure with a high tolerance repeatable surface and offset feed location. The surface has been configured to have four offset parabolic apertures, each about 6 meters in diameter, and is made of gold plated molybdenum wire mesh. Pattern measurements were made with feed systems radiating at frequencies of 7.73, 11.60, 2.27, 2.225, and 4.26 (all in GHz). This report (Volume 1) covers the testing from an overall viewpoint and contains information of generalized interest for testing large antennas. This volume discusses the deployment of the antenna in the Martin Facility and the measurements to determine mechanical stability and trueness of the reflector surface, gives the test program outline, and gives a synopsis of antenna electromagnetic performance. Three techniques for measuring surface mechanical tolerances were used (theodolites, metric cameras, and near-field phase), but only the near-field phase approach is included. The report also includes an error analysis. A detailed listing of the antenna patterns are provided for the 2.225 Ghz feed in Volume 3 of this report, and for all other feeds in Volume 2.

N86-29877\*# Martin Marietta Aerospace, Denver, Colo.
NEAR-FIELD TESTING OF THE 15-METER MODEL OF THE
HOOP COLUMN ANTENNA. VOLUME 2: NEAR- AND FAR-FIELD
PLOTS FOR THE LARC FEEDS

J. HOOVER, N. KEFAUVER, T. CENCICH, and J. OSBORN Mar. 1986 282 p

(Contract NAS1-18016)

(NASA-CR-178060; NAS 1.26:178060; MCR-85-640-VOL-2)

Avail: NTIS HC A13/MF A01 CSCL 22B

The technical results from near-field testing of the 15-meter model of the hoop column antenna at the Martin Marietta Denver

Aerospace facility are described. The antenna consists of a deployable central column and a 15-meter hoop, stiffened by cable into a structure with a high tolerance repeatable surface and offset feed location. The surface has been configured to have four offset parabolic apertures, each about 6 meters in diameter, and is made of gold plated molybdenum wire mesh. Pattern measurements were made with feed systems radiating at frequencies of 7.73, 11.60, 2.27, 2.225, and 4.26 (all in GHz). This report (Volume II) gives the detailed patterns measured with the LaRC feeds (7.73, 11.60, 2.27, and 4.26 GHz). Volume I covers the testing from an overall viewpoint and contains information of generalized interest for testing large antennas, including the deployment of the antenna in the Martin Facility and the measurements to determine mechanical stability and trueness of the reflector surface, the test program outline, and a synopsis of antenna electromagnetic performance. A detailed listing of the antenna patterns are provided for the 2.225 Ghz feed in Volume III of this report.

N86-29893# Toronto Univ. (Ontario). Dept. of Electrical Engineering.

CHARGE ACCUMULATION AND ARC DISCHARGES ON SPACECRAFT MATERIALS AND COMPONENTS Final Report, 1 Sep. 1984 - 31 Aug. 1985

K. G. BALMAIN 11 Nov. 1985 62 p (Contract AF-AFOSR-0342-84)

(AD-A166216; AFOSR-86-0057TR) Avail: NTIS HC A04/MF A01 CSCL 22B

A study of arc discharge strength was carried out, emphasizing its variation with the thickness of the dielectric-sheet specimens which had been exposed to an incident 20 keV electron beam at a current density of a thickness at which the peak current and the energy released into a load resistor are maximized. The addition of a low-energy ion beam was found to reduce discharge strength without significantly altering thickness-scaling. Also, experimental evidence was presented for a new effect called the ion spot phenomenon in which the incident ions are focussed into a central spot which then glows due to electron-impact luminescence. The first stage in the analysis of the ion spot phenomenon has been carried out and is described in this report. A two-dimensional analysis reveals complex ion trajectories which produce not only a strip (equivalent to a spot) of ion deposition, but are also such as to produce a spot with very sharply defined edges, just as observed experimentally. As for the spacecraft-charging experimental facility, a chamber capable of holding specimens up to 30 cm diameter has been completed. Arc discharges of 700 A peak have been recorded for the largest specimens and a system for making surface potential measurements has been tested.

GRA

N86-30590\*# Chicago Univ., III. Lab. for Astrophysics and Space Research.

A NEW INSTRUMENT TO MEASURE CHARGED AND NEUTRAL COMETARY DUST PARTICLES AT LOW AND HIGH IMPACT VELOCITIES

T. ECONOMON, J. A. SIMPSON, and A. J. TUZZOLINO In Lunar and Planetary Inst. Trajectory Determinations and Collection of Micrometeoroids on the Space Station p 54-55 1986 refs Avail: NTIS HC A06/MF A01 CSCL 03B

A new class of dust particle detector, the PVDF dust detector, was designed for space missions such as the Halley Comet missions where the particle impact velocity is very high. It is demonstrated that this same PVDF detector (operating in a different mode) also has the capability of detecting dust particles having low velocity (approx. 100 m/s). This low velocity detection capability is extremely important in terms of planned missions requiring measurement of low velocity dust particles such as comet rendezvous missions. An additional detecting element (charge induction cylinder) was also developed which, when combined with a PVDF detector, yields a system which will measure the charge (magnitude and sign) carried by a cometary particle as well as the particle velocity and mass for impact velocities in the range 100 to 500 m/s. Since the cylinder-PVDF detector system has a relatively small geometry factors, an array of PVDF detectors was

included having a total sensing area of 0.1 sq m for measurements in regions of space where the dust flux is expected to be low. The characteristics of the detectors in this array have been chosen to provide optimum mass sensitivity for both low-velocity cometary dust as well as high-velocity asteroid associated and interplanetary dust.

N86-30796# Royal Netherlands Aircraft Factories Fokker, Schiphol-Oost. Space Div.

DESIGN AND DEVELOPMENT OF THE ADVANCED RIGID ARRAY (ARA) SOLAR PANEL

R. W. H. HORSSELENBERG In ESA Proceedings of a Workshop on Composites Design for Space Applications p 319-328 Feb. 1986

Avail: NTIS HC A16/MF A01

The Advanced Rigid Array panel technologies are summarized: specific weight is less than 1.2 kg/sqm; can survive extreme thermal cycling (plus 80 to minus 180 C); excellent flatness and dimensional stability; extremely high stiffness properties due to application of GY-70 carbon fiber; high satellite interface flexibility; high panel sizing flexibility; and simple and low cost production. Developments include the establishment of panel technologies to obtain specific weights below 0.8 kg/sqm via open lay-up CFRP facesheet technology.

N86-30802# Tri-Con Associates, Inc., Cambridge, Mass.
DESIGN, FABRICATE AND TEST SPACECRAFT AUTOMATIC
ACTIVE DISCHARGE SYSTEM (SAADS) Final Report, 20 Jul.
1983 - 15 Jun. 1985

R. S. HILLS 25 Sep. 1985 18 p (Contract F19628-83-C-0153)

(AD-A166559; C-214; AFGL-TR-85-0236) Avail: NTIS HC A02/MF A01 CSCL 22B

The objective of this contract is the design, fabrication, and testing of a Spacecraft Automatic Active Discharge System (SAADS) which will attempt to automatically control and dissipate the vehicle charge as a function of natural or induced disturbances in space. A microprocessor based controller will monitor and manipulate data from a Proton Electrostatic Analyzer (ESA) to determine if the vehicle charge is greater than a predetermined value and then activate a Plasma Source to discharge the vehicle. The plasma source short circuits the charge. This equipment is to be flown as part of the BERT I payload to demonstrate the feasibility of the system for eventual use in a satellite in a true space environment.

N86-31113# Oak Ridge National Lab., Tenn.

DEVELOPMENT OF A SIMULATION CODE FOR A LATENT HEAT THERMAL ENERGY STORAGE SYSTEM IN A SPACE STATION

A. D. SOLOMON, M. D. MORRIS, J. MARTIN, and M. OLSZEWSKI Apr. 1986 48 p (Contract DE-AC05-84OR-21400)

(DE86-010070; ORNL-6213) Avail: NTIS HC A03/MF A01

A conceptual design of a space station power system based on a Brayton cycle and solar powered has been developed. A key part of such a system is the thermal energy storage module, which is of crucial importance during periods of darkness. We have developed a simulation code for one possible storage configuration. In this report, we describe the considerations entering into the code development, and some results obtained thus far.

DOE

**N86-31997**# Societe Nationale Industrielle Aerospatiale, Cannes (France).

HIGH POWER RIGID SOLAR ARRAY

M. A. ZILIANI and L. PELENC 1986 7 p (SNIAS-861-440-110; ETN-86-97618) Avail: NTIS HC A02/MF

The design of a solar array providing 30 kW is described. Main specifications are compatibility with the European Columbus platform and resource module, low life cycle cost, reliability, multideployment-retraction ability and low development risk. The

design is based on interchangeable rigid panels with silicon cells and proved pantograph mechanisms. The advantages of this concept include modularity at elementary panel (0.5 kW) level, capability of providing power while partially retracted, and of withstanding high levels of in-orbit loads.

N86-31998# Royal Netherlands Aircraft Factories Fokker, Schiphol-Oost. Space Div.

HIGH POWER SOLAR ARRAY (HPSA) STUDY Final Report

G. J. HEGEMANS Paris ESA Jun. 1985 110 p

(Contract ESTEC-6063/84-NL-PB(SC))

(FOK-TR-R-85-068; ESA-CR(P)-2182; ETN-86-97795) Avail: NTIS HC A06/MF A01

The design of a 30 kW planar Si-cell solar array for space shuttle payloads along with a GaAs-concentrator array are presented. Both arrays consist of blankets supported by a central, coplanar telescopic mast. Analysis results describing the array performances are summarized. A design and development philosophy is presented, critical design areas are pinpointed, and descoping/growth capability, orbital replacement units, and extravehicular servicing are discussed.

N86-32517# MATRA Espace, Toulouse (France). Direction Etudes Systemes Spatiaux et Charges Utiles.

### ESABASE EXTENSION TO SPACECRAFT CHARGING Final Report

M. FREZET Paris ESA 17 Jun. 1986 125 p

(Contract ESTEC-3-5632/83-NL-PP)

(MATRA-CMT-TS101/RT/16.85; ESA-CR(P)-2191; ETN-86-97792) Avail: NTIS HC A06/MF A01

A system level tool, ESABASE/CHARGING, to simulate spacecraft charging in space conditions (geosynchronous) and test tank environment is described. The software results from the coupling of NASCAP with ESABASE/MATVIEW. It offers an integrated framework with automatic file management. Up to 30 different files are generated during a typical simulation. A high-level input langauge is automatically interpreted to generate the rigid NASCAP inputs. A 3-D preprocessor sets up the NASCAP model. A fully 3-D postprocessor allows the visualization of user-defined parameters for a selected cycle on the spacecraft. The 3-D postprocessor is easy to use and fast. Improved NASCAP auxiliary codes plot colored equipotentials or various graphics with UDISP.

07

### **ADVANCED MATERIALS**

Includes matrix composites, polyimide films, thermal control coatings, bonding agents, antenna components, manufacturing techniques, and space environmental effects on materials.

A86-30323

### THE SHUTTLE GLOW AS AN INDICATOR OF MATERIAL CHANGES IN SPACE

B. D. GREEN (Physical Sciences, Inc., Andover, MA) and E. MURAD (USAF, Geophysics Laboratory, Bedford, MA) Planetary and Space Science (ISSN 0032-0633), vol. 34, Feb. 1986, p. 219-224. refs

(AD-A167300; AFGL-TR-86-0082)

Observations of the glow occurring above the spacecraft surfaces and the theories used to explain this phenomena are reviewed. The interaction between the energetic ambient flux and the Shuttle near-field environment, and the reactions of energetic ambient ions and neutrals with the Shuttle surface are examined. It is observed that the reactions which produce the glow affect the composition and properties of the surface and alter the thermal, structural, or electrical characteristics. The glow also affects the ability of the astronauts to make remote observations from the spacecraft and causes material erosion. The spectral emissions

that could arise from the surface reaction products are analyzed. It is concluded that the Shuttle glow is observed only on the surface and in the ram direction, and the composition of the surface material and the interaction of this material with the ambient at orbital velocities produces the emission.

### A86-32406

### SPACE ENVIRONMENT EFFECTS ON SPACECRAFT SURFACE MATERIALS

H. K. A. KAN (Aerospace Corp., El Segundo, CA) IN: Radiation effects in optical materials; Proceedings of the Thirteenth Critical Reviews of Technology Conference, Albuquerque, NM, March 6, 7, 1985 Bellingham, WA, Society of Photo-Optical Instrumentation Engineers, 1985, p. 164-179. Research supported by the Aerospace Corp. refs

A review is given of the effect of the space environment on the external surfaces of satellites. The early development of thermal control materials in the 1960's and the 1970's is summarized. Selected recent results, based on flight experiments from the SCATHA satellite (P78-2) of the Space Test Program and the Space Shuttle, are reviewed along with laboratory experiments designed to understand the often unexpected results of the flight experiments. The topics include long-term stability of thermal control materials, contamination, spacecraft charging, and the effect of oxygen atoms on materials. Several areas of future research are proposed.

#### A86-32917#

### APPLICATION AND POTENTIAL FUTURE OF ADVANCED COMPOSITES IN SPACE

W. A. SIGUR (Martin Marietta Corp., New Orleans, ŁA) IN: Man's permanent presence in space; Proceedings of the Third Annual Aerospace Technology Symposium, New Orleans, ŁA, November 7, 8, 1985. New Orleans, LA, American Institute of Aeronautics and Astronautics, 1985, 33 p. refs

Historical composite spacecraft systems are reviewed, and the performance of advanced composites in space is discussed. The advanced composites of greatest usefulness in space applications are described, and the specific applications of such composites in various historical space missions are summarized. Pertinent space applications of advanced composites over the next 30 years are given, stating what particular functions composites are to be used for in various missions. Developments and trends in reinforcements, matrix materials, and advanced composite systems which may be instrumental in future spacecraft composites are listed, and unique manufacturing and design concepts which should contribute to potential composite usage are mentioned.

### A86-32977#

### REACTION OF HIGH-VELOCITY ATOMIC OXYGEN WITH CARBON

G. S. ARNOLD and D. R. PEPLINKSI (Aerospace Corp., Chemistry and Physics Laboratory, El Segundo, CA) AIAA Journal (ISSN 0001-1452), vol. 24, April 1986, p. 673-677. Research supported by the Aerospace Corp. Previously cited in issue 06, p. 741, Accession no. A84-18159. refs

### A86-39951#

### LONG-TERM PERFORMANCE OF THERMAL CONTROL COATINGS AT GEOSYNCHRONOUS ALTITUDE

D. F. HALL and A. A. FOTE (Aerospace Corp., El Segundo, CA) AIAA and ASME, Joint Thermophysics and Heat Transfer Conference, 4th, Boston, MA, June 2-4, 1986. 11 p. refs (Contract F04701-85-C-0086)

(AIAA PAPER 86-1356)

Flight measurements on 16 thermal control coating materials over 2200 days at geosynchronous altitude are reported. Fused-silica second surface mirrors and polished metals are much more stable in space than the other sample types. Two types of transparent conductive coatings degrade during the first year. Metallized Teflon FEP and Kapton degrade over a long time period, probably because of bombardment by ambient protons. The backing material on quartz fabrics influences their degradation.

3M 401C10 black paint bleaches slowly on orbit. The time dependence of the degradation of several of these samples is well described by physical models of the degradation processes.

Author

#### A86-40371

### CONTINUOUS FORMING OF THIN-WALLED CFRP PIPES FOR LARGE-SPACE STRUCTURE

T. WATANABE, T. SUGANO, and K. MURAYAMA (Mitsubishi Electric Co., Materials Laboratory, Sagamihara, Japan) IN: Developments in the science and technology of composite materials; Proceedings of the First European Conference on Composite Materials and Exhibition, Bordeaux, France, September 24-27, 1985. Bordeaux, France, Association Europeenne des Materiaux Composites, 1985, p. 505-510. Research sponsored by the Agency of Industrial Science and Technology.

A high efficiency continuous forming process for long and thin-walled CFRP pipes has been developed. The pipe will be applied to future large-scale space structures. An original manufacturing system, both process and equipment, is described. The essential working conditions of the pultrusion process through fabrication and quality evaluation of the products are presented. A useful method and the appropriate cure condition for the raw material are described. It was confirmed that the pultruded CFRP pipe had qualities equivalent to those obtained by the conventional batch method.

### A86-40378

THE PRODUCTION AND PROPERTIES OF COMPOSITE MATERIALS WITH LIGHT ALLOY MATRICES REINFORCED WITH CONTINUOUS FIBERS (C, SIC) [ELABORATION ET PROPRIETES DE MATERIAUX COMPOSITES A MATRICES D'ALLIAGELERERS REINFORCEES DE FIBRES CONTINUES /C, SIC/]

P. MACHETO (Aerospatiale, Division Systemes Balistiques et Spatiaux, Les Mureaux, France) IN: Developments in the science and technology of composite materials; Proceedings of the First European Conference on Composite Materials and Exhibition, Bordeaux, France, September 24-27, 1985 . Bordeaux, France, Association Europeenne des Materiaux Composites, 1985, p. 616-622. In French. refs

Solid phase manufacturing processes used for metal matrix composites (MMC) are briefly described, along with the mechanical properties of the resulting materials. Attention is focused on carbon-aluminum (C/Al) and silicon carbide-aluminum (SiC/Al) MMCs, wherein Al forms the matrix for the C and SiC fibers. Metallized tapes or cloths of the reinforcing fibers are laid in the mold and then hot pressed with the Al matrix material at an atmospheric pressure of 150-250 bars and a 500-600 C temperature. The materials are then quenched under pressure. The temperature-pressure-time triplet determines the quality of the resulting materials. Three-point bending tests have shown that the fatigue resistance of the C/AI MMCs have remained the same at temperatures from 20-300 C due to the high ductility of the Al matrix. Samples of SiC/Al have exhibited as high a stiffness as the C/Al materials. The C/Al MMCs eventually crack from fiber/matrix separation, while the SiC/AI MMCs fail due to fiber breakage. Finally, the low coefficients of thermal expansion of both materials commends then as candidates for tests in large space structures.

#### A86-40384

### MAGNESIUM MATRIX COMPOSITE MATERIALS PROCESSING AND APPLICATIONS

O. REMONDIERE, R. PAILLER (CNRS, Laboratoire de Chimie du Solide, Talence, France), A. MAMODE, and PH. ROY (CNES, Toulouse, France) IN: Developments in the science and technology of composite materials; Proceedings of the First European Conference on Composite Materials and Exhibition, Bordeaux, France, September 24-27, 1985. Bordeaux, France, Association Europeenne des Materiaux Composites, 1985, p. 732-737. CNES-supported research. refs

Carbon-magnesium composite materials exhibit mechanical and thermal properties which make them suitable for large space structure applications in which a high dimensional stability is required. C/Mg composite materials are processed according to either vapor or liquid phase techniques. An analysis of the most recent techniques is given, based on laboratory experiments.

Author

### A86-40487

### **CARBON FIBRES AND THEIR COMPOSITES**

E. FITZER, ED. (Karlsruhe, Universitaet, West Germany) Berlin and New York, Springer-Verlag, 1985, 307 p. For individual items see A86-40488 to A86-40499.

The present conference considers topics encompassing the fields of advanced composite reinforcing fibers, polymeric matrices, fabrication and design methodologies for carbon fiber-reinforced composites (CFRPs), the testing and fracture behavior of CFRPs, CFRP applications in aerospace, and the R&D activities in carbon fiber production of Brazil, India, China, and South Korea. Specific discussions are presented concerning the effect of matrix resin choice on prepreg processing, the development of thermosetting polyimide matrix resins, autoclave compression molding, design preparations for large space structures, CFRP testing and properties optimization, industrial and marine applications of carbon fiber reinforcements, and biomedical applications of CFRP. O.C.

#### A86-40495

### **AUTOCLAVE, COMPRESSION MOULDING**

K. BRUNSCH (Messerschmitt-Boelkow-Blohm GmbH, Munich, West Germany) IN: Carbon fibres and their composites . Berlin and New York, Springer-Verlag, 1985, p. 149-158.

Autoclave and compression molding are well-known technologies in use for the fabrication of fiber composite structures. This paper presents data gathered with autoclave curing of extremely thin, high modulus carbon fiber-composite (CFC) face skins for space structures, autoclave-curing of thickness tapered high tensile CFC skin of an aircraft taileron, press curing of thick high tensile strength CFC rotor hub components, and the use of an oven for vacuum bag curing.

#### A86-40498

### **EXPERIENCES IN FRG IN AEROSPACE APPLICATION**

K. BRUNSCH (Messerschmitt-Boelkow-Blohm GmbH, Munich, West Germany) IN: Carbon fibres and their composites . Berlin and New York, Springer-Verlag, 1985, p. 206-228.

Attention is given to the experience gained in West Germany to date with CFRPs' fiber, matrix resin, and fiber-resin interface characteristics. Attention is given to space structures applications such as the Intelsat V series satellites' solar cell array structure, as well as the Tornado fighter aircraft's taileron, a technology development CFRP fighter cockpit, and helicopter rotor blades and driveshafts. Also noted are recent advancements in CFRP fabrication and quality assurance techniques.

O.C.

#### A86-40503

### **CONTINUOUS FIBER COMPOSITE HOOPS**

R. R. VARIN (Varinit Corp., Greenville, SC) IN: Space tech; Proceedings of the Conference and Exposition, Anaheim, CA, September 23-25, 1985. Dearborn, MI, Society of Manufacturing Engineers, 1985, p. 2-1 to 2-3.

Low-cost, low-weight fiber-reinforced hoops up to 12 feet in diameter have been developed as reinforcement for space assemblies, rocket casings, tanks, fly wheels, etc. Their properties are described. Author

**A86-40530\***# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

### THE THERMAL AND MECHANICAL STABILITY OF COMPOSITE MATERIALS FOR SPACE STRUCTURES

S. S. TOMPKINS, G. F. SYKES, and D. E. BOWLES (NASA, Langley Research Center, Hampton, VA) ASM, ASME, IEEE, et al., Conference and Exposition on Space Tech, Anaheim, CA, Sept. 23-25, 1985, Paper. 19 p. refs

A continuing research objective of the National Aeronautical and Space Administration (NASA) is to develop advanced composite materials for space structures. The thrust of this research is to gain fundamental understanding of the performance of advanced composites in the space environment. The emphasis has been to identify and model changes in the thermal-physical properties due to induced damage and develop improved materials.

### A86-40594#

### HIGH MODULUS COMPOSITE PROPERTIES

M. J. MICHNO, JR. (Union Carbide Corp., Specialty Polymers and Composites Div., Bound Brook, NJ) IN: Space Systems Technology Conference, San Diego, CA, June 9-12, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 126-131. refs (AIAA PAPER 86-1187)

Reliable component design with high modulus composites systems requires a mechanical and physical property data base, including both average property levels and a measure of property variability. Composite properties are presented for a number of Thornel Advanced Composites Systems based on P-55S, P-75S, and P-100S high modulus fibers. Specific composite laminate properties presented include: RT longitudinal tension and compression; RT transverse tension, longitudinal shear and flexural strength (RT to 300 F) and coefficients of thermal expansion valid for the temperature range of -200 F to +200 F. Thermomechanical stability data are presented for quasi-isotropic laminates cycled over the temperature range of -300 F to +200 F. Data indicate that the materials tested may be well suited to harsh thermal environments. However, the performance of candidate materials must be judged in terms of requirements for specific applications.

Autho

### A86-41740#

### EFFECT OF DEGRADATION OF MATERIAL PROPERTIES ON THE DYNAMIC RESPONSE OF LARGE SPACE STRUCTURES

S. KALYANASUNDARAM, J. D. LUTZ, W. E. HAISLER, and D. H. ALLEN (Texas A&M University, College Station) (Structures, Structural Dynamics, and Materials Conference, 26th, Orlando, FL, April 15-17, 1985, Technical Papers. Part 2, p. 545-551) Journal of Spacecraft and Rockets (ISSN 0022-4650), vol. 23, May-June 1986, p. 297-302. Previously cited in issue 13, p. 1855, Accession no. A85-30382. refs

(Contract F49620-83-C-0067)

### A86-41750\*# Auburn Univ., Ala.

### **ANALYSES OF SPACECRAFT POLYMERIC MATERIALS**

S. D. WORLEY, A. T. FROMHOLD, K. DANESHVAR (Auburn University, AL), A. F. WHITAKER, S. A. LITTLE (NASA, Marshall Space Flight Center, Huntsville, AL) et al. Journal of Spacecraft and Rockets (ISSN 0022-4650), vol. 23, May-June 1986, p. 350-352. refs

(Contract NAS8-35914)

Partial analytical characterizations are made by four different techniques of three polymeric materials used in conjunction with the Space Telescope for samples flown on mission STS-8. The polymers were Tedlar, Kapton H, and Kapton F. The surfaces of the three polymers were attacked and oxidized by atomic oxygen, and fluorine is lost from the surface of Kapton F, largely due to displacement by atomic oxygen.

O.C.

#### A86-45646

### THE GERMAN PROGRAMME ON MATERIALS SCIENCE IN SPACE

W. STEINBORN (DFVLR, Cologne, West Germany) (Columbus Workshop, 1st, Capri, Italy, June 17-21, 1985) Earth-Oriented Applications of Space Technology (ISSN 0277-4488), vol. 6, no. 1, 1986, p. 113-116.

Current West German experimental programs on materials processing in space are reviewed in relation to follow-on experiments in the Columbus segment of the Manned Space Station (MSS). Over 80 percent of the 78 projects active in 1985 were funded by institutions, and were in part dedicated to improving the quality and quantity of the materials processed. West Germany performed electrophoresis experiments on the Apollo-Soyuz mission, experiments with immiscible alloys on the SPAR rocket, and several experiments on the STS OSTA and Spacelab missions. All the previous experiments suffered from the short on-orbit stay and from a lack of continuous power supplies should the stays have been longer. The MSS will ameliorate these problems and access to experimental apparatus will be increased by the multi-user facility nature of the MSS.

### A86-47337

### SPACECRAFT MATERIALS TEST IN A CONTINUOUS, BROAD ENERGY-SPECTRUM ELECTRON BEAM

M. BLEZ, J. THAYER, and J. E. NANEVICZ (SRI International, Menlo Park, CA) IN: International Aerospace and Ground Conference on Lightning and Static Electricity, 10th, and Congres International Aeronautique, 17th, Paris, France, June 10-13, 1985, Proceedings. Les Ulis, France, Les Editions de Physique, 1985, p. 485-497. refs

The discharge behavior of several samples made of Kapton, a material used in spacecraft thermal control systems was studied under conditions of a simulated space environment, comparing the results of exposure to two types of electron beams. The first was a constant monoenergetic electron beam, used in past studies; the second was a continuous broad-energy-spectrum electron beam, generated by a novel multienergy multipactor electron gun. It has been found that the discharges produced by a multienergetic beam, which represents a more realistic environment situation, had longer (by a factor of 2) rise times than the discharges produced by a monoenergetic beam, indicating lower penetration efficiency by the multienergetic beam. However, while the samples exposed to a monoenergetic beam have stopped discharging after a few minutes, the same samples exposed to a multienergetic beam continued discharging indefinitely. The hitherto uncontrolled physical parameters, such as the manner of cleaning the sample and the production run of a sample, were found to influence the material response.

#### A86-47605

# ENHANCEMENTS IN THE ROUTINE EVALUATION OF COMPOSITE AEROSPACE COMPONENTS USING A MICROPROCESSOR BASED EQUIPMENT

P. R. TEAGLE (Inspection Instruments (NDT), Ltd., Slough, England) IN: AIRMEC '85 - Aviation equipment servicing: Aircraft and helicopter maintenance; International Exhibition and Conference, 4th, Duesseldorf, West Germany, February 26-March 3, 1985, Conference Reports . Duesseldorf, West Germany, Duesseldorfer Messegesellschaft mbH, 1985, 39 p.

The principles of operation and signal detection techniques used in NDT are outlined, and the use of computer-based technology in such methods is discussed. A computerized scanning frame, used to eliminate the operator variability in the transducer manipulation, is described together with a device that can evaluate and digitize analog signals from any test equipment. The device provides five independently selectable threshold levels for data analysis, which can be set at the amplitudes significant to the particular test. The application of the intelligent scanning equipment, used in conjunction with the data analyzer, to three types of ultrasonic tests and to mechanical impedance testing is described.

#### A86-49595#

### THE AFML/LOCKHEED TEST METHOD FOR CHARACTERIZING MATERIAL OUTGASSING AND DEPOSITION KINETICS

J. W. GARRETT, A. P. M. GLASSFORD (Lockheed Missiles and Space Co., Inc., Sunnyvale, CA), and P. M. FALCO (USAF, Materials Laboratory, Wright-Patterson AFB, OH) AIAA and ASME, Joint Thermophysics and Heat Transfer Conference, 4th, Boston, MA, June 2-4, 1986. 9 p. refs (AIAA PAPER 86-1279)

An improved test method to characterize the contamination potential of spacecraft materials has been developed. The test provides material outgassing and condensation kinetics data to support contamination modeling. The test apparatus includes four quartz-crystal microbalances controlled at temperatures between liquid nitrogen and 125 C, a mass spectrometer, and an effusion cell. The test method includes material sample requirements, the test procedure, and data presentation.

### N86-22617# Societe Crouzet, Valence (France).

# ADVANCED PRINTED WIRING BOARD (PWB) MATERIALS FOR SURFACE MOUNTED DEVICES IN AEROSPACE APPLICATIONS

G. MENOZZI *In* ESA Proceedings of 3rd European Symposium on Spacecraft Materials in Space Environment p 203-213 Nov. 1985 refs Sponsored by CNES Avail: NTIS HC A13/MF A01

Multilayer thick film hybrid and printed wiring board technologies for leadless ceramic chip carriers (LCCC) were developed. Copper clad invar MLBs prove to be a viable solution for LCCC interconnects. The ClC core MLB offers advantages such as large size, both-side mounting, an inner thermal plane for thermal management, an easier rework process, and better vibration tolerance. One disadvantage is the weight. Thermal coefficient of expansion measurements and calculations offer a quick approach for material inspection and assembly evaluation. The thermal cycling test from minus 55 to plus 125 C widely used for evaluation programs consisting of several hundred cycles is not realistic for aerospace qualification tests.

N86-22619# European Space Agency. European Space Research and Technology Center, ESTEC, Noordwijk (Netherlands).

### HIGH VOLTAGE POTTING FOR THE FAINT OBJECT CAMERA (FOC)

R. THOMAS In ESA Proceedings of 3rd European Symposium on Spacecraft Materials in Space Environment p 223-228 Nov. 1985 refs

Avail: NTIS HC A13/MF A01

Potting the high voltage parts on the photon detector of the Faint Object Camera (FOC) for the Space Telescope is described. The detector is required to have very high gain to provide a logic level signal for digital processing. Gain is provided by an image intensifier and a video camera tube, the former operating at up to 42KV (normally at 38KV) and the latter in the range -6.5 to -12KV (normally -10KV). Experience in developing the detector (including catastrophic failures) shows that when high voltage circuits are potted it is essential to define and control potentials on all surfaces. It is strongly recommended that a dummy unit be potted with pressure and stress gages to determine the forces involved in curing and environmental test cycles. The application of partial discharge testing is essential for assemblies and desirable for past screening (cables, correction techniques at least). Potting should be under vacuum and scrupulous attention must be paid to cleanliness of surfaces to be potted and all containers and equipment used for priming and potting. Author (ESA) N86-22620# Selenia S.p.A., Rome (Italy).

# MEASUREMENT OF THE THERMO-OPTICAL PROPERTIES OF VARYING PAINT THICKNESS ON CARBON FIBER COMPOSITES IN SPACECRAFT STRUCTURES

M. GIOMMI, M. MARCHETTI (Rome Univ., Italy), G. SALZA, and P. TESTA (Rome Univ., Italy) /n ESA Proceedings of 3rd European Symposium on Spacecraft Materials in Space Environment p 233-238 Nov. 1985 refs Sponsored by Max-Planck Inst. Avail: NTIS HC A13/MF A01

Diffuse spectral reflectivity for solar radiation at normal incidence, spectral normal emissivity, and integrated normal emittance for PV 100 painted samples having different paint thickness and different (carbon fiber or non) substrates were measured. Results mainly for thickness 70 microns show high spectral reflectivity or low spectral absorption coefficient while spectral emissivity has medium-high values. Limited effect (order of 10%) of the texture and thickness are pointed out.

Author (ESA)

N86-22621# Centre National d'Etudes Spatiales, Toulouse (France).

#### **NEW SPACE PAINTS**

J. C. GUILLAUMON *In* ESA Proceedings of 3rd European Symposium on Spacecraft Materials in Space Environment p 239-243 Nov. 1985 refs
Avail: NTIS HC A13/MF A01

White conductive paint with low solar absorptance (improvement of PCB-Z) (0.16 to 0.18); black conductive paint with low outgassing (improvement of PU1); white silicone paint with low solar absorptance (0.13); epoxy primer with low outgassing; and white conductive paint for launchers and aircraft were developed. Improvements under study are outlined.

Author (ESA)

N86-22622# Centre d'Etudes et de Recherches, Toulouse (France). Dept. d'Etudes et de Recherches en Technologie Spatiale.

### LONG TERM TESTS OF CONTAMINATED OPTICAL SOLAR REFLECTORS (OSRS) UNDER COMBINED ENVIRONMENT

J. MARCO and A. PAILLOUS In ESA Proceedings of 3rd European Symposium on Spacecraft Materials in Space Environment p 245-253 Nov. 1985 refs

Avail: NTIS HC A13/MF A01

A simulation program for 5 yr in geosynchronous orbit was carried out on thermal control coatings. Conductive and nonconductive optical solar reflectors (OSR's) were subjected to various thickness (50 to 500A) of contamination deposited in-situ at the start of the test, and irradiated. The variation in solar absorptance at the end of the test is 3 to 4 times greater for the OSR's having received 500 A of the products outgassed from the RTV 566 adhesive. The test data show that contamination is the most likely cause of the excessive degradations observed on many geosynchronous satellites.

Author (ESA)

N86-22623# European Space Agency. European Space Research and Technology Center, ESTEC, Noordwijk (Netherlands). Materials Section.

THE DEGRADATION AND CONTAMINATION EXPERIMENT FLOWN ON THE FIRST EUROPEAN COMMUNICATION SATELLITE ECS-1: PRELIMINARY RESULTS ON CONTAMINATION

G. GOURMELON and P. JOLLET In ESA Proceedings of 3rd European Symposium on Spacecraft Materials in Space Environment p 255-258 Nov. 1985 refs

Avail: NTIS HC A13/MF A01

An experiment on ECS-1 to study the in flight behavior of standard cerium doped optical solar reflectors is described. Three quartz crystal microbalances (QCMs) show a small increase of contamination certainly due to very light outgassing products at the beginning of the flight. During the first transfer orbit, a small reevaporation of these products occurred. At the firing of the apogee boost motor there is no detectable contamination on the QCMs. After 780 days in orbit QCM 1 and QCM 3 show the same level of contamination: 1200 ng/sqcm, comparable to the

value measured on SCATHA, considered as a clean satellite. On QCM 2 the level is 700 ng/sq cm and lower than QCM 1 and 3. A decrease which appears after 120 days in orbit cannot be explained.

Author (ESA)

N86-22624# European Space Agency. European Space Research and Technology Center, ESTEC, Noordwijk (Netherlands).

SCANNING LASER ACOUSTIC MICROSCOPY APPLIED TO THE EVALUATION OF MATERIAL INTERCONNECTIONS

B. D. DUNN and D. S. COLLINS *In its* Proceedings of 3rd European Symposium on Spacecraft Materials in Space Environment p 263-269 Nov. 1985

Avail: NTIS HC A13/MF A01

The Scanning Laser Acoustic Microscope (SLAM) for the nondestructive inspection of materials and interconnections is introduced. The operational modes of the SLAM are illustrated during the assessment of spacecraft solar cell-to-silver interconnector weldments and electronic component chip solder-attachment to a ceramic carrier.

Author (ESA)

N86-22626# European Space Agency. European Space Research and Technology Center, ESTEC, Noordwijk (Netherlands).

### **ULTRAVIOLET RADIOMETERS**

G. GOURMELON, H. LYALL (IRD, Newcastle upon Tyne, England), and R. FROUD (IRD, Newcastle upon Tyne, England) In its Proceedings of 3rd European Symposium on Spacecraft Materials Space Environment p 275-276 Nov. 1985

Avail: NTIS HC A13/MF A01

A radiometer to measure ultraviolet radiation in a series of bands between 180nm and 450nm in a space simulation system was developed. A single channel ultraviolet detector based on the multiband ultraviolet radiometers, but featuring a more robust construction for general use, was also developed. The wavelength coverage is from 250 to 400nm with excellent rejection of visible radiation, and good temperature stability. Detectors with filters to measure a narrow band within the ultraviolet can be supplied.

Author (ESA)

N86-22627# European Space Agency, Paris (France).
SPACE ENVIRONMENT SIMULATION TO TEST SATELLITE
THERMAL CONTROL COATINGS, VOLUME 1

M. DUTAT, J. MARCO, and A. PAILLOUS Aug. 1985 149 p refs Transl. into ENGLISH of 'Essais de Simulation d'Environmentale Spatial sur Revetements de Controle Thermique de Satellites, Tome 1" Rept. CERT-4128-Vol-1 Centre d'Etudes et de Recherche de Toulouse, France Original language document was announced as N85-17012 3 Vol.

(ESA-TT-891-VOL-1; CERT-4128-VOL-1) Avail: NTIS HC A07/MF A01

Simultaneous irradiation of satellite thermal control coatings by electrons, protons, and ultraviolet radiation, simulating 5 yr in geostationary orbit, was carried out. A layer of contaminant, originating from adhesive RTV566 by molecular flux, was applied to samples under controlled conditions. Changes were followed by microbalances and by measurements of optical reflectance over the spectrum. Samples of optical solar reflector (OSR) show a 3 to 4-fold increase in solar absorptance when contaminated by a layer of thickness 0.00005g/sq cm. The test covered four types of OSR: aluminized kapton, ITO-covered FEP, thin aluminized kapton stuck on to thick kapton, white conductive paint PCB Z, and black paint Electrodag 501. The change in solar absorptance of the materials as a function of time in orbit was determined. The electrical conductivity of ITO-covered FEP was observed.

Author (ESA)

N86-24762# Martin Marietta Aerospace, Denver, Colo.

DAMPING CHARACTERISTICS OF METAL MATRIX

COMPOSITES Quarterly Letter Report, 15 Sep. - 11 Dec. 1985

M. S. MISRA 11 Dec. 1985 6 p refs

(Contract N00014-85-C-0857)

(AD-A163569; MCR-85-721-ISSUE-1) Avail: NTIS HC A02/MF

(AD-A163569; MCR-85-721-ISSUE-1) Avail: NTIS HC A02/MF A01 CSCL 11D

Fiber reinforced metal matrix composites (MMC) are candidate structural materials for Large Space Structures because of their high specific stiffness, specific strength, and low coefficient of thermal expansion. In addition, MMC exhibits higher damping than structural alloys of aluminum or titanium, and the potential exists for designing MMC with predetermined damping, strength, and stiffness properties. In the present investigation P55/6061 Al composites with different fiber-fiber (consequently, fiber volume) spacing have been selected to study the damping characteristics.

N86-24880\*# National Aeronautics and Space Administration.

Langley Research Center, Hampton, Va.

MEASUREMENT APPARATION AND PROCEDURE FOR THE
DETERMINATION OF SURFACE EMISSIVITIES Patent
Application

H. J. C. BLUME, inventor (to NASA) 3 Dec. 1985 27 p (NASA-CASE-LAR-13455-1; NAS 1.71:LAR-13455-1; US-PATENT-APPL-SN-804040) Avail: NTIS HC A03/MF A01 CSCL 20N

A method and apparatus for independently determining the electromagnetic surface emissivity of a material is developed, which is particularly useful in the design of large deployable space antennas employing mesh membrane surfaces. The system is a closed one with respect to unwanted or uncorrelated radiation outside the system. The present embodiment comprises a radiometer connected to a horn antenna, a test section sealed to the horn antenna and a cryogenically cooled matched load (cryoload) exposed to the interior of the system. The material is enclosed in a convection test chamber within the test section, heated by convection within a test chamber and allowed to radiate within the system such that a component of the radiation energy of the material is measured by the radiometer in terms of brightness temperature. A matched load serves as the stabilized source of uncorrelated radiation within the system. The actual physical temperature of the material is also measured during the heating process with a thermometer. The difference in brightness temperature over a selected period of time when divided by the physical temperature over the same period of time is the emissivity of the material according to a derivation of the Raleigh - Jeans approximation for an ideal system free from all uncorrelated radiation.

N86-26434\*# National Aeronautics and Space Administration. Lewis Research Center, Cleveland, Ohio.

OXIDATION PROTECTING COATINGS FOR POLYMERS Patent Application

J. S. SOVEY, inventor (to NASA), B. A. BANKS, inventor (to NASA), and M. J. MIRTICH, inventor (to NASA) 27 Feb. 1986 12 p Sponsored by NASA

(NASA-CASE-LEW-14072-3; NAS 1.71:LEW-14072-3; US-PATENT-APPL-SN-834977) Avail: NTIS HC A02/MF A01 CSCL 11B

A polymeric substrate is coated with a metal oxide film to provide oxidation protection in low Earth orbital environments. The film contains about four volume percent polymer to provide flexibility.

NASA

N86-27376# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Stuttgart (West Germany). Inst. fuer Technische Physik.

THE PERFORMANCE OF UNBONDED MOS2 FOR SPACE APPLICATIONS

V. BUCK In ESA Second European Space Mechanisms and Tribology Symposium p 155-159 Dec. 1985

Avail: NTIS HC A15/MF A01; ESA, Paris FF 150 or \$18 Member States, AU, CN, NO (+20% others)

The performance of MoS2 as a dry lubricant in general is outlined and the advantages and disadvantages for space applications are reviewed. Knowledge in sputtering of MoS2 is discussed and the influence of preparation conditions on impurities or disorder of the films is assessed. Results showing correlations between H2O impurities in the plasma and structural parameters of the layers are given, and the importance of these effects is outlined. Considerations relating structural properties to tribological behavior are presented.

N86-27377# Centre Suisse de Documentation dans le Domaine de la Microtechnique, Neuchatel. Dept. de Recherche et Developpement.

### **COATINGS AGAINST FRETTING**

M. MAILLAT and H. E. HINTERMANN *In* ESA Second European Space Mechanisms and Tribology Symposium p 161-166 Dec. 1985

Avaii: NTIS HC A15/MF A01; ESA, Paris FF 150 or \$18 Member States, AU, CN, NO (+20% others)

Coatings and lubricants to protect aerospace mechanisms from wear and microweldings caused by fretting or reciprocal sliding were investigated. From the 144 tests performed, TiC, Tiodize and Adhesoil coatings show the best results under a high specific load; the best results are obtained with Rh + MoS2 coatings under low contact pressure against Be.

# N86-27378# European Space Tribology Lab., Risley (England). SURFACE-TREATED TITANIUM ALLOY GEARS FOR SPACE MECHANISMS

R. A. ROWNTREE In ESA Second European Space Mechanisms and Tribology Symposium p 167-171 Dec. 1985 Sponsored by ESTEC

Avail: NTIS HC A15/MF A01; ESA, Paris FF 150 or \$18 Member States, AU, CN, NO (+20% others)

The performance of surface treatments against adhesive wear (galling) on the alloy IMI 318 (Ti-6Al-4V) was tested using gears unlubricated in vacuum, in a four square rig. Gear performance was determined by life or number of tooth encounters before failure of the surface treatment rather than by wear depth. Conventional treatments such as nitriding or oxidation are found to offer limited improved gear life, above that of the untreated alloy. Boronizing gives the longest gear life but causes, during treatment, dimensional growth of the gears. Sputter-deposited coatings of TiN are poorly adherent to the substrate and give short lives. Arc-evaporated coatings of TiN give improved performance until coating fracture and subsequent galling of the titanium alloy occurs.

N86-27379# Societe Nationale Industrielle Aerospatiale, Cannes (France).

### USE OF MOS2 APPLIED BY PHYSICAL VAPOR DEPOSITION (PVD) ON SPACE MECHANISMS

J. F. PATIN, M. MAILLAT (Centre Suisse de Documentation dans le Domaine de la Microtechnique, Neuchatel.), and H. E. HINTERMANN *In* ESA Second European Space Mechanisms and Tribology Symposium p 173-176 Dec. 1985

Avail: NTIS HC A15/MF A01; ESA, Paris FF 150 or \$18 Member States, AU, CN, NO (+20% others)

Satellite mechanisms using a solid lubricant film of MoS2 applied by physical vapor deposition or RF sputtering are described. This process satisfies space requirements because MoS2 has excellent friction properties in vacuum; nevertheless it is necessary to take into account moisture effects during ground tests. Parameters likely to influence the performances of lubricated mechanisms were studied on a pin on disk tribological test rig. Sputter coated MoS2

films are successfully used in the telecommunication satellite Arabsat, the observation satellite SPOT, and the television satellite TDF. Examples of lubricated mechanisms are antennas, rigid solar array deployment mechanisms, and flexible solar array box opening mechanisms.

N86-28195\*# College of William and Mary, Williamsburg, Va. RADIATION EFFECTS ON HIGH PERFORMANCE POLYMERS Final Technical Report, 1 Jun. 1985 - 28 Feb. 1986

R. A. ORWOLL 1986 10 p

(Contract NAG1-593)

(NASA-CR-177191; NAS 1.26:177191) Avail: NTIS HC A02/MF A01 CSCL 11B

Polymer matrix materials are candidates for use in large space antennas and space platforms that may be deployed in geosynchronous orbit 22,500 miles above the Earth. A principal concern is the long term effects of an environment that is hostile to organic polymers, including high energy electromagnetic radiation, bombardment by charged particles, and large abrupt changes in temperature. Two polyarylene ethers which might be utilized as models for polymers in space applications were subjected to dosages of 70 keV electrons up to 3.4 x 10 to the 10th power rad. The irradiated films were then examined to determine the effects of the high-energy electrons.

N86-28633 Societe Nationale Industrielle Aerospatiale, Paris (France).

### IMPACT OF AUTOMATION ON THE DESIGN OF CARBON FIBER OMEGA RIBS

CLARIOU, PEREZ, and PLAGNE 1986 16 p Presented at 3rd Intern. Conf. on Composite Structures, Paisley, Scotland, 9-11 Sep. 1985

(SNIAS-861-422-101; ETN-86-97158) Avail: NTIS HC A02

A method to reduce production costs and improve quality of solar array carbon fiber omega ribs was developed. An automatic laying process was designed, but the definition had to be modified, as the thickness was not constant throughout the section, and the laying was nonsymmetric. Steps decided to change the definition, meet the specifications with the same margins, requalify the new omegas at minimal cost, be sure of reproductibility and quality of the product, and sell it to the customer are outlined. The impact of industrial constraints on the definition and qualification process, and difficulties entailed by such a performance are discussed.

# N86-29989\*# Boeing Aerospace Co., Seattle, Wash. DEVELOPMENT OF COMPOSITE TUBE PROTECTIVE COATINGS Final Report

H. DURSCH and C. HENDRICKS Jul. 1986 109 p (Contract NAS1-16854)

(NASA-CR-178116; NAS 1.26:178116; D180-29767-1) Avail: NTIS HC A06/MF A01 CSCL 11G

Protective coatings for graphite/epoxy (Gr/Ep) tubular structures proposed for the Space Station are evaluated. The program was divided into four parts; System Definition, Coating Concept Selection and Evaluation, Scale-up and Assembly, and Reporting, System Definition involved defining the structural and environmental properties required of the Gr/Ep tubes. The prepreg and ply sequence selected was a P75S/934 (O2, + or - 20, O2)sub s layup which meets the various structural requirements of the Space Station. Coating Concept and Selection comprised the main emphasis of the effort. Concepts for protectively coating the Gr/Ep tubes included the use of metal foil and electroplating. The program results demonstrated that both phosphoric and chromic acid anodized AI foil provided adequate adhesion to the Gr/Ep tubes and stability of optical properties when subjected to atomic oxygen and thermal cycling representative of the LEO environment. SiO2/Al coatings sputtered onto Al foils also resulted in an excellent protective coating. The electroplated Ni possessed unacceptable adhesion loss to the Gr/Ep tubes during atomic oxygen testing. Scale-Up and Assembly involved fabricating and wrapping 8-ft-long by 2-in-diameter Gr/EP tubes with chromic acid anodized foil and delivering these tubes, along with representative Space Station erectable end fittings, to NASA LaRC. Author

N86-30595\*# National Aeronautics and Space Administration. Lyndon B. Johnson Space Center, Houston, Tex.

EFFECTS OF THE LOW EARTH ORBITAL ENVIRONMENT ON SPACECRAFT MATERIALS Abstract Only

L. J. LEGER *In* Lunar and Planetary Inst. Trajectory Determinations and Collection of Micrometeoroids on the Space Station p 67 1986

Avail: NTIS HC A06/MF A01 CSCL 03B

It is evident from space flights during the last three years that the low Earth orbital (LEO) environment interacts with spacecraft surfaces in significant ways. One manifestation of these interactions is recession of, in particular, organic-polymer-based surfaces presumably due to oxidation by atomic oxygen, the major component of the LEO environment. Three experiments have been conducted on Space Shuttle flights 5, 8 and 41-G to measure reaction rates and the effects of various parameters on reaction rates. Surface recession on these flights indicates reaction efficiencies approximately 3 x 10(-24) cu cm/atoms for unfilled organic polymers. Of the metals, silver and osmium are very reactive. Effects on spacecraft or experiment surfaces can be evaluated using the derived reaction efficiencies and a definition of the total exposure to atomic oxygen. This exposure is obtained using an ambient density model, solar activity data and spacecraft parameters of altitude, attitude and operational date. Oxygen flux on a given surface is obtained from the ambient density and spacecraft velocity and can then be integrated to provide the total exposure or fluence. Such information can be generated using simple computational programs and can be converted to various formats. Overall, the extent of damage is strongly dependent on the type of surface and total exposure time.

**N86-30738\*#** California Polytechnic State Univ., San Luis Obispo. Dept. of Aeronautical Engineering.

A SURVEY OF HANDLING QUALITIES CRITERIA AND THEIR APPLICATIONS TO HIGH PERFORMANCE AIRCRAFT Final Report

D. L. PEAHL, F. KOLKAILAH, and D. R. SANDLIN Jan. 1986 68 p

(Contract NCC2-338)

(NASA-CR-179654; NAS 1.26:179654) Avail: NTIS HC A04/MF A01 CSCL 01C

Various handling qualities criteria and their application to high performance aircraft including state-of-the-art and highly augmented aircraft were surveyed. Neal-Smith, Bandwidth, Equivalent Systems, and Military Specification 8785 criteria are applied to flight test data from aircraft such as the F-8 Digital Fly-By-Wire, the YF-12, and an Advanced Fighter Aircraft. Backgrounds and example applications of each criteria are given. The results show that the handling qualities criteria investigated can be applied to highly augmented aircraft with fairly good results in most cases; however, since no one method excelled, more than one criteria should be used whenever possible. Equivalent time delays appear to be the most frequent critical factor in determining pilot rating levels of highly augmented aircraft.

N86-30759# Fulmer Research Inst. Ltd., Stoke Poges (England).

THE APPLICATION OF COMPOSITES TO SPACE STRUCTURES: GUIDELINES ON IMPORTANT ASPECTS FOR THE DESIGNER
D. P. BASHFORD In ESA Proceedings of a Workshop on Composites Design for Space Applications p 9-16 Feb. 1986
Avail: NTIS HC A16/MF A01

Guidelines and surveys on the state of composites as structural aerospace materials were produced. The guidelines give a detailed background on composites for spacecraft and are intended for designers and engineers unfamiliar with composites. Topics covered include: selection of composite materials; aramid composites; prepreg and resin procurement specifications; nondestructive tests polymeric matrices; mechanical test methods

for composites; joining techniques; and moisture absorption/thermal cycling response.

N86-30760# Salford Univ. (England). Dept. of Pure and Applied Physics.

### HYGROTHERMAL CHARACTERISTICS OF ANTENNA MATERIALS

J. W. ATKINSON, G. H. WOSTENHOLM, and B. YATES *In* ESA Proceedings of a Workshop on Composites Design for Space Applications p 17-24 Feb. 1986
Avail: NTIS HC A16/MF A01

Increases in mass resulting from the absorption of water by epoxy resins reinforced with Kevlar 49 and Nomex fibers are reported. The influence of relative humidity over the range 12% to 93% at 23 C was studied, along with the effects of fiber volume fraction and fiber type on the final moisture content of the systems. High volume fraction materials absorb less than low volume fraction materials. Nomex absorbs more moisture than Kevlar. The modified Boltzmann transport model proposed by Carter and Kibler (1978) gives a better description of the behavior than the classical Fickian model proposed by Shen and Springer (1976). Absorption from atmospheres at low humidities appears to be governed by different laws from those operating at intermediate and high humidities.

**ESA** 

N86-30761# National Engineering Lab., East Kilbride (Scotland). FATIGUE AND DAMAGE IN FIBRE REINFORCED NYLON

W. S. CARSWELL In ESA Proceedings of a Workshop on Composites Design for Space Applications p 25-29 Feb. 1986 Sponsored by UK Dept. of Trade and Industry Avail: NTIS HC A16/MF A01

Fatigue tests with a range of mean loads and at two temperatures were carried out on short glass-fiber nylon and short graphite-fiber reinforced nylon. Changes were monitored by noting the peak deflection. Range of deflections and the peak deflection increase, indicating a rotation of the hysteresis loop and creep in the direction of maximum load. The range of deflections at room temperature and at elevated temperature indicates endurance, although there are differences in performance at elevated temperature. The extent of such changes necessary for failure is obscure.

N86-30762# Office National d'Etudes et de Recherches Aerospatiales, Paris (France).

THERMAL RESIDUAL STRESSES IN SYMMETRIC AND UNSYMMETRIC CARBON FIBER REINFORCED PLASTICS: SOME TENTATIVE WAYS OF EVALUATION

J. P. FAVRE *In* ESA Proceedings of a Workshop on Composites Design for Space Applications p 31-38 Feb. 1986 Avail: NTIS HC A16/MF A01

Effects of thermal stresses which develop during fabrication on the integrity of composites used in spacecraft are discussed. For an unsymmetric material, the result is a modification of the shape. In the simple case of a long and thin cross-ply specimen, residual stresses in the transverse plies can be deduced from reading the curvature. For a plate, the existence of several stable shapes according to the aspect ratio is verified. For the symmetric material, in-situ estimation of residual stress magnitude by X-ray diffraction using a metallic powder embedded between the plies is described.

N86-30763# Atomic Energy Research Establishment, Harwell (England). Materials Development Div.

### DYNAMIC MECHANICAL ANALYSIS AS AN AID TO THE CHARACTERIZATION OF COMPOSITE MATERIALS

D. H. BOWEN, R. DAVIDSON, R. J. LEE, and M. AGUIRRE In ESA Proceedings of a Workshop on Composites Design for Space Applications p 39-46 Feb. 1986
Avail: NTIS HC A16/MF A01

Dynamic mechanical analysis (DMA) was used to assess the thermal properties of polymeric materials and resin matrix carbon fiber composites. By considering the storage and loss moduli and damping as a function of temperature, information relating to the

nature, state of cure, and hysteretic characteristics of the matrix can be obtained. This information assists in the interpretation of the impact strengths and creep resistance of polymers and composites. Examples of the use of DMA in research and development programs with composite materials based on heat resistant thermoplastic (PES, PEI, PEEK) and thermosetting polymers (phenolics, bismaleimides and epoxides) are given. The factors and limitations affecting the quantitative stiffness measurements of orthotropic composite materials by DMA are discussed, specifically measurements on unidirectional carbon fiber reinforced polyether ether ketone.

N86-30764# Southampton Univ. (England). Inst. of Sound and Vibration Damping.

### DAMPING OF COMPOSITES

T. A. WILLWAY In ESA Proceedings of a Workshop on Composites Design for Space Applications p 47-52 Feb. 1986
Avail: NTIS HC A16/MF A01

Methods of predicting the damping characteristics of composite materials and the effects of various parameters on that damping are reviewed. Experimentally determined values of the damping of composite materials are given.

**N86-30767**# Waldrich Siegen Werkzeugmaschinen G.m.b.H., Burbach (West Germany).

# THEORETICAL AND EXPERIMENTAL BEHAVIOR OF CARBON FIBER REINFORCED PLASTICS UNDER MECHANICAL AND THERMAL LOAD

U. BIELING *In* ESA Proceedings of a Workshop on Composites Design for Space Applications p 71-78 Feb. 1986 Avail: NTIS HC A16/MF A01

Based on a fiber resin system for aerospace components, the linear and nonlinear stress-strain behavior of CRP laminates is investigated. Theoretical and experimental results correlate very well up to high loads by entering strain-dependent coefficients into the stiffness matrix. Approaches for tracking the initiation of microcracks and crack propagation by acoustic emission and dissipation of energy are presented. By measuring the coefficients of thermal expansion (CTE) of a basic lamina and the equations of classical lamination theory, CTE's of any laminate can be calculated.

N86-30768# Politecnico di Milano (Italy). Dept. of Aerospace Engineering.

### ANALYTICAL AND EXPERIMENTAL RESULTS OF ADVANCED COMPOSITE STIFFENED PANELS UNDER COMBINED LOADS

G. ROMEO In ESA Proceedings of a Workshop on Composites Design for Space Applications p 79-86 Feb. 1986 Sponsored by Italian Ministry of Education Avail: NTIS HC A16/MF A01

A theoretical analysis to design advanced composite hat and blade-stiffened panels under uni and biaxial compression and/or shear is reported. The analysis is based on the buckling equation of the simply-supported orthotropic plate to predict the overall buckling of the panel and the local buckling of each cross-section element, and on the torsional instability theory for the blade-stiffened panels. A computer program to evaluate the minimum-mass optimization of the panels was designed. Tests on graphite/epoxy hat and blade-stiffened panels under uniaxial compression and unstiffened panels under shear were conducted. Adequate correlation between theoretical analysis and experimental results is obtained.

N86-30770# Royal Netherlands Aircraft Factories Fokker, Schiphol-Oost. Space Div.

### ADEQUATE FIBER REINFORCED STRUCTURAL ELEMENTS IN LOAD INTRODUCTION AREA OF FIBER REINFORCED SHELLS

F. S. D. REKERS /n ESA Proceedings of a Workshop on Composites Design for Space Applications p 95-99 Feb. 1986 Avail: NTIS HC A16/MF A01

Design of reinforcements around access holes and near cylinder ends in structural shells is discussed. Elements necessary for

introduction of axial-load and bending moment in a cylinder are presented. Monolithical behavior; hoop stiffness; torsional stiffness; shear stiffness; and shear introduction were implemented in three different shell-configurations.

N86-30771# Brussels Univ. (Belgium).

### NEW PREDICTION METHODS FOR COMPOSITES HYGROTHERMAL BEHAVIOR

C. C. HIEL *In* ESA Proceedings of a Workshop on Composites Design for Space Applications p 101-107 Feb. 1986 Sponsored by NAS-NRC and NATO Avail: NTIS HC A16/MF A01

A method to predict the thermal expansion and swelling of a composite material due to temperature and moisture variations which typically occur in a launch environment is presented. It is demonstrated that constitutive equations for moisture absorption and moisture-induced dimensional changes can be obtained with an internal variable method rooted in the theory of irreversible thermodynamics. Realism is injected into the model through the concept of free volume.

N86-30777# California Univ., Berkeley. Dept. of Mechanical Engineering and Center for Advanced Materials.

### DELAMINATION FRACTURE TOUGHNESS OF COMPOSITE SPACECRAFT STRUCTURES

C. K. H. DHARAN *In* ESA Proceedings of a Workshop on Composites Design for Space Applications p 159-167 Feb. 1986

(Contract DE-AC03-76SF-00098)

Avail: NTIS HC A16/MF A01

Opening mode (mode 1) delamination fracture behavior of graphite and aramid-epoxy composites was investigated. The effect of loading rate and reinforcement geometry (unidirectional vs woven) on fracture toughness was determined, and observation of the fracture surface was used to derive microfailure modes. A micromechanical delamination model to estimate the relative contributions of the matrix and the fiber-matrix interface to the overall delamination fracture toughness is proposed. Results show that the mode 1 delamination fracture toughness of graphite composites is small relative to glass composites. Woven graphite composites exhibit opening mode delamination crack energy release rates 2.5 times those of the unidirectionally reinforced material. The fracture surface of the graphite-epoxy laminates is characterized by clean exposed fiber surfaces indicating poor interfacial fracture toughness.

N86-30778# Royal Inst. of Tech., Stockholm (Sweden). Dept. of Aeronautical Structures and Materials.

### DAMAGE ZONE FRACTURE ANALYSIS OF FIBROUS COMPOSITES

K. HOLLMANN, P. CLARIN, C. G. ARONSSON, and J. BAECKLUND *In* ESA Proceedings of a Workshop on Composites Design for Space Applications p 169-174 Feb. 1986 Avail: NTIS HC A16/MF A01

Excellent results were achieved using the Damage Zone Model (DZM) to predict mode 1 fracture loads of notched composites. A computer program of high computational efficiency, called FRACOM, was developed. Computations are performed in a few minutes on a personal computer and result in an estimated load-displacement behavior and damage zone characteristics under quasi-static loading.

N86-30779# Engineering System International, Rungis (France).
INDUSTRIAL CALCULATION OF DAMAGE TOLERANCE AND
STRESS ALLOWABLES IN COMPONENTS MADE OF
COMPOSITE MATERIALS USING THE PAM-FISS/BIPHASE
MATERIAL MODEL

A. DEROUVRAY and E. HAUG *In* ESA Proceedings of a Workshop on Composites Design for Space Applications p 175-185 Feb. 1986 Sponsored by ESA/ESTEC

Avail: NTIS HC A16/MF A01

A finite element code to simulate the heterogeneous constitution of composite materials during the damage process was developed.

The code simulates the basic damage mechanisms; matrix micro and macrocracking, fiber ruptures, layer delamination. It is used to calculate initial, tangent, and residual rheological properties, as well as damage (or defect) initiation and stable/unstable growth, in the critical zones of arbitrary composite structures. It provides realistic equivalent homogeneous properties (moduli; stress/strain allowables) compatible with an efficient damage tolerant design.

ESA

N86-30780# Paderborn Univ. (West Germany). Fachgebeit Technische Mechanik.

# ON CORRELATION BETWEEN THERMAL STRESSES, ELASTIC STRAIN ENERGY AND DEBONDING IN THERMALLY LOADED FIBER-REINFORCED COMPOSITE MATERIALS

F. G. BUCHHOLZ In ESA Proceedings of a Workshop on Composites Design for Space Applications p 187-196 Feb. 1986

Avail: NTIS HC A16/MF A01

Correlations between thermal stresses, elastic strain energy, and the energy release rate during debonding of unidirectionally fiber reinforced composite materials are investigated numerically. It is shown that the strain energy caused by thermal loads in a single circular unit cell of such a material is directly correlated with the energy spent by the compound on debonding of fiber and matrix. For a corresponding hexagonal unit cell within a compound two additional influences are effective, resulting in an interferred correlation and distinctly lower energy release rates during the process of debonding.

N86-30781# Strathclyde Univ., Glasgow (Scotland). Dept. of Mechanics of Materials.

### ASSESSING THE EFFECTS OF DELAMINATIONS ON THE POSTBUCKLING STRENGTH OF CRFP PANELS

W. M. BANKS, J. RHODES, and G. B. CHAI In ESA Proceedings of a Workshop on Composites Design for Space Applications p 197-202 Feb. 1986 Sponsored by UK Ministry of Defense and ESA

Avail: NTIS HC A16/MF A01

The effect of deliberately inbuilt delaminations on the postbuckling strength of carbon fiber composite panels with a b/t ratio of 70 and 50 was tested. The panels are fabricated from 14 layers of unidirectional carbon fiber using an autoclave process. The delamination positions were chosen to coincide with the position of highest interlaminar shear stress, the position of highest direct strain, the central buckle peak, and the inflection points on the panel. The control panel for a b/t ratio of 68.57 failed prematurely due to unforeseen edge effects. However it is clear that the worst position for delamination is when it coincides with the highest interlaminar shear stress at the edge of the panel. There appears to be little effect with the delamination at the buckle peak.

N86-30782# Messerschmitt-Boelkow-Blohm G.m.b.H., Bremen (West Germany).

### ON THE DEFECT SENSITIVITY OF SPACECRAFT TYPICAL THIN CFRP LAMINATES

J. BISCHOFF /n ESA Proceedings of a Workshop on Composites Design for Space Applications p 203-209 Feb. 1986 Avail: NTIS HC A16/MF A01

The brittleness of high modulus CFRP laminates used in spacecraft was investigated. It is shown that small defects can cause a crucial reduction of loading capacity. The dependence of this reduction on fiber orientation and the laminate stacking sequence is discussed. Fiber-matrix-bonding is identified as an essential factor affecting the notch sensitivity.

**N86-30784**# Messerschmitt-Boelkow-Blohm G.m.b.H., Bremen (West Germany).

NONDESTRUCTIVE TESTING OF FIBER REINFORCED COMPOSITES USING X-RAY FINE STRUCTURE PROCEDURES J. WALTER and HENSCHEL (Bundesanstalt fuer Materialpruefung, Berlin, West Germany) In ESA Proceedings of a Workshop on Composites Design for Space Applications p 217-229 Feb. 1986

Avail: NTIS HC A16/MF A01

Nondestructive inspection (NDI) of fiber reinforced composites is introduced. Nondestructive testing with the X-ray fine structure procedure is based on the fact that the paracrystalline microstructure of the fibers diffracts the X-rays at the lattice planes. The long chain molecules are arranged in a nearly crystalline (paracrystalline) configuration; the chains have a high degree of orientation parallel to the fiber axis, so that the X-ray pattern produced by a bundle of fibers irradiated in a directional normal to their long axis is typical for the specific type. This property can be used as NDI-criterion and thickness layer measurement method.

N86-30785# Fulmer Research Inst. Ltd., Stoke Poges (England).

### DEVELOPMENTS IN THE NONDESTRUCTIVE EVALUATION (NDE) OF COMPOSITE MATERIALS

R. L. CROCKER In its Proceedings of a Workshop on Composites Design for Space Applications (ESA-SP-243) p 231-235 Feb. 1986

Avail: NTIS HC A16/MF A01

The effects on composites inspection of digital techniques of computing and data storage, robotics, and image processing made possible by digitizing raw data are assessed. Ultrasonics, X-radiography, thermography, mechanical impedance, vibrothermography, and laser holography are discussed. In many cases the actual defect detection capability is not changed by introducing these techniques, it is the integrity of the inspection or evaluation which is improved.

**N86-30794**# Messerschmitt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany).

### STRENGTH OF CARBON FIBER COMPOSITE/TITANIUM BONDED JOINTS AS USED FOR SPAS-TYPE STRUCTURES

J. FRANZ and H. LAUBE *In* ESA Proceedings of a Workshop on Composites Design for Space Applications p 301-308 Feb. 1986

Avail: NTIS HC A16/MF A01

The analytical and experimental verification of bonded tubes used for SPAS strut assemblies is described. The strut elements consist of a carbon fiber tube and two titanium mounting elements, connected by tapered, double-shear bonded joints. The analysis of the geometric design minimized the shear stress peaks at the ends of the overlapping section under external and temperature loadings. The load capability is verified by a destructive qualification test program (static load and fatigue) and each individual strut is acceptance tested before integration into a satellite structure. Data can be used for load capability estimations for similar strut components, i.e., with increased or decreased tube diameter, or with modified overlapping length of the bonding section.

N86-30799# Messerschmitt-Boelkow-Blohm G.m.b.H., Bremen (West Germany).

### A STEP TOWARDS AN ESA COMPOSITES DESIGN HANDBOOK FOR SPACE STRUCTURE APPLICATIONS

J. BOLZ In ESA Proceedings of a Workshop on Composites Design for Space Applications p 351-355 Feb. 1986 Avail: NTIS HC A16/MF A01

The European Space Agency initiated a Composites Design Handbook for Space Structure Applications, because the increasing application of composite materials in space structures requires harmonization. Establishment of a Handbook structure and the compilation of information on as many topics as possible is described.

N86-30804# Societe Nationale Industrielle Aerospatiale, Saint-Medard-en-Jalles (France).

WINDING WITH THERMOPLASTIC POLYMERS

J. L. TISNE and J. BOUVARD 1986 8 p Presented at 3rd European Symposium on Spacecraft Materials in Space Environment, Noordwijk, Netherlands, 3 Oct. 1985 Previously announced as N86-22613

(SNIAS-861-430-106; ETN-86-97168) Avail: NTIS HC A02/MF A01

Filament winding of continuous fibers impregnated with thermoplastic resins for spacecraft structure manufacturing is described. The mandrel is at ambient temperature, or is maintained below the fusion temperature, which enables winding unstable trajectories by means of the under layer/strand sticking. Another method consists in having the material and the mandrel at the fusion temperature while winding. This process simplifies the machine but presents two drawbacks, with respect to the thermoset resins: it is impossible to wind other than stable trajectories, close to geodetic ones; and the curing on the thermoset epoxy (maximum 180 C) is replaced by a fusion in an oven (from 250 to 400 C). This poses a problem of resistance of the enclosed parts and tools.

N86-31427\*# Hawaii Univ., Honolulu. Dept. of Mechanical Engineering.

MATERIALS CONSIDERATIONS IN THE DESIGN OF A METAL-HYDRIDE HEAT PUMP FOR AN ADVANCED EXTRAVEHICULAR MOBILITY UNIT

B. E. LIEBERT In NASA. Johnson Space Center NASA/American Society for Engineering Education (ASEE) Summer Faculty Fellowship Program, 1985 62 p Jul. 1986
Avail: NTIS HC A99/MF E03 CSCL 20D

A metal-hydride heat pump (HHP) has been proposed to provide an advanced regenerable nonventing thermal sink for the liquid-cooled garment worn during an extravehicular activity (EVA). The conceptual design indicates that there is a potential for significant advantages over the one presently being used by shuttle crew personnel as well as those that have been proposed for future use with the space station. Compared to other heat pump designs, a HHP offers the potential for extended use with no electrical power requirements during the EVA. In addition, a reliable, compact design is possible due to the absence of moving parts other than high-reliability check valves. Because there are many subtleties in the properties of metal hydrides for heat pump applications, it is essential that a prototype hydride heat pump be constructed with the selected materials before a committment is made for the final design. Particular care must be given to the evaporator heat exchanger worn by the astronaut since the performance of hydride heat pumps is generally heat transfer limited.

**N86-31634\*#** National Aeronautics and Space Administration. Lewis Research Center, Cleveland, Ohio.

EFFECT OF AN OXYGEN PLASMA ON THE PHYSICAL AND CHEMICAL PROPERTIES OF SEVERAL FLUIDS FOR THE LIQUID DROPLET RADIATOR

D. A. GULINO and C. E. COLES 1986 12 p Proposed for presentation at the 25th Aerospace Sciences Meeting, Reno, Nev., 12-15 Jan. 1987; sponsored by the American Institute of Aeronautics and Astronautics

(NASA-TM-88839; E-3222; NAS 1.15:88839) Avail: NTIS HC A02/MF A01 CSCL 07D

The Liquid Droplet Radiator is one of several radiator systems currently under investigation by NASA Lewis Research Center. It involves the direct exposure of the radiator working fluid to the space environment. An area of concern is the potential harmful effects of the low-Earth-orbit atomic oxygen environment on the radiator working fluid. To address this issue, seven candidate fluids were exposed to an oxygen plasma environment in a laboratory plasma asher. The fluids studied included Dow Corning 705 Diffusion Pump Fluid, polymethylphenylsiloxane and polydimethlsiloxane, both of which are experimental fluids made by Dow Corning, Fomblin Z25, made by Montedison, and three

fluids from the Krytox family of fluids, Krytox 143AB, 1502, and 16256, which are made by DuPont. The fluids were characterized by noting changes in visual appearance, physical state, mass, and infrared spectra. Of the fluids tested, the Fomblin and the three Krytoxes were the least affected by the oxygen plasma. The only effect noted was a change in mass, which was most likely due to an oxygen-catalyzed deploymerization of the fluid molecule.

N86-31639# Societe Nationale Industrielle Aerospatiale, Cannes (France).

USE OF MOS2 APPLIED BY PHYSICAL VAPOR DEPOSITION (PVD) ON SPACE MECHANISMS

J. F. PATIN, M. MAILLAT, and H. E. HINTERMANN 1986 6 p Presented at Second ESA European Symposium on Space Mechanisms and Tribology, Schloss Meersburg, West Germany, 9-11 Oct. 1985

(SNIAS-861-440-101; ETN-86-97610) Avail: NTIS HC A02/MF A01

The laboratory test results of sputter coatings of MoS2 are described. The lubricating film, produced using a physical vapor deposition technique was used in the Arabsat, SPOT and TDF satellites. The test program includes the study of the influence of many parameters, including speed, vacuum, temperature, load, and air humidity in the case of ground tests. The tests show that MoS2 is an excellent lubricant for space mechanisms. The only remaining problem is its high sensitivity to moisture when performing ground tests.

N86-31641# Societe Nationale Industrielle Aerospatiale, Cannes (France).

NEW ALUMINUM ALLOYS FOR SATELLITE STRUCTURES
J. L. CECCONI and J. F. PATIN 1986 9 p
(SNIAS-861-440-111; ETN-86-97619) Avail: NTIS HC A02/MF A01

The utilization of aluminum-lithium alloys in spacecraft structures is discussed. The weight reduction attainable is 10% to 13% compared with other aluminum alloy options. The applications are examined and carbon fiber reinforced plastic alternatives are analyzed. It is shown that the optimum choice depends on the required shape and properties of the spacecraft constituents.

**ESA** 

N86-31668# Martin Marietta Aerospace, Denver, Colo.

DAMPING CHARACTERISTICS OF METAL MATRIX

COMPOSITES Quarterly Letter Report

10 Apr. 1986 6 p

(Contract N00014-85-C-0857)

(AD-A167792; MCR-85-721) Avail: NTIS HC A02/MF A01 CSCL 11D

Damping test data of Gr/Al composites, from previous measurements at Martin Marietta Denver Aerospace, CO suggest that composites exhibit higher damping than aluminum and titanium base structural alloys. Enhanced material damping of metal matrix composite (MMC), as a structural material will significantly improve the stability control and reliability of space structures. The objectives of the present investigation are: (1) to identify the mechanism and the source of damping in MMC (P55 Gr/6061 Al); (2) to determine the role of microstructural parameters, e.g., fiber volume, fiber orientation and interfiber spacing, and (3) to define the role of fiber matrix interfaces.

N86-32347# European Space Agency, Paris (France).
PREPARING FOR THE FUTURE: THE ESA TECHNOLOGICAL
RESEARCH AND DEVELOPMENT PROGRAM 1986-1988
Executive Summary

N. LONGDON, ed. Dec. 1985 55 p Original document contains color illustrations

(ESA-SP-1079; ISSN-0250-1589; ETN-86-97566) Avail: NTIS HC A04/MF A01

European Space Agency work on Earth-space telematics; space communications; infrastructure; global Earth monitoring; deep space and observatory facilities; microgravity utilization; space platforms;

in-orbit operations; and maintenance of European competitiveness is outlined.

N86-32537# Societe Nationale Industrielle Aerospatiale, Paris (France).

### DEPLOYABLE ANTENNA REFLECTOR [REFLECTEUR D'ANTENNE DEPLOYABLE]

C. LABRUYERE 1986 6 p In FRENCH Presented at Journees Industrielles France-Canada, Ottawa, Ontario, 10-12 Sep. 1985

(SNIAS-861-422-117; ETN-86-97602) Avail: NTIS HC A02/MF A01

Carbon fiber structures for space operating deployable reflectors 4 to 40 m diameter for frequencies between 1 and 30 GHz are discussed. The reflector should be compatible with Ariane launcher transportation. The reflecting skin is gold plated molybdenum knitted wire. The computation software is operational, and deployment tests were carried out.

N86-32584# European Space Agency. European Space Research and Technology Center, ESTEC, Noordwijk (Netherlands). Product Assurance Div.

### DATA FOR SELECTION OF SPACE MATERIALS

Nov. 1985 211 p

(ESA-PSS-01-701-ISSUE-1; ISSN-0379-4059; ETN-86-97796)

Avail: NTIS HC A10/MF A01

Data on adhesives, adhesive tapes, coatings and varnishes, glasses, lubricants, metals, paints, plastic films, potting compounds, reinforced and thermosetting resins, rubbers, and thermoplastics for space applications are presented. The materials were used by ESA.

### 80

### **ASSEMBLY CONCEPTS**

Includes automated manipulator techniques,-EVA, robot assembly, teleoperators, and equipment installation.

#### A86-32550

### ROBOT SPACECRAFT SURVIVABILITY USING A DECISION TREE FOR DATA PROCESSING

A. M. CHANDE and R. W. NEWCOMB (Maryland, University, College Park) IN: EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 . New York, Institute of Electrical and Electronics Engineers, Inc., 1985, p. 243-249. refs

This paper deals with the survivability of robot spacecraft in hostile and congested space environments. Outlined herein is a bottom-up tree that makes navigational and stability decisions and generates a sequence of control actuations for accurate trajectories for the robot spacecraft. The approach provides the spacecraft with a sense of survivability by virtue of its tactual abilities. A path towards creating an intelligent machine and associated processing regarding its surroundings is recommended. The decision-based strategy using knowledge based heuristics is introduced to achieve autonomous and/or human assisted trajectory determination and collision avoidance, making the robot spacecraft rugged for transits in complex environments.

### A86-32929#

### MOBILE GANTRY ROBOTS FOR LARGE STRUCTURES

D. FRAZIER (Martin Marietta Corp., Michoud Div., New Orleans, LA) IN: Man's permanent presence in space; Proceedings of the Third Annual Aerospace Technology Symposium, New Orleans, LA, November 7, 8, 1985. New Orleans, LA, American Institute of Aeronautics and Astronautics, 1985, 14 p.

A NASTRAN analysis was used to investigate the design and feasibility of transporting a large gantry robot for use in aerospace

manufacturing. A model of a rectangular gantry of high tensile 4140 steel with a 400 pound carriage/manipulator mounted on top was constructed and tested by the sudden failure of one of the frictionless airskids on which the gantry was moving at constant speed. The locations and magnitudes of the extreme stresses are identified.

#### A86-34970

# APPLICATION OF SOLIDS MODELING TECHNOLOGY TO SPACE STATION CONCEPTUAL DESIGN AND ON-ORBIT ASSEMBLY

R. R. YORK and S. B. RIDER (Martin Marietta Corp., Denver, CO) IN: Space and society - Progress and promise; Proceedings of the Twenty-second Space Congress, Cocoa Beach, FL, April 23-26, 1985. Cape Canaveral, FL, Canaveral Council of Technical Societies, 1985, p. 7-1 to 7-13.

The 'Geomod' solids-modelling technology has been applied to NASA Space Station proposal development efforts, aiding in the conceptual design of the common module and the Materials Technology Laboratory (MTL) as well as generating animation sequences depicting the complex technique of on-orbit assembly for the modules comprising the habitable elements of the Space Station. Attention is given to the experience gained from the conceptual design of the MTL, and the construction method animations. A videotape has been prepared from the animation sequences.

#### A86-34971

# EVOLUTIONARY PATHS FOR ARTIFICIAL INTELLIGENCE TECHNOLOGIES IN OPERATOR INTERACTIONS WITH SPACE STATION ROBOTS

R. A. HAMMOND, D. C. DORROUGH (Boeing Computer Services Co., Bellevue, WA), and D. P. MEYER (Boeing Aerospace Co., Seattle, WA) IN: Space and society - Progress and promise; Proceedings of the Twenty-second Space Congress, Cocoa Beach, FL, April 23-26, 1985 . Cape Canaveral, FL, Canaveral Council of Technical Societies, 1985, p. 7-14 to 7-20.

Two paths have been proposed for the evolution of technologies supporting human interfacing with robots aboard the NASA Space Station: (1) the use of teleoperators (so that human operators are in the control loop as the robot operates) followed by the adoption of autonomous robotics, as the technology advances; and (2) the use of fully independent robots from the outset, but using simple task menus until more autonomous robotic technology is developed. Attention is given to the relative merits of each approach in the illustrative case of EVA robots for routine station keeping tasks. The route of essential robot autonomy is concluded to provide the better EVA system.

**A86-37047\***# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

### SPACE TELEROBOTICS - A FEW MORE HURDLES

J. E. PENNINGTON (NASA, Langley Research Center, Hampton, VA) IEEE, International Conference on Robotics and Automation, San Francisco, CA, Apr. 8-10, 1986, Paper. 5 p. refs

In the early 1990's, a telerobotic work system which can be used with the Mobile Remote Manipulator System (MRMS) on the Space Station is to become available. However, a number of difficulties have to be overcome before these plans can be realized. The word 'telerobotics' is used in connection with a system which can function as teleoperator, and which, in addition, has also autonomous functions. Thus, as a robot, the system would automatically perform selected operations using multisensory internal feedback for control. A role for telerobotics is defined, taking into account EVA servicing and repair work, remote satellite refueling, and operations during the Space Station development refueling. Attention is also given to the definition of a telerobotic system, the definition of the telerobotics technology set, and approaches related to the development of a telerobotic system.

G.R.

#### A86-39503#

### EXPERIMENTS IN OPTIMAL CONTROL OF A FLEXIBLE ARM WITH PASSIVE DAMPING

T. E. ALBERTS, G. G. HASTINGS, W. J. BOOK, and S. L. DICKERSON (Georgia Institute of Technology, Atlanta) IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985. Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 423-435. Research supported by the Georgia Institute of Technology. refs (Contract NSF MEA-83-03539)

This paper presents a hybrid active and passive control scheme for controlling the motion of a lightweight flexible arm. A straightforward development of LaGrange's equations using a series expansion of assumed flexible modes provides a time domain model for controller design. The active controller design was approached as a steady state linear quadratic continuous regulator. A constrained viscoelastic layer treatment was employed to achieve passive damping. The passive damping treatment serves to enhance the system's stability while providing sound justification for the use of a highly truncated dynamic model and reduced order controller. Initial experimental results comparing controller performance with and without passive damping demonstrate the merit of the proposed combined active/passive approach.

Author

#### A86-40508

### RECENT ADVANCES IN TELEOPERATION - IMPLICATIONS FOR THE SPACE STATION

M. M. CLARKE (Rockwell International Corp., Downey, CA) IN: Space tech; Proceedings of the Conference and Exposition, Anaheim, CA, September 23-25, 1985. Dearborn, MI, Society of Manufacturing Engineers, 1985, p. 4-1 to 4-10. refs

The paper describes recent advances in teleoperation in nonaerospace hostile environments and discusses their applicability to space-related teleoperation. For example, remotely maintainable manipulators can increase system availability while continuing to exclude the crew from the hostile environment. Force reflection and supervisory control can reduce the operator's fatigue and workload. The Universal Master Controller can increase the system control flexibility.

### A86-42997

### DECENTRALIZED CONTROL OF SEQUENTIALLY ASSEMBLED LARGE SPACE STRUCTURES

D. P. LOOZE, M. ATHANS, and J. S. ETERNO (Alphatech, Inc., Burlington, MA) IN: Conference on Decision and Control, 24th, Fort Lauderdale, FL, December 11-13, 1985, Proceedings. Volume 3. New York, Institute of Electrical and Electronics Engineers, Inc., 1985, p. 1844-1851. refs

A novel design approach for the decentralized robust control systems of large space structures (LSS) is presented. A decentralized design approach whereby each subsystem controller is designed independently based on a subsystem design model, subsystem performance goals and subsystem errors is adopted so as to address the following issues: (1) the necessary architecture of the control system must be determined from the system structure, performance requirements and hardware implementations of the LSS; (2) the procedure must be able to handle a large number of variables that will be present in a realistic design problem; and (3) the procedure must incorporate LSS performance specifications and dynamic modeling errors. The advantages inherent in this approach are outlined and it is noted that the major technical difficulty which arises is that the coordination between the subsystem designs is accomplished through the subsystem performance and error specifications. In the present analysis, a number of techniques are developed which enable the decentralized design procedure to be applied to a specific simplified problem. The specific problem that is considered is the sequential assembly problem for two subassemblies.

#### A86-43341

CONTRACTS OF AND WITH PRIVATE ENTERPRISES CONCERNING THE DEVELOPMENT, THE CONSTRUCTION, AND THE ASSEMBLY OF SPACE VEHICLES [VERTRAEGE VON UND MIT PRIVATUNTERNEHMEN BETR. DIE ENTWICKLUNG, DEN BAU UND DIE MONTAGE VON RAUMFLUGKOERPERN]

E. WOLFF (Dornier System GmbH, Friedrichshafen, West Germany) IN: Space stations: Legal aspects of scientific and commercial use in a framework of transatlantic cooperation; Proceedings of the International Colloquium, Hamburg, West Germany, October 3, 4, 1984. Cologne, West Germany, Carl Heymanns Verlag, 1985, p. 89-99. In German. refs

This paper provides a representation of some special features which characterize development contracts that governmental agencies award to industrial enterprises. Particular attention is given to conditions in West Germany. However, approaches used in connection with contracts involving ESA and NASA are also considered. The origin of the development contract is discussed along with the objective of the development contract, questions regarding the legal qualification of the development contract, regulations regarding compensation in development contracts, assurances concerning the quality of the performed work, and the rights of the party awarding the contract with respect to information, participation, and control.

#### A86-43884

#### STATE OF THE ART IN INTELLIGENT/BRILLIANT ROBOTS

R. HONG (Grumman Aerospace Corp., Bethpage, NY) IN: AUTOTESTCON '85; Proceedings of the International Automatic Testing Conference, Uniondale, NY, October 22-24, 1985. New York, Institute of Electrical and Electronics Engineers, 1985, p. 75-80. refs

The state of the art of intelligent/brilliant robots of various types which will be in operation in the next decades is addressed. These are robots which will possess human-like capabilities and beyond. As such, they will generally be implemented with artificial intelligence technology such as knowledge based/expert systems. Learning and self adaptive capabilities are also being applied to these future robots.

### A86-43885

### SHUTTLE REMOTE MANIPULATOR COLLISION-AVOIDANCE SYSTEM

J. G. MAUCERI (Sperry Corp., Great Neck, NY) IN: AUTOTESTCON '85; Proceedings of the International Automatic Testing Conference, Uniondale, NY, October 22-24, 1985. New York, Institute of Electrical and Electronics Engineers, 1985, p. 89-94. refs

A brilliant collision avoidance system for use on the Shuttle Remote Manipulator is described. This paper will provide an overview of the complete system and address the details of the collision avoidance algorithm, and its implementation using Automated Reasoning. The system presented will possess the capabilities to manuever the RMS and payload around obstacles, learn by discovery, and reason about its environment as a human would.

### A86-44550

### **ROBOTICS IN SPACE**

P. NORRIS (Logica Space and Defence Systems, Ltd., Cobham, England) IN: Space - Technology and opportunity; Proceedings of the Conference, Geneva, Switzerland, May 28-30, 1985 . Pinner, England, Online Publications, 1985, p. 297-305.

The scope for the use of robotics in space in the coming two decades is reviewed. Lessons from the application of robotics on ground are used to suggest the most promising space-borne applications. The technical issues associated with robotics in space are examined.

Author

### **CANADARM - A REVIEW OF ITS FLIGHTS**

S. S. SACHDEV (Spar Aerospace, Ltd., Remote Manipulator Systems Div., Toronto, Canada) Journal of Vacuum Science and Technology A (ISSN 0734-2101), vol. 4, May-June 1986, pt. I, p. 268-272.

The Shuttle Remote Manipulator System (SRMS), or Canadarm, has been singularly successful in accomplishing both planned and unforeseen tasks in space. Following its first flight in November 1981, it has deployed payloads ranging in mass from 156 to 9765 kg. It has been flight tested for all its operating modes, its handling characteristics, and structural dynamics. It is now an operational subsystem of the Shuttle's Orbiter. The SRMS was instrumental in the retrieval and repair of the Solar Maximum Mission Satellite (SMM) in 1984, and featured prominently in the salvage of the Palapa and Westar Satellites later that year. It has been used as an extension of the human arm in unforeseen duties such as removing ice from the orbiter's waste management system and attempting to throw a switch on the malfunctioning Syncom Satellite. Most recently it has been part of an ingenious man/machine team in the in-orbit repair of the Syncom Satellite. A review of the highlights of the flight accomplishments of Canadarm is given.

#### A86-47404#

### EXPERIMENTS ON THE END-POINT CONTROL OF A TWO-LINK ROBOT WITH ELASTIC DRIVES

M. G. HOLLARS and R. H. CANNON, JR. (Stanford University, CA) IN: Guidance, Navigation and Control Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 19-27. refs

(Contract F49620-82-C-0092)

(AIAA PAPER 86-1977)

This paper discusses the use of end-point feedback to improve the position control performance of manipulators that have lumped sources of flexibility within the drive trains or joints. The links are assumed to be rigid. Four different control strategies are discussed and compared. Classical control using only position and rate sensors colocated at the motors gives limited performance and rejection of disturbances at the end-effector. Linear-Quadratic-Regulator full-state feedback with end-point position and rate sensing dramatically improves performance and disturbance rejection, but only for a certain class of trajectories in which linearized models are effective. Robust controllers designed for larger regions of motion improve the average performance of the manipulator but at the cost of specific performance. None of the above three constant-gain controllers performs well for a large class of desired trajectories in which the non-linear dynamics dominate. Non-linear computed-torque methods offer better performance for these cases. An experimental two-link manipulator has been constructed and experimental verification of these control strategies is in progress.

**A86-47440\***# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

### DESIGN FOR A GOAL-ORIENTED TELEROBOTIC SYSTEM

R. W. WILL and N. O. SLIWA (NASA, Langley Research Center, Hampton, VA) IN: Guidance, Navigation and Control Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 357-363. refs

(AIAA PAPER 86-2090)

Robotic systems will play an increasingly important role in space operations. This paper describes the objective and design of a proposed goal-oriented telerobotic system for space operations. This design effort encompasses the elements of the system executive and user interface, and the distribution and general structure of the knowledge bases, the displays, and the task sequencing. The objective of the design effort is to provide an evolutionary structure for a telerobotic system, i.e., one that can progress from strictly teleoperated through phases of serving as an assistant, a colleague, and an expert, to eventually serve as a

truly autonomous unit, requiring only minimal supervision. A preliminary design for such a system involving 'mixed initiative', or the flexible shared control between the human operator and the software system, is complete and described in this paper.

Author

### A86-47467#

### ON-ORBIT MANIPULATORS - SENSORY AND CONTROL APPROACHES

J. MCLAUGHLIN, B. STAUNTON, and L. WARD (Aerospace Corp., El Segundo, CA) IN: Guidance, Navigation and Control Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 591-598. Research supported by the Aerospace Corp. refs (AIAA PAPER 86-2185)

This paper presents an overview of ongoing research, describing work on some control issues relevant to space applications of robotics and teleoperation. Problems in manipulator path tracking, absolute position control, and link flexibility are addressed. A hardware experiment demonstrates the application of modern control design to trajectory control of a manipulator with nonlinear dynamics. Work on camera modeling and the use of computer vision and estimation in closed-loop position control is detailed. A two link, flexible manipulator is modeled and a linearization approach to controlling end-effector oscillations is simulated.

Author

#### A86-47468#

### A LABORATORY ROBOT FOR SPACE APPLICATION RESEARCH

H. FLASHNER, G. SHIFLETT (Southern California, University, Los Angeles), Y. GUO, and V. SPECTOR IN: Guidance, Navigation and Control Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 599-607. (AIAA PAPER 86-2186)

This paper discusses the development of the USC manipulator system, designed specifically for test and verification of control algorithms for space based robot applications. The robot features a simple but well defined mechanical configuration with modular components. Various dynamic characteristics can be easily modified allowing evaluation of their influence on system performance. A hybrid approach using digital and analog controllers was taken for the electromechanical design.

#### A86-47469#

### AN ADAPTIVE VISION-BASED MANIPULATOR CONTROL SCHEME

S. B. SKAAR, W. H. BROCKMAN (Iowa State University of Science and Technology, Ames), and R. HANSON IN: Guidance, Navigation and Control Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 608-614. refs (Contract NSF MEA-83-18867)

(AIAA PAPER 86-2187)

A control strategy for manipulation of objects in space or under water is discussed and early experimental results for this strategy are reported. The strategy involves determining the relationship between servoable manipulator joint coordinates and the camera-space location of 'manipulatable' cues. If, due to camera motion of motion of the objects, the cues that are placed on the object of interest are nonstationary in camera space, the strategy uses models to predict the camera-space trajectories. A camera-space trajectory plan for the cues is then developed which is compatible with the limitations of the physical system and that results in the desired camera-space cue configurations. C.D.

### A86-47923#

### MODELING AND SIMULATION OF SPACECRAFT SOLAR ARRAY DEPLOYMENT

B. WIE, N. FURUMOTO, A. K. BANERJEE, and P. M. BARBA (Ford Aerospace and Communications Corp., Palo Alto, CA) IN: Astrodynamics Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 237-242. refs (AIAA PAPER 86-2122)

This paper presents the dynamic and digital simulation of the deployment of rigid solar panels on Intelsat-V and INSAT spacecraft. Each spacecraft is characterized by very distinct mechanisms for its solar array deployment. The arrays on Intelsat-V are in a topological tree configuration, while the INSAT arrays are in a closed-loop configuration because of the four-bar linkage deployment mechanism. It is shown that the kinematic control rod on the INSAT has a synchronizing function very similar to that of the closed cable loop on the Intelsat-V spacecraft. Practical aspects of the modeling and simulation of complex deployment mechanisms are emphasized. The use and limitations of the DISCOS multibody code for deployment dynamics simulations are discussed, and the need for developing specialized simulation tools emphasized.

A86-49552\*# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

### **AUTOMATION AND ROBOTICS FOR SPACE STATION IN THE** TWENTY-FIRST CENTURY

K. F. WILLSHIRE (NASA, Langley Research Center, Hampton, VA) and D. L. PIVIROTTO (California Institute of Technology, Jet Propulsion Laboratory, Pasadena) AIAA, Space Station in the Twenty-first Century, Meeting, Reno, NV, Sept. 3-5, 1986. 7 p.

(AIAA PAPER 86-2300)

Space Station telerobotics will evolve beyond the initial capability into a smarter and more capable system as we enter the twenty-first century. Current technology programs including several proposed ground and flight experiments to enable development of this system are described. Advancements in the areas of machine vision, smart sensors, advanced control architecture, manipulator joint design, end effector design, and artificial intelligence will provide increasingly more autonomous telerobotic systems. Author

N86-24294# Cornell Univ., Ithaca, N.Y.

NONLINEAR DYNAMICS AND CHAOTIC MOTIONS IN FEEDBACK CONTROLLED ELASTIC SYSTEMS Annual Report, 1 Dec. 1983 - 30 Nov. 1984

P. J. HOLMES, F. C. MOON, and R. H. RAND Aug. 1985 29 p. (Contract AF-AFOSR-0051-84)

(AD-A162385; AFOSR-85-1087TR) Avail: NTIS HC A03/MF A01 CSCL 12A

Local and global bifurcation studies of nonlinear systems subject to linear and nonlinear feedback forces have been completed which have application to robotic devices or controlled elastic structures. Related to these studies has been the application of mathematical knot theory to trace certain bifurcation sequences for two-dimensional maps. This work has led to the conclusion that many other routes to chaos in dynamical systems exist besides period doubling when the map is two-dimensional. The use of computer algebra (MACSYMA) has been developed as a tool to study nonlinear systems. In one application the investigators explored a new control scheme for flexible space structures based on controlling the stiffness matrix. MACSYMA was used along with normal form theory to predict the stability properties of a stiffness controlled systems. Other studies using MACSYMA related to problems in robotic dynamics were also completed or started. Finally, experimental work was completed involving the application of mathematics to chaotic motion of flexible structures.

N86-27358# Dornier-Werke G.m.b.H., Friedrichshafen (West Germany).

### ANALYSIS OF IN-ORBIT PERFORMANCE OF MECHANISMS WITHIN LARGE STRUCTURES

H. BAIER In ESA Second European Space Mechanisms and Tribology Symposium p 29-34 Dec. 1985

Avail: NTIS HC A15/MF A01; ESA, Paris FF 150 or \$18 Member States, AU, CN, NO (+20% others)

Simulating and predicting the behavior of spacecraft mechanisms especially within larger structures are discussed. Deployment kinematic analysis is outlined. Actuators and their transfer functions within an active isolation or damping system as well as investigations of the static behavior of a refocus mechanism and the dynamic behavior of a bearing and power transfer assembly are treated. For the latter case, the effects of nonlinearities and of static preloads are emphasized. Ways to verify mechanism behavior in flexible structures are summarized.

N86-27363# Technische Univ., Munich (West Germany). Lehrstuhl B fuer Mechanik.

### MODELING AND CONTROL OF A LIGHTWEIGHT ROBOT

B. GEBLER In ESA Second European Space Mechanisms and Tribology Symposium p 59-64 Dec. 1985

Avail: NTIS HC A15/MF A01; ESA, Paris FF 150 or \$18 Member States, AU, CN, NO (+20% others)

For a lightweight industrial robot the influence of elasticity of the structural parts is studied. The system is modeled as a hybrid multibody system. It is shown that using the static deflection bending lines as shape functions yields, with only a few degrees of freedom, very good results. For control of the system, consideration of nominal deflections is proposed. This concept takes into account the elastic properties of robot arms when computing feedforward control torques.

N86-27369# Societe Nationale Industrielle Aerospatiale, Cannes (France).

#### SPEED **REGULATORS FOR SPACE APPENDAGES** DEPLOYMENT

J. M. LEBLANC In ESA Second European Space Mechanisms and Tribology Symposium p 105-111 Dec. 1985 Avail: NTIS HC A15/MF A01; ESA, Paris FF 150 or \$18 Member

States, AU, CN, NO (+20% others)

The requirements, design, test program, and performances of a centrifugal brake speed regulator for the deployment of spaceborne appendages are described. The regulator is qualified for the SPOT solar array, the TVSAT/TDF reflectors, and TELE-X reflectors.

European Space Agency. European Space N86-27386# Research and Technology Center, ESTEC, (Netherlands).

#### EXPERIMENT MANIPULATORS FOR AUTOMATIC SAMPLE HANDLING

In ESA Second European Space Mechanisms and Tribology Symposium p 221-226 Dec. 1985

Avail: NTIS HC A15/MF A01; ESA, Paris FF 150 or \$18 Member

States, AU, CN, NO (+20% others)

The application of robotics to small scale manipulator systems for materials handling in microgravity was studied, using the single core payload of EURECA. A skeleton and an advanced concept were studied. Modularity; size and mass; joint design; sensors; reliability, safety and redundancy; orbit and ground operation; computer aided design; end effectors; grapple fixtures; storage and process interfaces; processors; software; and the use of commercially available manipulators were investigated.

N86-27388# Sener, S.A., Madrid (Spain).

A SENER LATCH DESIGN FOR DOCKING MECHANISMS

F. ABARRATEGUI, M. FUENTES, J. RIVACOBA, and J. A. ROS In ESA Second European Space Mechanisms and Tribology Symposium p 233-238 Dec. 1985

(Contract ESA-5195/82-NL-BI)

Avail: NTIS HC A15/MF A01; ESA, Paris FF 150 or \$18 Member States, AU, CN, NO (+20% others)

Latch mechanisms were designed for the docking of two spacecrafts at relatively short distances and with small relative velocity between them. The mechanism mounted on one of the spacecrafts has to receive the passive element of the other, guide it, dissipate as much as possible the small relative kinetic energy, stop it, bring it to the final rest position, and rigidize the interface between both spacecraft. The mechanism elements necessary to carry out this task and the operation of the latch in the process of docking and undocking are explained. A model of the latch was built and tested in a bidimensional air bearing set-up.

N86-27390# European Space Tribology Lab., Risley (England).
SOME RECENT EXPERIENCES OF MECHANISM
PERFORMANCE AND COMPONENT ASSESSMENT IN
THERMAL VACUUM TESTS AT ESTL

J. A. DUVALL and K. PARKER *In* ESA Second European Space Mechanisms and Tribology Symposium p 251-260 Dec. 1985 Avail: NTIS HC A15/MF A01; ESA, Paris FF 150 or \$18 Member States, AU, CN, NO (+20% others)

The spacecraft mechanism test facilities at the European Space Tribology Laboratory (ESTL) are described. Test results are reviewed on three mechanisms where, in a variety of thermal conditions, the measurement of the reaction torque which would be experienced by the spacecraft was important. Valuable performance data is obtained when it is possible to dismantle mechanisms and examine the condition of all components after the tests. This was particularly important for two ESA mechanisms subjected to seven-year real life tests, one having lead-lubricated bearings and the other oil-lubricated bearings. The ESTL experience in component examination and failure analysis, with advice on how to improve mechanism reliability, is reviewed.

N86-30234\*# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

A SIMPLE NONLINEAR JOINT MODEL

W. B. FICHTER Aug. 1986 7 p (NASA-TM-87749; L-16169; NAS 1.15:87749) Avail: NTIS HC A02/MF A01 CSCL 20K

Hertzian contact theory is applied to a butt joint with specially mismatched bearing surfaces to devise a simple mathematical model of nonlinear axial force-displacement behavior in jointed members. Normalized tangent stiffness-force plots, for several values of a joint imperfection parameter, are presented for the sample case of solid structural members of circular section. The results illustrate the potential problem of high joint compliance at low axial-force levels, as well as the generally desirable stiffening and linearizing effects of preload. A nonlinear oscillator problem based on the static model is also formulated and solved to illustrate the effect of amplitude on natural frequency. As expected, natural frequency is low when amplitude is small. The results call attention to the important roles that tight tolerances and preload are expected to play in the design and fabrication of deployable and erectable truss-type space structures.

N86-33016\*# Stanford Univ., Calif. Dept. of Aeronautics and Astronautics.

CONTROL OF A FREE-FLYING ROBOT MANIPULATOR SYSTEM Semiannual Report, Feb. - Jul. 1985

H. ALEXANDER and R. H. CANNON, JR. Jul. 1985 8 p (Contract NCC2-333)

(NASA-CR-179717; NAS 1.26:179717; SAR-1) Avail: NTIS HC A02/MF A01 CSCL 05H

The goal of the research is to develop and test control strategies for a self-contained, free flying space robot. Such a robot would perform operations in space similar to those currently handled by astronauts during extravehicular activity (EVA). The focus of the work is to develop and carry out a program of research with a series of physical Satellite Robot Simulator Vehicles (SRSV's), two-dimensionally freely mobile laboratory models of autonomous free-flying space robots such as might perform extravehicular functions associated with operation of a space station or repair of orbiting satellites. The development of the SRSV and of some of the controller subsystems are discribed. The two-link arm was fitted to the SRSV base, and researchers explored the open-loop characteristics of the arm and thruster actuators. Work began on building the software foundation necessary for use of the on-board computer, as well as hardware and software for a local vision system for target identification and tracking.

N86-33024# National Aerospace Lab., Amsterdam (Netherlands). Space Div.

CONTROL LOOPS WITH HUMAN OPERATORS IN SPACE OPERATIONS. PART 2: ROBOTICS OPERATIONS AND MANUAL CONTROL EXPERIMENT Final Report

C. M. VANSWIETEN and S. KAMPEN Paris ESA 5 Sep. 1985 140 p Prepared in cooperation with Royal Netherlands Aircraft Factories Fokker, Amsterdam (Contract ESA-5594/83)

(NLR-TR-84116-L-PT-2; FOK-TR-R-84-CHO-131-PT-2; ESA-CR(P)-2190-PT-2; ETN-86-97788-PT-2) Avail: NTIS HC A07/MF A01

Servicing of satellites and assembly of space structures via robotic operations controlled from the ground by human operators are discussed. Five operational modes for the combined space and ground segment are defined: high level manipulation; manual augmented: preprogrammed; single joint (emergency mode); and direct drive (emergency mode). The main difficulty in the manual modes is the presence of time delay in the control loop and the way the operator can cope with it. Human operator performance was assessed for the direct drive mode, in which the system provides the least support. A simple model for this mode shows essentially nonlinear actuator behavior, which makes results from the literature not applicable. Therefore experiments were done. The experiments show that the operator can control the system. but a lot of overshooting responses are observed. Possibly, these overshoots can be eliminated by different instructions to the operator, who was instructed in the experiments to be as fast as possible.

### 09

### **PROPULSION**

Includes propulsion concepts and designs utilizing solar sailing, solar electric, ion, and low thrust chemical concepts.

### A86-33203

### FLEXIBILITY CONTROL OF SOLAR BATTERY ARRAYS OF SPACECRAFTS

T. FUKUDA, H. HOSOGAI, Y. KURIBAYASHI (Tokyo, Science University, Japan), and N. YAJIMA (Ministry of International Trade and Industry, Mechanical Engineering Laboratory, Sakura, Japan) IN: A bridge between control science and technology. Volume 5. Oxford and New York, Pergamon Press, 1985, p. 2933-2938. refs

The paper examines the problem of how to estimate and control the vibrational modes of flexible booms of the arrays in a reliable way even in large angle attitude maneuvers. A proposed mode estimation method, which makes use of differential outputs of instrument solar cells, gives a good estimation of the vibrational modes. Even static output maximization control in a desired direction cannot work stably without flexibility control, based on the mode estimation. The boom is controlled and implemented as a distributed parameter system by microprocessors. The dynamic control based on the feedback control theory can give good results

to suppress the vibration of the arrays even in large angle attitude maneuvers. The control system has fault tolerant properties, such as dual microprocessor controlled systems with independent fault self-diagnostic software, and can degrade itself as faults go into the worse.

Author

**A86-34174\*** Virginia Polytechnic Inst. and State Univ., Blacksburg.

MINIMUM-FUEL CONTROL OF HIGH-ORDER SYSTEMS

J. SHENHAR and L. MEIROVITCH (Virginia Polytechnic Institute and State University, Blacksburg) Journal of Optimization Theory and Applications (ISSN 0022-3239), vol. 48, March 1986, p. 469-491. refs (Contract NAG1-225)

The minimum-fuel control problem is of special interest in various space systems. To date, solutions of minimum-fuel control problems have been carried out for relatively low-order systems. Space structures, however, are generally characterized by a large number of degrees of freedom, so that minimum-fuel control of such systems requires a new approach. In the independent modal-space control (IMSC) method, the control laws are designed in the modal space for each mode independently. The minimum-fuel problem reduces to that of a set of independent second-order systems, so that minimum-fuel control is possible. This paper shows how the IMSC method can be used to control a space structure with a minimum amount of fuel. A numerical example is presented.

# A86-34972 PROPULSION SYSTEM CONCEPT ASSESSMENT AND TECHNOLOGY REQUIREMENTS FOR SPACE STATION

W. F. RECTOR, III and M. W. HENLEY (General Dynamics Corp., Convair Div., San Diego, CA) IN: Space and society - Progress and promise; Proceedings of the Twenty-second Space Congress, Cocoa Beach, FL, April 23-26, 1985. Cape Canaveral, FL, Canaveral Council of Technical Societies, 1985, p. 7-21 to 7-30.

A development status assessment is presented for the alternative Space Station propulsion systems under consideration, identifying potential advantages and disadvantages of each. An outline is given of an advanced development program for the promising initial operational capability alternative of gaseous hydrogen and oxygen propellants; the advanced development work for such a system could support an early decision for the Space Station design. Maintainability, commonality and growth potential are among the major propulsion system evaluation criteria. O.C.

### A86-34990#

### POWER AND THERMAL MANAGEMENT CONCEPTS FOR FREE-FLYING PLATFORMS IN THE SPACE STATION ERA

H. O. CURTIS, P. R. PIERCE, K. R. JOHNSON, and D. R. CHALMERS (RCA, Astro Electronics Div., Princeton, NJ) Canaveral Council of Technical Societies, Space Congress, 22nd, Cocoa Beach, FL, Apr. 23-26, 1985, Paper. 11 p. refs

The use of space platforms for special scientific and commercial payloads will enhance the system capability of the Space Station program and spur the exploitation of low earth orbits. These platforms will be serviceable to promote low-cost extension of platform life, as well as to provide long term payload maintenance, repair and change-out. The power and thermal subsystems of these platforms threfore will be designed to satisfy a broad and evolving range of payload resource requirements, while providing maintainability and sericeability consistent with long life. Early designs highlight the need for, and impact of, modular configurations employing advanced technologies.

#### A86-34994#

### DYNAMIC POWER - A KEY TO THE PROMISE OF SPACE

C. N. HALL and J. P. MULLIN (Sundstrand Corp., Sundstrand Advanced Technology Group, Rockford, IL) Canaveral Council of Technical Societies, Space Congress, 22nd, Cocoa Beach, FL, Apr. 23-26, 1985, Paper. 22 p. refs

The evolution of Rankine cycle power conversion equipment is traced, beginning with early designs of solar dynamic power

conversion applications based on a mature terrestrial data base. This development then moves through applications which use various energy sources including radioisotopes and particular types of stored chemical energy. Current equipment designs viable for use on Space Station and possible SDI applications are described and compared with possible alternative solutions. Methods for accommodating growth to much larger power levels using solar power and chemical energy sources as well as nuclear heat sources are also discussed.

#### A86-36668

### CONVERSION OF SOLAR ENERGY [PREOBRAZOVANIE SOLNECHNOI ENERGII]

N. N. SEMENOV, ED. and A. E. SHILOV, ED. Moscow, Izdatel'stvo Nauka, 1985, 184 p. In Russian. For individual items see A86-36669 to A86-36673.

The papers presented in this volume provide an overview of current theoretical and experimental research related to the conversion and practical utilization of solar energy. Topics discussed include semiconductor photovoltaic cells, orbital solar power stations, chemical and biological methods of solar energy conversion, and solar energy applications. Papers are included on new theoretical models of solar cells and prospects for increasing their efficiency, metrology and optical studies of solar cells, and some problems related to the thermally induced deformations of large space structures.

### A86-38623

### **NUCLEAR POWER FOR EARTH ORBIT AND BEYOND**

B. NOLLEY Space World (ISSN 0038-6332), vol. W-5-269, May 1986, p. 18-20.

The development of space-based thermoelectric nuclear power generators for such future applications as the propulsion of an Orbital Transfer Vehicle or planetary exploration is discussed. Nuclear fission reactors have a higher power/mass ratio than radioisotope or chemical generators, less atmospheric drag, and will not be dependent on attitude control. The NASA in-core thermionics SP-100 nuclear fission reactor prototype is expected in the mid-1990s. A low mass 6.4 percent efficient multimegawatt capability reactor is described with a fast spectrum reactor in the cone's apex, separate from the two silicon-germanium element thermoelectric conversion system. Liquid lithium transports heat from the 1970-C reactor to heat exchanges that convey it to the heat pipe array, and heat rejection occurs at the deployable radiator panels.

#### A86-42608#

### NUCLEAR POWERED ION ENGINE ORBIT TRANSFER VEHICLE DESIGN AND OPERATIONAL EFFECTIVENESS

S. P. MAHONEY (USAF, Satellite Test Center, Sunnyvale Air Force Station, CA) and M. M. MEKARU (USAF, Institute of Technology, Wright-Patterson AFB, OH) AIAA, ASME, SAE, and ASEE, Joint Propulsion Conference, 22nd, Huntsville, AL, June 16-18, 1986. 10 p. refs

(AIÀA PAPER 86-1391)

The feasibility and the cost effectiveness for using nuclear powered electric propulsion orbit transfer vehicles (EOTV) to move Block 3 Navstar Global Positioning System (GPS) satellites from low earth orbit (LEO) to a 10,900 nm orbit are determined. The electric propulsion systems considered are present and 1990's technology ion engines using mercury, xenon or argon for a propellant. A systems cost model which combines payload, power source, trajectory, and earth-to-LEO launch parameters with algorithms characterizing the electric propulsion system is used. The least costly systems which had an outbound triptime equal to or less than 90 days are determined. These systems are then compared with the PAM D-II, Centaur-G, and IUS in terms of total deployment costs for 28 GPS satellites launched at a rate of four per year for seven years. The study finds that a reusable EOTV with 37 Xenon ion engines powered by a nuclear reactor can perform the mission for less cost than the chemical systems.

**Author** 

### A86-42615\*# Rockwell International Corp., Canoga Park, Calif. SPACE STATION PROPULSION TEST BED - A COMPLETE

G. L. BRILEY, A. M. NORMAN (Rockwell International Corp., Rocketdyne Div., Canogo Park, CA), L. JONES, and H. CAMPBELL (NASA, Marshall Space Flight Center, Huntsville, AL) AIAA, ASME, SAE, and ASEE, Joint Propulsion Conference, 22nd, Huntsville, AL, June 16-18, 1986. 9 p. (AIAA PAPER 86-1402)

A test bed was fabricated under NASA/MSFC (Marshall Space Contract NAS8-36418 to demonstrate Center) hydrogen/oxygen propulsion technology readiness for the Initial Operating Conditions Space Station application and for use as a means to test evolving technology for the growth station. This paper describes the test bed and its function.

### A86-42616\*# Technion, Inc., Irvine, Calif.

### A 10,000 HOUR LIFE MULTIPROPELLANT ENGINE FOR SPACE STATION APPLICATIONS

T. K. PUGMIRE, G. L. CANN (Technion, Inc., Irvine, CA), B. HECKERT (Rockwell International Corp., Canoga Park, CA), and J. S. SOVEY (NASA, Lewis Research Center, Cleveland, OH) AIAA, ASME, SAE, and ASEE, Joint Propulsion Conference, 22nd, Huntsville, AL, June 16-18, 1986. 9 p. Research supported by Johnson Matthey, Inc. and Engelhard Corp. refs (AIAA PAPER 86-1403)

A review of the design background and operating objectives of a multipropellant resistojet is presented. An engine has been designed to operate with carbon dioxide, methane, water, hydrazine decomposition products and hydrogen. Design performance has been constrained to ensure a 10,000-hour life. The engine, constructed primarily of grain stabilized platinum, is to operate at temperatures up to 1400 C. General performance guidelines, design and fabrication methods are reported.

### A86-42617\*# Textron Bell Aerospace Co., Buffalo, N. Y. A LONG-LIFE 50 LBF H2/O2 THRUSTER FOR SPACE STATION **AUXILIARY PROPULSION**

J. M. SENNEFF (Bell Aerospace Textron, Buffalo, NY) and G. P. RICHTER (NASA, Lewis Research Center, Cleveland, OH) AIAA, ASME, SAE, and ASEE, Joint Propulsion Conference, 22nd, Huntsville, AL, June 16-18, 1986. 9 p. refs (AIAA PAPER 86-1404)

In preparation for the development of a manned Space Station, the National Aeronautics and Space Administration (NASA) is conducting a program to develop technology related to on-board Auxiliary Propulsion Systems. To develop the required thruster technology to support the Space Station project, the NASA Lewis Research Center has sponsored a development program based on a unique 'reverse flow' concept where the fuel is injected 'backwards' in the chamber to cool the spherical combustor wall. This combustor was based on previous developments at the 50-lbf, 1000-lbf, and 1500-lbf thrust levels. This paper describes the design and test program carried out to demonstrate a new 50-lbf thruster, the design which was based on this previous technology. Included are the test results for the initial mixture ratio 4 thruster which can operate with uncooled Cres (stainless steel) combustor walls. In addition, the effort to operate a thruster redesigned for operation at a mixture ratio of eight for potential integration with the life support system is described.

### A86-42618#

### LIFE CYCLE COST METHODOLOGY FOR SPACE STATION **PROPULSION SYSTEM**

C. J. MEISL (Rockwell International Corp., Rocketdyne Div., Canoga AIAA, ASME, SAE, and ASEE, Joint Propulsion Conference, 22nd, Huntsville, AL, June 16-18, 1986. 12 p. refs (AIAA PAPER 86-1405)

A Life Cycle Cost (LCC) model was developed for the space station propulsion system to support the requirement and configuration trade studies. The model was conceived to be flexible in its structure in order to handle the large variations in propulsion concepts with regard to propellants, hardware, space station characteristics and operational support schemes. The model categorizes LCC into four cost segments, i.e., development, production, transportation, and operational support. methodology is described with regard to model structure. assumptions and ground rules, types of Cost Estimating Relationships (CERs) used, validation, and input/output features. Typical cost analysis results are presented to illustrate the application of the methodology. These cover several propulsion concepts using hydrazine and oxygen/hydrogen as propellants. A comparison is made with previously published cost data by JPL, and the cost differences are explained. The methodology includes cost risk, and a description of the risk approach and the different elements of risk are provided.

National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

### TWO-STAGE EARTH-TO-ORBIT VEHICLES WITH SERIES AND PARALLEL BURN

J. A. MARTIN (NASA, Langley Research Center, Hampton, VA) AIAA, ASME, SAE, and ASEE, Joint Propulsion Conference, 22nd, Huntsville, AL, June 16-18, 1986. 7 p. (AIAA PAPER 86-1413)

Recent studies have indicated that a fully reusable earth-to-orbit vehicle system will be needed near the beginning of the next century. One likely concept is a two-stage, vertical takeoff system with liquid rocket propulsion. Such vehicles have been examined with series burn and parallel burn of the engines of each stage. The results indicate that the preferred concept will have parallel burn with crossfeed, the booster will have hydrocarbon engines, the Orbiter will have both hydrocarbon and hydrogen engines, and the staging velocity will be low enough to allow the booster to glide back to the launch site.

### A86-42713#

#### A PROVEN 25-LBF H2/O2 THRUSTER FOR SPACE STATION **AUXILIARY PROPULSION**

P. J. ROBINSON and S. E. ROSENTHAL (Aerojet TechSystems Co., Sacramento, CA) AIAA, ASME, SAE, and ASEE, Joint Propulsion Conference, 22nd, Huntsville, AL, June 16-18, 1986. 11 p. refs (AIAA PAPER 86-1560)

A 25-lbF GO2/GH2 thruster for the Space Station propulsion system has been designed, fabricated and successfully tested under a NASA Lewis Research Center-sponsored technology program. Analytical models have been developed to predict thermal and performance characteristics of the thruster. Although originally designed to operate over a mixture ratio range of 3.0 to 5.0, the thruster has been tested over the range from 2.2 to 8.1. The total accumulated firing time and impulse to date are 22,198 seconds (6.166 hours) and 538,457 lbF-sec, respectively, with the longest steady state burn being 2200 seconds at 7.5 mixture ratio.

Author

### A86-42714\*# Rockwell International Corp., Canoga Park, Calif. **OXYGEN/HYDROGEN SPACE STATION PROPULSION SYSTEM** CONCEPT DEFINITION FOR IOC

J. M. SHOJI, C. J. MEISL, J. F. GLASS, W.-H. TU, S. J. EBERT, S. A. EVANS (Rockwell International Corp., Rocketdyne Div., Canoga Park, CA), L. W. JONES, and H. CAMPBELL (NASA. Marshall Space Flight Center, Huntsville, AL) AIAA, ASME, SAE, and ASEE, Joint Propulsion Conference, 22nd, Huntsville, AL. June 16-18, 1986. 23 p. refs (AIAA PAPER 86-1561)

The potential for the reduction in propulsion system life cycle costs through the use of on-board water electrolysis to generate oxygen and hydrogen propellants, as well as the potential advantages of improved system safety and contamination impact, led to a study to evaluate candidate oxygen-/hydrogen-based propulsion systems. In this study a representative set of propulsion requirements were compiled and oxygen/hydrogen-based propulsion systems synthesized. These candidate concepts were screened and a systems evaluation was performed on the remaining eight candidate concepts. Detailed system schematics were prepared. Operational design conditions were determined and system weight, volume, energy requirements, and costs were calculated. Evaluation results indicated that the oxygen/hydrogen propulsion systems can provide simple, low cost, and viable systems for the IOC Space Station. Based on these data, a relative concept evaluation was conducted using as selection criteria reliability, safety, cost, technical risk, contamination, operational utility, growth potential, and integration potential. Top ranked candidate systems were recommended to NASA/MSFC for consideration for the IOC Space Station.

Author

A86-42715#

### MONOPROPELLANT HYDRAZINE SYSTEMS FOR SPACE STATION APPLICATIONS

H. S. HILLBRATH and J. C. CONCEPCION (Boeing Aerospace Co., Huntsville, AL) AIAA, ASME, SAE, and ASEE, Joint Propulsion Conference, 22nd, Huntsville, AL, June 16-18, 1986. 9 p. (AIAA PAPER 86-1562)

Hydrazine systems using catalytic monopropellant decomposition thrusters are attractive candidates for space station propulsion applications. They offer low technical risk, low initial cost and favorable contamination characteristics. The modular configuration seems to offer some advantages in maintainability and safety. Hydrazine toxicity hazards in the space station environment are a principal source of concern. Other systems under evaluation are also attractive, especialy several types of GO2/GH2 systems which have higher initial cost, but lower operating cost due to higher specific impulse. Evaluation of the testing done in this program and others indicates that thruster life time may not be as significant a cost driver as was initialy thought. Testing has confirmed that mixing waste gasses with the hydrazine thruster exhaust products results in substantially more total impulse that would be obtained from the two fluids separately. A self-testing fluid connector has been designed, constructed and tested. Design concepts for a minimum spill disconnect are being developed. Both concepts are applicable to hydrazine and other hazardous fluid system. Author

**A86-42716\*#** Jet Propulsion Lab., California Inst. of Tech., Pasadena.

### ADVANCED PROPULSION FOR POLAR-ORBITING AND COORBITING FREE FLYERS

B. A. PALASZEWSKI (California Institute of Technology, Jet Propulsion Laboratory, Pasadena) AIAA, ASME, SAE, and ASEE, Joint Propulsion Conference, 22nd, Huntsville, AL, June 16-18, 1986. 11 p. NASA-supported research. refs (AIAA PAPER 86-1564)

Advanced propulsion systems for polar-orbiting and coorbiting were Resistojet, arcjet, flvers investigated. magnetoplasmadynamic and chemical-bipropellant nitrogen tetroxide/monomethyl hydrazine (NTO/MMH) propulsion systems compared to the baseline free-flyer (N2H4)-propulsion-system performance. Advanced resistojet, arcjet, ion, and NTO/MMH propulsion systems enable significant propellant-mass savings over the baseline N2H4-propulsion system. Using free-flyer mission requirements from the Langley Research Center Mission-Data Base, detailed propulsion requirements for over thirty free-flyer missions were analyzed. The Polar-Platform constraints may preclude using a low-thrust electric-propulsion system. Electric propulsion will, however, allow a significant coorbiter propellant-mass reduction. Frequent servicing and nodal-regression effects on the coorbiting free-flyer's orbit increase the required mission velocity change and propellant mass. For many coorbiter missions high-specific-impulse resistojet-, arcjetand ion-propulsion systems allow substantial life-cycle propellant-mass savings. Author **A86-42799\***# National Aeronautics and Space Administration. Lewis Research Center, Cleveland, Ohio.

NASA ELECTROTHERMAL AUXILIARY PROPULSION TECHNOLOGY

J. R. STONE (NASA, Lewis Research Center, Cleveland, OH) AIAA, ASME, SAE, and ASEE, Joint Propulsion Conference, 22nd, Huntsville, AL, June 16-18, 1986. 19 p. Previously announced in STAR as N86-24749. refs (AIAA PAPER 86-1703)

Electrothermal auxiliary propulsion systems provide high performance options which can have major mission benefits. There are several electrothermal concepts which offer a range of characteristics and benefits. Resistojets are the highest thrust to power option and are currently operational at mission average values of specific impulse, I sub sp approximately 295 sec. Long life, multipropellant resistojets are being developed for the Space Station, and resistojet technology advancements are being pursued to improve the I sub sp by more than 20 percent for resistojets used in satellite applications. Direct current arcjets have the potential of I sub sp over 400 sec with storable propellants and should provide over 1000 sec with hydrogen. Advanced concepts are being investigated to provide high power density options and possible growth to primary propulsion applications. Broad based experimental and analytical research and technology programs of NASA are summarized and recent significant advances are reviewed.

#### A86-43206

PARAMETRIC DESIGN AND PRELIMINARY MISSION ANALYSIS OF A PROPOSED HYBRID OTV WITH TOS/AMS (TM) SOLID-FUEL BOOSTERS, AND RING-CUSP ION RETURN ENGINES

L. W. MADDOX (USAF, Space Command, Colorado Springs, CO) IN: Astrodynamics 1985; Proceedings of the Conference, Vail, CO, August 12-15, 1985. Part 1 . San Diego, CA, Univelt, Inc., 1986, p. 75-92. refs (AAS PAPER 85-304)

This study addresses the problem of slow transfer time inherent in low-thrust electric propulsion. The study consists of two parts. The first part defines the partially reuseable Hybrid Orbit Transfer Vehicle (HOTV) parametrics. The TOS/AMS system boosts the vehicle from Shuttle or Space Station orbit to operational orbits and the ring-cusp ion system brings payload(s) and vehicle back to low orbit. The second part of the study uses first order dynamics to evaluate the HOTV operating envelope and examines possible missions in earth orbit. Missions found to be feasible with the HOTV include: observe and return, replace, service, retrieve, and satellite rescue. This HOTV is primarily limited to inspection missions at GEO, but still has clear advantages over refuelable liquid-rocket and aerobraked OTVs.

### A86-44447#

### RIT-10 LOW-THRUST CONTROL OF EURECA'S ORBITAL DECAY

R. MUGELLESI and J. C. VAN DER HA (ESA, Orbit Attitude Div., Darmstadt, West Germany) (IAF, Congress, 36th, Stockholm, Sweden, Oct. 7-12, 1985) ESA Journal (ISSN 0379-2285), vol. 10, no. 1, 1986, p. 59-70. refs

The possibility of using the RIT-10 low-thrust experiment to control Eureca's orbital decay during its free-flight phase is investigated. The optimal thruster switch-on and switch-off points are determined taking into account the thrusting direction relative to that of the Carrier's velocity. An analytical model of the changes in the orbital elements under such a switching strategy has been constructed. Two control strategies are proposed, the first aimed at keeping the semi-major axis constant, and the second at maintaining a prescribed decay level. The benefit of a controlled Eureca orbital decay is substantial in that the target-node error for retrieval is thereby reduced. Consequently, fuel savings can be made during the rendezvous with the retrieving Shuttle.

Author

### A86-47460#

### PRELIMINARY EVALUATION OF A REACTION CONTROL SYSTEM FOR A SPACE STATION

H. H. WOO, E. T. FALANGAS, and J. A. FINLEY (Rockwell International Corp., Downey, CA) IN: Guidance, Navigation and Control Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 538-546. Research sponsored by Rockwell International Corp. (AIAA PAPER 86-2152)

The Space Station reaction control system (RCS) functions include disturbance damping, reboost maneuvers, and rotation maneuvers. This paper presents the design concepts and methodology used to define the RCS and simulation results used to evaluate the design performance. The objective is to present a preliminary RCS concept that meets the given functional, operational, and performance goals and requirements. RCS design concepts incorporate notch-bending filters, multiple-level switching functions, and integral trims. To evaluate these concepts in terms of performance, simulation data including attitude, rate, torque, and deflection time histories are presented for cases involving reboost, attitude maneuvers, disturbance conditions, and maneuvers during assembly. The RCS accommodation of a blowdown propulsion system with distributed propellant tanks is also evaluated.

### A86-47910#

# REDUCED RISK TWO STAGE TRANSFERS TO GEOSYNCHRONOUS ORBIT BY USE OF AN OPTIMIZED INTERMEDIATE TRANSFER ORBIT

R. E. COFFEY (Ball Corp., Ball Aerospace Systems Div., Boulder, CO) and J. R. STUART (Orbital Sciences Corp., Vienna, VA) IN: Astrodynamics Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 98-105. refs (AIAA PAPER 86-2063)

Recent experience has shown the inherent risk associated in delivering a payload onto geosynchronous transfer orbit using currently available upperstage technology. As a consequence of this risk, an increased burden is placed on the customer to insure against high launch and replacement costs brought about with payload losses. Mission reliability is shown to be greatly increased and delivery risk lowered by use of an optimum intermediate transfer orbit allowing for checkout and return of a faulty payload, or continued ascent to geostationary orbit. The optimum (minimum energy) intermediate transfer orbit is developed for a nonplanar and coplanar transfer from a standard shuttle parking orbit circular altitude to geostationary altitude. The optimum intermediate orbit for the nonplanar transfer is shown to differ from the classic modified Hohmann transfer, to be invariant to payload mass delivered onto the geostationary orbit, and to dictate design parameters for new efficient transfer stage architectures.

#### A86-47969#

### A DESIGN FOR FLUID MANAGEMENT IN SPACE

N. E. SEARBY AIAA Student Journal (ISSN 0001-1460), vol. 23, Winter 1986, p. 6-9, 15. refs

Liquid-gas degassification, solid-liquid-gas separation, and algae growth, separation and harvesting are the problems primarily addressed by the present low energy system for fluids management in space conditions. The system incorporates a centrifugal approach in which a divergent, truncated conical spinning separation chamber is coupled with density-dependent valving. The degassification of fluids and separation of multiphased media are achieved while the pumping pressures required for the movement of the separated media to storage areas are generated. O.C.

#### A86-48206#

# OPERATION AND CONTROL OF SPACE-BASED SOLAR ENERGY POWER PLANTS WITH CCGT USING HELIUM AS A WORKING MEDIUM

A. SUTSCH (Institute for Computer-Assisted Research in Astronomy, Alterswil, Switzerland) ASME, International Gas Turbine Conference and Exhibit, 31st, Duesseldorf, West Germany, June 8-12, 1986. 8 p. refs (ASME PAPER 86-GT-152)

The generation of both electricity and process heat for industrial manufacturing systems aboard a large space station is presently addressed by a solar energy powerplant employing a closed cycle gas turbine that uses helium as its working fluid. Attention is given to the optical properties of the parabolic solar concentrator disk used, as well as to the thermodynamics of the helium cycle and the design features of the turbomachinery used. It is noted that the turbomechanical component of the helium-based system is substantially more compact than that of a steam-based system of comparable output. A 50-MW electrical output and a 60 MW thermal output are projected.

**A86-49553\***# National Aeronautics and Space Administration. Lewis Research Center, Cleveland, Ohio.

### FLUID MANAGEMENT AND ITS ROLE IN THE FUTURE OF SPACE STATION

J. SALZMAN, R. VERNON, M. HILL, and T. PETERSON (NASA, Lewis Research Center, Cleveland, OH) AIAA, Space Station in the Twenty-first Century, Meeting, Reno, NV, Sept. 3-5, 1986. 14 p. refs

(AIAA PAPER 86-2301)

Technological challenges and suggested plans for meeting them pertaining to fluid management in the Space Station are discussed. A short overview is given of the major Space Station systems and operations which employ or rely on fluid management, followed by a description of the general system issues and challenges encountered in managing fluids in space. Examples of some current and near term activities directed toward providing the understanding and technologies necessary to overcome relevant problems are presented. Finally, suggested plans for similar but longer range research and development activities are offered. These plans emphasize the requirements and benefits of expanded in-space experiments, with the ultimate aim of using the Space Station as a facility for fluid management research and technology development efforts.

# N86-24025# AEG-Telefunken, Wedel (West Germany). ALTERNATIVE MODULE CONFIGURATIONS FOR ADVANCED SOLAR ARRAYS ON LOW ORBIT AND EXTENDED LIFETIME MISSIONS (AMOC 1) Final Report

D. GRINGEL, J. KOĆH, and W. SCHMITZ Paris ESA Jan. 1985 166 p

(Contract ESTEC-5508/83-NL-PB(SC))

(ESA-CR(P)-2129) Avail: NTIS HC A08/MF A01

The applicability and power improvement of the p-grid solar cell for low Earth orbit missions were assessed. The power improvement predicted analytically is confirmed by electrical performance measurements. Two measurement methods were used: separate illimination of front and rearside; and simultaneous illumination of front and rearside. Bifacial cells were bonded onto window type and continuous type substrates for electrical performance determination. Test samples composed of different substrate materials covered with solar cells or glass dummies were tested with respect to the expected thermal environment and mechanical behavior. Three favorable substrate designs were selected for a thermal cycling test: glass or carbon fiber reinforced Kapton modules, and treated glass cloth module. Electric performance increase is 10% to 15% after 15,000 cycles at plus or minus 100 C, compared to standard BSFR cells.

Author (ESA)

N86-26358\*# Evansville Univ., Ind. Dept. of Physics.
THEORETICAL STUDY ON THE EFFECT OF THE DESIGN OF
SMALL (MILLI-NEWTON) THRUSTER JETS ON MOLECULAR

SMALL (MILLI-NEWTON) THRUSTER JETS ON MOLECULAR CONTAMINATION FOR THE SPACE STATION Final Report, 15 Nov. 1985 - 30 Jun. 1986

B. R. RILEY 1986 44 p refs

(Contract NAG3-674)

(NASA-CR-177263; NAS 1.26:177263) Avail: NTIS HC A03/MF A01 CSCL 22B

The self-induced molecular contamination around the space station could have adverse effects on space station components (for example solar panels) as well as scientific experiments that might be done on or near the space station. Aerospace engineers need to design a space station (SS) propulsion system that keeps the SS in a stable orbit and at the same time does not allow the propellant gases to interfere with the experiments of the user. One scenario that might accomplish the above requirements is to use an electrothermal propulsion system, resistojet, that will thrust continuously in the hundreds of milli-Newton range which will provide a constant altitude for the SS with a low g environment. As a first attempt to understand the contamination from such a propulsion system, a point source model was developed. The numerical results of the point source model are given. Number column densities for CO2 are presented as a function of direction of observation (line of sight), temperature of the exit gas, and mean exit velocity. All the results are for a constant exhaust rate of 5,000 kg/year. In addition, a mathematical model to study the effect of nozzle design on the induced molecular environment around the space station produced by simple gas propellants is described. The mathematical model would allow one to follow the expansion of the gas from the throat of a nozzle to the nozzle exit plane and then into the space external to the nozzle.

N86-26369\*# Rockwell International Corp., Canoga Park, Calif. Rocketdyne Div.

ORBIT TRANSFER ROCKET ENGINE TECHNOLOGY PROGRAM: ADVANCED ENGINE STUDY, TASK D.1/D.3 Interim Report

A. MARTINEZ, C. ERICKSON, and B. HINES Jan. 1986 237 p (Contract NAS3-23773)

(NASA-CR-175084; NAS 1.26:175084; RI/RD86-116) Avail: NTIS HC A11/MF A01 CSCL 21H

Concepts for space maintainability of OTV engines were examined. An engine design was developed which was driven by space maintenance requirements and by a failure mode and effects (FME) analysis. Modularity within the engine was shown to offer cost benefits and improved space maintenance capabilities. Space operable disconnects were conceptualized for both engine change-out and for module replacement. Through FME mitigation the modules were conceptualized to contain the least reliable and most often replaced engine components. A preliminary space maintenance plan was developed around a controls and condition monitoring system using advanced sensors, controls, and condition monitoring concepts. A complete engine layout was prepared satisfying current vehicle requirements and utilizing projected component advanced technologies. A technology plan for developing the required technology was assembled. Author

N86-28991# Stuttgart Univ. (West Germany).

PLASMA THRUSTER DEVELOPMENT: MAGNETOPLASMA-DYNAMIC PROPULSION, STATUS AND BASIC PROBLEMS Interim Report, Oct. 1984 - Sep. 1985

R. D. BUEHLER Feb. 1986 108 p Prepared in cooperation with AF Rocket Propulsion Lab., Edwards AFB, Calif. (Contract AF-AFOSR-0394-84)

This report provides an overview of the present state and the problem areas of magnetoplasmadynamic (MPD) space propulsion devices and systems potentially suitable for orbit raising and maneuvering of large space structures, i.e., thrust and power levels of presently most promising steady (or quasisteady pulsed) thruster types, self field, axial applied field arcjets and Hall ion thrusters

are reviewed in terms of performance trends, present understanding, uncertainties and ground testing problems, with the conclusion that there is as yet no reliable basis for choosing one type for final development. Typical efficiency vs. specific impulse curves for all MPD thrusters show the dominant role of the propellant on the thrust to input power ratio (as for ion engines), and the necessity of achieving relatively high specific impulse values for each propellant for acceptable efficiencies. The specific impulse (or onset) limit of self-field thrusters using a variety of propellants is discussed, together with predicted trends from several theoretical models. Considering system complexity and development cost as well as performance, the advantages and disadvantages if pulsed (quasisteady) vs. continuous thruster operation and the propellant selection criteria are reviewed. Electrode erosion, especially on cathodes, losses and limits imposed by radiation cooling are emphasized as critical problem areas for larger MPD thrusters.

N86-31647\*# Rockwell International Corp., Canoga Park, Calif. Propulsion Programs.

SPACE STATION PROPULSION TECHNOLOGY Annua Progress Report, 24 May 1985 - 23 May 1986

G. L. BRILEY 1986 92 p

(Contract NAS8-36418)

(NASA-CR-178897; NAS 1.26:178897; RI/RD86-226;

REPT-0737P-105-; APR-1) Avail: NTIS HC A05/MF A01 CSCL 21H

The progress on the Space Station Propulsion Technology Program is described. The objectives are to provide a demonstration of hydrogen/oxygen propulsion technology readiness for the Initial Operating Capability (IOC) space station application, specifically gaseous hydrogen/oxygen and warm hydrogen thruster concepts, and to establish a means for evolving from the IOC space station propulsion to that required to support and interface with advanced station functions. The evaluation of concepts was completed. The accumulator module of the test bed was completed and, with the microprocessor controller, delivered to NASA-MSFC. An oxygen/hydrogen thruster was modified for use with the test bed and successfully tested at mixture ratios from 4:1 to 8:1.

N86-32522\*# National Aeronautics and Space Administration. Lewis Research Center, Cleveland, Ohio.

PROVEN, LONG-LIFE HYDROGEN/OXYGEN THRUST CHAMBERS FOR SPACE STATION PROPULSION

G. P. RICHTER and H. G. PRICE 1986 20 p Presented at the 1986 JANNAF Propulsion Meeting, New Orleans, La., 26-28 Aug. 1986; sponsored by JANNAF Interagency Propulsion Committee

(NASA-TM-88822; E-3171; NAS 1.15:88822) Avail: NTIS HC A02/MF A01 CSCL 21H

The development of the manned space station has necessitated the development of technology related to an onboard auxiliary propulsion system (APS) required to provide for various space station attitude control, orbit positioning, and docking maneuvers. A key component of this onboard APS is the thrust chamber design. To develop the required thrust chamber technology to support the Space Station Program, the NASA Lewis Research Center has sponsored development programs under contracts with Aerojet TechSystems Company and with Bell Aerospace Textron Division of Textron, Inc. During the NASA Lewis sponsored program with Aerojet TechSystems, a 25 lb sub f hydrogen/oxygen thruster has been developed and proven as a viable candidate to meet the needs of the Space Station Program. Likewise, during the development program with Bell Aerospace, a 50 lb sub f hydrogen/oxygen Thrust Chamber has been developed and has demonstrated reliable, long-life expectancy at anticipated space station operating conditions. Both these thrust chambers were based on design criteria developed in previous thruster programs and successfully verified in experimental test programs. Extensive thermal analyses and models were used to design the thrusters to achieve total impulse goals of 2 x 10 to the 6th power lb sub f-sec. Test data for each thruster will be compared to the analytical predictions for the performance and heat transfer characteristics. Also, the results of thrust chamber life verification tests will be presented.

Author

### 10

### **GENERAL**

Includes either state-of-the-art or advanced technology which may apply to Large Space Systems and does not fit within the previous categories. Publications of conferences, seminars, and workshops are covered in this area.

**A86-30113\*** National Aeronautics and Space Administration. Lyndon B. Johnson Space Center, Houston, Tex.

LUNAR BASES AND SPACE ACTIVITIES OF THE 21ST CENTURY

W. W. MENDELL, ED. (NASA, Johnson Space Center, Houston, TX) Houston, TX, Lunar and Planetary Institute, 1985, 875 p. For individual items see A86-30114 to A86-30174, A86-30176 to A86-30180.

The present conference gives attention to such major aspects of lunar colonization as lunar base concepts, lunar transportation, lunar science research activities, moon-based astronomical researches, lunar architectural construction, lunar materials and processes, lunar oxygen production, life support and health maintenance in lunar bases, societal aspects of lunar colonization, and the prospects for Mars colonization. Specific discussions are presented concerning the role of nuclear energy in lunar development, achromatic trajectories and the industrial scale transport of lunar resources, advanced geologic exploration from a lunar base, geophysical investigations of the moon, moon-based astronomical interferometry, the irradiation of the moon by particles, cement-based composites for lunar base construction, electrostatic concentration of lunar soil minerals, microwave processing of lunar materials, a parametric analysis of lunar oxygen production, hydrogen from lunar regolith fines, metabolic support for a lunar base, past and future Soviet lunar exploration, and the use of the moons of Mars as sources of water for lunar bases.

### A86-31259

SECTAM XII - PROCEEDINGS OF THE TWELFTH SOUTHEASTERN CONFERENCE ON THEORETICAL AND APPLIED MECHANICS, PINE MOUNTAIN, GA, MAY 10, 11, 1984. VOLUME 2

Auburn, AL, Auburn University, 1984, 586 p. No individual items are abstracted in this volume.

Subjects in the area of fluid mechanics are discussed, taking into account heat-up flows of a contained fluid, an analytical solution for natural convection in a vertical oriented porous annulus, the Weissenberg effect generated by a torsionally oscillating rod in a layered medium, a system analysis for a model of bluff body base flow, steady solutions of the shallow water equations, and the subsonic near-wake of an axisymmetric body with a slanted base. Computational methods are considered along with structural vibrations, structural stability, experimental methods, coastal hydrodynamics, dynamical systems, large space structural systems, the hydraulics of sediment transport, localization of deformation, wave propagation, vibrations of plates and shells, composite materials, and design studies. Attention is given to damage tolerance studies in operational aircraft, design verification testing of advanced prototype structures, continuous filament wound grid stiffened composite structures for aircraft fuselages, and Navier-Stokes solutions for two-dimensional subsonic base flow. G.R.

A86-31260

CONFERENCE ON DECISION AND CONTROL, 23RD, LAS VEGAS, NV, DECEMBER 12-14, 1984, PROCEEDINGS. VOLUME

Conference sponsored by IEEE. New York, Institute of Electrical and Electronics Engineers, 1984, 688 p. No individual items are abstracted in this volume.

Various papers on decision and control in engineering are presented. The general topics addressed include: estimation and filtering, stochastic adaptive control nonlinear systems, model order reduction, new approaches to stability problems of electric power systems, reliable/robust control and some applications to large-space structures, production planning and control of manufacturing systems, control systems governed by nonlinear partial differential equations, generalized state-space systems, and frequency-domain design of multivariable control systems. Also discussed are: identification, implementation issues applications of adaptive control, analysis and synthesis of nonlinear input-output responses, signal processing, voltage VAR modeling and control for power systems, optimal control and filtering algorithms, analysis of queueing networks and related systems, control of distributed parameter systems, computer-aided technology, control of linear systems, and failure detection and fault-tolerant systems.

#### A86-31776

GUIDANCE AND CONTROL 1985; PROCEEDINGS OF THE EIGHTH ANNUAL ROCKY MOUNTAIN CONFERENCE, KEYSTONE, CO, FEBRUARY 2-6, 1985

R. D. CULP, ED. (Colorado, University, Boulder), E. J. BAUMAN, ED. (Colorado, University, Colorado Springs), and C. A. CULLIAN, ED. (Ball Corp., Ball Aerospace Systems Div., Boulder, CO) Conference sponsored by AAS. San Diego, CA, Univelt, Inc., 1985, 616 p. For individual items see A86-31777 to A86-31808.

Consideration is given to the history of classical control theory and the current guidance and control theory taught at universities. Papers are presented on payload isolation, precision pointing spacecraft experiments, the evaluation of spacecraft disturbances, the performance of a laser communications pointing and tracking system, and the hardware and working models of control-related components and subsystems. Topics discussed include spacecraft attitude control, new guidance, navigation and control components, space repair mission activities, and on-orbit control systems. I.F.

**A86-32095\***# National Aeronautics and Space Administration. Lyndon B. Johnson Space Center, Houston, Tex.

MAINTAINABILITY PLANNING FOR THE SPACE STATION

G. R. EGAN (NASA, Johnson Space Center, Houston, TX) AIAA, AHS, CASI, DGLR, IES, ISA, ITEA, SETP, and SFTE, Flight Testing Conference, 3rd, Las Vegas, NV, Apr. 2-4, 1986. 5 p. (AIAA PAPER 86-9754)

The planned NASA Space Station, which is expected to have many years of on-orbit operation, for the first time confronts spacecraft designers with major questions of maintainability in design. A Maintainability Guidelines Document has been distributed to all Space Station Definition and Preliminary Design personnel of the Space Station Program Office. Trade studies are being performed to determine the most economical balance between initial (reliability) cost and life cycle cost (crew time and replacement hardware) costs.

O.C.

**A86-32117\***# Jet Propulsion Lab., California Inst. of Tech., Pasadena.

SUBSYSTEM TESTING OF GALILEO'S ATTITUDE AND ARTICULATION CONTROL FAULT PROTECTION

L. L. ANDERSON and D. M. COHEN (California Institute of Technology, Jet Propulsion Laboratory, Pasadena) AIAA, AHS, CASI, DGLR, IES, ISA, ITEA, SETP, and SFTE, Flight Testing Conference, 3rd, Las Vegas, NV, Apr. 2-4, 1986. 6 p. NASA-supported research. refs (AIAA PAPER 86-9783)

This paper discusses the fault protection tesing of the Attitude and Articulation Control Subsystem (AACS) of the Galileo

spacecraft. The need for an autonomous fault protection system on an interplanetary spacecraft is discussed. Galileo requirements for the detection and response of specific hardware failures is discussed along with the fault protection software design and implementation. The test beds and test methods used for fault protection testing are described. The paper concludes with a presentation of the results of this testing with an emphasis on requirement and design changes that were made as a result of these tests.

A86-32407

# OPTICAL FABRICATION AND TESTING WORKSHOP: LARGE TELESCOPE OPTICS, ALBUQUERQUE, NM, MARCH 4-8, 1985, PROCEEDINGS

R. S. MCDOWELL, ED. (Los Alamos National Laboratory, NM) Workshop sponsored by OSA and SPIE. Bellingham, WA, Society of Photo-Optical Instrumentation Engineers (SPIE Proceedings. Volume 542), 1985, 83 p. For individual items see A86-32408 to A86-32417.

(SPIE-542)

The present conference considers outstanding problems in the fabrication of large telescopic optics, new design opportunities in high precision space telescope mirrors due to materials-selection tradeoffs, mirror substrate scalability criteria in light of fabrication limitations, improved coatings for large astronomical telescope mirrors, the development status of a large 'optical generator' grinder apparatus for telescopic mirrors, and the development status of glass mirrors for space telescopes. Also discussed are trends in optical telescope technology, design aspects of the University of Texas 7.6-m telescope, the fabrication of the Keck 10-m telescope's primary mirror, the 'bend-and-polish' mirror fabrication technique, and the optics of the 15-m National New Technology Telescope.

A86-32526

### EASCON '85: NATIONAL SPACE STRATEGY - A PROGRESS REPORT; PROCEEDINGS OF THE EIGHTEENTH ANNUAL ELECTRONICS AND AEROSPACE SYSTEMS CONFERENCE, WASHINGTON, DC, OCTOBER 28-30, 1985

Conference sponsored by IEEE, Boeing Electronics, Inc., General Electric Co., et al. New York, Institute of Electrical and Electronics Engineers, Inc., 1985, 387 p. For individual items see A86-32527 to A86-32566.

Aspects of the Space Transportation System technology are discussed, taking into account a review of high payoff technologies, structures and materials technology issues for reusable launch vehicles, advanced rocket propulsion system technology required to reduce LEO payload costs, advanced airbreathing propulsion as an enabling key to affordable aerospace transportation, a hypersonic aerothermodynamics status report, avionics and automation, and strategies to minimize Delta V costs of extraterrestrial resources. Other subjects studied are related to the Space Transportation System policy/programs, civil space program technology, civil space program policy, the common space support program, and the control of unclassified technology with military and space applications. Topics concerning the commercial space program are considered, giving attention to processing and services, policy, and boosters and transfer vehicles.

### A86-32552

### SDI ORBITAL SYSTEM TIMING CONSTRAINTS

J. R. LOCKER (SofTech, Inc., Fairborn, OH) IN: EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 . New York, Institute of Electrical and Electronics Engineers, Inc., 1985, p. 265-272. refs

Configuration issues for an SDI system are driven by two types of constraints: those dictated by limits of technology and those dictated by the physics of the problem. The tradeoffs chosen for a given configuration will in turn drive the CCC problem. This CCC paper identifies the major configuration issues for a system of orbital platforms and characterizes the tradeoffs in terms of

technology and physics. The underlying physical variables which impact all tradeoffs for the system are identified as platform height of orbit and distance between platforms. It is shown that all system level configuration variables may be considered in terms of these two variables, and implicitly, the speed of light lag in interplatform communication. Building upon this basis, some candidate system configurations are presented which make certain technological assumptions. It is shown, based upon system level functional analysis of these technological assumptions, that the major technological configuration drivers are primarily weapon system pointing and tracking capability.

### A86-32904

### MAN'S PERMANENT PRESENCE IN SPACE; PROCEEDINGS OF THE THIRD ANNUAL AEROSPACE TECHNOLOGY SYMPOSIUM, UNIVERSITY OF NEW ORLEANS, LA, NOVEMBER 7, 8, 1985 Symposium sponsored by AIAA. New Orleans, LA, American

Institute of Aeronautics and Astronautics, 1985, 813 p. For individual items see A86-32905 to A86-32934.

Papers are presented on the need, and capabilities of the Space Station, managing fluids in space, propellant supply for space operations, and the effect of the space environment on spacecraft materials. Topics discussed include docking concepts, a launch system, the designs and planning of a lunar base/lunar city, space applications of composite structures, and the fabrication of composite tooling. Consideration is given to FAA air traffic control program management technology applications, the application of thermal analysis to polyurethane prepolymeric materials, surface sensitive techniques for the analysis of ET polymers, nondestructive measurements of residual stress, integrated logistics support, and mobile gantry robots for large structures.

#### A86-32909#

### SEALING FOR LONG-TERM SPACE APPLICATION

P. B. ALLEN and H. W. BECKER (Martin Marietta Corp., New Orleans, LA) IN: Man's permanent presence in space; Proceedings of the Third Annual Aerospace Technology Symposium, New Orleans, LA, November 7, 8, 1985. New Orleans, LA, American Institute of Aeronautics and Astronautics, 1985, 35 p. Research supported by the Martin Marietta Independent Research and Development Program. refs

The performances of various seals in a space environment are examined. The design and applicability of elastomeric O-rings molded from nitrile, neoprene, fluorocarbon, and silicones are analyzed. The use of nylon and teflon plastic seals for split piston rings and backup and wear rings is discussed. The advantages and disadvantages of metallic seals and gaskets are studied. Test procedures for evaluating static seals and sealants for temperature and pressure in a simulated space environment are desribed.

I.F.

### A86-32912#

### ALTERNATIVE DOCKING CONCEPTS FOR APPLICATION TO THE SPACE STATION

D. S. MONITOR (Martin Marietta Corp., New Orleans, LA)
 IN: Man's permanent presence in space; Proceedings of the Third Annual Aerospace Technology Symposium, New Orleans, LA, November 7, 8, 1985.
 New Orleans, LA, American Institute of Aeronautics and Astronautics, 1985, 25 p. refs
 Studies of the International Space Station utilization have

Studies of the International Space Station utilization have identified concerns relating to the rendezvous and docking operations of all space vehicles with the Space Station. Some of these concerns include contamination of the immediate environment and exposed surfaces by the Reaction Control System (RCS) exhaust products, Space Station attitude disturbances produced by the RCS exhaust plume pressure fields, and the Space Station structural response resulting from the residual velocity differences between two docking bodies. The use of remote docking facilities supported by either extensible arms or a tether combined with approaches along the orbital radius vector may attentuate these effects and satisfy the concerns.

INTERNATIONAL SYMPOSIUM ON AEROELASTICITY AND STRUCTURAL DYNAMICS, 2ND, RHEINISCH-WESTFAELISCHE TECHNISCHE HOCHSCHULE, AACHEN, WEST GERMANY, APRIL 1-3, 1985, COLLECTED PAPERS

Symposium organized by DGLR; Supported by BMFT. Bonn, Deutsche Gesellschaft fuer Luft- und Raumfahrt, 1985, 713 p. For individual items see A86-33227 to A86-33261, A86-33263 to A86-33291.

(DGLR BERICHT 85-02)

The present conference considers topics in the unsteady aerodynamics and aeroelastic characteristics of aircraft structures, active structural control technologies, structural modeling and optimization methods, structural system identification, and the structural dynamics design verification of space structures. Specific attention is given to the transonic equivalent strip method for aeroelastic applications, transonic unsteady methods for the calculation of flutter airloads, experimental and analytical buffeting investigations of a delta wing, the application of unsteady wing collocation methods to subsonic flow cascades, a static aeroelastic analysis employing aircraft vibration modes, and a general theory for the finite state modeling of aeroelastic systems for active control applications. Also discussed are the use of control law synthesis for gust load alleviation using linear quadratic Gaussian theory, the stiffness control of large space structures, the variation of isotropic behavior in structural optimization, the dynamic analysis of structures with flexible rotors, modal parameter estimation from driven-base tests, rapid vibration mode analysis of aircraft with external stores, and low frequency design verification of large spacecraft structures.

### A86-34110

U.S. OPPORTUNITIES IN SPACE CONFERENCE; PROCEEDINGS OF THE SECOND ANNUAL SPACE BUSINESS CONFERENCE, WASHINGTON, DC. OCTOBER 30-NOVEMBER 1, 1985

Conference organized by Space Consultants International, Ltd. London, Space Consultants International, Ltd., 1985, 264 p. For individual items see A86-34111 to A86-34123.

Papers are presented on the capabilities and commercial opportunities for materials processings in space, remote sensing systems, and the application of space technologies to terrestrial projects. Topics discussed include the privatization of Expendable Launch Vehicles and the legal issues related to commercialization. Consideration is given to the Leasecraft system, 'Canadarm', and the Space Station.

### A86-34123#

### THE CANADARM - ON EARTH AS IT IS IN SPACE

C. G. TRUMP (Spar Aerospace, Ltd., Toronto, Canada) IN: U.S. Opportunities in Space Conference; Proceedings of the Second Annual Space Business Conference, Washington, DC, October 30-November 1, 1985 . London, Space Consultants International, Ltd., 1985, 9 p.

Canada's contributions to space technology are reviewed. The development of the Shuttle Remote Manipulator System, which is used on manned US spacecraft and in the device used to fuel the Candu nuclear reactors, is described. Canada's satellite communication system is examined. Future Canadian space projects such as a mobile satellite system and space-based radar surveillance system are discussed.

### A86-34574

### MOTION TRAJECTORIES OF PARTICLES INSIDE AND OUTSIDE AN ORBITING SPACE SHUTTLE

H. F. BAUER (Muenchen, Universitaet der Bundeswehr, Munich, West Germany) Zeitschrift fuer Flugwissenschaften und Weltraumforschung (ISSN 0342-068X), vol. 10, Jan.-Feb. 1986, p. 22-33.

In connection with the conduction of space missions, certain tasks, as, for instance, the assembly of space stations in orbit, will involve the placement of objects outside the space vehicle. Such objects may be subjected to certain forces, including aerodynamic drag and lift from a residual atmosphere. The present

study has the objective to assess the effect of some of the forces on the relative motion of a system outside a space laboratory in cases in which constant and time-variant forces have to be considered. Attention is given to the disturbed motion of a mass point due to an oscillatory force, disturbed motion due to a pulse, the dynamics of a mechanical mass point system, and numerical evaluations and conclusions.

G.R.

#### A86-34951

SPACE AND SOCIETY - PROGRESS AND PROMISE; PROCEEDINGS OF THE TWENTY-SECOND SPACE CONGRESS, COCOA BEACH, FL, APRIL 23-26, 1985

Congress sponsored by the Canaveral Council of Technical Societies. Cape Canaveral, FL, Canaveral Council of Technical Societies, 1985, 411 p. For individual items see A86-34952 to A86-34989.

A collection of papers is presented which examines improvements in space systems operations, new initiatives in the procurement process for space technology, and technological developments supporting future initiatives. The reporting of mission results and plans for the future by worldwide sources is addressed. The general topics covered include: operational efficiency in STS, remote operation in space and robotics, contracting and management, space systems technology, Spacelab mission results, advanced missions and transportation, Space Station technology, international programs, productivity in space activities, Getaway spacial program, and energy.

**A86-34992\***# National Aeronautics and Space Administration, Washington, D.C.

ENABLING TECHNOLOGIES FOR TRANSITION TO UTILIZATION OF SPACE-BASED RESOURCES AND OPERATIONS

S. R. SADIN (NASA, Office of Aeronautics and Space Technology, Washington, DC) and J. D. LITTY (General Research Corp., Space Systems Div., McLean, VA) Canaveral Council of Technical Societies, Space Congress, 22nd, Cocoa Beach, FL, Apr. 23-26, 1985, Paper. 10 p.

This article explores a potential scenario for the further development of space infrastructure resources and operations management. It is a scenario that transitions from the current ground-based system to an architecture that is predominantly space-based by exploiting key mission systems in an operational support role. If this view is accurate, an examination of the range of potential infrastructure elements and how they might interact in a maximally productive space-based operations complex is needed, innovative technologies beyond the current Shuttle and Space Station legacy need to be identified, and research programs pursued. Development of technologies within the areas of telerobotics, machine autonomy, human autonomy, in-space manufacturing and construction, propulsion and energy is discussed.

#### A86-35426

AEROSPACE BEHAVIORAL ENGINEERING TECHNOLOGY CONFERENCE, 4TH, LONG BEACH, CA, OCTOBER 14-17, 1985, PROCEEDINGS

Conference sponsored by SAE. Warrendale, PA, Society of Automotive Engineers, Inc., 1985, 444 p. For individual items see A86-35427 to A86-35458. (SAE P-168)

Papers are presented on assessing human fitness and performance; the use of simulation as a cockpit design tool; the man-machine interface; the Space Station; and human performance. Consideration is given to advanced transport aircraft technology; operator workload analysis; rotorcraft missions; the pilot in the operational loop; and flight crew training. Topics also discussed include cockpit communications; color displays; commercial air transport and general aviation operations; and space and military operations.

### AEROSPACE SIMULATION II; PROCEEDINGS OF THE SECOND CONFERENCE, SAN DIEGO, CA, JANUARY 23-25, 1986

M. UNG, ED. (Southern California, University, Los Angeles, CA) San Diego, CA, Society for Computer Simulation (Simulation Series. Volume 16, No. 2, 1986), 1986, 304 p. For individual items see A86-37177 to A86-37195.

Papers are presented on techniques for optimizing computer performance in real-time flight simulation; the effects of simulator variation on the fidelity of a UH-60 Black Hawk simulation; a real-time simulation for helicopter rotor wind-tunnel operations; simulation support software in a real-time environment; simulation of auto-rendezvous and docking; a generic missile weapon system model for war-gaming; and the optimal missile nonlinear multiloop controller design principle. Topics discussed include the modeling of a tethered two-body system in space; the testing of a spacecraft attitude control system; Space Station dynamic modeling; interactive mission planning for a Space Shuttle flight experiment; hybrid simulation of ejection seat dynamics, adaptive autoregressive target modes' identification; and optimal control of air-launched homing missiles using realistic performance indices. Consideration is given to flow separation and dynamic stall research, transonic trailing edge flow, fluid dynamics, man/machine interface, computer generated image time delays, the simulation of a satellite attitude control system, and the application of flight simulators to the development of advanced fighter flight control.

#### A86-37852

# INTERNATIONAL CONFERENCE ON SPACE, 25TH, ROME, ITALY, MARCH 26-28, 1985, PROCEEDINGS [CONVEGNO INTERNAZIONALE SULLO SPAZIO, 25TH, ROME, ITALY, MARCH 26-28, 1985, ATTI]

Conference sponsored by the Ministero per il Coordinamento delle Iniziative per la Ricerca Scientifica e Tecnologica, Ministero degli Affari Esteri, FAO, and ESA. Rome, Rassegna Internazionale Elettronica Nucleare ed Aerospaziale, 1985, 487 p. In Italian and English. For individual items see A86-37853 to A86-37881.

Various papers are presented on space station missions and programs, utilization, configuration, subsystems, services, as well as miscellaneous topics concerning space stations. Individual subjects addressed include: the U.S. Space Station program, European participation in international space stations, the views of the U.S. scientific community on the Space Station, prospects for the life sciences and microgravitational experiments in the Space Station, data and communications infrastructure for the Space Station, polar platforms, and the Ariane 5 space transportation system. Also discussed are: attitude stability of a class of tethered space stations, large space structural models combining finite elements and transfer matrix methods, inflatable technology in orbit demonstration, design of the ESA thematic mapper processing chains, and an energy balance study by satellite imagery. Several papers are also presented on the Italian Space Agency and on the Italian-Chinese SIRIO program. C.D.

### A86-38051

### INTERNATIONAL INSTRUMENTATION SYMPOSIUM, 31ST, SAN DIEGO, CA, MAY 6-9, 1985, PROCEEDINGS

Symposium sponsored by ISA. Research Triangle Park, NC, Instrumentation Society of America (Instrumentation in the Aerospace Industry. Volume 31; Advances in Test Measurement. Volume 22), 1985, 808 p. For individual items see A86-38052 to A86-38084.

Consideration is given to techniques for measuring pressure, temperature, and solid mechanics, blast and shock instrumentation, flow measurements, measurement errors, and uncertainty analyses. Topics discussed include the applications of mini/microcomputers, data acquisition, processing, and analysis techniques and systems, and real-time control and display systems. Papers are presented on weighing instruments for space, special test facilities and data reduction procedures, flow applications, and wind tunnel instrumentation and control. Emphasis is given to the study of electrooptic and fiber optic instrumentation, NDT and acoustic emissions, software development for instrumentation, and science

policies and the role of the government concerning scientific developments.

### A86-38540

STRUCTURAL DYNAMIC TESTING AND ANALYSIS; AEROSPACE TECHNOLOGY CONFERENCE AND EXPOSITION, LONG BEACH, CA, OCTOBER 14-17, 1985, TECHNICAL PAPERS

Conference and Exposition sponsored by SAE. Warrendale, PA, Society of Automotive Engineers, Inc. (SAE SP-635), 1986, 115 p. For individual items see A86-38541 to A86-38548.

Papers are presented on a normal mode identification test using multiple inputs; a global technique for estimation of modal parameters from measured data; and a comparison of experimental and analytical structural dynamics using a modal assurance criterion. Topics discussed include the design of an optimal seismic isolation system; modal randomness induced by boundary conditions; and eigenvector relations for natural vibrations of damped systems. Consideration is given to the constrained adjustment of analytical stiffness matrices; the multiple boundary condition test; smoothing errors in Fourier transform-based modal data analysis; and the synthesis of discrete passive vibration dampers.

#### A86-38551

SPACECRAFT DESIGN AND OPERATIONAL PROBLEMS: PROCEEDINGS OF THE AEROSPACE TECHNOLOGY CONFERENCE AND EXPOSITION, LONG BEACH, CA, OCTOBER 14-17, 1985

Conference and Exposition sponsored by SAE, Martin Marietta Corp., McDonnell Douglas Corp., et al. Warrendale, PA, Society of Automotive Engineers, Inc. (SAE SP-636), 1985, 58 p. For individual items see A86-38552 to A86-38556. (SAE SP-636)

Papers are presented on space and launch vehicle designs and flight operations. Topics discussed include flight planning with the NASA Flight Design System and flight planning techniques for mixing deployable payloads on the Space Shuttle. Consideration is given to health and safety in the Shuttle environment and spacecraft software costs.

### A86-38801

STRUCTURES, STRUCTURAL DYNAMICS AND MATERIALS CONFERENCE, 27TH, SAN ANTONIO, TX, MAY 19-21, 1986, TECHNICAL PAPERS. PARTS 1 & 2

Conference sponsored by AIAA, ASME, ASCE, and AHS. New York, American Institute of Aeronautics and Astronautics, 1986. Pt. 1, 788 p.; pt. 2, 706 p. For individual items see A86-38802 to A86-38950.

Among the topics discussed are finite nodal point methods, the Advanced Software Environment for Automated Design, verification methods for large beam-type space structures, a nonlinear optimization expert system, a transfinite element methodology for unified thermal/structural analysis, hysteresis and energy dissipation in metallic tubes, ingot metallurgy Al-Li alloys for aircraft, a cryogenic tank design for the Orbital Transfer Vehicle, a structural analysis of the controlled impact demonstration of a jet transport aircraft, and the mechanical property degradation of advanced composites in aircraft service. Also treated are the thermostructural behavior of composite sandwich structures, the synthesis of structures with multiple frequency constraints, the aeroelastic behavior of forward-swept graphite/epoxy wings with rigid body freedoms, the buckling of viscoelastic beam columns. and the effect of crack growth rate variations on life predictions. Finally, attention is given to cracking in military transport pressure bulkheads, a modular approach to three-dimensional structural shape optimization, the aeroelastic tailoring of composite wings with external stores, and the effect of load history on cumulative damage in a composite solid propellant.

# DYNAMICS AND CONTROL OF LARGE STRUCTURES; PROCEEDINGS OF THE FIFTH SYMPOSIUM, BLACKSBURG, VA, JUNE 12-14, 1985

L. MEIROVITCH, ED. (Virginia Polytechnic Institute and State University, Blacksburg) Symposium sponsored by the Virginia Polytechnic Institute and State University and AIAA. Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, 605 p. For individual items see A86-39477 to A86-39511.

Papers are presented on Space Station on-orbit parameter and disturbance identification, the identification of a damping matrix from model data, structural parameter identification using modal response data, a Neumann series approach to random vibrations, and the evaluation of performance characteristics for a space antenna system subjected to stochastic disturbances. Also considered are spacecraft uniform damping control, the control of traveling waves in flexible structures, the control of civil engineering structures, balanced augmented controller reduction, and closed-loop stability of large space structures with reduced-order controllers. Other topics include dynamics of gyroelastic vehicles, a matrix approach to dynamics formulation of complex space structures, linear regulator control of the hoop-column antenna, and a robust nonlinear attitude control law for space stations with flexible structural components. Papers are also presented on experiments in optimal control of a flexible arm with passive damping, the effects of sensor and actuator errors on static shape control for large space structures, maneuvering of flexible spacecraft with application to SCOLE, a slewing control experiment for flexible structures, and single step optimization strategies for constrained retargeting maneuvers.

A86-39477\*# Jet Propulsion Lab., California Inst. of Tech., Pasadena.

### ON-ORBIT PARAMETER AND DISTURBANCE IDENTIFICATION FOR SPACE STATION

D. S. BAYARD, F. Y. HADAEGH, and C. C. IH (California Institute of Technology, Jet Propulsion Laboratory, Pasadena) IN: Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985. Blacksburg, VA, Virginia Polytechnic Institute and State University, 1985, p. 1-18. refs

This paper describes recent efforts directed at the problem of on-orbit parameter and disturbance identification for the Space Station. Techniques are developed for identification of rigid body parameters, flexible body parameters, and quasi-static disturbances relevant to the Power Tower configuration currently under investigation by NASA. The paper concludes with a case study investigating the identification of modal frequencies in a 15 degree of freedom planar model of the Space Station under a variety of operational settings.

### A86-39981

### REAL FANTASY [REAL'NAIA FANTASTIKA]

S. P. UMANSKII Moscow, Izdateľstvo Moskovskii Rabochii, 1985, 242 p. In Russian.

The need for the continual exploration of outer space is emphasized, and the ultimate benefits in store for mankind are presented in detail. The pioneers of rocket technology, the first flights into outer space, and developments in astronautics are discussed as well as the design of rockets, spacecraft, and orbital space stations. Lunar features are examined, and plans for lunar-based scientific investigation are described. Attention is given to results of investigations conducted on Mars and Venus, the design of Mars probes, and the instruments used to study Venus. Plans for flights to nearby stars are also described. K.K.

#### A86-40501

### SPACE TECH; PROCEEDINGS OF THE CONFERENCE AND EXPOSITION, ANAHEIM, CA, SEPTEMBER 23-25, 1985

Conference and Exposition sponsored by ASM, ASME, IEEE, et al. Dearborn, MI, Society of Manufacturing Engineers, 1985, 413 p. For individual items see A86-40502 to A86-40529.

The conference presents papers on the geostationary platform as an application of the Space Station, and continuous fiber

composite hoops as well as guidance, controls and sensors, artificial intelligence and robotics, material applications, simulation and software, space structures, habitation, manufacturing for and in space, propulsion and communications. Attention is focused on reentry guidance and control for an Aeroassist Flight Experiment, a two-dimensional near-infrared tracking system, robotic nondestructive inspection of aerospace structures, the cost of materials in space, an orbital maneuvering vehicle simulator and the effect of pressurization on natural frequencies and modes of vibration of orthotropic cylindrical shells. Also considered are concepts for a permanent human lunar colony, Mars survival kit engineering, automation requirements derived from space manufacturing concepts, optimizing cutting tool performance in high tensile strength materials, and communications and tracking as the keys to Space Station utilization.

### A86-40509

### ROBOTIC NONDESTRUCTIVE INSPECTION OF AEROSPACE STRUCTURES

G. L. WORKMAN and W. TEOH (Alabama, University, Huntsville) IN: Space tech; Proceedings of the Conference and Exposition, Anaheim, CA, September 23-25, 1985. Dearborn, MI, Society of Manufacturing Engineers, 1985, p. 4-11 to 4-24.

Nondestructive inspection of critical components and systems used in aerospace structures requires that the inspection system provide a consistent scanning capability to determine structural integrity in a timely and cost-effective manner. The scanning system may be single-ended, as in pulse echo electronics or eddy currents, or double-ended as in through transmission ultrasonics or X-ray applications. Many of the scanning systems developed in the past for automated nondestructive inspection of large structures such as aircraft wings or fuselages usually are designed specifically for that application and can be very expensive. There is no built-in flexibility for scanning other types of structures; hence there is a need for general purpose scanning systems which use the industrial robot as a programmable scanning device.

#### A86-40576

### SPACE SYSTEMS TECHNOLOGY CONFERENCE, SAN DIEGO, CA, JUNE 9-12, 1986, TECHNICAL PAPERS

Conference sponsored by AIAA. New York, American Institute of Aeronautics and Astronautics, 1986, 259 p. For individual items see A86-40577 to A86-40608.

Papers are presented on liquid droplet radiator thermal characteristics, battery designs, mobile satellite communications, space-based air traffic surveillance, the Italsat regenerative downlink performance, nondisruptive group delay and amplitude measurement, the Polar Platform of the Space Shuttle, EVA tasks and services, fault diagnosis, and an autonomous power system test bed. Topics discussed include space debris and manned space operations, data transport and command management services for the Space Station, a thermodynamic approach to data processor analysis, anomaly detection and resolution system, the Telemetry, Timing, Command, and Control system, the Space Construction Shuttle Flight experiment, and structural analysis of the Space Shuttle propulsion components. Consideration is given to electrostatic charging and arc discharges on satellite dielectrics, the attitude control system of the IUE, orbital acceleration, spaceborne distributed aperture/coherent array processing, the propulsion module for the Columbus Space Platform, the next-generation STS, trajectory performance evaluation, the Hubble Space Telescope, a linear quadratic tracker for control moment gyro based attitude control of the Space Station, and existing satellite systems and networks.

### A86-40585#

### ADVANCED EVA OPERATION ON-ORBIT TASKS AND SERVICES

F. J. ABELES and R. H. SCHAEFER (Grumman Corp., Bethpage, NY) IN: Space Systems Technology Conference, San Diego, CA, June 9-12, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 60-68. (AIAA PAPER 86-1175)

Methods for improving astronauts' productivity during extravehicular activity (EVA) are described. EVA operations involve construction, servicing, and maintenance of the Space Shuttle and servicing and maintenance of the Shuttle's payloads. EVA cycle tasks must be performed in the proper sequence and it is estimated that an astronaut can perform up to 6.5 hrs of EVA productive work during one EVA and a maximum of 19.5 hrs of EVA productive work per astronaut can be accomplished in a week. The utilization of dedicated work stations, a dedicated translation system, properly designed equipment, and job performance aids, such as the helmet mounted display (HMD), to increase EVA productive time is studied. The function and advantages of the HMD are examined. The need to consider the astronaut's comfort during performance of EVA tasks is discussed.

#### A86-40588#

### THE IMPACT OF SPACE DEBRIS ON MANNED SPACE OPERATIONS

L. P. TEMPLE, III (DOD, Space Operations Committee, Washington, DC) IN: Space Systems Technology Conference, San Diego, CA, June 9-12, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 85-90. refs (AIAA PAPER 86-1178)

The effects of space debris on manned space activities are investigated. The probability of collisions of man-sized objects or large-scale structures with space debris is estimated; it is determined that the probability of a man-sized object receiving an impact from space debris is 1000-10000; however, for large structures the potential for impact is greater, and the structures must be designed with this consideration. The rate of debris increase which is dependent on collisions between space objects and additions due to normal operations is examined. Pit densities observed in Skylab windows and Space Shuttle flights are compared; the densities observed from Skylab are 0.1/sq cm after 84 days of exposure and 10 years later the Shuttle recorded 100-200/sq cm of debris after 7-8 days in space. It is noted that though debris is not a current problem standardized operating procedures and equipment need to be developed in order to minimize the amount of debris in space.

**A86-41978\*** National Aeronautics and Space Administration, Washington, D.C.

BUSINESS IN ORBIT - THE COMMERCIAL USE OF SPACE

I. T. GILLAM, IV (NASA, Washington, DC) Journal of International Affairs (ISSN 0022-197X), vol. 39, Summer 1985, p. 115-120.

Current and proposed business opportunities in space are discussed. The advantages offered by the zero gravity environment of space are examined. The roles of the Space Shuttle and the Space Station in space commercialization are described. International development and use of the Space Station is proposed. It is observed that the communications satellite industry is a successful space venture, and opportunities for materials processing and pharmaceuticals production in space are considered. The relationship between NASA's Office of Commercial Programs, which assists businesses in space commercialization, and industry is studied. The impact of space commercialization on the national economy and international trade is analyzed. I.F.

#### A86-41982

**EXPECTATIONS IN SPACE LAW - A PEEK INTO THE FUTURE** S. GOROVE (Mississippi, University, University) Journal of International Affairs (ISSN 0022-197X), vol. 39, Summer 1985, p. 167-174. refs

Legal concerns related to the Space Station and human settlements in free space and celestial bodies, solar power

satellites, the geostationary orbit, direct broadcast satellites, and remote sensing are discussed. The issues of interparty and third party liability, the registration of the Space Station, and jurisdiction, supervision, and control of the Space Station are examined. The need for laws for human conduct in space and the prohibiting of space resources exploitation is described. Questions related to national versus international authority are considered. The proposed use of solar power satellites to generate energy will result in problems related to the impact of the transmission on the earth's environment, potential interference with other radio transmissions, and access to GEO for power transfer. Problems with the free dissemination of remote sensing data and prior consent for direct satellite broadcasting are studied.

#### A86-42236

### DEVELOPING THE FINAL FRONTIER: INTERNATIONAL COOPERATION IN THE PEACEFUL USES OF OUTER SPACE

A. FLORINI Research supported by the James S. McDonnell Foundation, Armand Hammer Foundation, and Carnegie Corp. New York, United Nations Association of the United States of America, Inc., 1985, 79 p.

This history and law of human activity in outer space is examined, current space programs are reviewed, and the major policy issues facing the U.S. and the world are outlined. The launching of Sputnik is discussed as well as the formation of NASA, the race to the moon, the Apollo-Soyuz Test Project, the Outer Space Treaty and the Moon Treaty. NASA's Space Shuttles are considered as well as U.S. scientific aspirations in space; the Salyut space stations; ESA's Ariane, Spacelab, and EURECA projects; and the space programs of Japan, China, India, and Canada. A treatment is provided of the Space Station from the point of view of international cooperation and the military. The militarization of outer space is discussed, with particular emphasis on antisatellite systems and 'SDI'. Multilateral initiatives are also outlined.

#### A86-42743#

### ORBITAL CONSUMABLES RESUPPLY REQUIREMENTS IMPACT ON THE EVOLUTION OF OSCRS

D. L. PERRY and R. BEMIS (Rockwell International Corp., Downey, CA) AIAA, ASME, SAE, and ASEE, Joint Propulsion Conference, 22nd, Huntsville, AL, June 16-18, 1986. 8 p. (AIAA PAPER 86-1603)

Development of the Orbital Spacecraft Consumables Resupply System (OSCRS) is an essential and logical step in the progression of man's utilization of space. Present and future space assets that would benefit from resupply provide specific design-related requirements. These requirements integrated with the role OSCRS will play in the industrialization of space provide an optimized utilitarian vehicle. Specific requirements and their impact on OSCRS design include the potential user resupply requirements and mission scenarios, unique user spacecraft handling needs and other OSCRS uses, and the accompanying integration concerns. These and other elements and their effect on the evolution of an OSCRS design are discussed. The paper closes with a focus on the influence the bipropellant resupply scenario has on the design and development of the generic resupply tanker.

A86-42993\* California Univ., Los Angeles.

### COMPUTER AIDED MODELLING/COMPENSATOR DESIGN FOR A FLEXIBLE SPACE ANTENNA

J. S. GIBSON and D. L. MINGORI (California, University, Los Angles) IN: Conference on Decision and Control, 24th, Fort Lauderdale, FL, December 11-13, 1985, Proceedings. Volume 3. New York, Institute of Electrical and Electronics Engineers, Inc., 1985, p. 1788-1793. refs (Contract NAS7-918)

Controller design algorithms are developed to produce simultaneously both a model of the plant and a compensator. The size of the model and properties of the compensator are driven by the performance requirements, the disturbance environment, and the location, number and type of sensors and actuators. The procedure is based on linear optimal control theory

for distributed systems, and balanced realization theory is used to guide the development of the model and reduce the order of the compensator.

Author

A86-43201

ASTRODYNAMICS 1985; PROCEDINGS OF THE CONFERENCE, VAIL, CO, AUGUST 12-15, 1985. PARTS 1 & 2 B. KAUFMAN, ED. (U.S. Navy, Naval Research Laboratory, Washington, DC), J. J. F. LIU, ED., F. R. HOOTS, ED. (USAF, Space Command, Peterson AFB, CO), and R. A. CALICO, ED. (USAF, Institute of Technology, Wright-Patterson AFB, OH) Conference sponsored by AAS and AIAA. San Diego, CA, Univelt, Inc. , 1986. Pt. 1, 785 p.; pt. 2, 745 p. For individual items see A86-43202 to A86-43253, A86-43255 to A86-43278.

Papers are presented on the age and stability of the solar system, orbit dynamics, transfer dynamics, attitude dynamics and control, optimal control, and control and identification of large space structures. Topics discussed include platform servicing, mission design, and control for the 1990's, platform configurations, mission designs and applications, and atmospheric density at satellite altitudes. Consideration is given to estimating the Extreme Ultraviolet Explorer sky survey exposure, a fiber-optic laser velocimeter for studying unsteady rotating flows in spinning rocket motors, nonlinear feedback control for remote orbital capture, orbit evolution and ion cloud releases, collision-induced and explosion-induced satellite breakups, and the transfer of asteroidal material to earth orbit by means of gravity assist trajectories. Emphasis is placed on celestial mechanics, geosynchronous satellite orbits, orbit determination and maneuvers, determination using TDRSS and the GPS, interplanetary exploration, and planetary exploration.

#### A86-43204

### ORBIT TRANSFER ERROR ANALYSIS FOR MULTIPLE FINITE PERIGEE BURN, ASCENT TRAJECTORIES

N. J. ADAMS (Charles Stark Draper Laboratory, Inc., Cambridge, MA) and R. G. MELTON (Pennsylvania State University, University Park) IN: Astrodynamics 1985; Proceedings of the Conference, Vail, CO, August 12-15, 1985. Part 1 . San Diego, CA, Univelt, Inc., 1986, p. 37-56. refs (AAS PAPER 85-302)

A new algorithm has been developed which calculates the propagation of guidance and navigation errors along a nominal trajectory involving finite-duration perigee burns. A numerical simulation of a transfer from low earth orbit to geostationary orbit (including finite-duration burns, coast phases, impulsive trim burns, and an impulsive plane change and circularization burn at apogee) serves to demonstrate the applications of the algorithm. This example also indicates the effects of mid-course corrections on the final errors at apogee.

### A86-43230

### EURECA CONCEPT AND ITS POTENTIAL EVOLUTION WITHIN THE SPACE STATION ERA

R. L. MORY (ESA, Paris, France) IN: Astrodynamics 1985; Proceedings of the Conference, Vail, CO, August 12-15, 1985. Part 1 . San Diego, CA, Univelt, Inc., 1986, p. 551-568. (AAS PAPER 85-398)

The development and project objectives of the EURECA concept are presented as well as the design approach, system capabilities and the first mission payload. An account of EURECA's adaptation for nonmicrogravity missions is given together with its role in the Space Station and Columbus scenarios. The EURECA platform will be deployed from the Shuttle cargo bay in-orbit, will operate in a free-flying mode for about six months, and will then be retrieved, returned to earth (by a subsequent Orbiter) and prepared for the next mission. It is noted that this carrier provides all essential services so that the development of a special satellite is not necessary. Moreover, as a potential autonomous payload carrier within the future Space Station, it could accommodate and operate space instruments either in the free-flying or docked modes. It is concluded that the role EURECA will play in the

Space Station scenario will be governed by the results of on-going studies and by negotiations with NASA.

K.K.

A86-43274\* Jet Propulsion Lab., California Inst. of Tech., Pasadena.

### GALILEO INFLIGHT FRICTION IDENTIFICATION FOR THE SCAN PLATFORM CONTROL LOOP

G. D. IANCULESCU and G. K. MAN (California Institute of Technology, Jet Propulsion Laboratory, Pasadena) IN: Astrodynamics 1985; Proceedings of the Conference, Vail, CO, August 12-15, 1985. Part 2 . San Diego, CA, Univelt, Inc., 1986, p. 1373-1391. NASA-supported research. refs (AAS PAPER 85-383)

Two types of friction identification algorithms (position-based and rate-based) are investigated in an attempt to better understand cone actuator inflight behavior in the Galileo scan platform pointing system. This investigation involves the measurement of the scan platform position (or rate) with respect to the stator following a platform slew maneuver. Inflight data collection by the spacecraft's sensors and subsequent ground-based data processing comprise the two major steps in the identification experiment. The proposed algorithms were capable of obtaining friction estimates within + or - 10 percent accuracy; hence, it is concluded that this inflight system identification technique can sufficiently tune the Galileo cone controller.

#### A86-43335

SPACE STATIONS: LEGAL ASPECTS OF SCIENTIFIC AND COMMERCIAL USE IN A FRAMEWORK OF TRANSATLANTIC COOPERATION; PROCEEDINGS OF THE INTERNATIONAL COLLOQUIUM, HAMBURG, WEST GERMANY, OCTOBER 3, 4, 1984

K.-H. BOECKSTIEGEL, ED. (Koeln, Universitaet, Cologne, West Germany) Colloquium organized by the Universitaet Koeln and DGLR; Supported by BMFT. Cologne, West Germany, Carl Heymanns Verlag (Schriften zum Luft- und Weltraumrecht. Volume 5), 1985, 262 p. In English and German. For individual items see A86-43336 to A86-43350.

Amerian experiences and perspectives regarding international coperation on a permanently manned space station are considered along with European experience and perspectives, the relevance of general multilateral space conventions to space stations, possible models for specific space agreements, agreements between States and with International Organizations, and contracts of and with private enterprises concerning the development, the construction, and the assembly of space vehicles. Attention is given to contractual and related agreements required for a satellite launch, applicable law and dispute settlement, forms of coverage and current market situation in the case of insurance, state supervision and registration, and legal questions which need to be addressed in the case of the Space Station. Other questions explored are related to legal aspects of stations in space, space stations and the law concerning intellectual property, aspects of law and practice in the U.S., and the experience of the European Space Agency. G.R.

### A86-43336

### EUROPEAN EXPERIENCE AND PERSPECTIVES [EUROPAEISCHE ERFAHRUNGEN UND PERSPEKTIVEN]

G. GREGER (BMFT, Bonn, West Germany) IN: Space stations: Legal aspects of scientific and commercial use in a framework of transatlantic cooperation; Proceedings of the International Colloquium, Hamburg, West Germany, October 3, 4, 1984. Cologne, West Germany, Carl Heymanns Verlag, 1985, p. 17-25. In German.

The history of the cooperation between the U.S. and Europe, in particular West Germany, with respect to space-related activities is examined, taking into account the beginning of this cooperation in 1964, the cooperative satellite projects Azur and Aeros, Spacelab, and the American offer regarding a participation of other countries in the Space Station project. The form and the results of this cooperation were generally satisfactory for European partners. However, there were and are also some difficulties. One

problem is related to the launching services provided by the U.S., giving attention to a complaint of an American aerospace company, claiming the violation of one of its patents. Difficulties can arise, in particular, in connection with the economic utilization of space-related activities and the competition of private firms. Attention is given to the European trend to autonomy, possible obstacles to technology transfer, problems related to U.S. laws, and the Space Station as a challenge.

#### A86-43701

# SPACECOM '85; SPACE AND RADIOCOMMUNICATIONS SYMPOSIUM, 5TH, PARIS AND LE BOURGET, FRANCE, JUNE 5-7, 1985, SPEAKERS' PAPERS

Symposium organized by ITU and Direction Generale des Telecommunications. Geneva, Switzerland, International Telecommunication Union, 1985, 232 p. In English and French. For individual items see A86-43702 to A86-43718.

Papers are presented on future space transportation systems, space platforms and launchers, telecommunications satellite designs, and the Olympus spacecraft. The application of direct television satellite broadcasting, advanced satellite communication systems, Telecom 1, and radio determination satellite service to aeronautical and land functions is discussed. Consideration given to orbit utilization by different services, the effect of earth stations on orbit utilization, and access for satellites of the fixed-satellite service to orbit and spectrum. Topics related to technology transfer and training, the cost and benefits of international space meteorology programs, the use of the global distress system to provide for sea safety, remote sensing, and collaboration and cooperation between governments and industry on a regional level are examined.

#### A86-44326

### **SPACE SAFETY AND RESCUE 1984-1985**

G. W. HEATH, ED. (SAR-assist, Inc., Greenwich, CT) San Diego, CA, Univelt, Inc. (Science and Technology Series. Volume 64), 1986, 400 p. For individual items see A86-44327 to A86-44333.

The present conference on spacecraft crew safety and rescue technologies and operations considers safety aspects of Space Shuttle ground processing, the Inmarsat and COSPAS/SARSAT emergency location satellite systems, emergency location and rescue communications using Geosat, the use of the Manned Maneuvering Unit for on-orbit rescue operations, NASA Space Station safety design and operational considerations, and the medico-legal implications of space station operation. Also discussed are the operational and environmental aspects of EPIRBS, mobile satellites for safety and disaster response, Inmarsat's role in the Future Global Maritime Distress and Safety System, and test results of the L-band satellite's EPIRB system.

### O.C.

### A86-44526

## SPACE - TECHNOLOGY AND OPPORTUNITY; PROCEEDINGS OF THE CONFERENCE, GENEVA, SWITZERLAND, MAY 28-30, 1985

Pinner, England, Online Publications, 1985, 356 p. For individual items see A86-44527 to A86-44551.

The technologies, organizations, hardware and plans for the commercialization of space activities in the near future are detailed. Financing schemes for manufacturing, leasing, sharing, or owning all or part of a spacecraft or a potential space-based industrial process are delineated, along with the problems facing the space insurance business. Although emphasis is placed on ESA and other European programs, the NASA Manned Space Station plays a pivotal role in the space development plans of most western nations, experimenters, and corporations. Attention is also devoted to unmanned platforms, their potential commercial applications, and to the necessary hardware infrastructure to support their operations. The capabilities of the Ariane 5 launch vehicle, the Hermes space plane, and a series of Chinese launch vehicles are described. Comparisons are made of the economics of various types of partially and fully reusable launch vehicles with diverse

payload capabilities, of which the STS has the largest capacity.

#### A86-45626

# COLUMBUS I; PROCEEDINGS OF THE FIRST COLUMBUS WORKSHOP UTILIZATION ASPECTS, CAPRI, ITALY, JUNE 17-21, 1985

Earth-Oriented Applications of Space Technology (ISSN 0277-4488), vol. 6, no. 1, 1986, 156 p. For individual items see A86-45627 to A86-45651.

The directions being taken in the development of the European Columbus pressurized module for the NASA Manned Space Station (MSS) are explored. Attention is given to the distribution of work among the participating nations on the basis of funding contributions, and to previous space research by the same countries, particularly in the Spacelab missions. The Phase B studies will lead to a final definition of the module design, its interfaces with the rest of the MSS, the instrumental and experimental payloads, and avenues for future expansion. ESA plans for a parallel development of an autonomous capability, including another pressurized module, the Hermes space plane, an unmanned service vehicle and a data relay satellite, are described. Details of the experimental goals and hardware prototypes for future experiments in fluid physics, biology, materials processing, and tethered satellite applications are presented. Finally, possible configurations of the polar and co-orbiting unmanned platform elements of the MSS program are discussed.

#### M.S.K.

#### A86-46808

# DISTRIBUTED PARAMETER SYSTEMS; PROCEEDINGS OF THE SECOND INTERNATIONAL CONFERENCE ON CONTROL THEORY FOR DISTRIBUTED PARAMETER SYSTEMS AND APPLICATIONS, VORAU, AUSTRIA, JULY 9-14, 1984

F. KAPPEL, ED., W. SCHAPPACHER, ED. (Graz, Universitaet, Austria), and K. KUNISCH, ED. (Graz, Technische Universitaet, Austria) Conference sponsored by BMFWF. Berlin and New York, Springer-Verlag (Lecture Notes in Control and Information Sciences, Volume 75), 1985, 470 p. For individual items see A86-46809 to A86-46816.

Papers are presented on a variational approach to parameter estimation; fixed point methods in nonlinear control; an initial value control problem for Burgers' equation; control of retarded Lienard equations: the identification of a spatially varying coefficient in a parabolic partial differential equation; disturbance decoupling for distributed systems; the Riccati equation with unbounded coefficients; shape optimal designs for communications satellites; and distributed parameters in porous media flow. Topics discussed include the maximum principle for nonlinear, nonconvex systems and of distributed parameter systems with time lags; the optimal of non-well-posed systems; the Legendre-Tau control approximation for functional differential equations; time-minimal control problems; the approximation of Riccati equations corresponding to hyperbolic boundary control problems; an interconnected distributed parameter system; the tandem connection of systems with delays; distributed vibratory systems; and an infinite dimensional system with unbounded control and observation. Consideration is given to coefficient identification for a parabolic problem, theorems for a stochastic system with Poisson jumps; the differential stability of control-constrained optimal control problem; the stability properties of a hyperbolic damped wave equation; continuous time programming without differentiability; and shape stabilization of flexible structures.

A86-46851\* Louisiana State Univ., Baton Rouge.

WORKSHOP ON COSMIC RAY AND HIGH ENERGY GAMMA RAY EXPERIMENTS FOR THE SPACE STATION ERA, LOUISIANA STATE UNIVERSITY, BATON ROUGE, OCTOBER 17-20, 1984, PROCEEDINGS

W. V. JONES, ED. and J. P. WEFEL, ED. (Louisiana State University, Baton Rouge) Workshop sponsored by the Louisiana State University, Martin Marietta Corp., NASA, and NSF. Baton Rouge, LA, Louisiana State University, 1985, 575 p. For individual items see A86-46852 to A86-46899.

The potential of the Space Station as a platform for cosmic-ray and high-energy gamma-ray astronomy is discussed in reviews, reports, and specific proposals. Topics examined include antiparticles and electrons, science facilities and new technology, high-energy nuclear interactions, nuclear composition and energy spectra, Space Shuttle experiments, Space Station facilities and detectors, high-energy gamma rays, and gamma-ray facilities and techniques. Consideration is given to universal-baryon-symmetry testing on the scale of galactic clusters, particle studies in a high-inclination orbit, balloon-borne emulsion-chamber results on ultrarelativistic nucleus-nucleus interactions, ionization states of low-energy cosmic rays, a large gamma-ray telescope for point-source studies above 1 GeV, and the possible existence of stable quark matter.

### A86-46855

### EXTERNAL TANK/AFT CARGO CARRIER ON ORBIT APPLICATIONS

T. MOBLEY and P. MITCHELL (Martin Marietta Corp., New Orleans, LA) IN: Workshop on Cosmic Ray and High Energy Gamma Ray Experiments for the Space Station Era, Baton Rouge, LA, October 17-20, 1984, Proceedings . Baton Rouge, LA, Louisiana State University, 1985, p. 83-92.

The use of the Space Shuttle external tank (ET) and aft cargo carrier (ACC) as orbital-platform structures is proposed. The ET and ACC are described; the relatively low cost of orbiting the ET rather than discarding it is indicated; and a basic orbital-platform design using the ET as strongback for payloads and an ACC module to provide utilities is presented. Consideration is given to a large-area gamma-ray telescope of gas-Cerenkov type (installed in the ET on orbit by EVA) and a solar furnace capable of melting the ET for use as an on-orbit materials resource. Photographs, drawings, diagrams, and graphs are provided.

### A86-46942#

### ZERO-G SIMULATION VERIFIES EVA SERVICING OF SPACE STATION MODULES

B. N. GRIFFIN (Boeing Aerospace Co., Huntsville, AL) AIAA, Space Station in the Twenty-first Century, Meeting, Reno, NV, Sept. 3-5, 1986. 6 p.

(AIAA PAPER 86-2312)

The Space Station accommodations required for on orbit zero-g maintenance and repair were evaluated during two months of neutral buoyancy testing. Boeing, in a joint effort with NASA, used Shuttle-type pressure suits and the simulated weightlessness provided by neutral buoyancy to assess four areas of hardware and operations. These included: (1) Space Station System Architecture; (2) Common Module Exterior; (3) Common Module Interior; and (4) Voice-Activated Systems. Specifically, the tests focused on servicing debris shield/body-mounted radiator panels, replacement of thermal blankets or Multi-Layer insulation and repair techniques for debris damage. Design engineers and astronauts participated as pressure-suited test subjects in evaluation of a broad range of concept options. The significant findings for these tests are: (1) the astronaut positioning arm is one of the most useful tools for Space Station EVA operations; (2) the minimum separation between modules should be 78 inches; (3) axial debris panels were preferred over circumferential; (4) on-orbit repair techniques for debris-damaged modules were effective; and (5) voice-activated systems are ideal for EVA. Improved suit communications, however, are required for implementation.

**Author** 

#### A86-47292

INTERNATIONAL AEROSPACE AND GROUND CONFERENCE ON LIGHTNING AND STATIC ELECTRICITY, 10TH, AND CONGRES INTERNATIONAL AERONAUTIQUE, 17TH, PARIS, FRANCE, JUNE 10-13, 1985, PROCEEDINGS

Conference and Congress organized by the Association Aeronautique et Astronautique de France; Sponsored by the Delegation Generale pour l'Armement, CNES, U.S. Army, et al. Les Ulis, France, Les Editions de Physique, 1985, 527 p. For individual items see A86-47293 to A86-47338.

The conference presents papers on statistical data and standards, coupling and indirect effects, meteorology and thunderstorm studies, lightning simulators, fuel ignition hazards, the phenomenology and characterization of lightning, susceptibility and protection of avionics, ground systems protection, lightning locators, aircraft systems protection, structures and materials, electrostatics, and spacecraft protection against static electricity. Particular attention is given to a comparison of published HEMP and natural lightning on the surface of an aircraft, electromagnetic interaction of external impulse fields with aircraft, of thunderstorm currents and lightning charges at the NASA Kennedy Space Center, the design of a fast risetime lightning generator, lightning simulation tests in FAA CV-580 lightning research aircraft, and the energy requirements of an aircraft triggered discharge. Papers are also presented on aircraft lightning attachment at low altitudes, a new form of transient suppressor, a proving ground for lightning research, and a spacecraft materials test in a continuous, broad energy-spectrum electron beam.

#### A86-47401

### GUIDANCE, NAVIGATION AND CONTROL CONFERENCE, WILLIAMSBURG, VA, AUGUST 18-20, 1986, TECHNICAL PAPERS

Conference sponsored by AIAA. New York, American Institute of Aeronautics and Astronautics, 1986, 983 p. For individual items see A86-47402 to A86-47509.

Recent developments in navigation, guidance, and control technology are discussed in reviews and reports, with an emphasis on aeronautical and space applications. Topics examined include flight-management systems for commercial jets, nonlinear adaptive control of an elastic robotic arm, the Space Telescope precision-pointing control system, spin-axis controllers for GEO satellites, dynamics and control of slew maneuvers of a large flexible spacecraft, and multicriterion approaches to optimization of linear regulators. Consideration is given to the effect of time delay on flying qualities, laser feedback controls for passive ring-laser gyros, eigensystem synthesis for active flutter suppression on an oblique-wing aircraft, terminal control factors for the carrier landing task, and a linear-quadratic guidance law for solid-fuel space-based interceptors.

### A86-47648#

# THE U.S. CIVIL SPACE PROGRAM: A REVIEW OF THE MAJOR ISSUES REPORT OF AN AIAA WORKSHOP, ALEXANDRIA, VA, JULY 22, 23, 1986

New York, American Institute of Aeronautics and Astronautics, 1986, 85 p. refs

Urgent and long-term issues affecting the U.S. civil space program are defined and recommendations are made. These issues include: (1) access to space (i.e., Shuttle redesign and requalification, launch and spacecraft insurance, and new launcher development); (2) space program management (ie., budget rationale and implementation, NASA's relation to other agencies, and military-civil interaction); (3) international involvement (ie., interactional civil space leadership, international cooperation and competition and international space year 1992); and (4) human motivations, resources and perceptions. It is noted that U.S. leadership in space can be restored only by vigorous action backed by firm commitments. The first requirement is a unified national policy which sets along terms objectives, and the second is a civil space budget which is approximately double what it is at the present time.

### ASTRODYNAMICS CONFERENCE, WILLIAMSBURG, VA. AUGUST 18-20, 1986, TECHNICAL PAPERS

Conference sponsored by AIAA and AAS. New York, American Institute of Aeronautics and Astronautics, 1986, 413 p. For individual items see A86-47902 to A86-47944.

Various papers on satellite and planetary mission dynamics are presented. Individual topics discussed include: orbital motion in the frequency domain, the Galileo orbital tour for the 1986 launch opportunity, circulating transportation orbits between earth and Mars, optimum burn scheduling for low-thrust orbital transfers, comparison of nonlinear filters for orbit determination, common period four-satellite continuous global coverage, motion of a drag-free experiment on the Space Station, and engineering improvements, sequencing and orbital determination for Voyager 2 Uranus encounter. Also considered are: approach strategy for rendezvous with Comet Tempel 2, maneuver strategies for Magellan Mission, Jupiter Polar Orbiter Mission concepts, modelling and simulation of Spacecraft Solar Array deployment, sensitivity analysis for lunar trajectories, maximum likelihood estimation for orbit determination, adaptive estimation for an accelerating spacecraft, Slinger in-orbit booster facility, simulation of satellite breakups, missile launch windows of avoiding collisions with satellites, linear-quadratic stationkeeping for the STS Orbiter.

C.D.

A86-47931\*# National Aeronautics and Space Administration. Goddard Space Flight Center, Greenbelt, Md.

### THE SLINGER - AN IN-ORBIT BOOSTER FACILITY

R. M. MULLER (NASA, Goddard Space Flight Center, Greenbelt,
 MD) IN: Astrodynamics Conference, Williamsburg, VA, August
 18-20, 1986, Technical Papers . New York, American Institute of Aeronautics and Astronautics, 1986, p. 298-302.
 (AIAA PAPER 86-2175)

The Slinger, a permanent facility that can be built and stationed in a low earth orbit and can reduce the cost of transporting satellites into geostationary orbit by a factor of three, is examined. The Slinger is described, giving its size, mass, capacity, and the construction of its tethers. Techniques for accelerating the tethers are discussed. The operation of the Slinger is examined, including its launching of a payload into geostationary transfer orbit (GTO) and its return to lower orbit. The Slinger's cycle time, its handling of lighter GTO payloads, and the effects of orbital precession and drag are briefly discussed. A possible reusable second stage based at the Slinger is discussed, and missions involving higher velocity and heavier payloads that can be helped by the Slinger are briefly considered along with the use of the Slinger to provide astronauts with 1 g and the use of a Slinger on the moon.

A86-49597\*# Boeing Aerospace Co., Seattle, Wash.

A STEERABLE RADIATOR FOR SPACECRAFT APPLICATION B. L. HEIZER, S. D. GOO, G. D. RHODES, D. W. THORESON (Boeing Aerospace Co., Seattle, WA), and R. C. PARISH (NASA, Johnson Space Center, Houston, TX) AIAA and ASME, Joint Thermophysics and Heat Transfer Conference, 4th, Boston, MA, June 2-4, 1986. 7 p.

(Contract NAS9-17310)

(AIAA PAPER 86-1298)

Future large space structures such as the Space Station will have high dissipation and long life requirements which dictate the requirements for steerable radiators. Several rotary coupling concepts were considered to accomplish heat transport across the steerable radiator system's rotating interface. Rotary fluid couplings were chosen over rotary contact couplings or flexible lines because of low temperature gradients and operational flexibility. A rotary fluid coupling has been designed for use on initial operating capability (IOC) and growth Space Station. Its internal seals have been demonstrated to a 10 year life with minimal (0.055 lbm NH3/year) leakage between internal passages. Materials compatibility tests have been conducted to demonstrate compatibility with ammonia. A seal leakage management system has been designed to: (1) monitor pressures between the internal

seals, (2) remove leakage, and (3) store the leakage fluid in a reservoir. Author

#### A86-50334

TOWARDS COLUMBUS AND SPACE STATION; PROCEEDINGS OF THE INTERNATIONAL SYMPOSIUM, BONN, WEST GERMANY, OCTOBER 2-4, 1985

Symposium organized by DGLR; Sponsored by AAS, AIAA, BMFT, et al. Bonn, Deutsche Gesellschaft fuer Luft- und Raumfahrt, 1985, 384 p. For individual items see A86-50335 to A86-50340. (DGLR BERICHT 85-03)

The progress made in ESA design and other work on the development of the Columbus segment and other ESA contributions to the NASA Space Station project as of October 1985 is summarized. The discussions are performed from technology synthesis, utilization, program and schedule, and user requirements points of view. Design decisions and technological developments necessary to realize the attached Columbus module and the associated free-flying platforms, either co- or polar-orbiting, are delineated. Attention is given to power system, data management system and other hardware systems which have been selected for Columbus, along with possible evolutions to meet future Space Station or autonomous European space station requirements. Finally, design schedules and project milestones which have been or must still be met are described.

N86-24217\*# Essex Corp., Huntsville, Ala. Space Systems Group.

# THE SYSTEM INTEGRATION AND VERIFICATION TESTING OF AN ORBITAL MANEUVERING VEHICLE FOR AN AIR BEARING FLOOR Final Report

N. L. SHIELDS, JR., M. F. MARTIN, K. R. PAULUKAITIS, J. W. HASLAM, JR., and D. E. HENDERSON 22 Feb. 1986 125 p refs

(Contract NAS8-35636)

(NASA-CR-178350; NÁS 1.26:178350; H-86-02) Avail: NTIS HC A06/MF A01 CSCL 05H

The teleoperator and Robotics Evaluation Facility (TOREF) is composed of a 4,000 square foot precision air bearing floor, the Teleoperator Motion Base, the Target Motion and Support Simulator, the mock-ups of the Hubble Space Telescope, Multi-mission Modular Spacecraft, and the Orbital Maneuvering Vehicle (OMV). The TOREF and its general capabilities to support the OMV and other remote system simulations; the facility operating procedures and requirements; and the results of generic OMV investigations are summarized.

N86-24536\*# Alabama Univ., Birmingham. Dept. of Computer and Information Science.

### MACHINE VISION AND THE OMV

M. A. MCANULTY /n NASA. Marshall Space Flight Center Research Reports: 1985 NASA/ASEE Summer Faculty Fellowship Program 24 p Jan. 1986 refs

Avail: NTIS HC A99/MF E04 CSCL 09B

The orbital Maneuvering Vehicle (OMV) is intended to close with orbiting targets for relocation or servicing. It will be controlled via video signals and thruster activation based upon Earth or space station directives. A human operator is squarely in the middle of the control loop for close work. Without directly addressing future, more autonomous versions of a remote servicer, several techniques that will doubtless be important in a future increase of autonomy also have some direct application to the current situation, particularly in the area of image enhancement and predictive analysis. Several techniques are presentet, and some few have been implemented, which support a machine vision capability proposed to be adequate for detection, recognition, and tracking. Once feasibly implemented, they must then be further modified to operate together in real time. This may be achieved by two courses, the use of an array processor and some initial steps toward data reduction. The methodology or adapting to a vector architecture is discussed in preliminary form, and a highly tentative rationale for data reduction at the front end is also discussed. As a by-product, a working implementation of the most advanced graphic display technique, ray-casting, is described. Author

N86-24537\*# Berry Coll., Mount Berry, Ga. Dept. of Physics.

A STUDY OF 35-GHZ RADAR-ASSISTED ORBITAL
MANEUVERING VEHICLE/SPACE TELESCOPE DOCKING

M. W. MCDONALD /n NASA. Marshall Space Flight Center Research Reports: 1985 NASA/ASEE Summer Faculty Fellowship Program 31 p Jan. 1986 refs

Avail: NTIS HC A99/MF E04 CSCL 22A

An experiment was conducted to study the effects of measuring range and range rate information from a complex radar target (a one-third scale model of the Edwin P. Hubble Space Telescope). The radar ranging system was a 35-GHz frequency-modulated continuous wave unit developed in the Communication Systems Branch of the Information and Electronic Systems Laboratory at Marshall Space Flight Center. Measurements were made over radar-to-target distances of 5 meters to 15 meters to simulate the close distance realized in the final stages of space vehicle docking. The Space Telescope model target was driven by an antenna positioner through a range of azimuth and elevation (pitch) angles to present a variety of visual aspects of the aft end to the radar. Measurements were obtained with and without a cube corner reflector mounted in the center of the aft end of the model. The results indicate that range and range rate measurements are performed significantly more accurately with the cooperative radar reflector affixed. The results further reveal that range rate (velocity) can be measured accurately enough to support the required soft docking with the Space Telescope.

N86-24711 National Aeronautics and Space Administration, Washington, D.C.

SPACE STATION SYSTEMS: A BIBLIOGRAPHY WITH INDEXES (SUPPLEMENT 1)

Mar. 1986 158 p

(NASA-SP-7056(01); NAS 1.21:7056(01)) Avail: NTIS HC A07 CSCL 22A

This bibliography lists 624 reports, articles, and other documents introduced into the NASA scientic and technical information system between January 1, 1985 and June 30, 1985. Its purpose is to provide helpful information to the researcher, manager, and designer in technology development and mission design according to system, interactive analysis and design, structural and thermal analysis and design, structural concepts and control systems, electronics, advanced materials, assembly concepts, propulsion, and solar power satellite systems. The coverage includes documents that define major systems and subsystems, servicing and support requirements, procedures and operations, and missions for the current and future Space Station.

N86-24736\*# National Aeronautics and Space Administration, Washington, D.C.

SPACECRAFT ARCHITECTURE

V. V. ZEFELD Mar. 1986 9 p refs Transl. into ENGLISH from Arkhitektura Kosmicheskikh Obyektov (Moscow, USSR), Nauka, 1977 p 187-191 Original language doc. was announced in IAA as A78-13592 Transl. by SCITRAN, Inc., Santa Barbara, Calif.

(Contract NASW-4004)

(NASA-TM-77908; NAŚ 1.15:77908) Avail: NTIS HC A02/MF A01 CSCL 22B

Three requirements for a spacecraft interior are considered. Adequate motor activity in the anatomical-physiological sense results from attention to the anthropometric characteristics of humans. Analysis of work requirements is a prerequisite for the planning of adequate performance space. The requirements for cognitive activity are also elucidated. The importance of a well-designed interior during a long space flight is discussed.

Author

N86-24741# Air Force Inst. of Tech., Wright-Patterson AFB, Ohio. School of Engineering.

A PROPOSED DESIGN FOR AN INTERIM SPACE RESCUE FERRY VEHICLE M.S. Thesis

J. D. HALSELL, JR. Dec. 1985 211 p refs

(AD-A164039; AFIT/GSO/ENY/85D-2) Avail: NTIS HC A10/MF A01 CSCL 22B

This investigation proposed a method of connecting the Personnel Rescue Enclosure to the Manned Maneuvering Unit using a modified flight-qualified hardware item the Apogee Kick Motor Capture Device. The resulting configuration is an immediately available but non-optimum vehicle for transferring stranded astronauts housed within Personnel Rescue Enclosures from a rotating stranded spacecraft to a nearby rescue spacecraft. The flying qualities of this Interim Rescue Vehicle (IRV) were simulated using an existing NASA spaceflight simulation computer program. The results showed that the Manned Maneuvering Unit's control system was capable of limiting uncommanded IRV rotations to within the control law deadbands during all simulated maneuvers and in all control modes except during transverse translations in the backup control mode. The IRV's increased mass and increased center-of-mass/center-of-thrust offset significantly degraded acceleration capability and specific propellant consumption. Plume impingement however was found to be of minor importance. The satellite stabilization mode was found to have significant rotational-to-translational coupling which made it undesirable for IRV use. Finally procedures were outlined for using the IRV in an orbiter-to-orbiter rescue scenario. Author (GRA)

**N86-25791\*** National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

LATCHING MECHANISM FOR DEPLOYABLE/RE-STOWABLE COLUMNS USEFUL IN SATELLITE CONSTRUCTION Patent

E. L. AHL, JR., inventor (to NASA) 6 May 1986 11 p Filed May 1984 Supersedes N84-25063 Sponsored by NASA (NASA-CASE-LAR-13169-1; US-PATENT-4,587,526; US-PATENT-APPL-SN-606431; US-PATENT-CLASS-343-883;

US-PATENT-CLASS-343-DIG.2; US-PATENT-CLASS-52-110)
Avail: US Patent and Trademark Office CSCL 13I

A column longeron latch assembly provides the securing mechanism for the deployable, telescoping column of a hoop/column antenna. The column is an open lattice structure with three longerons disposed 120 deg apart as the principle load bearing member. The column is deployed from a pair of eleven nested bays disposed on opposite sides of a center section under the influence of a motor-cable-pulley system. The longeron latch is a four bar linkage mechanism using the over-center principle for automatically locking the longeron sections into position during deployment. The latch is unlocked when the antenna is to be restowed. A spring pack disposed in the end of each longeron serves to absorb stress forces on the deployed column through the cam head piston and abutting latch from an adjacent longeron.

Official Gazette of the U.S. Patent and Trademark Office

**N86-25794\***# National Aeronautics and Space Administration, Washington, D.C.

PROCEEDINGS OF A WORKSHOP ON APPLICATIONS OF TETHERS IN SPACE: EXECUTIVE SUMMARY

W. A. BARACAT, Compiler 1986 43 p Proc. held in Venice, Italy, 15-17 Oct. 1985

(Contract NASW-3921)

(NASA-CP-2422; NAS 1.55:2422) Avail: NTIS HC A03/MF A01 CSCL 13I

The workshop was attended by persons from government, industry, and academic institutions to discuss the rapidly evolving area of tether applications in space. Many new applications were presented at the workshop, and existing applications were revised, refined, and prioritized as to which applications should be implemented and when. The workshop concluded with summaries developed individually and jointly by each of the applications panels.

N86-26650\*# National Aeronautics and Space Administration. Ames Research Center, Moffett Field, Calif.

INDEX AEROSPACE **MECHANISMS SYMPOSIA PROCEEDINGS 1-19** 

A. RINALDO (Lockheed Missiles and Space Co., Sunnyvale, Calif.) and J. WILSON Apr. 1986 281 p

(NASA-TM-88205; A-86076; NAS 1.15:88205) Avail: NTIS HC A13/MF A01 CSCL 131

This index, organized in five sections (by symposium, by title, by author, by subject, and by project), brings together information on the first 19 Aerospace Mechanisms symposia. Key words are included, cross-referencing all the symposia, and the eighteenth and nineteenth symposia are cross-indexed by project. The Aerospace Mechanisms symposia are devoted to discussions of design, fabrication, test, and operational use of aerospace mechanisms; this is the first index that compiles information on symposia held from 1966 through 1985.

N86-27300\*# Ohio State Univ., Columbus. Dept. of Aeronautical and Astronautical Eng.

SPACE MANUFACTURING UTILIZING THE DIRECTIONAL **ELECTROSTATIC ACCRETION PROCESS** 

A. MORTENSEN In NASA. Goddard Space Flight Center The 1985 Get Away Special Experimenter's Symposium p 19-24 May

Avail: NTIS HC A13/MF A01 CSCL 22A

The Directional Electrostatic Accretion Process (DEAP) is described with respect to both the physical process and its application to manufacturing in space. This high precision portable manufacturing method will revolutionize current practices in manufacturing and repair of spacecraft and space structures. The cost effectiveness of this process will be invaluable to future space manufacturing projects. Author

## N86-27353# European Space Agency, Paris (France). SECOND EUROPEAN SPACE MECHANISMS AND TRIBOLOGY **SYMPOSIUM**

T. D. GUYENNE, comp. and J. HUNT, comp. Dec. 1985 327 p In ENGLISH and FRENCH Symposium held in Schloss Meersburg, West Germany, 9-11 Oct. 1985; sponsored by ESA, Dornier-Werke GmbH, and DFVLR

(ESA-SP-231; ETN-86-96851) Avail: NTIS HC A15/MF A01; ESA, Paris FF 150 or \$18 Member States, AU, CN, NO (+20% others)

Spacecraft mechanisms; motors and actuators; tribology; space stations; and mechanism analysis and testing were discussed.

**ESA** 

N86-27356# Dornier-Werke G.m.b.H., Friedrichshafen (West Germany).

FEATURES OF THE SOLAR ARRAY DRIVE MECHANISM FOR THE SPACE TELESCOPE

R. G. HOSTEMKAMP In ESA Second European and Space Mechanisms and Tribology Symposium p 13-17 Dec. 1985 Avail: NTIS HC A15/MF A01; ESA, Paris FF 150 or \$18 Member States, AU, CN, NO (+20% others)

Spacecraft mechanisms; motors and actuators; tribology; space stations; and mechanism analysis and testing were discussed.

The Solar Array Drive Mechanism for the Space Telescope is described. Power and signal transfer is achieved by a flexible wire harness for which the chosen solution, consisting of 168 standard wires, is described. The torque performance data of the harness over its temperature range is presented. The off load system which protects the bearings from the launch loads is released by a trigger made from Nitinol, a memory alloy. The benefits of memory alloy and the caveats for the design are discussed. The design of the off load is outlined and test experience reported.

N86-27357# British Aerospace Dynamics Group, Stevenage (England). Space and Communications Div.

HISTORICAL DEVELOPMENT OF SOLAR ARRAY DRIVE MECHANISMS BY BRITISH AEROSPACE

I. D. HENDERSON In ESA Second European Space Mechanisms and Tribology Symposium p 19-24 Dec. 1985

Avail: NTIS HC A15/MF A01; ESA, Paris FF 150 or \$18 Member States, AU, CN, NO (+20% others)

Solar array drive mechanisms are described. Design and technical features of the Bearing and Power Transfer Assembly and the solar array drive mechanisms for Olympus and Eurostar satellites are outlined. Arrays for large space platforms are considered.

N86-27382# European Space Agency. European Space Research and Technology Center, ESTEC, (Netherlands).

## DEVELOPMENT AND TESTING OF A DUAL-WOUND DC MOTOR **GEARHEAD**

B. W. HENSON and J. C. ANDERSON (European Space Tribology In ESA Second European Space Lab., Risley (England).) Mechanisms and Tribology Symposium p 193-200 Dec. 1985 Avail: NTIS HC A15/MF A01; ESA, Paris FF 150 or \$18 Member States, AU, CN, NO (+20% others)

The development and testing of a dual-wound dc motor and integral gearhead are described. Extensive testing proves its ability to operate in vacuum over the temperature range -45 to +85C with a life greater than 250 hours. The unit has a rated torque output of 1.5 Nm with a nominal output speed of 30 rpm and could be used as a prime mover in many medium speed space applications. Its high overall efficiency means that it can be backdriven.

N86-27385# Deutsche Forschungs- und Versuchsanstalt fuer Luft- und Raumfahrt, Oberpfaffenhofen (West Germany). INTEGRATED SENSOR AND ACTUATOR SYSTEM FOR

FLEXIBLE SPACE STRUCTURE EXPERIMENTS

T. LANGE and H. HOLZACH In ESA Second European Space Mechanisms and Tribology Symposium p 217-220 Dec. 1985 Avail: NTIS HC A15/MF A01; ESA, Paris FF 150 or \$18 Member States, AU, CN, NO (+20% others)

A high accuracy sensor and actuator system for laboratory experiments on flexible structure control, comprising an optical sensor and a magnetic actuator, is presented. It features high linearity and large bandwidth. A special wiring profile was realized for the actuator coil to generate a constant magnetic driving field in a defined working space. This design prevents force variations as a result of relative displacement. The performance is confirmed by tests and experiments.

## N86-27391# European Space Tribology Lab., Risley (England). THERMAL VACUUM INCLINOMETRY: A TEST FACILITY FOR ANTENNA POINTING MECHANISMS

E. W. ROBERTS In ESA Second European Space Mechanisms and Tribology Symposium p 261-265 Dec. 1985

Avail: NTIS HC A15/MF A01; ESA, Paris FF 150 or \$18 Member

States, AU, CN, NO (+20% others)

The development of a measurement and test facility for space antenna pointing mechanisms is described. The system allows measurements of high accuracy and resolution to be made on mechanisms operating under ambient or thermal vacuum conditions (-40 C to +80 C). The basis of the facility is a high precision tilt sensor which can be used in high vacuum. Data acquisition from such sensors is by means of an LSI/11-23 based computer which also allows data processing and programmed control over mechanism movements. In static measurements the system displays high accuracy (+ or - 0.001 deg) high resolution (0.0004 deg) and good repeatability (0.0005 deg). Examples of tests made possible by this measuring system are presented.

N86-27394# Centre National d'Etudes Spatiales, Toulouse (France).

MECHANISMS DEVELOPED IN THE FRENCH SPACE INDUSTRY

R. SALOME and L. PETITJEAN In ESA Second European Space Mechanisms and Tribology Symposium p 283-288 Dec. 1985 Avail: NTIS HC A15/MF A01; ESA, Paris FF 150 or \$18 Member States, AU, CN, NO (+20% others)

Mechanisms developed for satellite projects such as SPOT, Giotto, TV.SAT, and TELEX-X are described. Solar Array Drives, antenna pointing mechanisms, and hinges for robot arms are presented.

N86-27397# European Space Agency. European Space Research and Technology Center, ESTEC, Noordwijk (Netherlands).

#### MECHANISMS DEVELOPMENT IN THE EŞA TECHNOLOGICAL RESEARCH PROGRAM

D. WYN-ROBERTS In ESA Second European Space Mechanisms and Tribology Symposium p 305-310 Dec. 1985

Avail: NTIS HC A15/MF A01; ESA, Paris FF 150 or \$18 Member

States, AU, CN, NO (+20% others)

Spacecraft components, control actuators, space operation mechanisms, instrument mechanisms, deployment mechanisms, and solar array mechanisms are described. Motors, wheels (including energy storage), docking and robotics mechanisms, and masts are discussed.

## N86-27525# Rome Air Development Center, Griffiss AFB, N.Y. PROCEEDINGS OF THE 1985 ANTENNA APPLICATIONS SYMPOSIUM, VOLUME 2

Dec. 1985 372 p Conference held in Monticello, III., 18-20 Sept. 1985

(AD-A165535; RADC-TR-85-242-VOL-2) Avail: NTIS HC A16/MF A01 CSCL 09E

The Proceedings of the 1985 Antenna Applications Symposium is a collection of state-of-the-art papers relating to phased array antennas, multibeam antennas, satellite antennas, microstrip antennas, reflector antennas, HF, VHF, UHF, and various other antennas.

N86-27644\*# National Aeronautics and Space Administration, Washington, D.C.

APPLICATIONS OF TETHERS IN SPACE: WORKSHOP PROCEEDINGS, VOLUME 2

W. A. BARACAT, comp. (General Research Corp., McLean, Va.) Jun. 1986 502 p Workshop held in Venice, Italy, 15-17 Oct. 1985; sponsored by NASA, the Italian National Space Plan and CNR

(Contract NASW-3921)

(NASA-CP-2422-VOL-2; NAS 1.55:2422-VOL-2) Avail: NTIS HC A23/MF A01 CSCL 13I

Topics addressed include: tethered orbital transfer vehicle operations, Centaur and Shuttle tether technology; tethered constellations, gravitational effects; Shuttle continuous open wind tunnel; optimal control laws, electrodynamic tether technology; and space station facilities.

## N86-27645\*# Naples Univ. (Italy). TETHERED CONSTELLATIONS, THEIR UTILIZATION AS MICROGRAVITY PLATFORMS AND RELEVANT FEATURES

L. G. NAPOLITANO and F. BEVILACQUA (Aeritalia S.p.A., Torino (Italy).) In NASA, Washington Applications of Tethers in Space: Workshop Proceedings, Volume 2 p 65-77 Jun. 1986 Previously announced in IAA as A85-13279

Avail: NTIS HC A23/MF A01 CSCL 13I

The gravitational, thermal, and dynamic docking effects on tethered platforms were studied. The near-earth environment has gravitational effects such a g-jitters and intermittencies, g-noise, and frequency and amplitude features which may influence life science, materials processing, and fluid processes research and commercial activities. Artificial gravity is produced by minute accelerations imparted by tethers. The magnitudes of gravitational forces produced by tethers 100 and 100,000 m long at various altitudes from 463 to 35,786 km are calculated. Thermal analyses were performed for stainless steel and Kevlar tethers, showing the steel tether could vary 300 m in length and the polyamide 25 m during one orbit. Finally, consideration given to docking with a tethered platform revealed that the center of mass could change, which would produce, however, negligible changes in orbit and therefore gravity. M.S.K. (IAA)

N86-27649\*# Naples Univ. (Italy). Istituto Aerodinamica U. Nobile.

#### TETHERED ELEVATOR: A UNIQUE OPPORTUNITY FOR SPACE **PROCESSING**

R. MONTI In NASA, Washington Applications of Tethers in Space: Workshop Proceedings, Vol. 2 p 137-147 Jun. 1986 Avail: NTIS HC A23/MF A01 CSCL 13I

The latest fluid dynamic and material science experiments in the microgravity environment have emphasized the importance of the residual gravity level and of the g-jitter on fluid physics phenomena. The tethered elevator presents the possibility of providing variable g-levels (both steady and g-jitter) around a very low steady g-level (that can be realized when the elevator is near the center of mass of the space station-tether complex). When positioning a variable periodic oscillation to the payload a clean g-jitter disturbance can be obtained that would not be otherwise obtainable by other systems. These two possibilities make the elevator a facility to help resolve a number of still open questions that are preventing wider utilization of the space environment in the microgravity area. BG

N86-27706\* National Aeronautics and Space Administration. Pasadena Office, Calif.

#### TELESCOPING **PROTECTIVE** SHIELD **FOR SOLAR CONCENTRATOR Patent**

M. J. ARGOUD (Jet Propulsion Lab., California Inst. of Tech., Pasadena), W. L. WALKER, and L. V. BUTLER, inventors (to 6 May 1986 7 p Filed 22 Feb. 1984 Supersedes N84-25164 (22 - 15, p 2361) Sponsored by NASA. Pasadena Office

(NASA-CASE-NPO-16236-1; US-PATENT-4,586,487;

US-PATENT-APPL-SN-582495; US-PATENT-CLASS-126-418; US-PATENT-CLASS-126-419; US-PATENT-CLASS-126-438)

An apparatus is described for use with a solar concentrator such as a parabolic dish which concentrates sunlight onto a small opening of a solar receiver, for protecting the receiver in the event of a system failure that could cause concentrated sunlight to damage the receiver. The protective apparatus includes a structure which can be moved to a stowed position where it does not block sunlight, to a deployed position. In this position, the structure forms a tube which substantially completely surrounds an axis connecting the receiver opening to the center of the concentrator at locations between the receiver and the concentrator.

Official Gazette of the U.S. Patent and Trademark Office

N86-28105\* National Aeronautics and Space Administration, Washington, D.C.

SPACE STATION SYSTEMS: A BIBLIOGRAPHY WITH INDEXES (SUPPLEMENT 2)

Jul. 1986 232 p

(NASA-SP-7056(02); NAS 1.21:7056(02)) Avail: NTIS HC A10 CSCL 22A

This bibliography lists 904 reports, articles and other documents introduced into the NASA scientific and technical information system between July 1, 1985 and December 31, 1985. Its purpose is to provide helpful information to the researcher, manager, and designer in technology development and mission design according to system, interactive analysis and design, structural and thermal analysis and design, structural concepts and control systems, electronics, advanced materials, assembly concepts, propulsion, and solar power satellite systems. The coverage includes documents that define major systems and subsystems, servicing and support requirements, procedures and operations, and missions for the current and future space station.

National Aeronautics and Space Administration, N86-28407\*# Washington, D.C.

APPLICATIONS OF TETHERS IN SPACE: WORKSHOP PROCEEDINGS, VOLUME 1

W. A. BARACAT, comp. (General Research Corp., McLean, Va.) Jun. 1986 585 p Workshop held in Venice, Italy, 15-17 Oct. 1985; sponsored by NASA, the Italian National Space Plan and

(Contract NASW-3921)

(NASA-CP-2422-VOL-1; NAS 1.55:2422-VOL-1) Avail: NTIS HC A25/MF A01 CSCL 13I

The complete documentation of the workshop including all addresses, panel reports, charts, and summaries are presented. This volume presents all the reports on the fundamentals of applications of tethers in space. These applications include electrodynamic interactions, transportation, gravity utilization, constellations, technology and test, and science applications.

### N86-28410\*# Energy Science Labs., Inc., San Diego, Calif. TETHER FUNDAMENTALS

J. A. CARROLL In NASA, Washington Applications of Tethers in Space: Workshop Proceedings, Volume 1 p 81-101 Avail: NTIS HC A25/MF A01 CSCL 131

Some fundamental aspects of tethers are presented and briefly discussed. The effects of gravity gradients, dumbbell libration in circular orbits, tether control strategies and impact hazards for tethers are among those fundamentals. Also considered are aerodynamic drag, constraints in momentum transfer applications and constraints with permanently deployed tethers. The theoretical feasibility of these concepts are reviewed.

N86-29888\*# National Aeronautics and Space Administration. John F. Kennedy Space Center, Cocoa Beach, Fla.

PROCEEDINGS OF THE 2ND ANNUAL CONFERENCE ON NASA/UNIVERSITY ADVANCED SPACE DESIGN PROGRAM

Jun. 1986 31 p Conference held at Cocoa Beach, Fla., 18-20 Jun. 1986

(Contract NGT21-002-080)

(NASA-TM-89399; NAS 1.15:89399) Avail: NTIS HC A03/MF A01 CSCL 22B

Topics discussed include: lunar transportation system, Mars rover, lunar fiberglass production, geosynchronous space stations, regenerative system for growing plants, lunar mining devices, lunar oxygen transporation system, mobile remote manipulator system, Mars exploration, launch/landing facility for a lunar base, and multi-megawatt nuclear power system.

N86-30135\*# Stanford Univ., Calif. Dept. of Aeronautics and Astronautics.

## A 3-COMPONENT LASER-DOPPLER VELOCIMETER DATA **ACQUISITION AND REDUCTION SYSTEM**

L. C. RODMAN, J. H. BELL, and R. D. MEHTA Aug. 1985

(Contract NCC2-294)

(NASA-CR-176929; NAS 1.26:176929; JIAA-TR-63) Avail: NTIS HC A05/MF A01 CSCL 20E

A laser doppler velocimeter capable of measuring all three components of velocity simultaneously in low-speed flows is described. All the mean velocities, Reynolds stresses, and higher-order products can be evaluated. The approach followed is to split one of the two colors used in a 2-D system, thus creating a third set of beams which is then focused in the flow from an off-axis direction. The third velocity component is computed from the known geometry of the system. The laser optical hardware and the data acquisition electronics are described in detail. In addition, full operating procedures and listings of the software (written in BASIC and ASSEMBLY languages) are also included. Some typical measurements obtained with this system in a vortex/mixing layer interaction are presented and compared directly to those obtained with a cross-wire system.

N86-30584\*# Lunar and Planetary Inst., Houston, Tex.
TRAJECTORY DETERMINATIONS AND COLLECTION OF MICROMETEOROIDS ON THE SPACE STATION. REPORT OF **WORKSHOP** ON MICROMETEORITE **CAPTURE EXPERIMENTS** 

F. HOERZ, ed. 1986 105 p refs Workshop held in Houston, Tex., 16-18 Dec. 1985 (Contract NASW-4066)

(NASA-CR-177303; NAS 1.26:177303; LPI-TR-86-05) Avail: NTIS HC A06/MF A01 CSCL 03B

Summaries of papers presented at the Workshop on Micrometeorite Capture Experiments are compiled. The goals of the workshop were to define the scientific objectives and the resulting performance requirements of a potential Space Station facility and to identify the major elements of a coherent development program that would generate the desired capabilities within the next decade. Specific topics include cosmic dust and space debris collection techniques, particle trajectory and source determination, and specimen analysis methods.

N86-30606\*# National Aeronautics and Space Administration. Langley Research Center, Hampton, Va.

CAPACITOR-TYPE MICROMETEOROID DETECTORS

J. J. WORTMAN (North Carolina State Univ., Raleigh.), D. P. GRIFFIS (North Carolina Univ., Chapel Hill.), S. R. BRYAN, and W. KINARD In Lunar and Planetary Inst. Trajectory Determinations and Collection of Micrometeoroids on the Space Station p 94-96 1986 refs

Avail: NTIS HC A06/MF A01 CSCL 03B

The metal oxide semiconductor (MOS) capacitor micrometeroid detector consists of a thin dielectric capacitor fabricated on a silicon wafer. In operation, the device is charged to a voltage level sufficiently near breakdown that micrometeoroid impacts will cause dielectric deformation or heating and subsequent arc-over at the point of impact. Each detector is capable of recording multiple impacts because of the self-healing characteristics of the device. Support instrumentation requirements consist of a voltage source and pulse counters that monitor the pulse of recharging current following every impact. An investigation has been conducted in which 0.5 to 5 micron diameter carbonized iron spheres traveling at velocities of 4 to 10 Km/sec were impacted on to detectors with either a dielectric thickness of 0.4 or 1.0 micron. This study demonstrated that an ion microprobe tuned to sufficiently high resolution can detect Fe remaining on the detector after the impact. Furthermore, it is also possible to resolve Fe ion images free of mass interferences from Si, for example, giving its spatial distribution after impact. Specifically this technique has shown that significant amounts of impacting particles remain in the crater and near it which can be analyzed for isotopic content. Further testing and calibration could lead to quantitive analysis. This study has shown that the capacitor type micrometeroid detector is capable of not only time and flux measurements but can also be used for isotopic analysis.

N86-30627# Deutsche Gesellschaft fuer Luft- und Raumfahrt, Bonn (West Germany).

INTERNATIONAL SYMPOSIUM **SECOND AEROELASTICITY AND STRUCTURAL DYNAMICS** 

1985 713 p Symposium held in Aachen, West Germany, 1-3 Apr. 1985; sponsored in cooperation with DFVLR, NLR and

(DGLR-85-02; ISBN-3-922010-28-8; ETN-86-97411) Avail: NTIS HC A99/MF E03

Unsteady aerodynamics and aeroelastic characteristics; active control technology; structural modeling and optimization; structural system identification; and structural dynamics design verification of space structures were discussed.

**ESA** 

N86-30758# European Space Agency, Paris (France).
PROCEEDINGS OF A WORKSHOP ON COMPOSITES DESIGN
FOR SPACE APPLICATIONS

W. R. BURKE, comp. Feb. 1986 375 p Workshop held in Noordwijk, Netherlands, 15-18 Oct. 1985 (ESA-SP-243; ISSN-0379-6566; ETN-86-97217) Avail: NTIS HC

(ESA-SP-243; ISSN-0379-6566; E1N-86-97217) Avail: NTIS HC A16/MF A01

The choice and characteristics of composite materials for space applications, calculation and design methods, and dimensional stability were some areas of discussion in this workshop. Also discussed was integrity control, Ariane applications of composites, load carrying structures in satellites, and satellite antenna and solar array applications.

**ESA** 

N86-31409\*# National Aeronautics and Space Administration. Lyndon B. Johnson Space Center, Houston, Tex.


NASA/AMERICAN SOCIETY FOR ENGINEERING EDUCATION (ASEE) SUMMER FACULTY FELLOWSHIP PROGRAM, 1985
R. G. CHILTON, ed. (Texas A&M Univ., College Station.) and C. E. WILLIAMS, ed. Jul. 1986 733 p Program held in Houston, Tex., 1985

(Contract NGT-44-001-800)

(NASA-CR-171931; NAS 1.26:171931) Avail: NTIS HC A99/MF E03 CSCL 05I

The 1985 NASA/ASEE Summer Faculty Fellowship Research Program was conducted by Texas A&M University and the Johnson Space Center. The ten week program was operated under the auspices of the American Society for Engineering Education (ASEE). The faculty fellows spent the time at JSC engaged in research projects commensurate with their interests and background and worked in collaboration with NASA/JSC colleagues. This document is a compilation of the final reports of their research during the summer of 1985.

## Typical Subject Index Listing



The subject heading is a key to the subject content of the document. The title is used to provide a description of the subject matter. When the title is insufficiently descriptive of the document content, the title extension is added, separated from the title by three hyphens. The (NASA or AIAA) accession number and the page number are included in each entry to assist the user in locating the abstract in the abstract section. If applicable, a report number is also included as an aid in identifying the document. Under any one subject heading, the accession numbers are arranged in sequence with the AIAA accession numbers appearing first.

## **ACCELERATION (PHYSICS)**

A proposed design for an interim space rescue ferry (AD-A1640391 p 101 N86-24741

## ACCUMULATORS

determinations Trajectory

micrometeoroids on the space station. Report of the Workshop on Micrometeorite Capture Experiments [NASA-CR-177303] p 104 N86-30584 The use of tethered satellites for the collection of cosmic

dust and the sampling of man made orbital debris far from the space station p 15 N86-30589

A new instrument to measure charged and neutral cometary dust particles at low and high impact velocities p 70 N86-30590

## **ACOUSTIC FATIGUE**

Nonlinear response - A time domain approach --- with applications to acoustic fatigue, spacecraft and composite

AIAA PAPER 86-19341 ACOUSTIC MICROSCOPES

p 52 A86-45423

p 75 N86-22624

Scanning laser acoustic microscopy applied to the evaluation of material interconnections

## **ACTIVE CONTROL**

Aspects of active isolation as applied to a satellite structure with shape precision payload

p 37 A86-33255 Microprocessor controlled force actuator [AIAA PAPER 86-0916] p 40 A86-38827

Experiments in optimal control of a flexible arm with passive damping p 82 A86-39503 Active structural control with decentralized and colocated control units p 46 A86-39506 A slewing control experiment for flexible structures

p 47 A86-39509 Control of dynamic response of a continuum model of a large space structure p 52 A86-43772

Traveling wave control for large spacecraft structures p 53 A86-46463

Control-motivated dynamic tailoring of truss-work structures

[AIAA PAPER 86-2190] p 56 A86-47471 Issues of order reduction in active control system design

[AIAA PAPER 86-2138]

p 57 A86-47515

Theoretical and experimental investigations of sensor location for optimal aeroelastic system state estimation [NASA-CR-177115] p 62 N86-29272

ACOSS eleven (Active Control Of Space Structures) s p 62 N86-29890 [AD-A1658641

Aspects of active isolation as applied to a satellite structure with shape precision payload p 63 N86-30653

#### **ACTUATORS**

Experimental verification of distributed piezoelectric actuators for use in precision space structures

[AIAA PAPER 86-0878] p 19 A86-38813 Microprocessor controlled force actuator

[AIAA PAPER 86-0916] p 40 A86-38827 Actuator failure detection in the control of distributed p 47 A86-39507 systems

Vibration control of flexible structures using member dampers p 49 A86-42941

Some considerations of actuator dynamics in the attitude control of a flexible beam [AIAA PAPER 86-2124] p 57 A86-47955

Index of aerospace mechanisms symposia proceedings 1-19

[NASA-TM-88205] p 102 N86-26650 Design and test of a linear thermal actuator --- space

applications p 34 N86-27380 Integrated sensor and actuator system for flexible space

structure experiments --- space applications p 102 N86-27385

Mechanisms developed in the French space industry spacecraft antennas p 103 N86 27394

## ADAPTIVE CONTROL

An investigation of adaptive control techniques for space p 38 A86-35333 Stable direct adaptive control in Hilbert space

p 43 A86-39483

An adaptive vision-based manipulator control scheme [AIAA PAPER 86-2187] p 83 A86-47469 Moving-bank multiple model adaptive algorithms applied

to flexible spacecraft control [AD-A164016] p 59 N86-24740 Adaptive control of large space structures using

recursive lattice filters [NASA-CR-177270] p 60 N86-27401

# ADHESIVE BONDING

Design of bonded structural joints for spacecraft [SNIAS-861-430-105] p 22 N86-28118

Strength of carbon fiber composite/titanium bonded joints as used for SPAS-type structures p 79 N86-30794

## **AEROASSIST**

Thermal design of aeroassisted orbital transfer vehicles --- Book p 30 A86-37041

## **AERODYNAMIC CHARACTERISTICS**

A survey of handling qualities criteria and their applications to high performance aircraft

[NASA-CR-179654] p 77 N86-30738

# **AERODYNAMIC CONFIGURATIONS**

Dynamics of tethered constellations in Earth orbit p 61 N86-27650

# **AERODYNAMIC DRAG**

Quasi-analytical solutions for the dynamics of a class of tethered satellites with Danby's aerodynamical drag p 52 A86-46383

## **AERODYNAMIC LOADS**

A survey of handling qualities criteria and their applications to high performance aircraft

[NASA-CR-179654] p 77 N86-30738

## AERODYNAMICS

Thermal and electromagnetic damping analysis and its application p 34 N86-27677

## **AEROELASTICITY**

International Symposium on Aeroelasticity and Structural Dynamics, 2nd, Rheinisch-Westfaelische Technische Hochschule, Aachen, West Germany, April 1-3, 1985, Collected Papers

[DGLR BERICHT 85-02] p 93 A86-33226

Some considerations on earthbound dynamic testing of large space structures [AIAA PAPER 86-0908]

p 42 A86-38918 Thermal and electromagnetic damping analysis and its application p 34 N86-27677

Theoretical and experimental investigations of sensor location for optimal aeroelastic system state estimation [NASA-CR-177115] p 62 N86-29272

The Second International Symposium on Aeroelasticity and Structural Dynamics [DGLR-85-02] p 104 N86-30627

#### **AFRONAUTICS**

Air and space travel - Tasks for the future

p 3 A86-35518

### **AEROSPACE ENGINEERING**

Man's permanent presence in space; Proceedings of the Third Annual Aerospace Technology Symposium, University of New Orleans, LA, November 7, 8, 1985 p 92 A86-32904

Space and society - Progress and promise; Proceedings of the Twenty-second Space Congress, Cocoa Beach, FL, April 23-26, 1985 p 93 A86-34951

Aerospace Behavioral Engineering Technology Conference, 4th, Long Beach, CA, October 14-17, 1985, **Proceedings** 

[SAE P-168] p.93 A86-35426 Thermal engineering of spacecraft composite structures p 30 A86-37107

Space tech; Proceedings of the Conference and Exposition, Anaheim, CA, September 23-25, 1985

p 95 A86-40501 Space Systems Technology Conference, San Diego, CA, June 9-12, 1986, Technical Papers p 95 A86-40576 International Aerospace and Ground Conference on Lightning and Static Electricity, 10th, and Congres International Aeronautique, 17th, Paris, France, June 10-13, 1985, Proceedings p 99 A86-47292

Integrated structure/control design Present methodology and future opportunities

p 58 A86-49094 Advanced Printed Wiring Board (PWB) materials for surface mounted devices in aerospace applications

p 74 N86-22617 Space Station Systems: A bibliography with indexes

(supplement 1) NASA-SP-7056(01)1 p 101 N86-24711

Data for selection of space materials [ESA-PSS-01-701-ISSUE-1] p 81 N86-32584

**AEROSPACE ENVIRONMENTS** 

Environmental criteria guidelines for space vehicle and space design p 18 A86-32553 Status of critical issues in the area of spacecraft charging p 67 A86-47336

Radiation effects on high performance polymers [NASA-CR-177191] p 76 N86-28195

## AEROSPACE INDUSTRY

International Instrumentation Symposium, 31st, San Diego, CA, May 6-9, 1985, Proceedings p 94 A86-38051

Robotics in space p 82 A86-44550 **AEROSPACE SAFETY** 

Design for space debris protection p 18 A86-32910 Satellite debris - Recent measurements p 7 A86-41747

Space safety and rescue 1984-1985

p 98 A86-44326

## **AEROSPACE SYSTEMS**

Vibration qualification at the David Florida Laboratory test facilities for space systems NASA space plans and scenarios to 2000 and beyond p 2 A86-34594

Aerospace simulation II; Proceedings of the Second Conference, San Diego, CA, January 23-25, 1986

p 94 A86-37176

Structural control requirements for the 1990s for	ANALOG SIMULATION	ANTIMISSILE DEFENSE
aerospace systems [AAS PAPER 85-420] p 51 A86-43221	Numerical experiments on a controlled flexible structure using DCAF flexible spacecraft simulation	SDI orbital system timing constraints p 92 A86-32552
Projections of space systems opportunities and	[ESA-CR(P)-2159] p 61 N86-28116	The effect of energy dissipation due to friction at the
technologies for the 2000 to 2030 time period	ANGULAR VELOCITY	joint of a simple beam structure
p 11 A86-48451	The effect of energy dissipation due to friction at the	[AD-A163975] p 58 N86-24739 <b>APERTURES</b>
Primer on operating and support (O and S) costs for space systems	joint of a simple beam structure [AD-A163975] p 58 N86-24739	Near-field testing of the 15-meter model of the hoop
[AD-A162381] p 12 N86-24588	ANTENNA ARRAYS	column antenna
Damping characteristics of metal matrix composites	Investigation of arrays of high-Q microstrip antennas	[NASA-CR-178059] p 69 N86-29115
[AD-A163569] p 75 N86-24762	p 66 A86-44733	APPLICATIONS PROGRAMS (COMPUTERS)  Space Station multidisciplinary analysis capability -
Index of aerospace mechanisms symposia proceedings 1-19	A distributed array antenna system p 68 A86-50286	IDEAS2
[NASA-TM-88205] p 102 N86-26650	Behavior of very large short pulse antennas. Revision	[AIAA PAPER 86-0954] p 19 A86-38847
AEROSPACE TECHNOLOGY TRANSFER	[DE86-004180] p 68 N86-25680	Vibration and structureborne noise in space station
Technology base for the future of space p 10 A86-45709	Proceedings of the 1985 Antenna Applications	[NASA-CR-177146] p 64 N86-31336 APPROXIMATION
AEROTHERMODYNAMICS	Symposium, Volume 2	Reduced order models for distributed systems based
Thermal design of aeroassisted orbital transfer vehicles	[AD-A165535] p 103 N86-27525	on Hankel-norm approximations p 19 A86-39490
Book p 30 A86-37041	ANTENNA COMPONENTS  Deployable antenna reflector	ARABSAT  Comparison of classical and cocuring manufacturing
Shuttle Tethered Aerothermodynamics Research Facilty (STARFAC) instrumentation requirements	[SNIAS-861-422-117] p 81 N86-32537	techniques for a CFRP honeycomb central tube satellite
p 34 N86-27652	ANTENNA DESIGN	central tube p 29 N86-30792
Shuttle Tethered Aerothermodynamics Research	Spline-based distributed system identification with	ARC DISCHARGES
Facility (STARFAC) p 34 N86-27653	application to large space antennas p 42 A86-39037	Electrostatic charging and arc discharges on satellite dielectrics simulated by electron beam
AIRCRAFT CONSTRUCTION MATERIALS  Experiences in FRG in aerospace application of	Evaluation of performance characteristics for a space antenna system subjected to stochastic disturbances	[AIAA PAPER 86-1191] p 66 A86-40597
carbon fiber reinforced plastics p 72 A86-40498	p 43 A86-39482	Charge accumulation and arc discharges on spacecraft
Enhancements in the routine evaluation of composite	Linear regulator control of the hoop-column antenna	materials and components
aerospace components using a microprocessor based	deployable large space structure design	[AD-A166216] p 70 N86-29893
equipment p 73 A86-47605	p 45 A86-39498	ARC JET ENGINES  NASA electrothermal auxiliary propulsion technology
AIRCRAFT CONTROL Guidance, Navigation and Control Conference,	Electronic compensation for structural deformations of	[AIAA PAPER 86-1703] p 88 A86-42799
Williamsburg, VA, August 18-20, 1986, Technical Papers	large space antennas [AAS PAPER 85-395] p 20 A86-43216	ARIANE LAUNCH VEHICLE
p 99 A86-47401	A distributed array antenna system p 68 A86-50286	An overview of European space transportation
Tine domain design of robust controllers for LQG (Linear	Integrated thermal-structural-electromagnetic design	systems [NASA-TM-77683] p 13 N86-25398
Quadratic Gaussian); application to large space structures	optimization of large space antenna reflectors	Design of spacecraft
[AD-A163635] p 59 N86-26074	[NASA-TM-87713] p 35 N86-28984	[ISBN-2-225-80732-9] p 23 N86-31629
A survey of handling qualities criteria and their	Hygrothermal characteristics of antenna materials	ARRAYS
applications to high performance aircraft	spacecraft antennas p 77 N86-30760	Emulating structural motion by array processors [AIAA PAPER 86-1988] p 56 A86-47510
[NASA-CR-179654] p 77 N86-30738 AIRCRAFT DESIGN	Development of an antenna structure for a deployable offset antenna p 29 N86-30797	[AIAA PAPER 86-1988] p 56 A86-47510 ARTIFICIAL INTELLIGENCE
International Symposium on Aeroelasticity and Structural	Structural analysis, manufacturing and test evaluation	Artificial intelligence - NASA robotics for Space
Dynamics, 2nd, Rheinisch-Westfaelische Technische	of a polarization sensitive reflector p 35 N86-30798	Station p 17 A86-32538
Hochschule, Aachen, West Germany, April 1-3, 1985,	Deployable antenna reflector	Evolutionary paths for artificial intelligence technologies
Collected Papers	[SNIAS-861-422-117] p 81 N86-32537	in operator interactions with space station robots p 81 A86-34971
[DGLR BERICHT 85-02] p 93 A86-33226 Integrated structure/control design - Present	Offset unfurlable antenna, phase 1 communication satellites	State of the art in intelligent/brilliant robots
methodology and future opportunities	[MBB-RX11] p 29 N86-32622	p 82 A86-43884
p 58 A86-49094	ANTENNA FEEDS	Al applications for the Space Station program -
AIRCRAFT MAINTENANCE	Millimeter-wave range for the quick evaluation of large	Technology, design and integration challenges [AIAA PAPER 86-2315] p 21 A86-47048
Prospects for intelligent aerospace structures [AIAA PAPER 86-1139] p 25 A86-43328	reflector antennas with complex feeds p 65 A86-30714	ASSEMBLING
AIRCRAFT MANEUVERS	ANTENNA RADIATION PATTERNS	Decentralized control of sequentially assembled large
Transfer of alignment and calibration of multiple sensors	Millimeter-wave range for the quick evaluation of large	space structures p 82 A86-42997
in flexible systems p 50 A86-43003	reflector antennas with complex feeds	ASSEMBLY  The Giotto assembly, integration and verification
A survey of handling qualities criteria and their applications to high performance aircraft	p 65 A86-30714 Some electrical properties of C.F.R.P. reflector	programme p 5 A86-38273
[NASA-CR-179654] p 77 N86-30738	antennas p 65 A86-31923	ASTRODYNAMICS
AIRCRAFT STRUCTURES	Kalman-like estimation for static distributed systems	Modeling of a tethered two-body system in space
Optimum design of large structures with multiple	Antenna shape from radiation measurements	p 18 A86-37184 Astrodynamics 1985; Proceedings of the Conference,
constraints [AIAA PAPER 86-0952] p 19 A86-38845	p 66 A86-39480	Vail, CO, August 12-15, 1985. Parts 1 & 2
Robotic nondestructive inspection of aerospace	A correction for continuous rotation in measurements of the near field p 67 A86-46578	p 97 A86-43201
structures p 95 A86-40509	Proceedings of the 1985 Antenna Applications	On the dynamics of beam type structural members during
Assessing the effects of delaminations on the	Symposium, Volume 2	deployment of space platforms [AAS PAPER 85-392] p 50 A86-43214
postbuckling strength of CRFP panels aircraft structures p 79 N86-30781	[AD-A165535] p 103 N86-27525	Quasi-analytical solutions for the dynamics of a class
structures p 79 N86-30781  AIRGLOW	Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for	of tethered satellites with Danby's aerodynamical drag
The Shuttle glow as an indicator of material changes	the JPL feed	p 52 A86-46383
in space	[NASA-CR-178061] p 69 N86-28973	Astrodynamics Conference, Williamsburg, VA, August
[AD-A167300] p 71 A86-30323	Near-field testing of the 15-meter model of the hoop	18-20, 1986, Technical Papers p 100 A86-47901
ALGORITHMS	column antenna [NASA-CR-178059] p 69 N86-29115	ASTRONAUTICS Space and society - Progress and promise; Proceedings
An Eigensystem Realization Algorithm in Frequency Domain for modal parameter identification	[14707-011-170000]	
[AIAA PAPER 86-2048] p 54 A86-47431	Near-field testing of the 15-meter model of the hoop	or the Twenty-second Space Congress, Cocoa Beach, FL,
	Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for	of the Twenty-second Space Congress, Cocoa Beach, FL, April 23-26, 1985 p 93 A86-34951
Moving-bank multiple model adaptive algorithms applied	column antenna. Volume 2: Near- and far-field plots for the LaRC feeds	April 23-26, 1985 p 93 A86-34951 Real fantasy Russian book on cosmonautics and
to flexible spacecraft control	column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877	April 23-26, 1985 p 93 A86-34951 Real fantasy Russian book on cosmonautics and space exploration p 95 A86-39981
to flexible spacecraft control [AD-A164016] p 59 N86-24740	column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877 ANTENNAS	April 23-26, 1985 p 93 A86-34951 Real fantasy Russian book on cosmonautics and space exploration p 95 A86-39981 Space tech; Proceedings of the Conference and
to flexible spacecraft control [AD-A164016] p 59 N86-24740  ALIGNMENT	column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877  ANTENNAS Satellite voice broadcast system study, volume 2 [NASA-CR-174905] p 68 N86-24877	April 23-26, 1985 p 93 A86-34951 Real fantasy Russian book on cosmonautics and space exploration p 95 A86-39981
to flexible spacecraft control [AD-A164016] p 59 N86-24740	column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877  ANTENNAS  Satellite voice broadcast system study, volume 2 [NASA-CR-174905] p 68 N86-24877 Measurement apparation and procedure for the	April 23-26, 1985 p 93 A86-34951 Real fantasy Russian book on cosmonautics and p 95 A86-39981 Space tech; Proceedings of the Conference and Exposition, Anaheim, CA, September 23-25, 1985 p 95 A86-40501 Space Systems Technology Conference, San Diego, CA,
to flexible spacecraft control [AD-A164016] p 59 N86-24740  ALIGNMENT Transfer of alignment and calibration of multiple sensors in flexible systems p 50 A86-43003  ALUMINUM	column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877  ANTENNAS Satellite voice broadcast system study, volume 2 [NASA-CR-174905] p 68 N86-24877 Measurement apparation and procedure for the determination of surface emissivities	April 23-26, 1985 p 93 A86-34951 Real fantasy Russian book on cosmonautics and pace exploration p 95 A86-39981 Space tech; Proceedings of the Conference and Exposition, Anaheim, CA, September 23-25, 1985 p 95 A86-40501 Space Systems Technology Conference, San Diego, CA, June 9-12, 1986, Technical Papers p 95 A86-40576
to flexible spacecraft control [AD-A164016] p 59 N86-24740  ALIGNMENT  Transfer of alignment and calibration of multiple sensors in flexible systems p 50 A86-43003  ALUMINUM  Damping characteristics of metal matrix composites	column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877  ANTENNAS  Satellite voice broadcast system study, volume 2 [NASA-CR-174905] p 68 N86-24877  Measurement apparation and procedure for the determination of surface emissivities [NASA-CASE-LAR-13455-1] p 75 N86-24880  Application of the LQG/LTR technique to robust	April 23-26, 1985 p 93 A86-34951 Real fantasy Russian book on cosmonautics and p 95 A86-39981 Space tech; Proceedings of the Conference and Exposition, Anaheim, CA, September 23-25, 1985 p 95 A86-40501 Space Systems Technology Conference, San Diego, CA, June 9-12, 1986, Technical Papers p 95 A86-40576  ASTRONAUTS
to flexible spacecraft control [AD-A164016] p 59 N86-24740  ALIGNMENT Transfer of alignment and calibration of multiple sensors in flexible systems p 50 A86-43003  ALUMINUM Damping characteristics of metal p matrix composites [AD-A167792] p 80 N86-31668	column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877  ANTENNAS  Satellite voice broadcast system study, volume 2 p 68 N86-24877 Measurement apparation and procedure for the determination of surface emissivities [NASA-CASE-LAR-13455-1] p 75 N86-24880 Application of the LQG/LTR technique to robust controller synthesis for a large flexible space antenna	April 23-26, 1985 p 93 A86-34951 Real fantasy Russian book on cosmonautics and p 95 A86-39981 Space tech; Proceedings of the Conference and Exposition, Anaheim, CA, September 23-25, 1985 p 95 A86-40501 Space Systems Technology Conference, San Diego, CA, June 9-12, 1986, Technical Papers p 95 A86-40576  ASTRONAUTS A proposed design for an interim space rescue ferry
to flexible spacecraft control [AD-A164016] p 59 N86-24740  ALIGNMENT Transfer of alignment and calibration of multiple sensors in flexible systems p 50 A86-43003  ALUMINUM Damping characteristics of metal [AD-A167792] p 80 N86-31668  ALUMINUM ALLOYS	column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877 ANTENNAS  Satellite voice broadcast system study, volume 2 [NASA-CR-174905] p 68 N86-24877 Measurement apparation and procedure for the determination of surface emissivities [NASA-CASE-LAR-13455-1] p 75 N86-24880 Application of the LQG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800	April 23-26, 1985 p 93 A86-34951 Real fantasy Russian book on cosmonautics and p 95 A86-39981 Space tech; Proceedings of the Conference and Exposition, Anaheim, CA, September 23-25, 1985 p 95 A86-40501 Space Systems Technology Conference, San Diego, CA, June 9-12, 1986, Technical Papers p 95 A86-40576  ASTRONAUTS
to flexible spacecraft control [AD-A164016] p 59 N86-24740  ALIGNMENT Transfer of alignment and calibration of multiple sensors in flexible systems p 50 A86-43003  ALUMINUM Damping characteristics of metal p matrix composites [AD-A167792] p 80 N86-31668	column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877  ANTENNAS  Satellite voice broadcast system study, volume 2 [NASA-CR-174905] p 68 N86-24877  Measurement apparation and procedure for the determination of surface emissivities [NASA-CASE-LAR-13455-1] p 75 N86-24880  Application of the LQG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800  Effects of model error on control of large flexible space	April 23-26, 1985 p 93 A86-34951 Real fantasy Russian book on cosmonautics and p 95 A86-39981 Space tech; Proceedings of the Conference and Exposition, Anaheim, CA, September 23-25, 1985 p 95 A86-40501 Space Systems Technology Conference, San Diego, CA, June 9-12, 1986, Technical Papers p 95 A86-40576  ASTRONAUTS A proposed design for an interim space rescue ferry vehicle [AD-A164039] p 101 N86-24741  ASTRONOMICAL TELESCOPES
to flexible spacecraft control [AD-A164016] p 59 N86-24740  ALIGNMENT Transfer of alignment and calibration of multiple sensors in flexible systems p 50 A86-43003  ALUMINUM Damping characteristics of metal matrix composites [AD-A167792] p 80 N86-31668  ALUMINUM ALLOYS Damping characteristics of metal matrix composites p 80 N86-31668  [AD-A163569] p 75 N86-24762 New aluminum alloys for satellite structures	column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877  ANTENNAS  Satellite voice broadcast system study, volume 2 [NASA-CR-174905] p 68 N86-24877 Measurement apparation and procedure for the determination of surface emissivities [NASA-CASE-LAR-13455-1] p 75 N86-24880 Application of the LQG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800 Effects of model error on control of large flexible space antenna with comparisons of decoupled and linear	April 23-26, 1985 p 93 A86-34951 Real fantasy Russian book on cosmonautics and space exploration p 95 A86-39981 Space tech; Proceedings of the Conference and Exposition, Anaheim, CA, September 23-25, 1985 p 95 A86-40501 Space Systems Technology Conference, San Diego, CA, June 9-12, 1986, Technical Papers p 95 A86-40576 ASTRONAUTS A proposed design for an interim space rescue ferry vehicle [AD-A164039] p 101 N86-24741 ASTRONOMICAL TELESCOPES Optical Fabrication and Testing Workshop: Large
to flexible spacecraft control [AD-A164016] p 59 N86-24740  ALIGNMENT Transfer of alignment and calibration of multiple sensors in flexible systems p 50 A86-43003  ALUMINUM Damping characteristics of metal [AD-A167792] p 80 N86-31668  ALUMINUM ALLOYS Damping characteristics of metal [AD-A163569] p 75 N86-24762 [AD-A163569] p 75 N86-24762 New aluminum alloys for satellite structures [SNIAS-861-440-111] p 80 N86-31641	column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877  ANTENNAS  Satellite voice broadcast system study, volume 2 [NASA-CR-174905] p 68 N86-24877  Measurement apparation and procedure for the determination of surface emissivities [NASA-CASE-LAR-13455-1] p 75 N86-24880  Application of the LQG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800  Effects of model error on control of large flexible space antenna with comparisons of decoupled and linear quadratic regulator control procedures [NASA-TP-2604] p 64 N86-30801	April 23-26, 1985 p 93 A86-34951 Real fantasy Russian book on cosmonautics and space exploration p 95 A86-39981 Space tech; Proceedings of the Conference and Exposition, Anaheim, CA, September 23-25, 1985 p 95 A86-40501 Space Systems Technology Conference, San Diego, CA, June 9-12, 1986, Technical Papers p 95 A86-40576 ASTRONAUTS A proposed design for an interim space rescue ferry vehicle [AD-A164039] p 101 N86-24741 ASTRONOMICAL TELESCOPES Optical Fabrication and Testing Workshop: Large Telescope Optics, Albuquerque, NM, March 4-8, 1985,
to flexible spacecraft control [AD-A164016] p 59 N86-24740  ALIGNMENT Transfer of alignment and calibration of multiple sensors in flexible systems p 50 A86-43003  ALUMINUM Damping characteristics of metal matrix composites [AD-A167792] p 80 N86-31668  ALUMINUM ALLOYS Damping characteristics of metal matrix composites [AD-A163569] p 75 N86-24762 New aluminum alloys for satellite structures [SNIAS-861-440-111] p 80 N86-31641  ALUMINUM GRAPHITE COMPOSITES	column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877  ANTENNAS  Satellite voice broadcast system study, volume 2 [NASA-CR-174905] p 68 N86-24877  Measurement apparation and procedure for the determination of surface emissivities [NASA-CASE-LAR-13455-1] p 75 N86-24880  Application of the LGC/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800  Effects of model error on control of large flexible space antenna with comparisons of decoupled and linear quadratic regulator control procedures [NASA-TP-2604] p 64 N86-30801  A design study for the use of a multiple aperture	April 23-26, 1985 p 93 A86-34951 Real fantasy Russian book on cosmonautics and p 95 A86-39981 Space tech; Proceedings of the Conference and Exposition, Anaheim, CA, September 23-25, 1985 p 95 A86-40501 Space Systems Technology Conference, San Diego, CA, June 9-12, 1986, Technical Papers p 95 A86-40576  ASTRONAUTS A proposed design for an interim space rescue ferry vehicle [AD-A164039] p 101 N86-24741  ASTRONOMICAL TELESCOPES Optical Fabrication and Testing Workshop: Large Telescope Optics, Albuquerque, NM, March 4-8, 1985, Proceedings
to flexible spacecraft control [AD-A164016] p 59 N86-24740  ALIGNMENT Transfer of alignment and calibration of multiple sensors in flexible systems p 50 A86-43003  ALUMINUM Damping characteristics of metal matrix composites [AD-A167792] p 80 N86-31668  ALUMINUM ALLOYS Damping characteristics of metal matrix composites [AD-A163569] p 75 N86-24762 New aluminum alloys for satellite structures [SNIAS-861-440-111] p 80 N86-31641  ALUMINUM GRAPHITE COMPOSITES The production and properties of composite materials	column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877  ANTENNAS  Satellite voice broadcast system study, volume 2 [NASA-CR-174905] p 68 N86-24877  Measurement apparation and procedure for the determination of surface emissivities [NASA-CASE-LAR-13455-1] p 75 N86-24880  Application of the LQG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800  Effects of model error on control of large flexible space antenna with comparisons of decoupled and linear quadratic regulator control procedures [NASA-TP-2604] p 64 N86-30801  A design study for the use of a multiple aperture deployable antenna for soil moisture remote sensing	April 23-26, 1985 p 93 A86-34951 Real fantasy Russian book on cosmonautics and space exploration p 95 A86-39981 Space tech; Proceedings of the Conference and Exposition, Anaheim, CA, September 23-25, 1985 p 95 A86-40501 Space Systems Technology Conference, San Diego, CA, June 9-12, 1986, Technical Papers p 95 A86-40576 ASTRONAUTS A proposed design for an interim space rescue ferry vehicle [AD-A164039] p 101 N86-24741 ASTRONOMICAL TELESCOPES Optical Fabrication and Testing Workshop: Large Telescope Optics, Albuquerque, NM, March 4-8, 1985,
to flexible spacecraft control [AD-A164016] p 59 N86-24740  ALIGNMENT Transfer of alignment and calibration of multiple sensors in flexible systems p 50 A86-43003  ALUMINUM Damping characteristics of metal matrix composites [AD-A167792] p 80 N86-31668  ALUMINUM ALLOYS Damping characteristics of metal matrix composites [AD-A163569] p 75 N86-24762 New aluminum alloys for satellite structures [SNIAS-861-440-111] p 80 N86-31641  ALUMINUM GRAPHITE COMPOSITES	column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877  ANTENNAS  Satellite voice broadcast system study, volume 2 [NASA-CR-174905] p 68 N86-24877  Measurement apparation and procedure for the determination of surface emissivities [NASA-CASE-LAR-13455-1] p 75 N86-24880  Application of the LGC/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800  Effects of model error on control of large flexible space antenna with comparisons of decoupled and linear quadratic regulator control procedures [NASA-TP-2604] p 64 N86-30801  A design study for the use of a multiple aperture	April 23-26, 1985 p 93 A86-34951 Real fantasy Russian book on cosmonautics and space exploration p 95 A86-39981 Space tech; Proceedings of the Conference and Exposition, Anaheim, CA, September 23-25, 1985 p 95 A86-40501 Space Systems Technology Conference, San Diego, CA, June 9-12, 1986, Technical Papers p 95 A86-40576  ASTRONAUTS A proposed design for an interim space rescue ferry vehicle [AD-A164039] p 101 N86-24741  ASTRONOMICAL TELESCOPES Optical Fabrication and Testing Workshop: Large Telescope Optics, Albuquerque, NM, March 4-8, 1985, Proceedings [SPIE-542] p 92 A86-32407

ASYMPTOTIC METHODS

SYMPTOTIC METHODS	Vibration control of flexible beams using an active	Satellite voice broadcast. Volume 2: System study
Homogenization and control of lattice structures	hinge p 46 A86-39505	[NASA-CR-175017] p 13 N86-24876
p 45 A86-39495	Preload modeling, analysis, and optimal design techniques for beam/rod/cable element structures	Satellite voice broadcast system study, volume 2 [NASA-CR-174905] p 68 N86-24877
An asymptotic perturbation method for nonlinear optimal control problems	p 25 A86-41742	[NASA-CR-174905] p 68 N86-24877 Satellite voice broadcase system study. Volume 1:
[AAS PAPER 85-364] p 51 A86-43219	On the dynamics of beam type structural members during	Executive summary
TOMIC COLLISIONS	deployment of space platforms [AAS PAPER 85-392] p 50 A86-43214	[NASA-CR-174904] p 68 N86-24878
Reaction of high-velocity atomic oxygen with carbon p 71 A86-32977	Vibration of a large space beam under gravity effect	BUCKLING  Buckling and panlinear response of important
ATTITUDE CONTROL	p 52 A86-44884	Buckling and non-linear response of imperfect three-leaged truss columns
Compensating structure and parameter optimization for	Simplified lattice beam elements for geometrically nonlinear static, dynamic, and postbuckling analysis	[AIAA PAPER 86-0974] p 24 A86-38854
attitude control of a flexible spacecraft	p 26 A86-49818	Simplified lattice beam elements for geometrically
p 36 A86-31668 Subsystem testing of Galileo's attitude and articulation	Analysis of a single-fold deployable truss beam	nonlinear static, dynamic, and postbuckling analysis p 26 A86-49818
control fault protection	preloaded by extension of selected face diagonal members	Hand calculation method for buckling of composite shell
[AIAA PAPER 86-9783] p 91 A86-32117	(NASA-TM-87673) p 33 N86-23623	structures p 28 N86-30769
A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500	The effect of energy dissipation due to friction at the	Assessing the effects of delaminations on the
A linear quadratic tracker for Control Moment Gyro based	joint of a simple beam structure [AD-A163975] p 58 N86-24739	postbuckling strength of CRFP panels aircraft structures p 79 N86-30781
attitude control of the Space Station	Dynamics and control of flexible spacecraft during and	BURNING TIME
[AIAA PAPER 86-1194] p 48 A86-40607 Robust attitude and shape control of third generation	after slewing maneuvers	Orbit transfer error analysis for multiple finite perigee
spacecraft	[NASA-CR-177027] p 62 N86-28983 BELLOWS	burn, ascent trajectories [AAS PAPER 85-302] p 97 A86-43204
[AAS PAPER 85-425] p 52 A86-43224	Protective telescoping shield for solar concentrator	BUTT JOINTS
Predictive momentum management for the Space Station p 52 A86-46462	[NASA-CASE-NPO-16236-1] p 103 N86-27706	A simple nonlinear joint model
Nutational stability of a spinning spacecraft with internal	BENDING MOMENTS  A finite element model for the thermoelastic analysis	[NASA-TM-87749] p 85 N86-30234
mass motion and axial thrust	of large composite space structures	_
[AIAA PAPER 86-2271] p 57 A86-47940 Control/structures interaction study of two 300 KW	[AIAA PAPER 86-0875] p 31 A86-38811	С
dual-keel space station concepts	BIBLIOGRAPHIES Space Station Systems: A bibliography with indexes	0.451.50 (50550)
[NASA-TM-87679] p 61 N86-28113	(supplement 1)	CABLES (ROPES)  Near-field testing of the 15-meter model of the hoop
AUTOCLAVES Autoclave, compression moulding p 72 A86-40495	[NASA-SP-7056(01)] p 101 N86-24711	column antenna. Volume 2: Near- and far-field plots for
AUTOMATIC CONTROL	BOLTS The strength of bolted joints in Keylar RP reinforced	the LaRC feeds
Automation and robotics for Space Station in the	plastic (RP) p 28 N86-30765	[NASA-CR-178060] p 69 N86-29877 CALIBRATING
twenty-first century [AIAA PAPER 86-2300] p 84 A86-49552	BONDING	Transfer of alignment and calibration of multiple sensors
Machine vision and the OMV p 100 N86-24536	On correlation between thermal stresses, elastic strain energy and debonding in thermally loaded fiber-reinforced	in flexible systems p 50 A86-43003
NUTONOMY	composite materials p 79 N86-30780	CANADIAN SPACE PROGRAM  The Canadarm - On earth as it is in space
Exploring autonomy - The T(2)C(2) system Telemetry, Timing, Command and Control	BOOMS (EQUIPMENT)	p 93 A86-34123
[AIAA PAPER 86-1184] p 5 A86-40592	Thermally-induced vibration and stability of booms with	Space Station - The Canadian contribution
AUXILIARY PROPULSION	open cross section caused by unidirectional radiant heating p 35 A86-31024	p 12 A86-49563 CANTILEVER BEAMS
A long-life 50 lbf H2/O2 thruster for Space Station auxiliary propulsion	The Extendable and Retractable Mast (ERM) flexible	A finite element model for the thermoelastic analysis
[AIAA PAPER 86-1404] p 87 A86-42617	spacecraft p 27 N86-27364	of large composite space structures
Proven, long-life hydrogen/oxygen thrust chambers for	The Collapsible Tube Mast (CTM) solar arrays, spacecraft antennas p 27 N86-27365	[AIAA PAPER 86-0875] p 31 A86-38811 Experimental verification of distributed piezoelectric
space station propulsion [NASA-TM-88822] p 90 N86-32522	The Ulysses mechanisms former International Solar	actuators for use in precision space structures
AVIATION PSYCHOLOGY	Polar Mission (ISPM) p 27 N86-27368	[AIAA PAPER 86-0878] p 19 A86-38813
Aerospace Behavioral Engineering Technology	Nonlinear dynamic analysis of deploying flexible space booms	The effect of energy dissipation due to friction at the joint of a simple beam structure
Conference, 4th, Long Beach, CA, October 14-17, 1985, Proceedings	[NASA-TM-87617] p 61 N86-28981	[AD-A163975] p 58 N86-24739
[SAE P-168] p 93 A86-35426	Feasibility study of a discrete bearing/roller drive rotary	CAPACITORS
AVIONICS	joint for the space station [NASA-TM-88800] p 27 N86-30206	Capacitor-type micrometeoroid detectors p 104 N86-30606
Design of spacecraft [ISBN-2-225-80732-9] p 23 N86-31629	BOOSTER ROCKET ENGINES	CAPE KENNEDY LAUNCH COMPLEX
AXIAL COMPRESSION LOADS	Two-stage earth-to-orbit vehicles with series and parallel	Orbital transfer vehicle launch operations study.
Analytical and experimental results of advanced	burn [AIAA PAPER 86-1413] p 87 A86-42623	Processing flows. Volume 3 [NASA-CR-179766] p 17 N86-32505
composite stiffened panels under combined loads	Parametric design and preliminary mission analysis of	CAPILLARY FLOW
p 78 N86-30768 AXISYMMETRIC BODIES	a proposed Hybrid OTV with TOS/AMS (TM) solid-fuel	Application of capillary pumped loop heat transport
The detumbling of an axially symmetric satellite with	boosters, and ring-cusp ion return engines [AAS PAPER 85-304] p 88 A86-43206	systems to large spacecraft [AIAA PAPER 86-1295] p 31 A86-39903
an orbital maneuvering vehicle by nonlinear feedback	BOUNDARY LAYER TRANSITION	CARBON
control [AD-A163989] p 58 N86-24717	Shuttle Tethered Aerothermodynamics Research Facilty	Reaction of high-velocity atomic oxygen with carbon
AXISYMMETRIC FLOW	(STARFAC) instrumentation requirements p 34 N86-27652	p 71 A86-32977 CARBON FIBER REINFORCED PLASTICS
The detumbling of an axially symmetric satellite with an orbital maneuvering vehicle by nonlinear feedback	BOX BEAMS	Some electrical properties of C.F.R.P. reflector
control	Analysis of a single-fold deployable truss beam	antennas p 65 A86-31923
[AD-A163989] p 58 N86-24717	preloaded by extension of selected face diagonal members	Continuous forming of thin-walled CFRP pipes for large-space structure p 72 A86-40371
_	[NASA-TM-87673] p 33 N86-23623	Carbon fibres and their composites
В	BOXES	p 72 A86-40487
PACKURE	Hybrid deployable/erectable solar dynamic box truss system	Autoclave, compression moulding p 72 A86-40495 Experiences in FRG in aerospace application of
BACKUPS A proposed design for an interim space rescue ferry	[AIAA PAPER 86-0955] p 25 A86-38883	carbon fiber reinforced plastics p 72 A86-40498
vehicle	BRAYTON CYCLE	High modulus composite properties
[AD-A164039] p 101 N86-24741	Liquid droplet radiator program at the NASA Lewis Research Center	[AIAA PAPER 86-1187] p 73 A86-40594 CFRP support structure for high stability reflector
BAYS (STRUCTURAL UNITS)  Deployable geodesic truss structure A01	[ASME PAPER 86-HT-15] p 32 A86-49621	antennas p 26 A86-49988
[NASA-CASE-LAR-13113-1] p 26 N86-24867	Development of a simulation code for a latent heat	Measurement of the thermo-optical properties of varying
BEAMS (SUPPORTS)	thermal energy storage system in a space station  [DE86-010070] p 70 N86-31113	paint thickness on carbon fiber composites in spacecraft
An evaluation of foldable elastic tubes for application in space structures p 24 A86-34634	[DE86-010070] p 70 N86-31113  BRITTLENESS	structures p 74 N86-22620 Impact of automation on the design of carbon fiber
Verification of large beam-type space structures	On the defect sensitivity of spacecraft typical thin CFRP	omega ribs satellite solar arrays
[AIAA PAPER 86-0860] p 24 A86-38809	laminates p 79 N86-30782	[SNIAS-861-422-101] p 76 N86-28633
A global-local approach to solving vibration of large truss structures	BROADBAND Proceedings of the 1985 Antenna Applications	Thermal residual stresses in symmetric and unsymmetric carbon fiber reinforced plastics: Some tentative ways of
[AIAA PAPER 86-0872] p 41 A86-38907	Symposium, Volume 2	evaluation p 77 N86-30762
Vibration of a large space beam under gravity effect	[AD-A165535] p 103 N86-27525	Theoretical and experimental behavior of carbon fiber
[AIAA PAPER 86-0907] p 41 A86-38917 Some considerations on earthbound dynamic testing of	BROADCASTING Satellite voice broadcast. Volume 1: Executive	reinforced plastics under mechanical and thermal load p 78 N86-30767
large space structures	summary	Dimensional stability of CFRP tubes for space
[AIAA PAPER 86-0908] p 42 A86-38918	[NASA-CR-175016] p 13 N86-24875	structures p 35 N86-30775

Assessing the effects of delaminations on the	COMMUNICATION EQUIPMENT	Analytical and experimental results of advanced
postbuckling strength of CRFP panels aircraft	Space reflector supported by radiation pressure for telecommunication p 30 A86-33942	composite stiffened panels under combined loads p 78 N86-30768
structures p 79 N86-30781 On the defect sensitivity of spacecraft typical thin CFRP	10.000	Hand calculation method for buckling of composite shell
laminates p 79 N86-30782	COMMUNICATION NETWORKS  Space Station communication networks	structures p 28 N86-30769
Design and development testing of the bonded joint	[AIAA PAPER 86-2307] p 67 A86-46939	Adequate fiber reinforced structural elements in load
between a typical launch vehicle attachment ring and CFRP	COMMUNICATION SATELLITES	introduction area of fiber reinforced shells
thrust cone p 28 N86-30790	Geostationary communications platforms	p 78 N86-30770
Strength of carbon fiber composite/titanium bonded	p 2 A86-32547	New prediction methods for composites hygrothermal
joints as used for SPAS-type structures	The Canadarm - On earth as it is in space	behavior p 78 N86-30771
p 79 N86-30794	p 93 A86-34123	Design and manufacturing aspects of space trusses p 28 N86-30772
Deployable antenna reflector	SPACECOM '85; Space and Radiocommunications	Delamination fracture toughness of composite
[SNIAS-861-422-117] p 81 N86-32537  CARBON FIBERS	Symposium, 5th, Paris and Le Bourget, France, June 5-7,	spacecraft structures p 78 N86-30777
The production and properties of composite materials	1985, Speakers' Papers p 98 A86-43701	Industrial calculation of damage tolerance and stress
with light alloy matrices reinforced with continuous fibers	Olympus, the spacecraft of the future	allowables in components made of composite materials
(C, SiC) p 72 A86-40378	p 8 A86-43705	using the PAM-FISS/biphase material model
Magnesium matrix composite materials processing and	Space Station services provided to communications	p 78 N86-30779
applications p 72 A86-40384	satellites	Developments in the nondestructive evaluation (NDE)
Damping characteristics of metal matrix composites	[AIAA PAPER 86-2333] p 10 A86-46956	of composite materials p 79 N86-30785
[AD-A163569] p 75 N86-24762	Satellite voice broadcast. Volume 1: Executive	Comparison of classical and cocuring manufacturing
CARGO SPACECRAFT	summary	techniques for a CFRP honeycomb central tube satellite central tube p 29 N86-30792
External tank/aft cargo carrier on orbit applications	[NASA-CR-175016] p 13 N86-24875	central tube p 29 N86-30792 Strength of carbon fiber composite/titanium bonded
p 99 A86-46855 CARTESIAN COORDINATES	Satellite voice broadcast. Volume 2: System study	joints as used for SPAS-type structures
Analytical investigation of the dynamics of tethered	[NASA-CR-175017] p 13 N86-24876 Communications platform payload definition study	p 79 N86-30794
constellations in Earth orbit, phase 2	[NASA-CR-174986] p 14 N86-27402	Design and development of the Advanced Rigid Array
[NASA-CR-178754] p 58 N86-23629	Communications platform payload definition study,	(ARA) solar panel composite structures
CASSEGRAIN OPTICS	executive summary	p 70 N86-30796
Structural dynamic analysis of the Large Deployable	[NASA-CR-174985] p 14 N86-27407	A step towards an ESA composites design handbook
Reflector	On the development of a corrugated CFRP central	for space structure applications p 79 N86-30799
[AIAA PAPER 86-0004] p 42 A86-38951	cylinder for satellites p 28 N86-30791	COMPRESSING
CENTRIFUGES	Spacebus: Multimission communication satellites	Autoclave, compression moulding p 72 A86-40495 COMPRESSION LOADS
Design study for a high stability large centrifuge test	[SNIAS-861-422-119] p 16 N86-31637	Deployable M-braced truss structure
bed [AIAA PAPER 86-2100] p 11 A86-47445	Offset unfurlable antenna, phase 1 communication	[NASA-CASE-LAR-13081-1] p 29 N86-32737
CERAMIC FIBERS	satellites [MBB-RX11] p 29 N86-32622	COMPUTATIONAL GRIDS
The production and properties of composite materials	COMMUNICATIONS TECHNOLOGY SATELLITE	Control effectiveness characterization for state
with light alloy matrices reinforced with continuous fibers	Damping synthesis for a spacecraft using substructure	estimation and control on a highly flexible grid
(C, SiC) p 72 A86-40378	and component data p 37 A86-32940	[AIAA PAPER 86-2142] p 55 A86-47454
CHARACTERIZATION	COMPENSATORS	COMPUTER AIDED DESIGN
Multilayer printed circuit board characterization by	Robust control of a flexible non-symmetrical	Mobile gantry robots for large structures in space
thermal analysis p 33 N86-22618	spacecraft p 47 A86-39569	p 81 A86-32929
CHEMICAL PROPERTIES	Computer aided modelling/compensator design for a	Optimum design of large structures with multiple
Effect of an oxygen plasma on the physical and chemical	flexible space antenna p 96 A86-42993	constraints [AIAA PAPER 86-0952] p 19 A86-38845
properties of several fluids for the liquid droplet radiator	Reduced order compensator design for an experimental large flexible structure p 50 A86-42995	Space Station multidisciplinary analysis capability -
[NASA-TM-88839] p 80 N86-31634	large flexible structure p 50 A86-42995 Electronic compensation for structural deformations of	IDEAS2
CIRCUIT BOARDS  Advanced Printed Wiring Board (PWB) materials for	large space antennas	[AIAA PAPER 86-0954] p 19 A86-38847
surface mounted devices in aerospace applications	[AAS PAPER 85-395] p 20 A86-43216	Multidisciplinary capability for analysis of the dynamics
p 74 N86-22617	COMPLEX SYSTEMS	and control of flexible space structures
Multilayer printed circuit board characterization by	An improved multilevel optimization approach for the	[AIAA PAPER 86-0961] p 42 A86-38933
thermal analysis p 33 N86-22618	design of complex engineering systems	An improved multilevel optimization approach for the
CIRCULAR CYLINDERS	[AIAA PAPER 86-0950] p 19 A86-38953	design of complex engineering systems
A simple nonlinear joint model	A matrix approach to dynamics formulation of complex	[AIAA PAPER 86-0950] p 19 A86-38953
[NASA-TM-87749] p 85 N86-30234	space structures p 45 A86-39496	Design preparations for large space structures from
On the development of a corrugated CFRP central	Reliability models applicable to space telescope solar array assembly system p 21 N86-24541	fiber-reinforced composites p 32 A86-40496
cylinder for satellites p 28 N86-30791	COMPOSITE MATERIALS	Computer aided modelling/compensator design for a
CLOSED CYCLES	Carbon fibres and their composites	flexible space antenna p 96 A86-42993
Operation and control of space-based solar energy	p 72 A86-40487	Integrated design of space structures using lattice plate
power plants with CCGT using helium as a working medium	High modulus composite properties	finite elements p 21 A86-46465
closed cycle gas turbine	[AIAA PAPER 86-1187] p 73 A86-40594	Interactive computer graphics and its role in control
[ASME PAPER 86-GT-152] p 89 A86-48206	COMPOSITE STRUCTURES	system design of large space structures
COLLECTION	Design for space debris protection p 18 A86-32910	p 21 A86-47115
Proceedings of the 1985 Antenna Applications Symposium, Volume 2	Application and potential future of advanced composites	Modal assignment effects on decentralized control of
[AD-A165535] p 103 N86-27525	in space p 71 A86-32917 Thermal engineering of spacecraft composite	a large space structure [AD-A163977] p 59 N86-25402
The use of tethered satellites for the collection of cosmic	Thermal engineering of spacecraft composite structures p 30 A86-37107	COMPUTER AIDED MANUFACTURING
dust and the sampling of man made orbital debris far from	A finite element model for the thermoelastic analysis	Impact of automation on the design of carbon fiber
the space station p 15 N86-30589	of large composite space structures	omega ribs satellite solar arrays
COLLISION AVOIDANCE	[AIAA PAPER 86-0875] p 31 A86-38811	[SNIAS-861-422-101] p 76 N86-28633
The impact of space debris on manned space	Autoclave, compression moulding p 72 A86-40495	COMPUTER GRAPHICS
operations	Continuous fiber composite hoops p 72 A86-40503	Interactive computer graphics and its role in control
[AIAA PAPER 86-1178] p 96 A86-40588		
	Nonlinear response - A time domain approach with	system design of large space structures
Shuttle Remote Manipulator collision-avoidance	applications to acoustic fatigue, spacecraft and composite	p 21 A86-47115
system p 82 A86-43885	applications to acoustic fatigue, spacecraft and composite materials	p 21 A86-47115 COMPUTER NETWORKS
system p 82 A86-43885 COLUMNS (SUPPORTS)	applications to acoustic fatigue, spacecraft and composite materials [AIAA PAPER 86-1934] p 52 A86-45423	p 21 A86-47115  COMPUTER NETWORKS  An improved multilevel optimization approach for the
system p 82 A86-43885  COLUMNS (SUPPORTS)  Buckling and non-linear response of imperfect	applications to acoustic fatigue, spacecraft and composite materials	p 21 A86-47115  COMPUTER NETWORKS  An improved multilevel optimization approach for the design of complex engineering systems
system p 82 A86-43885 COLUMNS (SUPPORTS) Buckling and non-linear response of imperfect three-legged truss columns	applications to acoustic fatigue, spacecraft and composite materials  [AIAA PAPER 86-1934] p 52 A86-45423  Enhancements in the routine evaluation of composite	p 21 A86-47115  COMPUTER NETWORKS  An improved multilevel optimization approach for the design of complex engineering systems [AIAA PAPER 86-0950] p 19 A86-38953
system p 82 A86-43885  COLUMNS (SUPPORTS)  Buckling and non-linear response of imperfect three-legged truss columns  [AIAA PAPER 86-0974] p 24 A86-38854	applications to acoustic fatigue, spacecraft and composite materials  [AIAA PAPER 86-1934] p 52 A86-45423  Enhancements in the routine evaluation of composite aerospace components using a microprocessor based equipment p 73 A86-47605  CFRP support structure for high stability reflector	p 21 A86-47115  COMPUTER NETWORKS  An improved multilevel optimization approach for the design of complex engineering systems [AIAA PAPER 86-0950]  COMPUTER PROGRAMS
system p 82 A86-43885  COLUMNS (SUPPORTS)  Buckling and non-linear response of imperfect three-legged truss columns  [AIAA PAPER 86-0974] p 24 A86-38854  COMETS	applications to acoustic fatigue, spacecraft and composite materials  [AIAA PAPER 86-1934] p 52 A86-45423  Enhancements in the routine evaluation of composite aerospace components using a microprocessor based equipment p 73 A86-47605  CFRP support structure for high stability reflector antennas p 26 A86-49988	p 21 A86-47115  COMPUTER NETWORKS  An improved multilevel optimization approach for the design of complex engineering systems [AIAA PAPER 86-0950] p 19 A86-38953  COMPUTER PROGRAMS  Thermal analysis of the ACCESS space truss
system p 82 A86-43885  COLUMNS (SUPPORTS)  Buckling and non-linear response of imperfect three-legged truss columns [AIAA PAPER 86-0974] p 24 A86-38854  COMETS  A new instrument to measure charged and neutral	applications to acoustic fatigue, spacecraft and composite materials  [AIAA PAPER 86-1934] p 52 A86-45423  Enhancements in the routine evaluation of composite aerospace components using a microprocessor based equipment p 73 A86-47605  CFRP support structure for high stability reflector antennas p 26 A86-49988  Thermal stresses in composite tubes	p 21 A86-47115  COMPUTER NETWORKS  An improved multilevel optimization approach for the design of complex engineering systems [AIAA PAPER 86-0950]  COMPUTER PROGRAMS
system p 82 A86-43885  COLUMNS (SUPPORTS)  Buckling and non-linear response of imperfect three-legged truss columns  [AIAA PAPER 86-0974] p 24 A86-38854  COMETS	applications to acoustic fatigue, spacecraft and composite materials  [AIAA PAPER 86-1934] p 52 A86-45423  Enhancements in the routine evaluation of composite aerospace components using a microprocessor based equipment p 73 A86-47605  CFRP support structure for high stability reflector antennas p 26 A86-49988  Thermal stresses in composite tubes p 33 A86-50115	p 21 A86-47115  COMPUTER NETWORKS  An improved multilevel optimization approach for the design of complex engineering systems [AIAA PAPER 86-0950] p 19 A86-38953  COMPUTER PROGRAMS  Thermal analysis of the ACCESS space truss Assembly Concept for Construction of Erectable Space
system p 82 A86-43885  COLUMNS (SUPPORTS)  Buckling and non-linear response of imperfect three-legged truss columns  [AIAA PAPER 86-0974] p 24 A86-38854  COMETS  A new instrument to measure charged and neutral cometary dust particles at low and high impact velocities	applications to acoustic fatigue, spacecraft and composite materials  [AIAA PAPER 86-1934] p 52 A86-45423  Enhancements in the routine evaluation of composite aerospace components using a microprocessor based equipment p 73 A86-47605  CFRP support structure for high stability reflector antennas p 26 A86-49988  Thermal stresses in composite tubes p 33 A86-50115  Proceedings of a Workshop on Composites Design for	p 21 A86-47115  COMPUTER NETWORKS  An improved multilevel optimization approach for the design of complex engineering systems [AIAA PAPER 86-0950] p 19 A86-38953  COMPUTER PROGRAMS  Thermal analysis of the ACCESS space truss Assembly Concept for Construction of Erectable Space Structure p 32 A86-40516
system p 82 A86-43885  COLUMNS (SUPPORTS)  Buckling and non-linear response of imperfect three-legged truss columns  [AIAA PAPER 86-0974] p 24 A86-38854  COMETS  A new instrument to measure charged and neutral cometary dust particles at low and high impact velocities p 70 N86-30590	applications to acoustic fatigue, spacecraft and composite materials  [AIAA PAPER 86-1934] p. 52 A86-45423  Enhancements in the routine evaluation of composite aerospace components using a microprocessor based equipment p. 73 A86-47605  CFRP support structure for high stability reflector antennas p. 26 A86-49988  Thermal stresses in composite tubes p. 33 A86-50115  Proceedings of a Workshop on Composites Design for Space Applications conference	p 21 A86-47115  COMPUTER NETWORKS  An improved multilevel optimization approach for the design of complex engineering systems [AIAA PAPER 86-0950] p 19 A86-38953  COMPUTER PROGRAMS  Thermal analysis of the ACCESS space truss Assembly Concept for Construction of Erectable Space Structure p 32 A86-40516  Modal assignment effects on decentralized control of
system p 82 A86-43885  COLUMNS (SUPPORTS)  Buckling and non-linear response of imperfect three-legged truss columns  [AIAA PAPER 86-0974] p 24 A86-38854  COMETS  A new instrument to measure charged and neutral cometary dust particles at low and high impact velocities p 70 N86-30590  COMMAND AND CONTROL  Exploring autonomy - The T(2)C(2) system Telemetry, Timing, Command and Control	applications to acoustic fatigue, spacecraft and composite materials [AIAA PAPER 86-1934] p 52 A86-45423 Enhancements in the routine evaluation of composite aerospace components using a microprocessor based equipment p 73 A86-47605 CFRP support structure for high stability reflector antennas p 26 A86-49988 Thermal stresses in composite tubes p 33 A86-50115 Proceedings of a Workshop on Composites Design for Space Applications conference [ESA-SP-243] p 105 N86-30758	p 21 A86-47115  COMPUTER NETWORKS  An improved multilevel optimization approach for the design of complex engineering systems [AIAA PAPER 86-0950] p 19 A86-38953  COMPUTER PROGRAMS  Thermal analysis of the ACCESS space truss Assembly Concept for Construction of Erectable Space Structure  Modal assignment effects on decentralized control of a large space structure [AD-A163977] p 59 N86-25402  COMPUTER SYSTEMS DESIGN
system p 82 A86-43885  COLUMNS (SUPPORTS)  Buckling and non-linear response of imperfect three-legged truss columns [AlAA PAPEER 86-0974] p 24 A86-38854  COMETS  A new instrument to measure charged and neutral cometary dust particles at low and high impact velocities p 70 N86-30590  COMMAND AND CONTROL  Exploring autonomy - The T(2)C(2) system Telemetry, Timing, Command and Control  [AlAA PAPER 86-1184] p 5 A86-40592	applications to acoustic fatigue, spacecraft and composite materials  [AIAA PAPER 86-1934] p. 52 A86-45423  Enhancements in the routine evaluation of composite aerospace components using a microprocessor based equipment p. 73 A86-47605  CFRP support structure for high stability reflector antennas p. 26 A86-49988  Thermal stresses in composite tubes p. 33 A86-50115  Proceedings of a Workshop on Composites Design for Space Applications conference	p 21 A86-47115  COMPUTER NETWORKS  An improved multilevel optimization approach for the design of complex engineering systems [AIAA PAPER 86-0950] p 19 A86-38953  COMPUTER PROGRAMS  Thermal analysis of the ACCESS space truss Assembly Concept for Construction of Erectable Space Structure p 32 A86-40516  Modal assignment effects on decentralized control of a large space structure [AD-A163977] p 59 N86-25402  COMPUTER SYSTEMS DESIGN  Control loops with human operators in space operations.
system p 82 A86-43885  COLUMNS (SUPPORTS)  Buckling and non-linear response of imperfect three-legged truss columns [AlAA PAPER 86-0974] p 24 A86-38854  COMETS  A new instrument to measure charged and neutral cometary dust particles at low and high impact velocities p 70 N86-30590  COMMAND AND CONTROL  Exploring autonomy - The T(2)C(2) system Telemetry, Timing, Command and Control [AlAA PAPER 86-1184] p 5 A86-40592  COMMERCIAL SPACECRAFT	applications to acoustic fatigue, spacecraft and composite materials  [AIAA PAPER 86-1934] p 52 A86-45423  Enhancements in the routine evaluation of composite aerospace components using a microprocessor based equipment p 73 A86-47605  CFRP support structure for high stability reflector antennas p 26 A86-49988  Thermal stresses in composite tubes p 33 A86-50115  Proceedings of a Workshop on Composites Design for Space Applications conference  [ESA-SP-243] p 105 N86-30758  The application of composites to space structures:	p 21 A86-47115  COMPUTER NETWORKS  An improved multilevel optimization approach for the design of complex engineering systems [AIAA PAPER 86-0950] p 19 A86-38953  COMPUTER PROGRAMS  Thermal analysis of the ACCESS space truss Assembly Concept for Construction of Erectable Space Structure p 32 A86-40516  Modal assignment effects on decentralized control of a large space structure [AD-A163977] p 59 N86-25402  COMPUTER SYSTEMS DESIGN  Control loops with human operators in space operations. Part 1: Human engineering analysis, synthesis and
system p 82 A86-43885  COLUMNS (SUPPORTS)  Buckling and non-linear response of imperfect three-legged truss columns  [AIAA PAPER 86-0974] p 24 A86-38854  COMETS  A new instrument to measure charged and neutral cometary dust particles at low and high impact velocities p 70 N86-30590  COMMAND AND CONTROL  Exploring autonomy - The T(2)C(2) system Telemetry, Timing, Command and Control  [AIAA PAPER 86-1184] p 5 A86-40592  COMMERCIAL SPACECRAFT  Business in orbit - The commercial use of space	applications to acoustic fatigue, spacecraft and composite materials [AIAA PAPER 86-1934] p 52 A86-45423 Enhancements in the routine evaluation of composite aerospace components using a microprocessor based equipment p 73 A86-47605 CFRP support structure for high stability reflector antennas p 26 A86-49988 Thermal stresses in composite tubes p 33 A86-50115 Proceedings of a Workshop on Composites Design for Space Applications conference [ESA-SP-243] p 105 N86-30758 The application of composites to space structures: Guidelines on important aspects for the designer p 77 N86-30759 Hygrothermal characteristics of antenna materials	p 21 A86-47115  COMPUTER NETWORKS  An improved multilevel optimization approach for the design of complex engineering systems [AIAA PAPER 86-0950] p 19 A86-38953  COMPUTER PROGRAMS  Thermal analysis of the ACCESS space truss Assembly Concept for Construction of Erectable Space Structure p 32 A86-40516  Modal assignment effects on decentralized control of a large space structure [AD-A163977] p 59 N86-25402  COMPUTER SYSTEMS DESIGN  Control loops with human operators in space operations. Part 1: Human engineering analysis, synthesis and evaluation techniques
system p 82 A86-43885  COLUMNS (SUPPORTS)  Buckling and non-linear response of imperfect three-legged truss columns  [AIAA PAPER 86-0974] p 24 A86-38854  COMETS  A new instrument to measure charged and neutral cometary dust particles at low and high impact velocities p 70 N86-30590  COMMAND AND CONTROL  Exploring autonomy - The T(2)C(2) system Telemetry, Timing, Command and Control  [AIAA PAPER 86-1184] p 5 A86-40592  COMMERCIAL SPACECRAFT  Business in orbit - The commercial use of space p 96 A86-41978	applications to acoustic fatigue, spacecraft and composite materials [AIAA PAPER 86-1934] p 52 A86-45423 Enhancements in the routine evaluation of composite aerospace components using a microprocessor based equipment p 73 A86-47605 CFRP support structure for high stability reflector antennas p 26 A86-49988 Thermal stresses in composite tubes p 33 A86-50115 Proceedings of a Workshop on Composites Design for Space Applications conference [ESA-SP-243] p 105 N86-30758 The application of composites to space structures: Guidelines on important aspects for the designer p 77 N86-30759 Hygrothermal characteristics of antenna materials spacecraft antennas p 77 N86-30760	p 21 A86-47115  COMPUTER NETWORKS  An improved multilevel optimization approach for the design of complex engineering systems [AIAA PAPER 86-0950] p 19 A86-38953  COMPUTER PROGRAMS  Thermal analysis of the ACCESS space truss Assembly Concept for Construction of Erectable Space Structure p 32 A86-40516  Modal assignment effects on decentralized control of a large space structure [AD-A163977] p 59 N86-25402  COMPUTER SYSTEMS DESIGN  Control loops with human operators in space operations. Part 1: Human engineering analysis, synthesis and evaluation techniques [NLR-TR-84116-L-PT-1] p 16 N86-32107
system p 82 A86-43885  COLUMNS (SUPPORTS)  Buckling and non-linear response of imperfect three-legged truss columns [AIAA PAPER 86-0974] p 24 A86-38854  COMETS  A new instrument to measure charged and neutral cometary dust particles at low and high impact velocities p 70 N86-30590  COMMAND AND CONTROL  Exploring autonomy - The T(2)C(2) system Telemetry, Timing, Command and Control [AIAA PAPER 86-1184] p 5 A86-40592  COMMERCIAL SPACECRAFT  Business in orbit - The commercial use of space p 96 A86-41978  Contracts of and with private enterprises concerning the	applications to acoustic fatigue, spacecraft and composite materials [AIAA PAPER 86-1934] p 52 A86-45423 Enhancements in the routine evaluation of composite aerospace components using a microprocessor based equipment p 73 A86-47605 CFRP support structure for high stability reflector antennas p 26 A86-49988 Thermal stresses in composite tubes p 33 A86-50115 Proceedings of a Workshop on Composites Design for Space Applications conference [ESA-SP-243] p 105 N86-30758 The application of composites to space structures: Guidelines on important aspects for the designer p 77 N86-30759 Hygrothermal characteristics of antenna materials spacecraft antennas p 77 N86-30760 Dynamic mechanical analysis as an aid to the	p 21 A86-47115  COMPUTER NETWORKS  An improved multilevel optimization approach for the design of complex engineering systems [AIAA PAPER 86-0950] p 19 A86-38953  COMPUTER PROGRAMS  Thermal analysis of the ACCESS space truss Assembly Concept for Construction of Erectable Space Structure p 32 A86-40516  Modal assignment effects on decentralized control of a large space structure [AD-A163977] p 59 N86-25402  COMPUTER SYSTEMS DESIGN  Control loops with human operators in space operations. Part 1: Human engineering analysis, synthesis and evaluation techniques [NLR-TR-84116-L-PT-1] p 16 N86-32107  COMPUTER SYSTEMS PROGRAMS
system p 82 A86-43885  COLUMNS (SUPPORTS)  Buckling and non-linear response of imperfect three-legged truss columns  [AIAA PAPER 86-0974] p 24 A86-38854  COMETS  A new instrument to measure charged and neutral cometary dust particles at low and high impact velocities p 70 N86-30590  COMMAND AND CONTROL  Exploring autonomy - The T(2)C(2) system Telemetry, Timing, Command and Control  [AIAA PAPER 86-1184] p 5 A86-40592  COMMERCIAL SPACECRAFT  Business in orbit - The commercial use of space p 96 A86-41978	applications to acoustic fatigue, spacecraft and composite materials [AIAA PAPER 86-1934] p 52 A86-45423 Enhancements in the routine evaluation of composite aerospace components using a microprocessor based equipment p 73 A86-47605 CFRP support structure for high stability reflector antennas p 26 A86-49988 Thermal stresses in composite tubes p 33 A86-50115 Proceedings of a Workshop on Composites Design for Space Applications conference [ESA-SP-243] p 105 N86-30758 The application of composites to space structures: Guidelines on important aspects for the designer p 77 N86-30759 Hygrothermal characteristics of antenna materials spacecraft antennas p 77 N86-30760	p 21 A86-47115  COMPUTER NETWORKS  An improved multilevel optimization approach for the design of complex engineering systems [AIAA PAPER 86-0950] p 19 A86-38953  COMPUTER PROGRAMS  Thermal analysis of the ACCESS space truss Assembly Concept for Construction of Erectable Space Structure p 32 A86-40516  Modal assignment effects on decentralized control of a large space structure [AD-A163977] p 59 N86-25402  COMPUTER SYSTEMS DESIGN  Control loops with human operators in space operations. Part 1: Human engineering analysis, synthesis and evaluation techniques [NLR-TR-84116-L-PT-1] p 16 N86-32107

Industrial calculation of damage tolerance and stress allowables in components made of composite materials using the PAM-FISS/biphase material model p 78 N86-30779 ESABASE extension to spacecraft charging [MATRA-CMT-TS101/RT/16.85] p 71 N86-32517 COMPUTER TECHNIQUES Enhancements in the routine evaluation of composite aerospace components using a microprocessor based equipment p 73 A86-47605 COMPUTER VISION On-orbit manipulators - Sensory and control approaches [AIAA PAPER 86-2185] p 83 A86-47467 An adaptive vision-based manipulator control scheme p 83 A86-47469 [AIAA PAPER 86-2187] COMPUTERIZED SIMULATION Millimeter-wave range for the quick evaluation of large reflector antennas with complex feeds p 65 A86-30714 Flight results from the gravity-gradient-controlled RAE-1 satellite [AIAA PAPER 86-2140] p 11 A86-47453 Emulating structural motion by array processors [AIAA PAPER 86-1988] p 56 A86-47510 A proposed design for an interim space rescue ferry vahicla [AD-A164039] p 101 N86-24741 Control of large flexible systems by spatial modal input-distribution control [AD-A166912] p 64 N86-30803 ESABASE extension to spacecraft charging [MATRA-CMT-TS101/RT/16.85] p 71 p 71 N86-32517 CONCORDE AIRCRAFT Selections from Flug Revue und Flugwelt International.

A. On the border of Time-hypersonic flight. B. NASA programs pave the way for the hypersonic aircraft. C. Shuttle flight 61-B; construction in space. D. Faster than a bullet; hypersonic military aircraft INASA-TM-884181 p 26 N86-24652 CONDUCTIVE HEAT TRANSFER Some problems related to the thermally induced deformations of large space structures p 30 A86-36673 The development of an environmental disturbance model for large space structures after the onset of thermal [AIAA PAPER 86-2123] p 32 A86-47924 CONFERENCES Lunar bases and space activities of the 21st century p 91 A86-30113 SECTAM XII - Proceedings of the Twelfth Southeastern Conference on Theoretical and Applied Mechanics, Pine Mountain, GA, May 10, 11, 1984. Volume 2 p 91 A86-31259 Conference on Decision and Control, 23rd, Las Vegas, NV, December 12-14, 1984, Proceedings. Volume 1 p 91 A86-31260 Guidance and control 1985; Proceedings of the Eighth Annual Rocky Mountain Conference, Keystone, CO, February 2-6, 1985 p 91 A86-31776 Optical Fabrication and Testing Workshop: Large Telescope Optics, Albuquerque, NM, March 4-8, 1985, p 92 A86-32407 [SPIE-542] EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 p 92 A66-32526
Man's permanent presence in space; Proceedings of the Third Annual Aerospace Technology Symposium, University of New Orleans, LA, November 7, 8, 1985 p 92 A86-32904 International Symposium on Aeroelasticity and Structural Dynamics, 2nd, Rheinisch-Westfaelische Technische Hochschule, Aachen, West Germany, April 1-3, 1985, Collected Papers
[DGLR BERICHT 85-02] p 93 A86-33226 U.S. Opportunities in Space Conference; Proceedings of the Second Annual Space Business Conference, Washington, DC, October 30-November 1, 1985 p 93 A86-34110

Space and society - Progress and promise; Proceedings

of the Twenty-second Space Congress, Cocoa Beach, FL,

April 23-26, 1985 p 93 A86-34951
Aerospace Behavioral Engineering Technology
Conference, 4th, Long Beach, CA, October 14-17, 1985,

Aerospace simulation II; Proceedings of the Second Conference, San Diego, CA, January 23-25, 1986

International Conference on Space, 25th, Rome, Italy,

March 26-28, 1985, Proceedings

p 93 A86-35426

p 94 A86-37852

A86-37176

p 94

Proceedings

Spacecraft CONSTRAINTS constraints CONTINUOUS RADIATION Behavior of very large short pulse antennas. Revision [DE86-004180]

International Instrumentation Symposium, 31st, San Diego, CA, May 6-9, 1985, Proceedings Structural dynamic testing and analysis; Aerospace Technology Conference and Exposition, Long Beach, CA, October 14-17, 1985, Technical Papers [SAE SP-635] design and operational Proceedings of the Aerospace Technology Conference and Exposition, Long Beach, CA, October 14-17, 1985 [SAE SP-636] Structures, Structural Dynamics and Materials Conference, 27th, San Antonio, TX, May 19-21, 1986, Technical Papers. Parts 1 & 2 Dynamics and control of large structures, Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, Carbon fibres and their composites p 72 A86-40487 Space tech; Proceedings of the Conference and Exposition, Anaheim, CA, September 23-25, 1985 Space Systems Technology Conference, San Diego, CA, June 9-12, 1986, Technical Papers p 95 A86-40576 Astrodynamics 1985; Proceedings of the Conference. Vail, CO, August 12-15, 1985. Parts 1 & 2 Space stations: Legal aspects of scientific and commercial use in a framework of transatlantic cooperation; Proceedings of the International Colloquium, Hamburg, West Germany, October 3, 4, 1984 SPACECOM '85; Space and Radiocommunications Symposium, 5th, Paris and Le Bourget, France, June 5-7, 1985, Speakers' Papers p 98 A86-43701 Space safety and rescue 1984-1985 Space - Technology and opportunity; Proceedings of the Conference, Geneva, Switzerland, May 28-30, 1985 Columbus I; Proceedings of the First Columbus Workshop Utilization Aspects, Capri, Italy, June 17-21, Distributed parameter systems; Proceedings of the Second International Conference on Control Theory for Distributed Parameter Systems and Applications, Vorau, Austria, July 9-14, 1984 Workshop on Cosmic Ray and High Energy Gamma Ray Experiments for the Space Station Era, Louisiana State University, Baton Rouge, October 17-20, 1984, International Aerospace and Ground Conference on Lightning and Static Electricity, 10th, and Congres International Aeronautique, 17th, Paris, France, June 10-13, 1985, Proceedings p 99 A86-47292 Guidance, Navigation and Control Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers Astrodynamics Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers Towards Columbus and Space Station; Proceedings of the International Symposium, Bonn, West Germany, October 2-4, 1985 LDGLB BERICHT 85-031 Second European Space Mechanisms and Tribology [ESA-SP-231] Proceedings of the 2nd Annual Conference on NASA/University Advanced Space Design Program NASA-TM-89399] p 104 N86-29888 Trajectory determinations and collection of [NASA-TM-893991 micrometeoroids on the space station. Report of the Workshop on Micrometeorite Capture Experiments [NASA-CR-177303] The Second International Symposium on Aeroelasticity and Structural Dynamics [DGLR-85-02] Proceedings of a Workshop on Composites Design for Space Applications --- conference [ESA-SP-243] Space frame optimization subject to frequency (AIAA PAPER 86-0877) CONTAMINATION The AFML/Lockheed test method for characterizing material outgassing and deposition kinetics

CONTINUUM MECHANICS

structures via continuum/discrete concepts
[AIAA PAPER 86-1022] p 24

p 24 A86-38879

A global-local approach to solving vibration of large truss p 94 A86-38051 [AIAA PAPER 86-0872] p 41 A86-38907 Failure propagation in continuum models of LSS (Large Space Structures), part 1 [AD-A166208] p 63 N86-29892 p 94 A86-38540 CONTINUUM MODELING problems: A singular-solution approach for controlling the nonlinear response of a continuum model of a large space structure p 94 A86-38551 IAIAA PAPER 86-08411 p 41 A86-38889 Homogenization and control of lattice structures p 45 A86-39495 p 94 A86-38801 Spline-based Rayleigh-Ritz methods for the approximation of the natural modes of vibration for flexible beams with tip bodies p 48 A86-40843 p 95 A86-39476 Control of dynamic response of a continuum model of a large space structure p 52 A86-43772 Failure propagation in continuum models of LSS (Large Space Structures), part 1 [AD-A166208] p 63 N86-29892 p 95 A86-40501 CONTRACTS Contracts of and with private enterprises concerning the development, the construction, and the assembly of space p 82 A86-43341 CONTROL CONFIGURED VEHICLES p 97 A86-43201 Variable-structure control of spacecraft large-angle maneuvers Single-step optimal control of the RPL experiment [AAS PAPER 85-045] p 37 A86-31796 Construction and control of large space structures p 97 A86-43335 p 39 A86-37060 A mathematical formulation of a large space structure control problem Integrated design of space structures using lattice plate finite elements p 21 A86-46465 p 98 A86-44326 A parametric examination of the stability robustness characteristics of two decoupled controllers designed for large space structure control p 98 A86-44526 [AIAA PAPER 86-2053] CONTROL EQUIPMENT Testing of a failure accommodation system on a highly p 98 A86-45626 p 38 A86-35390 CONTROL MOMENT GYROSCOPES Dynamics of gyroelastic vehicles --- flexible spacecraft p 98 A86-46808 A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607 Predictive momentum management for the Space tation p 52 A86-46462 p 99 A86-46851 Station Effects of model error on control of large flexible space antenna with comparisons of decoupled and linear quadratic regulator control procedures [NASA-TP-2604] CONTROL SIMULATION p 64 N86-30801 A proposed design for an interim space rescue ferry p 99 A86-47401 [AD-A164039] p 101 N86-24741 p 100 A86-47901 Modeling and control of a lightweight robot --- flexible p 84 N86-27363 spacecraft Numerical experiments on a controlled flexible structure using DCAF --- flexible spacecraft simulation p 100 A86-50334 [ESA-CR(P)-2159] p 61 N86-28116 CONTROL STABILITY Stability of multiloop LQ regulators with nonlinearities.
- Regions of attraction. II - Regions of ultimate p 102 N86-27353 p 38 A86-36074 boundedness Multidisciplinary capability for analysis of the dynamics and control of flexible space structures [AIAA PAPER 86-0961] p 42 A86-38933 Stable direct adaptive control in Hilbert space p 43 A86-39483 p 104 N86-30584 Control of flexible structures with respect to infinity --exible spacecraft p 60 N86-27359 flexible spacecraft CONTROL SYSTEMS DESIGN p 104 N86-30627 Conference on Decision and Control, 23rd, Las Vegas, NV, December 12-14, 1984, Proceedings. Volume 1 p 91 A86-31260 p 105 N86-30758 Robust beam-pointing and attitude control of a flexible p 36 A86-31665 spacecraft The Galileo scan platform pointing control system - A modern control theoretic viewpoint [AAS PAPER 85-044] p 40 A86-38812 p 36 A86-31795 An investigation of adaptive control techniques for space p 38 A86-35333 Stability of multiloop LQ regulators with nonlinearities. stations p 74 A86-49595 I - Regions of attraction. II - Regions of ultimate boundedness p 38 A86-36074 Space Station dynamic modeling, control and p 39 A86-37186 p 68 N86-25680 Microprocessor controlled force actuator [AIAA PAPER 86-0916] p 40 p 40 A86-38827 Reduced modeling and analysis of large repetitive space Variable Structure Control System (VSCS) maneuvering of flexible spacecraft
[AIAA PAPER 86-0840]

p 40 A86-38888

The optimal projection equations for reduced-order, discrete-time modeling, estimation, and control p 42 A86-39035 Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, p 95 A86-39476 Evaluation of performance characteristics for a space antenna system subjected to stochastic disturbances p 43 A86-39482 In search of the optimal quadratic regulator p 43 A86-39484 Control of traveling waves in flexible structures p 44 A86-39487 Demonstration of vibration control of a flexible truss A86-39488 Flexibility formulation in Structural Control p 44 A86-39489 **Balanced Augmented Controller Reduction** p 44 A86-39491 The effects of structural perturbations on modal p 45 A86-39497 Linear regulator control of the hoop-column antenna --deployable large space structure design p 45 A86-39498 Modelling of the hoop-column antenna and design of p 46 A86-39501 nonlinear control law in orbit Control of Flexible Structures (COFS) Flight Experiment p 5 A86-39502 Experiments in optimal control of a flexible arm with p 82 A86-39503 passive damping Active structural control with decentralized and colocated control units p 46 A86-39506 Actuator failure detection in the control of distributed p 47 A86-39507 systems A slewing control experiment for flexible structures p 47 A86-39509 non-symmetrical control of a flexible Robust p 47 A86-39569 A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607 Integrated analysis tools for trade studies of spacecraft controller and sensor locations [AIAA PAPER 86-1192] p 20 A86-40613 Singular perturbation methods for discrete time systems p 48 A86-42855 Modelling and design of nonlinear feedback control law for a large space hoop-column antenna n 48 A86-42909 Control of symmetrizable distributed parameter systems p 49 A86-42921 Integration of structures and controls - Some computational issues --- for large space structure vibration p 49 A86-42939 Vibration control of flexible structures using member p 49 A86-42941 dampers Computer aided modelling/compensator design for a p 96 A86-42993 flexible space antenna Reduced order compensator design for an experimental large flexible structure p 50 A86-42995 Decentralized control of sequentially assembled large p 82 A86-42997 space structures Structural control requirements for the 1990s --- for aerospace systems [AAS PAPER 85-420] Interactive computer graphics and its role in control system design of large space structures p 21 A86-47115 Guidance, Navigation and Control Conference, Williamsburg, VA, August 18-20, 1986, Technical Papers p 99 A86-47401 Model reference adaptive control under uncertainty of nonlinear flexible manipulators [AIAA PAPER 86-1976] p 53 A86-47403 Experiments on the end-point control of a two-link robot with elastic drives [AIAA PAPER 86-1977] p 83 A86-47404 Conceptual design of pointing control systems for Space Station gimballed payloads p 53 A86-47411 [AIAA PAPER 86-1986] Design of dynamic output feedback controllers with parameter variation insensitivity [AIAA PAPER 86-2050] p 54 A86-47433 Modified LTR robust control for flexible structures [AIAA PAPER 86-2051] p 55 A86-47434 Robust reduced-order control of flexible structures using the optimal projection/maximum entropy design

satellite Control

a Space Station requiators using positivity [AD-A162385] structures [AD-A163635] spacecraft structures **CONTROL THEORY** 

Control loops with human operators in space operations. Attitude control system synthesis for the Hoop/Column antenna using the LQG/LTR method --- loop transfer Part 2: Robotics operations and manual control experiment IAIAA PAPER 86-21391 p 55 A86-47452 [NLR-TR-84116-L-PT-2] CONTROLLERS Flight results from the gravity-gradient-controlled RAE-1 [AIAA PAPER 86-2140] p 11 A86-47453 Preliminary evaluation of a reaction control system for [AIAA PAPER 86-2152] p 89 A86-47460 Active structural control with Multi-criterion approaches to optimization of linear colocated control units [AIAA PAPER 86-2198] p 56 A86-47478 controller and sensor locations [AIAA PAPER 86-1192] Issues of order reduction in active control system aerospace systems [AAS PAPER 85-420] [AIAA PAPER 86-2138] p 57 A86-47515 Robust multivariable control of large space structures using positivity
[AIAA PAPER 86-2125] [AIAA PAPER 86-2125] p 57 A86-47925 Integrated structure/control design Present methodology and future opportunities p 58 A86-49094 a large space structure [AD-A163977] Nonlinear dynamics and chaotic motions in feedback controlled elastic systems p 84 N86-24294 [AD-A1659171 Tine domain design of robust controllers for LQG (Linear [NASA-CR-179717] Quadratic Gaussian); application to large space COOLANTS n 59 N86-26074 Modeling and control of a lightweight robot --- flexible [NASA-TM-88839] p 84 N86-27363 **COOLING FINS** Integrated sensor and actuator system for flexible space structure experiments --- space applications p 102 N86-27385 expandable space radiator [AIAA PAPER 86-1323] The development of optimal control laws for orbiting tethered platform systems p 61 CORROSION PREVENTION Effects of damping on the control dynamics of the space NASA-CASE-LEW-14072-3] shuttle based on tethered systems p 61 N86-27656 CORRUGATED SHELLS Aspects of active isolation as applied to a satellite structure with shape precision payload vlinder for satellites p 63 N86-30653 Effects of model error on control of large flexible space COSMIC DUST antenna with comparisons of decoupled and linear space station quadratic regulator control procedures p 64 N86-30801 [NASA-TP-2604] Trajectory Dynamics of flexible spacecraft: An analysis of approaches towards mathematical model order reduct [NASA-CR-177303] p 65 N86-31643 INLR-TR-85068-U1 Control loops with human operators in space operations. the space station Part 1: Human engineering analysis, synthesis and evaluation techniques Cosmic dust [NLR-TR-84116-L-PT-1] p 16 N86-32107 piezoceramics Control loops with human operators in space operations. COSMIC RAYS Part 4: Research requirements for human-in-the-loop space teleoperator development [NLR-TR-84116-L-PT-4] p 17 N86-32109 Control loops with human operators in space operations. Proceedings Part 5: Executive summary COST ANALYSIS [NLR-TR-84116-L-PT-5] p 17 N86-32110 Reliability issues in active control of large flexible space challenge (SAWE PAPER 1673) [NASA-CR-179758] p 65 N86-32512 and operational effectiveness Conference on Decision and Control, 23rd, Las Vegas, [AIAA PAPER 86-1391] NV, December 12-14, 1984, Proceedings. Volume 1 p 91 A86-31260 [AD-A164405] Guidance and control 1985; Proceedings of the Eighth Annual Rocky Mountain Conference, Keystone, CO. p 91 A86-31776 [NASA-CR-174986] February 2-6, 1985 Estimation of distributed parameter systems - Some p 52 A86-46455 executive summary closed-form solutions [NASA-CR-174985] Distributed parameter systems; Proceedings of the Second International Conference on Control Theory for COST EFFECTIVENESS Distributed Parameter Systems and Applications, Vorau, p 98 A86-46808 Austria, July 9-14, 1984 Design of dynamic output feedback controllers with serviceable spacecraft parameter variation insensitivity AIAA PAPER 86-20501 n 54 A86-47433 electrostatic accretion process Maneuvering of flexible spacecraft --- Variable Structure COST REDUCTION p 56 A86-47473 [AIAA PAPER 86-2193] resources Mathematical models of flexible spacecraft dynamics: A survey of order reduction approaches --- aircraft tracking [NLR-MP-85004-U] [AIAA PAPER 86-1405] p 60 N86-26367 COUPLING COFFEIGIENTS Analytical investigation of the dynamics of tethered constellations in Earth orbit, phase 2 application p 61 N86-28114 [NASA-CR-178846] COUPLINGS Control theoretic analysis of human operator mediated rendezvous and docking [NLR-MP-85020-U]

p 16 N86-32106

p 17 N86-32108

Control loops with human operators in space operations

Part 3: Rendezvous and docking operations and model

analysis of performance with human-in-the-loop

[NLR-TR-84116-L-PT-3]

p 85 N86-33024 Controller design of flexible spacecraft attitude control p 37 A86-33204 Balanced Augmented Controller Reduction p 44 A86-39491 decentralized and p 46 A86-39506 Integrated analysis tools for trade studies of spacecraft p 20 A86-40613 Structural control requirements for the 1990s --- for p 51 A86-43221 Robust multivariable control of large space structures p 57 A86-47925 Modal assignment effects on decentralized control of p 59 N86-25402 ASCOT (Advanced Structural Control Techniques) p 62 N86-28985 Control of a free-flying robot manipulator system p 85 N86-33016 Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator p 80 N86-31634 Conceptual design of an 1 m long 'roll out fin' type p 20 A86-39924 Oxidation protecting coatings for polymers p 75 N86-26434 On the development of a corrugated CFRP central p 28 N86-30791 Cosmic dust collection with a sub-satellite tethered to p 14 N86-27146 determinations and collection micrometeoroids on the space station. Report of the Workshop on Micrometeorite Capture Experiments p 104 N86-30584 The use of tethered satellites for the collection of cosmic dust and the sampling of man made orbital debris far from p 15 N86-30589 large surface p 16 N86-30604 detection with Workshop on Cosmic Ray and High Energy Gamma Ray Experiments for the Space Station Era, Louisiana State University Baton Rouge, October 17-20. 1984 Space Station design-to-cost - A massive engineering p 18 A86-35216 Nuclear powered ion engine orbit transfer vehicle design p 86 A86-42608 Plan for space station polar-orbiting platform p 14 N86-25403 Communications platform payload definition study p 14 N86-27402 Communications platform payload definition study, p 14 N86-27407 Space platform design options - A comparison, for cost-effectiveness, of expendable, reusable p 8 A86-44531 Space manufacturing utilizing the directional p 102 N86-27300 Strategies to minimize Delta V costs of extraterrestrial p 1 A86-32536 Life Cycle Cost methodology for space station propulsion D 87 A86-42618 Thermal and electromagnetic damping analysis and its p 34 N86-27677 A Dornier latch design for a docking mechanism --- in p 22 N86-27387 space A SENER latch design for docking mechanisms p 85 N86-27388 Preloaded space structural coupling joints p 29 N86-31630 [NASA-CASE-LAR-13489-1]

methodology

[AIAA PAPER 86-2052]

[AIAA PAPER 86-2053]

large space structure control

A parametric examination of the stability robustness

characteristics of two decoupled controllers designed for

p 55 A86-47435

p 55 A86-47436

CRACK INITIATION	DEFENSE PROGRAM	Definition and testing of gears for space robotics
Dimensional stability of CFRP tubes for space	Future space transportation options - Overview	space applications p 22 N86-27375
structures p 35 N86-30775	[AIAA PAPER 86-1210] p 6 A86-40616 <b>DEFORMATION</b>	Low frequency design verification of large spacecraft
CRACK PROPAGATION Failure propagation in continuum models of LSS (Large	Deformation measurements on antennas under	structures p 28 N86-30686
Space Structures), part 1	simulated outer space conditions using holographic	A design study for the use of a multiple aperture deployable antenna for soil moisture remote sensing
[AD-A166208] p 63 N86-29892	interferometry	satellite applications
CREEP ANALYSIS	[DGLR PAPER 85-150] p 30 A86-35186 Electronic compensation for structural deformations of	[NASA-CR-178154] p 16 N86-30933
Decreased creep for increased space power p 66 A86-44906	large space antennas	DESIGN TO COST
CRYOGENIC FLUIDS	[AAS PAPER 85-395] p 20 A86-43216	Space Station design-to-cost - A massive engineering challenge
Analysis and modeling of fluid transfer in orbit	Nonlinear deformation analysis of the Olympus	[SAWE PAPER 1673] p 18 A86-35216
[AIAA PAPER 86-1718] p 32 A86-42809	Astromast p 21 A86-43756 Analysis of a single-fold deployable truss beam	Life Cycle Cost methodology for space station propulsion
CRYOSTATS	preloaded by extension of selected face diagonal	system
Accommodation study of the CRHESUS cryostat on the	members	[AIAA PAPER 86-1405] p 87 A86-42618
EURECA platform [SNIAS-1048ACA/LL/V] p 26 N86-22630	[NASA-TM-87673] p 33 N86-23623	DETECTION  Cosmic dust detection with large surface
[SNIAS-1048ACA/LL/V] p 26 N86-22630  CUMULATIVE DAMAGE	DEFORMETERS	Cosmic dust detection with large surface piezoceramics p 16 N86-30604
Effect of degradation of material properties on the	Deformation measurements on antennas under simulated outer space conditions using holographic	Capacitor-type micrometeoroid detectors
dynamic response of large space structures	interferometry	p 104 N86-30606
p 73 A86-41740	[DGLR PAPER 85-150] p 30 A86-35186	DIELECTRICS
CURING	DEGRADATION	Electrostatic charging and arc discharges on satellite
Continuous forming of thin-walled CFRP pipes for large-space structure p 72 A86-40371	The degradation and contamination experiment flown	dielectrics simulated by electron beam
large-space structure p 72 A86-40371  Comparison of classical and cocuring manufacturing	on the first European Communication Satellite ECS-1: Preliminary results on contamination p 74 N86-22623	[AIAA PAPER 86-1191] p 66 A86-40597
techniques for a CFRP honeycomb central tube satellite	DELAMINATING	DIFFERENTIAL EQUATIONS  An asymptotic perturbation method for nonlinear optimal
central tube p 29 N86-30792	Delamination fracture toughness of composite	control problems
CYLINDRICAL SHELLS	spacecraft structures p 78 N86-30777	[AAS PAPER 85-364] p 51 A86-43219
Adequate fiber reinforced structural elements in load	Assessing the effects of delaminations on the	DIGITAL FILTERS
introduction area of fiber reinforced shells	postbuckling strength of CRFP panels aircraft structures p 79 N86-30781	ASCOT (Advanced Structural Control Techniques)
p 78 N86-30770	DEPLOYMENT	[AD-A165917] p 62 N86-28985
Vibration and structureborne noise in space station [NASA-CR-177146] p 64 N86-31336	ESA-sponsored developments in the field of deployable	DIGITAL SIMULATION  Modeling and simulation of spacecraft solar array
[NASA-CH-177140] p 04 1100-51330	masts for pushing out solar arrays and antennas	deployment
n	p 24 A86-36029	[AIAA PAPER 86-2122] p 84 A86-47923
D	Hybrid deployable/erectable solar dynamic box truss system	Solar array deployment simulation using ADAMS
DAMPING	[AIAA PAPER 86-0955] p 25 A86-38883	software p 60 N86-27360
Damping synthesis for a spacecraft using substructure	On the dynamics of beam type structural members during	Numerical experiments on a controlled flexible structure
and component data p 37 A86-32940	deployment of space platforms	using DCAF flexible spacecraft simulation
Damping of composites p 78 N86-30764	[AAS PAPER 85-392] p 50 A86-43214	[ESA-CR(P)-2159] p 61 N86-28116 DIGITAL SYSTEMS
Damping characteristics of metal matrix composites	Modeling and simulation of spacecraft solar array	ASCOT (Advanced Structural Control Techniques)
'[AD-A167792] p 80 N86-31668 <b>DAMPING TESTS</b>	deployment [AIAA PAPER 86-2122] p 84 A86-47923	[AD-A165917] p 62 N86-28985
Material damping of simple structures in a simulated	Method of packaging and deployment of large	DIMENSIONAL STABILITY
space environment p 48 A86-41739	membranes in space	Magnesium matrix composite materials processing and
Thermal and electromagnetic damping analysis and its	[ISAS-618] p 26 N86-23624	applications p 72 A86-40384
Thermal and electromagnetic damping analysis and its application p 34 N86-27677	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable	applications p 72 A86-40384 High-stability telescope structures spaceborne
Thermal and electromagnetic damping analysis and its application p 34 N86-27677 DATA ACQUISITION	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction	applications p 72 A86-40384 High-stability telescope structures spaceborne telescopes p 28 N86-30773
Thermal and electromagnetic damping analysis and its application p 34 N86-27677 DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable	applications p 72 A86-40384 High-stability telescope structures p 28 N86-30773 Dimensional stability of CFRP tubes for space
Thermal and electromagnetic damping analysis and its application p 34 N86-27677 DATA ACQUISITION	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360	applications p 72 A86-40384 High-stability telescope structures p 28 N86-30773 Dimensional stability of CFRP tubes for space
Thermal and electromagnetic damping analysis and its application  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control  [AD-A164016] p 59 N86-24740  A 3-component laser-Doppler velocimeter data	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment	applications p 72 A86-40384 High-stability telescope structures spaceborne telescopes p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775 DIPOLE ANTENNAS Dynamics and control characteristics for the WISP 300
Thermal and electromagnetic damping analysis and its application p 34 N86-27677  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control  [AD-A164016] p 59 N86-24740  A 3-component laser-Doppler velocimeter data acquisition and reduction system	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment former International Solar Polar Mission (ISPM)	applications p 72 A86-40384 High-stability telescope structures spaceborne telescopes p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775 DIPOLE ANTENNAS Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration
Thermal and electromagnetic damping analysis and its application p 34 N86-27677  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control [AD-A164016] p 59 N86-24740 A 3-component laser-Doppler acquisition and reduction system [NASA-CR-176929] p 104 N86-30135	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment	applications p 72 A86-40384 High-stability telescope structures spaceborne telescopes p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775  DIPOLE ANTENNAS Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220
Thermal and electromagnetic damping analysis and its application  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control  [AD-A164016]  A 3-component laser-Doppler acquisition and reduction system  [NASA-CR-176929]  DATA LINKS	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment former International Solar Polar Mission (ISPM) p 84 N86-27369	applications p 72 A86-40384 High-stability telescope structures spaceborne telescopes p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775 DIPOLE ANTENNAS Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration
Thermal and electromagnetic damping analysis and its application p 34 N86-27677  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control [AD-A164016] p 59 N86-24740  A 3-component laser-Doppler velocimeter data acquisition and reduction system [NASA-CR-176929] p 104 N86-30135  DATA LINKS  COMLINK proposal for future missions of tethered satellite p 69 N86-27658	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment former International Solar Polar Mission (ISPM) p 84 N86-27369 A deployable and retractable strongback structure p 27 N86-27389 The Olympus antenna deployment subsystem design	applications p 72 A86-40384 High-stability telescope structures spaceborne telescopes p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775 DIPOLE ANTENNAS Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220 DIRECT CURRENT Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382
Thermal and electromagnetic damping analysis and its application  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control [AD-A164016]  A 3-component laser-Doppler acquisition and reduction system [NASA-CR-176929]  DATA LINKS  COMLINK proposal for future missions of tethered satellite  DATA MANAGEMENT	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment former International Solar Polar Mission (ISPM) A deployable and retractable strongback structure p 27 N86-27389 The Olympus antenna deployment subsystem design and testing spacecraft antennas p 27 N86-27392	applications p 72 A86-40384 High-stability telescope structures spaceborne telescopes p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775  DIPOLE ANTENNAS Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] DIRECT CURRENT Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382 DISCRETE FUNCTIONS
Thermal and electromagnetic damping analysis and its application  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control  [AD-A164016] p 59 N86-24740  A 3-component laser-Doppler acquisition and reduction system  [NASA-CR-176929] p 104 N86-30135  DATA LINKS  COMLINK proposal for future missions of tethered satellite  DATA MANAGEMENT  Communications and tracking - The keys to Space	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment former International Solar Polar Mission (ISPM) p 84 N86-27369 A deployable and retractable strongback structure p 27 N86-27389 The Olympus antenna deployment subsystem design and testing spacecraft antennas p 27 N86-27392 Nonlinear dynamic analysis of deploying flexible space	applications p 72 A86-40384 High-stability telescope structures spaceborne telescopes p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775  DIPOLE ANTENNAS Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220  DIRECT CURRENT Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382  DISCRETE FUNCTIONS The optimal projection equations for reduced-order,
Thermal and electromagnetic damping analysis and its application p 34 N86-27677  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control  [AD-A164016] p 59 N86-24740  A 3-component laser-Doppler velocimeter data acquisition and reduction system  [NASA-CR-176929] p 104 N86-30135  DATA LINKS  COMLINK proposal for future missions of tethered satellite p 69 N86-27658  DATA MANAGEMENT  Communications and tracking - The keys to Space Station utilization p 66 A86-40529	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment former International Solar Polar Mission (ISPM) A deployable and retractable strongback structure p 27 N86-27389 The Olympus antenna deployment subsystem design and testing spacecraft antennas p 27 N86-27392	applications p 72 A86-40384 High-stability telescope structures spaceborne telescopes p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775  DIPOLE ANTENNAS Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220  DIRECT CURRENT Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382  DISCRETE FUNCTIONS The optimal projection equations for reduced-order, discrete-time modeling, estimation, and control
Thermal and electromagnetic damping analysis and its application  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control  [AD-A164016] p 59 N86-24740  A 3-component laser-Doppler acquisition and reduction system  [NASA-CR-176929] p 104 N86-30135  DATA LINKS  COMLINK proposal for future missions of tethered satellite  DATA MANAGEMENT  Communications and tracking - The keys to Space	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment former International Solar Polar Mission (ISPM) p 84 N86-27369 A deployable and retractable strongback structure p 27 N86-27389 The Olympus antenna deployment subsystem design and testing space-craft antennas p 27 N86-27392 Nonlinear dynamic analysis of deploying flexible space booms [NASA-TM-87617] p 61 N86-28981 Evaluation of solar array flight experiment response	applications p 72 A86-40384 High-stability telescope structures spaceborne telescopes p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775  DIPOLE ANTENNAS Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220  DIRECT CURRENT Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382  DISCRETE FUNCTIONS The optimal projection equations for reduced-order, discrete-time modeling, estimation, and control p 42 A86-39035  DISPLAY DEVICES
Thermal and electromagnetic damping analysis and its application p 34 N86-27677  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control  [AD-A164016] p 59 N86-24740  A 3-component laser-Doppler velocimeter data acquisition and reduction system  [NASA-CR-176929] p 104 N86-30135  DATA LINKS  COMLINK proposal for future missions of tethered satellite p 69 N86-27658  DATA MANAGEMENT  Communications and tracking - The keys to Space Station utilization p 66 A86-40529  DATA PROCESSING  Robot spacecraft survivability using a decision tree for data processing p 81 A86-32550	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software Speed regulators for space appendages deployment former International Solar Polar Mission (ISPM) p 84 N86-27369 A deployable and retractable strongback structure p 27 N86-27389 The Olympus antenna deployment subsystem design and testing spacecraft antennas p 27 N86-27392 Nonlinear dynamic analysis of deploying flexible space booms [NASA-TM-87617] p 61 N86-28981 Evaluation of solar array flight experiment response during flight for extension/retraction phase	applications p 72 A86-40384 High-stability telescope structures spaceborne telescopes p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775  DIPOLE ANTENNAS Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220  DIRECT CURRENT Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382  DISCRETE FUNCTIONS The optimal projection equations for reduced-order, discrete-time modeling, estimation, and control p 42 A86-39035  DISPLAY DEVICES Machine vision and the OMV p 100 N86-24536
Thermal and electromagnetic damping analysis and its application  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control [AD-A164016]  A 3-component laser-Doppler acquisition and reduction system [NASA-CR-176929]  DATA LINKS  COMLINK proposal for future missions of tethered satellite  DATA MANAGEMENT  Communications and tracking - The keys to Space Station utilization  DATA PROCESSING  Robot spacecraft survivability using a decision tree for data processing  DATA REDUCTION	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment former International Solar Polar Mission (ISPM) p 84 N86-27369 A deployable and retractable strongback structure p 27 N86-27389 The Olympus antenna deployment subsystem design and testing spacecraft antennas p 27 N86-27392 Nonlinear dynamic analysis of deploying flexible space booms [NASA-TM-87617] p 61 N86-28981 Evaluation of solar array flight experiment response during flight for extension/retraction phase [NASA-TM-86551] p 29 N86-31606	applications p 72 A86-40384 High-stability telescope structures spaceborne telescopes p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775  DIPOLE ANTENNAS  Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365]  DIRECT CURRENT  Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382  DISCRETE FUNCTIONS  The optimal projection equations for reduced-order, discrete-time modeling, estimation, and control p 42 A86-39035  DISPLAY DEVICES  Machine vision and the OMV p 100 N86-24536  DISTRIBUTED PARAMETER SYSTEMS
Thermal and electromagnetic damping analysis and its application  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control  [AD-A164016] p 59 N86-24740  A 3-component laser-Doppler acquisition and reduction system  [NASA-CR-176929] p 104 N86-30135  DATA LINKS  COMLINK proposal for future missions of tethered satellite p 69 N86-27658  DATA MANAGEMENT  Communications and tracking - The keys to Space Station utilization p 66 A86-40529  DATA PROCESSING  Robot spacecraft survivability using a decision tree for data processing  DATA REDUCTION  Machine vision and the OMV p 100 N86-24536	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software Speed regulators for space appendages deployment former International Solar Polar Mission (ISPM) p 84 N86-27369 A deployable and retractable strongback structure p 27 N86-27389 The Olympus antenna deployment subsystem design and testing spacecraft antennas p 27 N86-27392 Nonlinear dynamic analysis of deploying flexible space booms [NASA-TM-87617] p 61 N86-28981 Evaluation of solar array flight experiment response during flight for extension/retraction phase	applications p 72 A86-40384 High-stability telescope structures spaceborne telescopes p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775  DIPOLE ANTENNAS Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220  DIRECT CURRENT Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382  DISCRETE FUNCTIONS The optimal projection equations for reduced-order, discrete-time modeling, estimation, and control p 42 A86-39035  DISPLAY DEVICES Machine vision and the OMV p 100 N86-24536
Thermal and electromagnetic damping analysis and its application  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control  [AD-A164016]  A 3-component laser-Doppler acquisition and reduction system  [NASA-CR-176929]  DATA LINKS  COMLINK proposal for future missions of tethered satellite  COMLINK proposal for future missions of tethered satellite  DATA MANAGEMENT  Communications and tracking - The keys to Space point of the communications and tracking - The keys to Space point of the communications and tracking and the communications and tracking and the communications and tracking and the communication point of the communications and tracking and the communication tree for data processing  DATA REDUCTION  Machine vision and the OMV p 100 N86-24536	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment former International Solar Polar Mission (ISPM) p 84 N86-27369 A deployable and retractable strongback structure p 27 N86-27389 The Olympus antenna deployment subsystem design and testing spacecraft antennas p 27 N86-27392 Nonlinear dynamic analysis of deploying flexible space booms [NASA-TM-87617] p 61 N86-28981 Evaluation of solar array flight experiment response during flight for extension/retraction phase [NASA-TM-86551] p 29 N86-31606 Design and test of a space deployable radiator [SNIAS-861-440-103] p 23 N86-31640  DEPOLYMERIZATION	applications p 72 A86-40384 High-stability telescope structures spaceborne telescopes p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775  DIPOLE ANTENNAS Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220  DIRECT CURRENT Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382  DISCRETE FUNCTIONS The optimal projection equations for reduced-order, discrete-time modeling, estimation, and control p 42 A86-39035  DISPLAY DEVICES Machine vision and the OMV p 100 N86-24536  DISTRIBUTED PARAMETER SYSTEMS Kalman-like estimation for static distributed systems
Thermal and electromagnetic damping analysis and its application  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control [AD-A164016]  A 3-component laser-Doppler acquisition and reduction system [NASA-CR-176929]  DATA LINKS  COMLINK proposal for future missions of tethered satellite  DATA MANAGEMENT  Communications and tracking - The keys to Space p 66 A86-40529  DATA PROCESSING  Robot spacecraft survivability using a decision tree for data processing  DATA REDUCTION  Machine vision and the OMV  A 3-component laser-Doppler acquisition and reduction system [NASA-CR-176929]  p 104 N86-24547  p 100 N86-24536  velocimeter data acquisition and reduction system [NASA-CR-176929]  p 104 N86-30135	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment former International Solar Polar Mission (ISPM) p 84 N86-27369 A deployable and retractable strongback structure p 27 N86-27389 The Olympus antenna deployment subsystem design and testing spacecraft antennas p 27 N86-27392 Nonlinear dynamic analysis of deploying flexible space booms [NASA-TM-87617] p 61 N86-28981 Evaluation of solar array flight experiment response during flight for extension/retraction phase [NASA-TM-86551] p 29 N86-31606 Design and test of a space deployable radiator [SNIAS-861-440-103] p 23 N86-31640  DEPOLYMERIZATION Effect of an oxygen plasma on the physical and chemical	applications p 72 A86-40384 High-stability telescope structures spaceborne telescopes p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775  DIPOLE ANTENNAS Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220  DIRECT CURRENT Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382  DISCRETE FUNCTIONS The optimal projection equations for reduced-order, discrete-time modeling, estimation, and control p 42 A86-39035  DISPLAY DEVICES Machine vision and the OMV p 100 N86-24536  DISTRIBUTED PARAMETER SYSTEMS Kalman-like estimation for static distributed systems Antenna shape from radiation measurements p 66 A86-39480 Reduced order models for distributed systems based
Thermal and electromagnetic damping analysis and its application  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control [AD-A164016] p 59 N86-24740  A 3-component laser-Doppler acquisition and reduction system [NASA-CR-176929] p 104 N86-30135  DATA LINKS  COMLINK proposal for future missions of tethered satellite p 69 N86-27658  DATA MANAGEMENT  Communications and tracking - The keys to Space Station utilization p 66 A86-40529  DATA PROCESSING  Robot spacecraft survivability using a decision tree for data processing  DATA REDUCTION  Machine vision and the OMV p 100 N86-24536 velocimeter data acquisition and reduction system [NASA-CR-176929] p 104 N86-30135	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment former International Solar Polar Mission (ISPM) p 84 N86-27369 A deployable and retractable strongback structure p 27 N86-27389 The Olympus antenna deployment subsystem design and testing spacecraft antennas p 27 N86-27392 Nonlinear dynamic analysis of deploying flexible space booms [NASA-TM-87617] p 61 N86-28981 Evaluation of solar array flight experiment response during flight for extension/retraction phase [NASA-TM-86551] p 29 N86-31606 Design and test of a space deployable radiator [SNIAS-861-440-103] p 23 N86-31640  DEPOLYMERIZATION Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator	applications p 72 A86-40384 High-stability telescope structures spaceborne telescopes p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775  DIPOLE ANTENNAS Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220  DIRECT CURRENT Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382  DISCRETE FUNCTIONS The optimal projection equations for reduced-order, discrete-time modeling, estimation, and control p 42 A86-39035  DISPLAY DEVICES Machine vision and the OMV p 100 N86-24536  DISTRIBUTED PARAMETER SYSTEMS  Kalman-like estimation for static distributed systems Antenna shape from radiation measurements p 66 A86-39480  Reduced order models for distributed systems based on Hankel-norm approximations p 19 A86-39490
Thermal and electromagnetic damping analysis and its application  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control [AD-A164016]  A 3-component laser-Doppler acquisition and reduction system [NASA-CR-176929]  DATA LINKS  COMLINK proposal for future missions of tethered satellite  DATA MANAGEMENT  Communications and tracking - The keys to Space Station utilization  Both spacecraft survivability using a decision tree for data processing  DATA REDUCTION  Machine vision and the OMV p 100 N86-24536 velocimeter data acquisition and reduction system [NASA-CR-176929]  DAYTIME  A new understanding of breakdowns in the day sections	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment former International Solar Polar Mission (ISPM) p 84 N86-27369 A deployable and retractable strongback structure p 27 N86-27389 The Olympus antenna deployment subsystem design and testing spacecraft antennas p 27 N86-27392 Nonlinear dynamic analysis of deploying flexible space booms [NASA-TM-87617] p 61 N86-28981 Evaluation of solar array flight experiment response during flight for extension/retraction phase [NASA-TM-86551] p 29 N86-31606 Design and test of a space deployable radiator [SNIAS-861-440-103] p 23 N86-31640  DEPOLYMERIZATION  Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-8839] p 80 N86-31634	applications p 72 A86-40384 High-stability telescope structures spaceborne telescopes p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775 DIPOLE ANTENNAS Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration (AAS PAPER 85-365) p 51 A86-43220 DIRECT CURRENT Development and testing of a dual-wound dc motor gearhead — space applications p 102 N86-27382 DISCRETE FUNCTIONS The optimal projection equations for reduced-order, discrete-time modeling, estimation, and control p 42 A86-39035 DISPLAY DEVICES Machine vision and the OMV p 100 N86-24536 DISTRIBUTED PARAMETER SYSTEMS Kalman-like estimation for static distributed systems Antenna shape from radiation measurements p 66 A86-39480 Reduced order models for distributed systems based on Hankel-norm approximations p 19 A86-39490 Finite dimensional stabilization of linear Distributed
Thermal and electromagnetic damping analysis and its application  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control [AD-A164016] p 59 N86-24740  A 3-component laser-Doppler acquisition and reduction system [NASA-CR-176929] p 104 N86-30135  DATA LINKS  COMLINK proposal for future missions of tethered satellite p 69 N86-27658  DATA MANAGEMENT  Communications and tracking - The keys to Space Station utilization p 66 A86-40529  DATA PROCESSING  Robot spacecraft survivability using a decision tree for data processing  DATA REDUCTION  Machine vision and the OMV p 100 N86-24536 velocimeter data acquisition and reduction system [NASA-CR-176929] p 104 N86-30135	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment former International Solar Polar Mission (ISPM) p 84 N86-27369 A deployable and retractable strongback structure p 27 N86-27389 The Olympus antenna deployment subsystem design and testing spacecraft antennas p 27 N86-27392 Nonlinear dynamic analysis of deploying flexible space booms [NASA-TM-87617] p 61 N86-28981 Evaluation of solar array flight experiment response during flight for extension/retraction phase [NASA-TM-86551] p 29 N86-31606 Design and test of a space deployable radiator [SNIAS-861-440-103] p 23 N86-31640  DEPOLYMERIZATION Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator	applications p 72 A86-40384 High-stability telescope structures spaceborne telescopes p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775  DIPOLE ANTENNAS Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220  DIRECT CURRENT Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382  DISCRETE FUNCTIONS The optimal projection equations for reduced-order, discrete-time modeling, estimation, and control p 42 A86-39035  DISPLAY DEVICES Machine vision and the OMV p 100 N86-24536  DISTRIBUTED PARAMETER SYSTEMS  Kalman-like estimation for static distributed systems Antenna shape from radiation measurements p 66 A86-39480  Reduced order models for distributed systems based on Hankel-norm approximations p 19 A86-39490
Thermal and electromagnetic damping analysis and its application  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control [AD-A164016]  A 3-component laser-Doppler acquisition and reduction system [NASA-CR-176929]  DATA LINKS  COMLINK proposal for future missions of tethered satellite  DATA MANAGEMENT  Communications and tracking - The keys to Space 96 A86-40529  DATA PROCESSING  Robot spacecraft survivability using a decision tree for data processing  DATA REDUCTION  Machine vision and the OMV  A 3-component laser-Doppler acquisition and reduction system [NASA-CR-176929]  P 100 N86-24536  velocimeter data velocimeter data acquisition and reduction system [NASA-CR-176929]  P 104 N86-30135  DAYTIME  A new understanding of breakdowns in the day sections of geosynchronous orbit  P 67 A86-47335	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment former International Solar Polar Mission (ISPM) p 84 N86-27369 A deployable and retractable strongback structure p 27 N86-27389 The Olympus antenna deployment subsystem design and testing spacecraft antennas p 27 N86-27392 Nonlinear dynamic analysis of deploying flexible space booms [NASA-TM-87617] p 61 N86-28981 Evaluation of solar array flight experiment response during flight for extension/retraction phase [NASA-TM-86551] p 29 N86-31606 Design and test of a space deployable radiator [SNIAS-861-440-103] p 23 N86-31640  DEPOLYMERIZATION Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634  DEPOSITION	applications p 72 A86-40384 High-stability telescope structures spaceborne telescopes p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775  DIPOLE ANTENNAS  Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration (AAS PAPER 85-365) DIRECT CURRENT  Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382  DISCRETE FUNCTIONS  The optimal projection equations for reduced-order, discrete-time modeling, estimation, and control p 42 A86-39035  DISPLAY DEVICES  Machine vision and the OMV p 100 N86-24536  DISTRIBUTED PARAMETER SYSTEMS  Kalman-like estimation for static distributed systems Antenna shape from radiation measurements p 66 A86-39480  Reduced order models for distributed systems based on Hankel-norm approximations p 19 A86-39490 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39492 Closed-loop stability of large space structures with
Thermal and electromagnetic damping analysis and its application  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control  [AD-A164016] p 59 N86-24740  A 3-component laser-Doppler acquisition and reduction system  [NASA-CR-176929] p 104 N86-30135  DATA LINKS  COMLINK proposal for future missions of tethered satellite p 69 N86-27658  DATA MANAGEMENT  Communications and tracking - The keys to Space Station utilization p 66 A86-40529  DATA PROCESSING  Robot spacecraft survivability using a decision tree for data processing p 81 A86-32550  DATA REDUCTION  Machine vision and the OMV p 100 N86-24536 velocimeter data acquisition and reduction system  [NASA-CR-176929] p 104 N86-30135  DAYTIME  A new understanding of breakdowns in the day sections of geosynchronous orbit p 67 A86-47335  DECISION MAKING  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment former International Solar Polar Mission (ISPM) p 84 N86-27369 A deployable and retractable strongback structure p 27 N86-27389 The Olympus antenna deployment subsystem design and testing spacecraft antennas p 27 N86-27392 Nonlinear dynamic analysis of deploying flexible space booms [NASA-TM-87617] p 61 N86-28981 Evaluation of solar array flight experiment response during flight for extension/retraction phase [NASA-TM-86551] p 29 N86-31606 Design and test of a space deployable radiator [SNIAS-861-440-103] p 23 N86-31640 DEPOLYMERIZATION Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634 DEPOSITION Space manufacturing utilizing the directional electrostatic accretion process	applications p 72 A86-40384 High-stability telescope structures spaceborne telescopes p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775  DIPOLE ANTENNAS Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220  DIRECT CURRENT Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382  DISCRETE FUNCTIONS The optimal projection equations for reduced-order, discrete-time modeling, estimation, and control p 42 A86-39035  DISPLAY DEVICES Machine vision and the OMV p 100 N86-24536  DISTRIBUTED PARAMETER SYSTEMS Kalman-like estimation for static distributed systems Antenna shape from radiation measurements p 66 A86-39480 Reduced order models for distributed systems based on Hankel-norm approximations p 19 A86-39490 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39492 Closed-loop stability of large space structures with reduced-order controllers p 45 A86-39493
Thermal and electromagnetic damping analysis and its application  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control  [AD-A164016] p 59 N86-24740  A 3-component laser-Doppler acquisition and reduction system  [NASA-CR-176929] p 104 N86-30135  DATA LINKS  COMLINK proposal for future missions of tethered satellite p 69 N86-27658  DATA MANAGEMENT  Communications and tracking - The keys to Space Station utilization p 66 A86-40529  DATA PROCESSING  Robot spacecraft survivability using a decision tree for data processing  DATA REDUCTION  Machine vision and the OMV p 100 N86-24536 velocimeter data acquisition and reduction system  [NASA-CR-176929] p 104 N86-30135  DAYTIME  A new understanding of breakdowns in the day sections of geosynchronous orbit p 67 A86-47335  DECISION MAKING  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control  [AD-A164016] p 59 N86-24740	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment former International Solar Polar Mission (ISPM) p 84 N86-27369 A deployable and retractable strongback structure p 27 N86-27389 The Olympus antenna deployment subsystem design and testing spacecraft antennas p 27 N86-27392 Nonlinear dynamic analysis of deploying flexible space booms [NASA-TM-87617] p 61 N86-28981 Evaluation of solar array flight experiment response during flight for extension/retraction phase [NASA-TM-86551] p 29 N86-31606 Design and test of a space deployable radiator [SNIAS-861-440-103] p 23 N86-31640  DEPOLYMERIZATION Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88393] p 80 N86-31634  DEPOSITION Space manufacturing utilizing the directional electrostatic accretion process p 102 N86-27300  DESIGN ANALYSIS Low frequency design verification of large spacecraft	applications p 72 A86-40384 High-stability telescope structures spaceborne telescopes p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775  DIPOLE ANTENNAS Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220  DIRECT CURRENT Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382  DISCRETE FUNCTIONS The optimal projection equations for reduced-order, discrete-time modeling, estimation, and control p 42 A86-39035  DISPLAY DEVICES Machine vision and the OMV p 100 N86-24536  DISTRIBUTED PARAMETER SYSTEMS Kalman-like estimation for static distributed systems Antenna shape from radiation measurements p 66 A86-39480 Reduced order models for distributed systems based on Hankel-norm approximations p 19 A86-39490 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39492 Closed-loop stability of large space structures with reduced-order controllers p 45 A86-39493 Actuator failure detection in the control of distributed
Thermal and electromagnetic damping analysis and its application  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control [AD-A164016]  A 3-component laser-Doppler acquisition and reduction system [NASA-CR-176929]  DATA LINKS  COMLINK proposal for future missions of tethered satellite  DATA MANAGEMENT  Communications and tracking - The keys to Space Station utilization  Robot spacecraft survivability using a decision tree for data processing  DATA REDUCTION  Machine vision and the OMV p 100 N86-24536  A 3-component laser-Doppler acquisition and reduction system [NASA-CR-176929]  DATIME  A new understanding of breakdowns in the day sections of geosynchronous orbit p 67 A86-47335  DECISION MAKING  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control [AD-A164016]  DECISION THEORY	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment former International Solar Polar Mission (ISPM) p 84 N86-27369 A deployable and retractable strongback structure p 27 N86-27389 The Olympus antenna deployment subsystem design and testing spacecraft antennas p 27 N86-27392 Nonlinear dynamic analysis of deploying flexible space booms [NASA-TM-87617] p 61 N86-28981 Evaluation of solar array flight experiment response during flight for extension/retraction phase [NASA-TM-86551] p 29 N86-31606 Design and test of a space deployable radiator [SNIAS-861-440-103] p 23 N86-31640  DEPOLYMERIZATION Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634  DEPOSITION Space manufacturing utilizing the directional electrostatic accretion process p 102 N86-27300  DESIGN ANALYSIS Low frequency design verification of large spacecraft structures p 38 A86-33288	applications p 72 A86-40384 High-stability telescope structures spaceborne telescopes p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775 DIPOLE ANTENNAS Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration (AAS PAPER 85-365) p 51 A86-43220 DIRECT CURRENT Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382 DISCRETE FUNCTIONS The optimal projection equations for reduced-order, discrete-time modeling, estimation, and control p 42 A86-39035 DISPLAY DEVICES Machine vision and the OMV p 100 N86-24536 DISTRIBUTED PARAMETER SYSTEMS Kalman-like estimation for static distributed systems Antenna shape from radiation measurements p 66 A86-39490 Reduced order models for distributed systems based on Hankel-norm approximations p 19 A86-39490 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique Closed-loop stability of large space structures with reduced-order controllers p 45 A86-39492 Actuator failure detection in the control of distributed systems
Thermal and electromagnetic damping analysis and its application  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control  [AD-A164016] p 59 N86-24740  A 3-component laser-Doppler acquisition and reduction system  [NASA-CR-176929] p 104 N86-30135  DATA LINKS  COMLINK proposal for future missions of tethered satellite p 69 N86-27658  DATA MANAGEMENT  Communications and tracking - The keys to Space Station utilization p 66 A86-40529  DATA PROCESSING  Robot spacecraft survivability using a decision tree for data processing  DATA REDUCTION  Machine vision and the OMV p 100 N86-24536 velocimeter data acquisition and reduction system  [NASA-CR-176929] p 104 N86-30135  DAYTIME  A new understanding of breakdowns in the day sections of geosynchronous orbit p 67 A86-47335  DECISION MAKING  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control  [AD-A164016] p 59 N86-24740	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment former International Solar Polar Mission (ISPM) p 84 N86-27369 A deployable and retractable strongback structure p 27 N86-27389 The Olympus antenna deployment subsystem design and testing spacecraft antennas p 27 N86-27392 Nonlinear dynamic analysis of deploying flexible space booms [NASA-TM-87617] p 61 N86-28981 Evaluation of solar array flight experiment response during flight for extension/retraction phase [NASA-TM-86551] p 29 N86-31606 Design and test of a space deployable radiator [SNIAS-861-440-103] p 23 N86-31640  DEPOLYMERIZATION Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88393] p 80 N86-31634  DEPOSITION Space manufacturing utilizing the directional electrostatic accretion process p 102 N86-27300  DESIGN ANALYSIS Low frequency design verification of large spacecraft	applications p 72 A86-40384 High-stability telescope structures spaceborne telescopes p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775  DIPOLE ANTENNAS Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220  DIRECT CURRENT Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382  DISCRETE FUNCTIONS The optimal projection equations for reduced-order, discrete-time modeling, estimation, and control p 42 A86-39035  DISPLAY DEVICES Machine vision and the OMV p 100 N86-24536  DISTRIBUTED PARAMETER SYSTEMS Kalman-like estimation for static distributed systems Antenna shape from radiation measurements p 66 A86-39480 Reduced order models for distributed systems based on Hankel-norm approximations p 19 A86-39490 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39492 Closed-loop stability of large space structures with reduced-order controllers p 45 A86-39493 Actuator failure detection in the control of distributed systems p 47 A86-39507 Control of symmetrizable distributed parameter systems p 49 A86-42921
Thermal and electromagnetic damping analysis and its application  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control [AD-A164016]  A 3-component laser-Doppler velocimeter data acquisition and reduction system [NASA-CR-176929]  DATA LINKS  COMLINK proposal for future missions of tethered satellite  DATA MANAGEMENT  Communications and tracking - The keys to Space Station utilization  Brobot spacecraft survivability using a decision tree for data processing  DATA REDUCTION  Machine vision and the OMV p 100 N86-24536  A 3-component laser-Doppler acquisition and reduction system  [NASA-CR-176929] p 104 N86-30135  DAYTIME  A new understanding of breakdowns in the day sections of geosynchronous orbit p 67 A86-47335  DECISION MAKING  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control  [AD-A164016] p 59 N86-24740  DECISION THEORY  Conference on Decision and Control, 23rd, Las Vegas, NV, December 12-14, 1984, Proceedings. Volume 1	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment former International Solar Polar Mission (ISPM) p 84 N86-27369 A deployable and retractable strongback structure p 27 N86-27389 The Olympus antenna deployment subsystem design and testing spacecraft antennas p 27 N86-27392 Nonlinear dynamic analysis of deploying flexible space booms [NASA-TM-87617] p 61 N86-28981 Evaluation of solar array flight experiment response during flight for extension/retraction phase [NASA-TM-86551] p 29 N86-31606 Design and test of a space deployable radiator [SNIAS-861-440-103] p 23 N86-31640 DEPOLYMERIZATION Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634 DEPOSITION Space manufacturing utilizing the directional electrostatic accretion process p 102 N86-27300 DESIGN ANALYSIS Low frequency design verification of large spacecraft structures Construction and control of large space structures	applications p 72 A86-40384 High-stability telescope structures spaceborne telescopes p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775 DIPOLE ANTENNAS Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration (AAS PAPER 85-365) p 51 A86-43220 DIRECT CURRENT Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382 DISCRETE FUNCTIONS The optimal projection equations for reduced-order, discrete-time modeling, estimation, and control p 42 A86-39035 DISPLAY DEVICES Machine vision and the OMV p 100 N86-24536 DISTRIBUTED PARAMETER SYSTEMS Kalman-like estimation for static distributed systems Antenna shape from radiation measurements p 66 A86-39490 Reduced order models for distributed systems based on Hankel-norm approximations p 19 A86-39490 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique Closed-loop stability of large space structures with reduced-order controllers p 45 A86-39492 Closed-loop stability of large space structures with reduced-order controllers p 45 A86-39493 Actuator failure detection in the control of distributed systems Control of symmetrizable distributed parameter systems p 49 A86-49291 Computer aided modelling/compensator design for a
Thermal and electromagnetic damping analysis and its application  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control [AD-A164016]  A 3-component laser-Doppler acquisition and reduction system [NASA-CR-176929]  DATA LINKS  COMLINK proposal for future missions of tethered satellite  DATA MANAGEMENT  Communications and tracking - The keys to Space Station utilization  A 3-component laser-Doppler acquisition and reduction system [P 104 N86-27658]  DATA MANAGEMENT  Communications and tracking - The keys to Space Station utilization  AR6-40529  DATA PROCESSING  Robot spacecraft survivability using a decision tree for data processing  DATA REDUCTION  Machine vision and the OMV  A 3-component laser-Doppler acquisition and reduction system [NASA-CR-176929]  DAYTIME  A new understanding of breakdowns in the day sections of geosynchronous orbit  DECISION MAKING  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control [AD-A164016]  DECISION THEORY  Conference on Decision and Control, 23rd, Las Vegas, NV, December 12-14, 1984, Proceedings. Volume 1  p 91 A86-31260  Robot spacecraft survivability using a decision tree for	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment former International Solar Polar Mission (ISPM) p 84 N86-27369 A deployable and retractable strongback structure p 27 N86-27389 The Olympus antenna deployment subsystem design and testing spacecraft antennas p 27 N86-27392 Nonlinear dynamic analysis of deploying flexible space booms [NASA-TM-87617] p 61 N86-28981 Evaluation of solar array flight experiment response during flight for extension/retraction phase [NASA-TM-86551] p 29 N86-31606 Design and test of a space deployable radiator [SNIAS-861-440-103] p 23 N86-31640  DEPOLYMERIZATION Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634  DEPOSITION Space manufacturing utilizing the directional electrostatic accretion process p 102 N86-27300  DESIGN ANALYSIS Low frequency design verification of large spacecraft structures p 38 A86-33288  Construction and control of large space structures p 39 A86-37060  Oxygen/hydrogen Space Station propulsion system concept definition for IOC	applications p 72 A86-40384 High-stability telescope structures spaceborne telescopes p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775  DIPOLE ANTENNAS Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220  DIRECT CURRENT Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382  DISCRETE FUNCTIONS The optimal projection equations for reduced-order, discrete-time modeling, estimation, and control p 42 A86-39035  DISPLAY DEVICES Machine vision and the OMV p 100 N86-24536  DISTRIBUTED PARAMETER SYSTEMS Kalman-like estimation for static distributed systems Antenna shape from radiation measurements  P 66 A86-39490 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39490  Closed-loop stability of large space structures with reduced-order controllers p 45 A86-39493  Actuator failure detection in the control of distributed systems  Computer aided modelling/compensator design for a flexible space antenna p 9 96 A86-42993
Thermal and electromagnetic damping analysis and its application  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control [AD-A164016] p 59 N86-24740 A 3-component laser-Doppler acquisition and reduction system [NASA-CR-176929] p 104 N86-30135  DATA LINKS  COMLINK proposal for future missions of tethered satellite p 69 N86-27658  DATA MANAGEMENT  Communications and tracking - The keys to Space p 66 A86-40529  DATA PROCESSING  Robot spacecraft survivability using a decision tree for data processing p 81 A86-32550  DATA REDUCTION  Machine vision and the OMV p 100 N86-24536 velocimeter data acquisition and reduction system [NASA-CR-176929] p 104 N86-30135  DATIME  A new understanding of breakdowns in the day sections of geosynchronous orbit p 67 A86-47335  DECISION MAKING  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control [AD-A164016] p 59 N86-24740  DECISION THEORY  Conference on Decision and Control, 23rd, Las Vegas, NV, December 12-14, 1984, Proceedings. Volume 1 p 91 A86-31260  Robot spacecraft survivability using a decision tree for data processing p 81 A86-32550	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment former International Solar Polar Mission (ISPM) p 84 N86-27369 A deployable and retractable strongback structure p 27 N86-27389 The Olympus antenna deployment subsystem design and testing spacecraft antennas p 27 N86-27392 Nonlinear dynamic analysis of deploying flexible space booms [NASA-TM-87617] p 61 N86-28981 Evaluation of solar array flight experiment response during flight for extension/retraction phase [NASA-TM-86551] p 29 N86-31606 Design and test of a space deployable radiator [SNIAS-861-440-103] p 23 N86-31640 DEPOLYMERIZATION Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634 DEPOSITION Space manufacturing utilizing the directional electrostatic accretion process p 102 N86-27300 DESIGN ANALYSIS Low frequency design verification of large spacecraft structures p 39 A86-33288 Construction and control of large space structures p 39 A86-37060 Oxygen/hydrogen Space Station propulsion system concept definition for IOC [AIAA PAPER 86-1561] p 87 A86-42714	applications p 72 A86-40384 High-stability telescope structures spaceborne telescopes p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775  DIPOLE ANTENNAS Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220  DIRECT CURRENT Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382  DISCRETE FUNCTIONS The optimal projection equations for reduced-order, discrete-time modeling, estimation, and control p 42 A86-39035  DISPLAY DEVICES Machine vision and the OMV p 100 N86-24536  DISTRIBUTED PARAMETER SYSTEMS Kalman-like estimation for static distributed systems Antenna shape from radiation measurements p 66 A86-39480 Reduced order models for distributed systems based on Hankel-norm approximations p 19 A86-39490 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39492 Closed-loop stability of large space structures with reduced-order controllers p 45 A86-39493 Actuator failure detection in the control of distributed systems p 47 A86-39507 Control of symmetrizable distributed parameter systems p 49 A86-42921 Computer aided modelling/compensator design for a flexible space antenna and identification methods for
Thermal and electromagnetic damping analysis and its application  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control [AD-A164016]  A 3-component laser-Doppler acquisition and reduction system [NASA-CR-176929]  DATA LINKS  COMLINK proposal for future missions of tethered satellite  DATA MANAGEMENT  Communications and tracking - The keys to Space Station utilization  A 3-component laser-Doppler acquisition and reduction system [P 104 N86-27658]  DATA MANAGEMENT  Communications and tracking - The keys to Space Station utilization  AR6-40529  DATA PROCESSING  Robot spacecraft survivability using a decision tree for data processing  DATA REDUCTION  Machine vision and the OMV  A 3-component laser-Doppler acquisition and reduction system [NASA-CR-176929]  DAYTIME  A new understanding of breakdowns in the day sections of geosynchronous orbit  DECISION MAKING  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control [AD-A164016]  DECISION THEORY  Conference on Decision and Control, 23rd, Las Vegas, NV, December 12-14, 1984, Proceedings. Volume 1  p 91 A86-31260  Robot spacecraft survivability using a decision tree for	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment former International Solar Polar Mission (ISPM) p 84 N86-27369 A deployable and retractable strongback structure p 27 N86-27389 The Olympus antenna deployment subsystem design and testing spacecraft antennas p 27 N86-27392 Nonlinear dynamic analysis of deploying flexible space booms [NASA-TM-87617] p 61 N86-28981 Evaluation of solar array flight experiment response during flight for extension/retraction phase [NASA-TM-865511] p 29 N86-31606 Design and test of a space deployable radiator [SNIAS-861-440-103] p 23 N86-31640  DEPOLYMERIZATION Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634  DEPOSITION Space manufacturing utilizing the directional electrostatic accretion process p 102 N86-27300  DESIGN ANALYSIS Low frequency design verification of large spacecraft structures p 38 A86-30288 Construction and control of large space structures p 39 A86-37060  Oxygen/hydrogen Space Station propulsion system concept definition for IOC [AIAA PAPER 86-1561] p 87 A86-42714  Transfer of alignment and calibration of multiple sensors	applications p 72 A86-40384 High-stability telescope structures spaceborne telescopes p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775  DIPOLE ANTENNAS Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220  DIRECT CURRENT Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382  DISCRETE FUNCTIONS The optimal projection equations for reduced-order, discrete-time modeling, estimation, and control p 42 A86-39035  DISPLAY DEVICES Machine vision and the OMV p 100 N86-24536  DISTRIBUTED PARAMETER SYSTEMS Kalman-like estimation for static distributed systems Antenna shape from radiation measurements p 66 A86-39480 Reduced order models for distributed systems based on Hankel-norm approximations p 19 A86-39490 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39493 Actuator failure detection in the control of distributed systems p 49 A86-39493 Computer aided modelling/compensator design for a flexible space antenna p 96 A86-42931 Computer aided modelling/compensator design for a flexible space antenna p 96 A86-42933 Modeling, estimation and identification methods for static shape determination of flexible structures for large space structure design
Thermal and electromagnetic damping analysis and its application p 34 N86-27677  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control [AD-A164016]  A 3-component laser-Doppler acquisition and reduction system [NASA-CR-176929]  DATA LINKS  COMLINK proposal for future missions of tethered satellite p 69 N86-27658  DATA MANAGEMENT  Communications and tracking - The keys to Space 96 A86-40529  DATA PROCESSING  Robot spacecraft survivability using a decision tree for data processing p 81 A86-32550  DATA REDUCTION  Machine vision and the OMV p 100 N86-24536 velocimeter data acquisition and reduction system [NASA-CR-176929] p 104 N86-30135  DATA REDUCTION  A 3-component laser-Doppler velocimeter data acquisition and reduction system [NASA-CR-176929] p 104 N86-30135  DATA REDUCTION  A new understanding of breakdowns in the day sections of geosynchronous orbit p 67 A86-47335  DECISION MAKING  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control [AD-A164016] p 59 N86-24740  DECISION THEORY  Conference on Decision and Control, 23rd, Las Vegas, NV, December 12-14, 1984, Proceedings. Volume 1 p 91 A86-31260  Robot spacecraft survivability using a decision tree for data processing p 81 A86-32550  Failure detection and accommodation in structural dynamics systems using analytic redundancy in large space structures p 49 A86-42938	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment former International Solar Polar Mission (ISPM) p 84 N86-27369 A deployable and retractable strongback structure p 27 N86-27389 The Olympus antenna deployment subsystem design and testing spacecraft antennas p 27 N86-27392 Nonlinear dynamic analysis of deploying flexible space booms [NASA-TM-87617] p 61 N86-28981 Evaluation of solar array flight experiment response during flight for extension/retraction phase [NASA-TM-86551] p 29 N86-31606 Design and test of a space deployable radiator [SNIAS-861-440-103] p 23 N86-31640  DEPOLYMERIZATION Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634  DEPOSITION Space manufacturing utilizing the directional electrostatic accretion process p 102 N86-27300  DESIGN ANALYSIS Low frequency design verification of large spacecraft structures p 38 A86-37060  Oxygen/hydrogen Space Station propulsion system concept definition for IOC [AIAA PAPER 86-1561] p 87 A86-42714  Transfer of alignment and calibration of multiple sensors in flexible systems p 50 A86-43003	applications p 72 A86-40384 High-stability telescope structures spaceborne telescopes p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775  DIPOLE ANTENNAS Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220  DIRECT CURRENT Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382  DISCRETE FUNCTIONS The optimal projection equations for reduced-order, discrete-time modeling, estimation, and control p 42 A86-39035  DISPLAY DEVICES Machine vision and the OMV p 100 N86-24536  DISTRIBUTED PARAMETER SYSTEMS Kalman-like estimation for static distributed systems Antenna shape from radiation measurements p 66 A86-39490  Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39492  Closed-loop stability of large space structures with reduced-order controllers p 45 A86-39493  Actuator failure detection in the control of distributed systems p 47 A86-39493  Computer aided modelling/compensator design for a flexible space antenna p 96 A86-42931  Modeling, estimation and identification methods for static shape determination of flexible structures for large space structure design [AAS PAPER 85-424] p 20 A86-43223
Thermal and electromagnetic damping analysis and its application  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control [AD-A164016]  A 3-component laser-Doppler velocimeter data acquisition and reduction system [NASA-CR-176929]  DATA LINKS  COMLINK proposal for future missions of tethered satellite  DATA MANAGEMENT  Communications and tracking - The keys to Space Station utilization  DATA PROCESSING  Robot spacecraft survivability using a decision tree for data processing  DATA REDUCTION  Machine vision and the OMV  A 3-component laser-Doppler velocimeter data acquisition and reduction system  [NASA-CR-176929]  DATIME  A new understanding of breakdowns in the day sections of geosynchronous orbit  p 67 A86-47335  DECISION MAKING  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control  (AD-A164016)  DECISION THEORY  Conference on Decision and Control, 23rd, Las Vegas, NV, December 12-14, 1984, Proceedings. Volume 1  p 91 A86-31260  Robot spacecraft survivability using a decision tree for data processing  P 91 A86-31260  Robot spacecraft survivability using a decision of data processing  P 91 A86-31260  Robot spacecraft survivability using a decision tree for data processing  Failure detection and accommodation in structural dynamics systems using analytic redundancy in large space structures  Moving-bank multiple model adaptive algorithms applied	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment former International Solar Polar Mission (ISPM) p 84 N86-27369 A deployable and retractable strongback structure p 27 N86-27389 The Olympus antenna deployment subsystem design and testing spacecraft antennas p 27 N86-27392 Nonlinear dynamic analysis of deploying flexible space booms [NASA-TM-87617] p 61 N86-28981 Evaluation of solar array flight experiment response during flight for extension/retraction phase [NASA-TM-86551] p 29 N86-31606 Design and test of a space deployable radiator [SNIAS-861-440-103] p 23 N86-31640  DEPOLYMERIZATION Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634  DEPOSITION Space manufacturing utilizing the directional electrostatic accretion process p 102 N86-27300  DESIGN ANALYSIS Low frequency design verification of large spacecraft structures p 38 A86-33288 Construction and control of large space structures p 39 A86-37060  Oxygen/hydrogen Space Station propulsion system concept definition for IOC  [AIAA PAPER 86-1561] p 87 A86-42714  Transfer of alignment and calibration of multiple sensors in flexible systems p 50 A86-43003  Design for a goal-oriented telerobotic system	applications p 72 A86-40384 High-stability telescope structures p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775 DIPOLE ANTENNAS Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration (AAS PAPER 85-365) DIRECT CURRENT Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382 DISCRETE FUNCTIONS The optimal projection equations for reduced-order, discrete-time modeling, estimation, and control p 42 A86-39035 DISPLAY DEVICES Machine vision and the OMV p 100 N86-24536 DISTRIBUTED PARAMETER SYSTEMS Kalman-like estimation for static distributed systems Antenna shape from radiation measurements p 66 A86-39490 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique Closed-loop stability of large space structures with reduced-order controllers p 45 A86-39492 Closed-loop stability of large space structures with reduced-order controllers p 45 A86-39492 Closed-loop stability of large space structures with reduced-order controllers p 45 A86-39492 Control of symmetrizable distributed parameter systems Computer aided modelling/compensator design for a flexible space antenna p 96 A86-42921 Computer aided modelling/compensator design for a flexible space antenna p 96 A86-42921 Computer aided modelling/structures for large space structure design [AAS PAPER 85-424] p 20 A86-43223 Estimation of distributed parameter systems - Some
Thermal and electromagnetic damping analysis and its application p 34 N86-27677  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control (AD-A164016) p 59 N86-24740  A 3-component laser-Doppler acquisition and reduction system (NASA-CR-176929) p 104 N86-30135  DATA LINKS  COMLINK proposal for future missions of tethered satellite p 69 N86-27658  DATA MANAGEMENT  Communications and tracking - The keys to Space Station utilization p 66 A86-40529  DATA PROCESSING  Robot spacecraft survivability using a decision tree for data processing p 81 A86-32550  DATA REDUCTION  Machine vision and the OMV p 100 N86-24536  A 3-component laser-Doppler acquisition and reduction system (NASA-CR-176929) p 104 N86-30135  DAYTIME  A new understanding of breakdowns in the day sections of geosynchronous orbit p 67 A86-47335  DECISION MAKING  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control (AD-A164016) p 59 N86-24740  DECISION THEORY  Conference on Decision and Control, 23rd, Las Vegas, NV, December 12-14, 1984, Proceedings. Volume 1 p 91 A86-31260  Robot spacecraft survivability using a decision tree for data processing p 81 A86-32550  Robot spacecraft survivability using a decision tree for data processing p 91 A86-31260  Robot spacecraft survivability using a decision tree for data processing p 81 A86-32550  Failure detection and accommodation in structural dynamics systems using analytic redundancy in large space structures p 49 A86-42938  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment former International Solar Polar Mission (ISPM) p 84 N86-27369 A deployable and retractable strongback structure p 27 N86-27389 The Olympus antenna deployment subsystem design and testing spacecraft antennas p 27 N86-27392 Nonlinear dynamic analysis of deploying flexible space booms [NASA-TM-87617] p 61 N86-28981 Evaluation of solar array flight experiment response during flight for extension/retraction phase [NASA-TM-86551] p 29 N86-31606 Design and test of a space deployable radiator [SNIAS-861-440-103] p 23 N86-31640 DEPOLYMERIZATION Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634 DEPOSITION Space manufacturing utilizing the directional electrostatic accretion process p 102 N86-27300 DESIGN ANALYSIS Low frequency design verification of large spacecraft structures p 38 A86-33288 Construction and control of large space structures p 39 A86-37060 Oxygen/hydrogen Space Station propulsion system concept definition for IOC [AIAA PAPER 86-1561] p 87 A86-42714 Transfer of alignment and calibration of multiple sensors in flexible systems p 50 A86-43003 Design for a goal-oriented telerobotic system	applications p 72 A86-40384 High-stability telescope structures spaceborne telescopes p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775  DIPOLE ANTENNAS Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220  DIRECT CURRENT Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382  DISCRETE FUNCTIONS The optimal projection equations for reduced-order, discrete-time modeling, estimation, and control p 42 A86-39035  DISPLAY DEVICES Machine vision and the OMV p 100 N86-24536  DISTRIBUTED PARAMETER SYSTEMS Kalman-like estimation for static distributed systems Antenna shape from radiation measurements p 66 A86-39490 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39490 Finite dimensional stabilization of distributed systems Actuator failure detection in the control of distributed systems Computer aided modelling/compensator design for a flexible space antenna p 96 A86-3993 Modeling, estimation and identification methods for static shape determination of flexible structures for large space structure design [AAS PAPER 85-424] p 20 A86-43223 Estimation of distributed parameter systems - Some closed-form solutions p 52 A86-46455
Thermal and electromagnetic damping analysis and its application  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control  [AD-A164016]  A 3-component laser-Doppler acquisition and reduction system  [NASA-CR-176929]  DATA LINKS  COMLINK proposal for future missions of tethered satellite  DATA MANAGEMENT  Communications and tracking - The keys to Space patton utilization  A 3-component laser-Doppler adecision tree for data processing  DATA PROCESSING  Robot spacecraft survivability using a decision tree for data processing  DATA REDUCTION  Machine vision and the OMV  A 3-component laser-Doppler velocimeter data acquisition and reduction system  [NASA-CR-176929]  DATA REDUCTION  Machine vision and the OMV  A 3-component laser-Doppler velocimeter data acquisition and reduction system  [NASA-CR-176929]  DAYTIME  A new understanding of breakdowns in the day sections of geosynchronous orbit  DECISION MAKING  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control  [AD-A164016]  DECISION THEORY  Conference on Decision and Control, 23rd, Las Vegas, NV, December 12-14, 1984, Proceedings. Volume 1  p 91 A86-32550  Failure detection and accommodation in structural dynamics systems using analytic redundancy in large space structures  p 49 A86-42938  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control  [AD-A164016]  P 59 N86-24740	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment former International Solar Polar Mission (ISPM) p 84 N86-27369 A deployable and retractable strongback structure p 27 N86-27389 The Olympus antenna deployment subsystem design and testing spacecraft antennas p 27 N86-27392 Nonlinear dynamic analysis of deploying flexible space booms [NASA-TM-87617] p 61 N86-28981 Evaluation of solar array flight experiment response during flight for extension/retraction phase [NASA-TM-86551] p 29 N86-31606 Design and test of a space deployable radiator [SNIAS-861-440-103] p 23 N86-31640  DEPOLYMERIZATION Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-8839] p 80 N86-31634  DEPOSITION Space manufacturing utilizing the directional electrostatic accretion process p 102 N86-27300  DESIGN ANALYSIS Low frequency design verification of large spacecraft structures p 38 A86-33288 Construction and control of large space structures p 39 A86-37060  Oxygen/hydrogen Space Station propulsion system concept definition for IOC [AIAA PAPER 86-1561] p 87 A86-42714 Transfer of alignment and calibration of multiple sensors in flexible systems p 50 A86-43003  Design study for a high stability large centrifuge test bed	applications p 72 A86-40384 High-stability telescope structures p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775 DIPOLE ANTENNAS Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration (AAS PAPER 85-365) DIRECT CURRENT Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382 DISCRETE FUNCTIONS The optimal projection equations for reduced-order, discrete-time modeling, estimation, and control p 42 A86-39035 DISPLAY DEVICES Machine vision and the OMV p 100 N86-24536 DISTRIBUTED PARAMETER SYSTEMS Kalman-like estimation for static distributed systems Antenna shape from radiation measurements p 66 A86-39490 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique Closed-loop stability of large space structures with reduced-order controllers p 45 A86-39492 Closed-loop stability of large space structures with reduced-order controllers p 45 A86-39492 Closed-loop stability of large space structures with reduced-order controllers p 45 A86-39492 Control of symmetrizable distributed parameter systems Computer aided modelling/compensator design for a flexible space antenna p 96 A86-42921 Computer aided modelling/compensator design for a flexible space antenna p 96 A86-42921 Computer aided modelling/structures for large space structure design [AAS PAPER 85-424] p 20 A86-43223 Estimation of distributed parameter systems - Some
Thermal and electromagnetic damping analysis and its application p 34 N86-27677  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control (AD-A164016) p 59 N86-24740  A 3-component laser-Doppler acquisition and reduction system (NASA-CR-176929) p 104 N86-30135  DATA LINKS  COMLINK proposal for future missions of tethered satellite p 69 N86-27658  DATA MANAGEMENT  Communications and tracking - The keys to Space Station utilization p 66 A86-40529  DATA PROCESSING  Robot spacecraft survivability using a decision tree for data processing p 81 A86-32550  DATA REDUCTION  Machine vision and the OMV p 100 N86-24536  A 3-component laser-Doppler acquisition and reduction system (NASA-CR-176929) p 104 N86-30135  DAYTIME  A new understanding of breakdowns in the day sections of geosynchronous orbit p 67 A86-47335  DECISION MAKING  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control (AD-A164016) p 59 N86-24740  DECISION THEORY  Conference on Decision and Control, 23rd, Las Vegas, NV, December 12-14, 1984, Proceedings. Volume 1 p 91 A86-31260  Robot spacecraft survivability using a decision tree for data processing p 81 A86-32550  Robot spacecraft survivability using a decision tree for data processing p 91 A86-31260  Robot spacecraft survivability using a decision tree for data processing p 81 A86-32550  Failure detection and accommodation in structural dynamics systems using analytic redundancy in large space structures p 49 A86-42938  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment former International Solar Polar Mission (ISPM) p 84 N86-27369 A deployable and retractable strongback structure p 27 N86-27389 The Olympus antenna deployment subsystem design and testing spacecraft antennas p 27 N86-27392 Nonlinear dynamic analysis of deploying flexible space booms [NASA-TM-87617] p 61 N86-28981 Evaluation of solar array flight experiment response during flight for extension/retraction phase [NASA-TM-86551] p 29 N86-31606 Design and test of a space deployable radiator [SNIAS-861-440-103] p 23 N86-31640 DEPOLYMERIZATION Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634 DEPOSITION Space manufacturing utilizing the directional electrostatic accretion process p 102 N86-27300 DESIGN ANALYSIS Low frequency design verification of large spacecraft structures p 38 A86-33288 Construction and control of large space structures p 39 A86-37060 Oxygen/hydrogen Space Station propulsion system concept definition for IOC [AIAA PAPER 86-1561] p 87 A86-42714 Transfer of alignment and calibration of multiple sensors in flexible systems p 50 A86-43003 Design study for a high stability large centrifuge test bed [AIAA PAPER 86-2000] p 83 A86-47440 Design study for a high stability large centrifuge test bed	applications p 72 A86-40384 High-stability telescope structures
Thermal and electromagnetic damping analysis and its application  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control  [AD-A164016]  A 3-component laser-Doppler acquisition and reduction system  [NASA-CR-176929]  DATA LINKS  COMLINK proposal for future missions of tethered satellite  DATA MANAGEMENT  Communications and tracking - The keys to Space station utilization  A 3-component laser-Doppler adecision tree for data processing  DATA PROCESSING  Robot spacecraft survivability using a decision tree for data processing  DATA REDUCTION  Machine vision and the OMV  A 3-component laser-Doppler acquisition and reduction system  [NASA-CR-176929]  DAY Machine vision and the OMV  A 3-component laser-Doppler acquisition and reduction system  [NASA-CR-176929]  DAY Machine vision and the OMV  A new understanding of breakdowns in the day sections of geosynchronous orbit  DECISION MAKING  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control  [AD-A164016]  DECISION THEORY  Conference on Decision and Control, 23rd, Las Vegas, NV, December 12-14, 1984, Proceedings. Volume 1  p 91 A66-31250  Robot spacecraft survivability using a decision tree for data processing  Failure detection and accommodation in structural dynamics systems using analytic redundancy in large space structures  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control  [AD-A164016]  P 59 N86-24740  DECOMPOSITION  An orthogonal decomposition approach to modal synthesis  p 39 A86-36216	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment former International Solar Polar Mission (ISPM) p 84 N86-27369 A deployable and retractable strongback structure p 27 N86-27389 The Olympus antenna deployment subsystem design and testing spacecraft antennas p 27 N86-27392 Nonlinear dynamic analysis of deploying flexible space booms [NASA-TM-87617] p 61 N86-28981 Evaluation of solar array flight experiment response during flight for extension/retraction phase [NASA-TM-86551] p 29 N86-31606 Design and test of a space deployable radiator [SNIAS-861-440-103] p 23 N86-31640  DEPOLYMERIZATION Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634  DEPOSITION Space manufacturing utilizing the directional electrostatic accretion process p 102 N86-27300  DESIGN ANALYSIS Low frequency design verification of large spacecraft structures p 38 A86-37060  Oxygen/hydrogen Space Station propulsion system concept definition for IOC [AIAA PAPER 86-1561] p 87 A86-42714  Transfer of alignment and calibration of multiple sensors in flexible systems p 50 A86-43003  Design study for a high stability large centrifuge test bed [AIAA PAPER 86-2000] p 83 A86-47445  Improved flexibility of an EVA glove	applications p 72 A86-40384 High-stability telescope structures spaceborne telescopes p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775  DIPOLE ANTENNAS Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220  DIRECT CURRENT Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382  DISCRETE FUNCTIONS The optimal projection equations for reduced-order, discrete-time modeling, estimation, and control p 42 A86-39035  DISPLAY DEVICES Machine vision and the OMV p 100 N86-24536  DISTRIBUTED PARAMETER SYSTEMS  Kalman-like estimation for static distributed systems Antenna shape from radiation measurements. p 66 A86-39490 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39490  Closed-loop stability of large space structures with reduced-order controllers p 45 A86-39493  Actuator failure detection in the control of distributed systems p 49 A86-439507  Control of symmetrizable distributed parameter systems p 49 A86-42993  Modeling, estimation and identification methods for static shape determination of flexible structures for large space structure design [AAS PAPER 85-424] p 20 A86-43223  Estimation of distributed parameter systems - Some closed-form solutions p 52 A86-46455 Distributed parameter systems and Applications, Vorau, Austria, July 9-14, 1984 p 98 A86-46808
Thermal and electromagnetic damping analysis and its application  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control [AD-A164016]  A 3-component laser-Doppler velocimeter data acquisition and reduction system [NASA-CR-176929]  DATA LINKS  COMLINK proposal for future missions of tethered satellite p 69 N86-27658  DATA MANAGEMENT  Communications and tracking - The keys to Space Station utilization p 66 A86-40529  DATA PROCESSING  Robot spacecraft survivability using a decision tree for data processing p 81 A86-32550  DATA REDUCTION  Machine vision and the OMV p 100 N86-24536 velocimeter data acquisition and reduction system [NASA-CR-176929] p 104 N86-30135  DATTIME  A new understanding of breakdowns in the day sections of geosynchronous orbit p 67 A86-47335  DECISION MAKING  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control (AD-A164016) p 59 N86-24740  DECISION THEORY  Conference on Decision and Control, 23rd, Las Vegas, NV, December 12-14, 1984, Proceedings. Volume 1 p 91 A86-31260  Robot spacecraft survivability using a decision tree for data processing p 81 A86-32550  Failure detection and accommodation in structural dynamics systems using analytic redundancy in large space structures p 49 A86-42938  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control [AD-A164016] p 59 N86-24740  DECISION THEORY  Conference on Decision and Control, 23rd, Las Vegas, NV, December 12-14, 1984, Proceedings. Volume 1 p 91 A86-31260  Robot spacecraft survivability using a decision tree for data processing p 81 A86-32550  Failure detection and accommodation in structural dynamics systems using analytic redundancy in large space structures p 49 A86-42938  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control [AD-A164016] p 59 N86-24740  DECOMPOSITION  An orthogonal decomposition approach to modal synthesis p 39 A86-36216	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment former International Solar Polar Mission (ISPM) p 84 N86-27369 A deployable and retractable strongback structure p 27 N86-27389 The Olympus antenna deployment subsystem design and testing spacecraft antennas p 27 N86-27392 Nonlinear dynamic analysis of deploying flexible space booms [NASA-TM-87617] p 61 N86-28981 Evaluation of solar array flight experiment response during flight for extension/retraction phase [NASA-TM-86551] p 29 N86-31606 Design and test of a space deployable radiator [SNIAS-861-440-103] p 23 N86-31640  DEPOLYMERIZATION Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634  DEPOSITION Space manufacturing utilizing the directional electrostatic accretion process p 102 N86-27300  DESIGN ANALYSIS Low frequency design verification of large spacecraft structures p 38 A86-37288  Construction and control of large space structures p 39 A86-37060  Oxygen/hydrogen Space Station propulsion system concept definition for IOC [AIAA PAPER 86-1561] p 87 A86-42714  Transfer of alignment and calibration of multiple sensors in flexible systems p 50 A86-43003  Design study for a high stability large centrifuge test bed [AIAA PAPER 86-2090] p 83 A86-47445 Improved flexibility of an EVA glove	applications p 72 A86-40384 High-stability telescope structures p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775 DIPOLE ANTENNAS Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220 DIRECT CURRENT Development and testing of a dual-wound dc motor gearhead p 50 p 102 N86-27382 DISCRETE FUNCTIONS The optimal projection equations for reduced-order, discrete-time modeling, estimation, and control p 42 A86-39035 DISPLAY DEVICES Machine vision and the OMV p 100 N86-24536 DISTRIBUTED PARAMETER SYSTEMS Kalman-like estimation for static distributed systems Antenna shape from radiation measurements p 66 A86-39490 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique P 45 A86-39492 Closed-loop stability of large space structures with reduced-order controllers p 45 A86-39492 Closed-loop stability of large space structures with reduced-order controllers p 47 A86-39490 Control of symmetrizable distributed parameter systems p 49 A86-42921 Computer aided modelling/compensator design for a flexible space antenna p 96 A86-42921 Computer aided modelling/compensator design for a flexible space antenna p 96 A86-42921 Estimation of distributed parameter systems - Some closed-form solutions p 52 A86-46455 Distributed parameter systems - Some closed-form solutions p 52 A86-464055 Distributed Parameter Systems and Applications, Vorau, Austria, July 9-14, 1984 Control of flexible structures with respect to infinity
Thermal and electromagnetic damping analysis and its application  DATA ACQUISITION  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control  [AD-A164016]  A 3-component laser-Doppler acquisition and reduction system  [NASA-CR-176929]  DATA LINKS  COMLINK proposal for future missions of tethered satellite  DATA MANAGEMENT  Communications and tracking - The keys to Space station utilization  A 3-component laser-Doppler adecision tree for data processing  DATA PROCESSING  Robot spacecraft survivability using a decision tree for data processing  DATA REDUCTION  Machine vision and the OMV  A 3-component laser-Doppler acquisition and reduction system  [NASA-CR-176929]  DAY Machine vision and the OMV  A 3-component laser-Doppler acquisition and reduction system  [NASA-CR-176929]  DAY Machine vision and the OMV  A new understanding of breakdowns in the day sections of geosynchronous orbit  DECISION MAKING  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control  [AD-A164016]  DECISION THEORY  Conference on Decision and Control, 23rd, Las Vegas, NV, December 12-14, 1984, Proceedings. Volume 1  p 91 A66-31250  Robot spacecraft survivability using a decision tree for data processing  Failure detection and accommodation in structural dynamics systems using analytic redundancy in large space structures  Moving-bank multiple model adaptive algorithms applied to flexible spacecraft control  [AD-A164016]  P 59 N86-24740  DECOMPOSITION  An orthogonal decomposition approach to modal synthesis  p 39 A86-36216	[ISAS-618] p 26 N86-23624 Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment former International Solar Polar Mission (ISPM) p 84 N86-27369 A deployable and retractable strongback structure p 27 N86-27389 The Olympus antenna deployment subsystem design and testing spacecraft antennas p 27 N86-27392 Nonlinear dynamic analysis of deploying flexible space booms [NASA-TM-87617] p 61 N86-28981 Evaluation of solar array flight experiment response during flight for extension/retraction phase [NASA-TM-86551] p 29 N86-31606 Design and test of a space deployable radiator [SNIAS-861-440-103] p 23 N86-31640  DEPOLYMERIZATION Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634  DEPOSITION Space manufacturing utilizing the directional electrostatic accretion process p 102 N86-27300  DESIGN ANALYSIS Low frequency design verification of large spacecraft structures p 38 A86-37060  Oxygen/hydrogen Space Station propulsion system concept definition for IOC [AIAA PAPER 86-1561] p 87 A86-42714  Transfer of alignment and calibration of multiple sensors in flexible systems p 50 A86-43003  Design study for a high stability large centrifuge test bed [AIAA PAPER 86-2000] p 83 A86-47445  Improved flexibility of an EVA glove	applications p 72 A86-40384 High-stability telescope structures spaceborne telescopes p 28 N86-30773 Dimensional stability of CFRP tubes for space structures p 35 N86-30775  DIPOLE ANTENNAS Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220  DIRECT CURRENT Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382  DISCRETE FUNCTIONS The optimal projection equations for reduced-order, discrete-time modeling, estimation, and control p 42 A86-39035  DISPLAY DEVICES Machine vision and the OMV p 100 N86-24536  DISTRIBUTED PARAMETER SYSTEMS  Kalman-like estimation for static distributed systems Antenna shape from radiation measurements. p 66 A86-39490 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39490  Closed-loop stability of large space structures with reduced-order controllers p 45 A86-39493  Actuator failure detection in the control of distributed systems p 49 A86-439507  Control of symmetrizable distributed parameter systems p 49 A86-42993  Modeling, estimation and identification methods for static shape determination of flexible structures for large space structure design [AAS PAPER 85-424] p 20 A86-43223  Estimation of distributed parameter systems - Some closed-form solutions p 52 A86-46455 Distributed parameter systems and Applications, Vorau, Austria, July 9-14, 1984 p 98 A86-46808

p 61 N86-28981

p 104 N86-30627

p 63 N86-30682

p 63 N86-30683

p 63 N86-30684

p 77 N86-30763

Nonlinear dynamic analysis of deploying flexible space

The Second International Symposium on Aeroelasticity

Test and analysis correlation for structural dynamic

Reconstruction of forcing functions based on measured

Dynamic mechanical analysis as an aid to the

Analytical and experimental results of advanced

composite stiffened panels under combined loads

Dynamic verification of very large space structures

[NASA-TM-87617]

structural responses

[DGLR-85-02]

and Structural Dynamics

systems --- spacecraft structures

characterization of composite materials

DOMAINS  Tine domain design of robust control		
Tine domain degian of rebust control		
Quadratic Gaussian); application	to la	rge space
structures	- 50	NOC 00074
[AD-A163635]  DOMESTIC SATELLITE COMMUNICATION	p 59	N86-26074
Space Station services provided		
satellites	o com	munications
[AIAA PAPER 86-2333]	p 10	A86-46956
DROPS (LIQUIDS)	P IO	700-40330
Liquid droplet radiator program at	the N	ASA Lewis
Research Center		non Lomo
[ASME PAPER 86-HT-15]	p 32	A86-49621
DRY FRICTION	•	
Frequency domain solutions to multi-	degree-	of-freedom,
dry friction damped systems under per	iodic e	xcitation
	p 44	A86-39485
DYNAMIC CHARACTERISTICS		
Uniform damping control of spacecr		400 04004
Eutopoion for ground based tootic	p 36	A86-31664
Extension for ground-based testing structures	p 37	A86-32944
	•	determinate
space-truss platforms	p 48	A86-41741
DYNAMIC CONTROL	p 40	7,00 41741
Balanced Augmented Controller Rec	fuction	
Data look yog licition oo licitor in the	p 44	A86-39491
Implementation problems associated		
maneuver and vibration suppres	sion	of flexible
spacecraft	p 47	A86-39511
Some considerations of actuator dyna		the attitude
control of a flexible beam		
[AIAA PAPER 86-2124]	p 57	A86-47955
Analytical investigation of the dyna	mics o	of tethered
constellations in Earth orbit, phase 2		NOO 6555
[NASA-CR-178754]		N86-23629
ACOSS eleven (Active Control Of S		
[AD-A165864]	p 62	
Influence of structural parameter unce	ertaintie	es on tiexible
space structural control performances	n 65	NIGE 22516
[SNIAS-861-440-104] DYNAMIC LOADS	p 65	N86-32516
The effect of energy dissipation du	a to fri	ction at the
joint of a simple beam structure		out at tile
[AD-A163975]	p 58	N86-24739
DYNAMIC MODELS	p 00	
An investigation of adaptive control to	chniau	es for space
stations		A86-35333
An orthogonal decomposition ag		
synthesis		A86-36216
Space Station dynamic modeli		ontrol and
simulation	- 20	
	p 39	A86-37186
Error estimation and compensation i		A86-37186
models of large space structures	n reduc	A86-37186 ced dynamic
models of large space structures [AIAA PAPER 86-0837]	n reduc p 25	A86-37186 ced dynamic A86-38885
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me	n reduc p 25	A86-37186 ced dynamic A86-38885
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model	p 25 thods f	A86-37186 ced dynamic A86-38885 for a generic
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838]	p 25 thods f	A86-37186 ced dynamic A86-38885 for a generic A86-38886
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large space	p 25 thods f p 40 e strue	A86-37186 ced dynamic A86-38885 for a generic A86-38886 ctures with
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large spac reduced-order controllers	p 25 thods f p 40 e strue p 45	A86-37186 ced dynamic A86-38885 for a generic A86-38886 ctures with A86-39493
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large spac reduced-order controllers Mathematical models of flexible sp.	p 25 thods f p 40 e strue p 45 acecraf	A86-37186 ded dynamic A86-38885 for a generic A86-38886 ctures with A86-39493 ft dynamics:
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large spac reduced-order controllers Mathematical models of flexible space A survey of order reduction appro	p 25 thods f p 40 e strue p 45 acecraf	A86-37186 ded dynamic A86-38885 for a generic A86-38886 ctures with A86-39493 ft dynamics:
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large spac reduced-order controllers Mathematical models of flexible sp. A survey of order reduction appro tracking	p 25 thods f p 40 e strue p 45 acecraf aches	A86-37186 and dynamic A86-38885 for a generic A86-38886 ctures with A86-39493 ft dynamics: aircraft
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large spac reduced-order controllers Mathematical models of flexible sp. A survey of order reduction approtracking [NLR-MP-85004-U]	p 25 thods f p 40 e struc p 45 accerat aches p 60	A86-37186 and dynamic A86-38885 for a generic A86-38886 ctures with A86-39493 ft dynamics: aircraft N86-26367
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large spac reduced-order controllers Mathematical models of flexible sp. A survey of order reduction approtracking [NLR-MP-85004-U] Failure propagation in continuum models and survey of order reduction approtracking	p 25 thods f p 40 e struc p 45 accerat aches p 60	A86-37186 and dynamic A86-38885 for a generic A86-38886 ctures with A86-39493 ft dynamics: aircraft N86-26367
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large spac reduced-order controllers Mathematical models of flexible sp. A survey of order reduction appro tracking [NLR-MP-85004-U] Failure propagation in continuum mo Space Structures), part 1	p 25 thods f p 40 e struc p 45 acceraf aches p 60 dels of	A86-37186 ted dynamic  A86-38885 for a generic  A86-38886 ctures with A86-39493 ft dynamics: aircraft  N86-26367 LSS (Large
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large spac reduced-order controllers Mathematical models of flexible sp. A survey of order reduction approtracking [NLR-MP-85004-U] Failure propagation in continuum mo Space Structures), part 1 [AD-A166208]	p 25 thods f p 40 e strue p 45 accerat aches p 60 dels of	A86-37186 ted dynamic  A86-38885 for a generic  A86-38886 ctures with A86-39493 ft dynamics: aircraft  N86-26367 LSS (Large
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large spac reduced-order controllers Mathematical models of flexible sp. A survey of order reduction approtracking [NLR-MP-85004-U] Failure propagation in continuum mo Space Structures), part 1 [AD-A166208] Dynamics of flexible spacecraft:	p 25 thods f p 40 e struc p 45 accerat aches p 60 dels of	A86-37186 ced dynamic A86-38885 or a generic A86-38886 ctures with A86-39493 ff dynamics: aircraft N86-26367 LSS (Large N86-29892 analysis of
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large spac reduced-order controllers Mathematical models of flexible sp. A survey of order reduction approtracking [NLR-MP-85004-U] Failure propagation in continuum mo Space Structures), part 1 [AD-A166208]	p 25 thods f p 40 e struc p 45 accerat aches p 60 dels of	A86-37186 ced dynamic A86-38885 or a generic A86-38886 ctures with A86-39493 ff dynamics: aircraft N86-26367 LSS (Large N86-29892 analysis of
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large spac reduced-order controllers Mathematical models of flexible sp. A survey of order reduction approtracking [NLR-MP-85004-U] Failure propagation in continuum mo Space Structures), part 1 [AD-A166208] Dynamics of flexible spacecraft: approaches towards mathematical meion	p 25 thods f p 40 e struct p 45 accerat aches p 60 dels of p 63 An indeed or	A86-37186 Led dynamic A86-38885 or a generic A86-38886 ctures with A86-3945 If dynamics:
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large space reduced-order controllers Mathematical models of flexible space A survey of order reduction appro tracking [NLR-MP-85004-U] Failure propagation in continuum mo Space Structures), part 1 [AD-A166208] Dynamics of flexible spacecraft: approaches towards mathematical me ion [NLR-TR-85068-U]	p 25 thods f p 40 e struc p 45 accerat aches p 60 dels of	A86-37186 Led dynamic A86-38885 or a generic A86-38886 ctures with A86-3945 If dynamics:
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large spac reduced-order controllers Mathematical models of flexible spac A survey of order reduction appro tracking [NLR-MP-85004-U] Failure propagation in continuum mo Space Structures), part 1 [AD-A166208] Dynamics of flexible spacecraft: approaches towards mathematical mi ion [NLR-TR-85068-U] DYNAMIC PROGRAMMING	p 25 thods f p 40 e struct p 45 accerat aches p 60 dels of p 63 An indeel or p 65	A86-37186 ted dynamic A86-38885 for a generic A86-38886 ctures with A86-39493 ft dynamics:
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large space reduced-order controllers Mathematical models of flexible space A survey of order reduction appro tracking [NLR-MP-85004-U] Failure propagation in continuum mo Space Structures), part 1 [AD-A166208] Dynamics of flexible spacecraft: approaches towards mathematical me ion [NLR-TR-85068-U]	p 25 thods f p 40 e struct p 45 accerat aches p 60 dels of p 63 An indeel or p 65	A86-37186 ted dynamic A86-38885 for a generic A86-38886 ctures with A86-39493 ft dynamics:
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large spac reduced-order controllers Mathematical models of flexible sp. A survey of order reduction approtracking [NLR-MP-85004-U] Failure propagation in continuum mo Space Structures), part 1 [AD-A166208] Dynamics of flexible spacecraft: approaches towards mathematical mion [NLR-TR-85068-U] DYNAMIC PROGRAMMING Optimum detumbling of space platfor	p 25 thods f p 40 e struct p 45 accerat aches p 60 dels of p 63 An odel or p 65	A86-37186 ted dynamic A86-38885 for a generic A86-38886 ctures with A86-39493 ft dynamics:
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large spac reduced-order controllers Mathematical models of flexible space structures and the space of space structures, part 1 [AD-A166208] Dynamics of flexible spacecraft approaches towards mathematical mion [NLR-TR-85068-U] DYNAMIC PROGRAMMING Optimum detumbling of space platter programming algorithm [AIAA PAPER 86-2154]	p 25 thods f p 40 e struct p 45 accerat aches p 60 dels of p 63 An odel or p 65	A86-37186 hed dynamic A86-38885 for a generic A86-38886 ctures with A86-39493 ht dynamics:
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large spac reduced-order controllers Mathematical models of flexible space tracking [NLR-MP-85004-U] Failure propagation in continuum mo Space Structures), part 1 [AD-A166208] Dynamics of flexible spacecraft: approaches towards mathematical mion [NLR-TR-85068-U] DYNAMIC PROGRAMMING Optimum detumbling of space platter programming algorithm [AIAA PAPER 86-2154]	p 25 thods f p 40 e stru- p 45 e stru- p 45 accecrafa aches p 60 dels of p 63 An - odel or p 65 rrms via	A86-37186 Led dynamic A86-38885 or a generic A86-38886 ctures with A86-39836 It dynamics:
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large spac reduced-loop stability of large spac reduced-order controllers Mathematical models of flexible sp. A survey of order reduction appro tracking [NLR-MP-85004-U] Failure propagation in continuum mo Space Structures), part 1 [AD-A166208] Dynamics of flexible spacecraft: approaches towards mathematical m ion [NLR-TR-85068-U] DYNAMIC PROGRAMMING Optimum detumbling of space platfo programming algorithm [AIAA PAPER 86-2154] DYNAMIC RESPONSE	p 25 thods f p 40 p 45 accerate p 45 accerate p 60 dels of p 63 An codel or p 65 rms via	A86-37186 Led dynamic A86-38885 or a generic A86-38886 ctures with A86-39836 It dynamics:
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large space reduced-order controllers Mathematical models of flexible sp. A survey of order reduction approstracking [NLR-MP-85004-U] Failure propagation in continuum mo Space Structures), part 1 [AD-A166208] Dynamics of flexible spacecraft: approaches towards mathematical mion [NLR-TR-85068-U] DYNAMIC PROGRAMMING Optimum detumbling of space platfor programming algorithm [AIAA PAPER 86-2154] DYNAMIC RESPONSE Low frequency design verification of	p 25 thods for p 40 e struing p 45 accerata aches p 60 dels of p 63 An acdel or p 65 rms via p 57 of large p 38	A86-37186 Led dynamic A86-38885 for a generic A86-38886 Ctures with A86-39493 A86-39493 It dynamics:
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large spac reduced-order controllers Mathematical models of flexible sp. A survey of order reduction appro tracking [NLR-MP-85004-U] Failure propagation in continuum mo Space Structures), part 1 [AD-A166208] Dynamics of flexible spacecraft: approaches towards mathematical m ion [NLR-TR-85068-U] DYNAMIC PROGRAMMING Optimum detumbling of space platfor programming algorithm [AIAA PAPER 86-2154] DYNAMIC RESPONSE Low frequency design verification of structures Buckling and non-linear respon three-legged truss columns	p 25 thods for p 40 e struing p 45 accerata aches p 60 dels of p 63 An acdel or p 65 rms via p 57 of large p 38	A86-37186 Led dynamic A86-38885 for a generic A86-38886 Ctures with A86-39493 A86-39493 It dynamics:
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large spac reduced-order controllers Mathematical models of flexible sp. A survey of order reduction appro tracking [NLR-MP-85004-U] Failure propagation in continuum mo Space Structures), part 1 [AD-A166208] Dynamics of flexible spacecraft: approaches towards mathematical mion [NLR-TR-85068-U] DYNAMIC PROGRAMMING Optimum detumbling of space platforprogramming algorithm [AIAA PAPER 86-2154] DYNAMIC RESPONSE Low frequency design verification of structures Buckling and non-linear respon three-legged truss columns [AIAA PAPER 86-0974]	p 25 thods f p 40 e struct p 45 p 46 e struct p 45 f 60 dels of p 63 An dels of p 65 rms via p 57 f largee p 38 se of p 24	A86-37186 Led dynamic A86-38885 for a generic A86-38886 tures with A86-39493 ft dynamics:
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large space reduced-loop stability of large space reduced-order controllers Mathematical models of flexible space A survey of order reduction approteacking [NLR-MP-85004-U] Failure propagation in continuum mo Space Structures), part 1 [AD-A166208] Dynamics of flexible spacecraft: approaches towards mathematical mi ion [NLR-TR-85068-U] DYNAMIC PROGRAMMING Optimum detumbling of space platfor programming algorithm [AIAA PAPER 86-2154] DYNAMIC RESPONSE Low frequency design verification of structures Buckling and non-linear respon three-legged truss columns [AIAA PAPER 86-0974] A singular-solution approach for conti-	p 25 thods f p 40 e struu p 45 e struu p 45 accerat p 60 dels of p 63 An	A86-37186 Led dynamic A86-38885 or a generic A86-38886 ctures with A86-39885 It dynamics:
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large spac reduced-order controllers Mathematical models of flexible space structures are reduction approtracking [NLR-MP-85004-U] Failure propagation in continuum mo Space Structures), part 1 [AD-A166208] Dynamics of flexible spacecraft: approaches towards mathematical mion [NLR-TR-85068-U] DYNAMIC PROGRAMMING Optimum detumbling of space platfor programming algorithm [AIAA PAPER 86-2154] DYNAMIC RESPONSE Low frequency design verification of structures Buckling and non-linear respontance-legged truss columns [AIAA PAPER 86-0974]	p 25 thods f p 40 e struu p 45 e struu p 45 accerat p 60 dels of p 63 An	A86-37186 Led dynamic A86-38885 or a generic A86-38886 ctures with A86-39885 It dynamics:
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large spac reduced-order controllers Mathematical models of flexible sp. A survey of order reduction approtracking [NLR-MP-85004-U] Failure propagation in continuum mo Space Structures), part 1 [AD-A166208] Dynamics of flexible spacecraft: approaches towards mathematical mion [NLR-TR-85068-U] DYNAMIC PROGRAMMING Optimum detumbling of space platfor programming algorithm [AIAA PAPER 86-2154] DYNAMIC RESPONSE Low frequency design verification of structures Buckling and non-linear responstructures [AIAA PAPER 86-0974] A singular-solution approach for contresponse of a continuum model of structure	p 25 thods f p 40 e struin p 45 e struin p 45 dels of p 63 An odel or p 65 rms via p 57 of large p 38 se of p 24 tolling t	A86-37186 Led dynamic A86-38885 for a generic A86-38886 ctures with A86-39493 A86-26367 LSS (Large N86-26367 LSS (Large N86-29892 analysis of der reduct N86-31643 a a dynamic A86-47518 b spacecraft A86-33288 imperfect A86-38854 he nonlinear arge space
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large space reduced-loop stability of large space reduced-loop stability of large space reduced-loop stability of large space reduced-order controllers Mathematical models of flexible space space space structures, part 1 [AILA-MF-85004-U] Failure propagation in continuum mo Space Structures), part 1 [AILA-A166208] Dynamics of flexible spacecraft: approaches towards mathematical mi ion [NLR-TR-85068-U] DYNAMIC PROGRAMMING Optimum detumbling of space plattor programming algorithm [AILAA PAPER 86-2154] DYNAMIC RESPONSE Low frequency design verification of structures Buckling and non-linear responseructures a continuum model of structure [AILAA PAPER 86-0974] A singular-solution approach for contresponse of a continuum model of structure [AILAA PAPER 86-0841]	p 25 thods f p 40 e structure p 25 p 40 e structure p 45 p 60 dels of p 63 p 65 rms via p 57 f large p 38 p 24 tolling the p 41	A86-37186 Led dynamic A86-38885 or a generic A86-38886 ctures with A86-39891 A86-26367 LSS (Large N86-26367 LSS (Large N86-29892 analysis of der reduct N86-31643 a a dynamic A86-47518 a spacecraft A86-33288 imperfect A86-38854 the nonlinear arge space A86-38889
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large space reduced-order controllers Mathematical models of flexible space A survey of order reduction approtacking [NLR-MP-85004-U] Failure propagation in continuum mo Space Structures), part 1 [AD-A166208] Dynamics of flexible spacecraft: approaches towards mathematical mi ion [NLR-TR-85068-U] DYNAMIC PROGRAMMING Optimum detumbling of space platfor programming algorithm [AIAA PAPER 86-2154] DYNAMIC RESPONSE Low frequency design verification of structures Buckling and non-linear respon three-legged truss columns [AIAA PAPER 86-0974] A singular-solution approach for cont response of a continuum model of structure [AIAA PAPER 86-0841] Effect of degradation of material	p 25 thods f p 40 e structure p 25 p 40 e structure p 45 p 40 dels of p 63 and p 65 p 67 p 68 p 38 se of p 24 p 70 p 67 p 18 p 24 p 70 p 67 p 70 p 18 p 1	A86-37186 Led dynamic A86-38885 or a generic A86-38886 ctures with A86-39891 A86-26367 LSS (Large N86-26367 LSS (Large N86-29892 analysis of der reduct N86-31643 a a dynamic A86-47518 a spacecraft A86-33288 imperfect A86-38854 the nonlinear arge space A86-38889
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large space reduced-loop stability of large space reduced-loop stability of large space reduced-loop stability of large space reduced-order controllers Mathematical models of flexible space space space structures, part 1 [AILA-MF-85004-U] Failure propagation in continuum mo Space Structures), part 1 [AILA-A166208] Dynamics of flexible spacecraft: approaches towards mathematical mi ion [NLR-TR-85068-U] DYNAMIC PROGRAMMING Optimum detumbling of space plattor programming algorithm [AILAA PAPER 86-2154] DYNAMIC RESPONSE Low frequency design verification of structures Buckling and non-linear responseructures a continuum model of structure [AILAA PAPER 86-0974] A singular-solution approach for contresponse of a continuum model of structure [AILAA PAPER 86-0841]	p 25 thods f p 40 e struing 45 p 45 e struing 45 p 60 dels of p 63 An oddel or p 65 rms via p 57 of large p 38 se of p 24 thodolling to p 65 p 7 24 p 7 4 1 p 7 4 1 p 7 4 1 p 7 4 1 p 7 4 1 p 7 4 1 p 7 4 1 p 7 4 1 p 7 4 1	A86-37186 Led dynamic A86-38885 for a generic A86-38886 ctures with A86-39493 A86-26367 LSS (Large N86-26367 LSS (Large N86-29892 LSS (Large N86-31643 A a dynamic A86-47518 A86-33288 Imperfect A86-38854 A86-38854 A86-38889
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large space reduced-order controllers Mathematical models of flexible space spa	p 25 thods f p 40 e structure p 25 p 40 e structure p 45 p 40 e structure p 60 dels of p 63 p 57 f large p 38 p 57 f large p 38 p 24 p 41 p 75 p 41 p 75 p 73	A86-37186 Led dynamic A86-38885 or a generic A86-38886 ctures with A86-39886 tdynamics:
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large space reduced-order controllers Mathematical models of flexible sp. A survey of order reduction approtacking [NLR-MP-85004-U] Failure propagation in continuum mo Space Structures), part 1 [AD-A166208] Dynamics of flexible spacecraft: approaches towards mathematical mi ion [NLR-TR-85068-U] DYNAMIC PROGRAMMING Optimum detumbling of space platfor programming algorithm [AIAA PAPER 86-2154] DYNAMIC RESPONSE Low frequency design verification of structures Buckling and non-linear respon three-legged truss columns [AIAA PAPER 86-0974] A singular-solution approach for contresponse of a continuum model of structure [AIAA PAPER 86-0841] Effect of degradation of material dynamic response of a control of dynamic response of a	p 25 thods f p 40 e structure p 25 p 40 e structure p 45 p 60 dels of p 63 An p 65 rrms via p 57 f large p 38 se of p 24 p 75 p 24 p 75 p 7	A86-37186 Led dynamic A86-38885 or a generic A86-38886 ctures with A86-39493 It dynamics:
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large space reduced-order controllers Mathematical models of flexible sp. A survey of order reduction approtracking [NLR-MP-85004-U] Failure propagation in continuum mo Space Structures), part 1 [AD-A166208] Dynamics of flexible spacecraft: approaches towards mathematical mion [NLR-TR-85068-U] DYNAMIC PROGRAMMING Optimum detumbling of space platto programming algorithm [AIAA PAPER 86-2154] DYNAMIC RESPONSE Low frequency design verification of structures Buckling and non-linear responstructures Buckling and non-linear response of a continuum model of structure [AIAA PAPER 86-0841] Effect of degradation of material dynamic response of a calarge space structure	p 25 thods f p 40 e struing 45 p 45 e struing 45 p 60 dels of p 63 An oddel or p 65 rrms via p 57 of large p 38 se of p 24 p 41 p 4	A86-37186 Led dynamic A86-38885 for a generic A86-38886 Care a generic A86-38886 A86-39493 A86-26367 LSS (Large N86-29892 Lanalysis of der reduct A86-31643 A a dynamic A86-47518 A86-3752 A86-38889 A86-38889 A86-38889 A86-41740 A86-41740 A86-41740 A86-43772
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large space reduced-order controllers Mathematical models of flexible space structures), part 1 [AD-A166208] Dynamics of flexible spacecraft: approaches towards mathematical moion [NLR-TR-85068-U] DYNAMIC PROGRAMMING Optimum detumbling of space platfor programming algorithm [AIAA PAPER 86-2154] DYNAMIC RESPONSE Low frequency design verification of structures Buckling and non-linear respons three-legged truss columns [AIAA PAPER 86-0974] A singular-solution approach for contresponse of a continuum model of structure [AIAA PAPER 86-0841] Effect of degradation of material dynamic response of large space structure Control of dynamic response of a calarge space structure A model for predicting thermomech	p 25 thods f p 40 e struing 45 p 45 e struing 45 p 60 dels of p 63 An oddel or p 65 rrms via p 57 of large p 38 se of p 24 p 41 p 4	A86-37186 Led dynamic A86-38885 for a generic A86-38886 Care a generic A86-38886 A86-39493 A86-26367 LSS (Large N86-29892 Lanalysis of der reduct A86-31643 A a dynamic A86-47518 A86-3752 A86-38889 A86-38889 A86-38889 A86-41740 A86-41740 A86-41740 A86-43772
models of large space structures [AIAA PAPER 86-0837] Dynamic analysis and experiment me space station model [AIAA PAPER 86-0838] Closed-loop stability of large space reduced-order controllers Mathematical models of flexible sp. A survey of order reduction approtracking [NLR-MP-85004-U] Failure propagation in continuum mo Space Structures), part 1 [AD-A166208] Dynamics of flexible spacecraft: approaches towards mathematical mion [NLR-TR-85068-U] DYNAMIC PROGRAMMING Optimum detumbling of space plattoprogramming algorithm [AIAA PAPER 86-2154] DYNAMIC RESPONSE Low frequency design verification of structures Buckling and non-linear responsince-legged truss columns [AIAA PAPER 86-0974] A singular-solution approach for continuum model of structure [AIAA PAPER 86-0841] Effect of degradation of material dynamic response of a calarge space structure	p 25 thods f p 40 e structure p 25 p 40 e structure p 45 p 60 dels of p 63 An p 67 p 68 p 38 se of p 57 p 24 p 79 p 7	A86-37186 Led dynamic A86-38885 for a generic A86-38886 Care a generic A86-38886 A86-39493 A86-26367 LSS (Large N86-29892 Lanalysis of der reduct A86-31643 A a dynamic A86-47518 A86-3752 A86-38889 A86-38889 A86-38889 A86-41740 A86-41740 A86-41740 A86-43772

Analytical investigation of the dynamics of tethered

p 61 N86-28114

constellations in Earth orbit, phase 2

[NASA-CR-178846]

```
DYNAMIC STABILITY
    A three-dimensional dynamic analysis and libration study
  of a tethered satellites system
  [AAS PAPER 85-340]
                                          p 50 A86-43208
    Design study for a high stability large centrifuge test
  bed
  [AIAA PAPER 86-2100]
                                          p 11 A86-47445
    A review of tether induced dynamical features
                                         p 61 N86-28411
DYNAMIC STRUCTURAL ANALYSIS
    Thermally-induced vibration and stability of booms with
  open cross section caused by unidirectional radiant
                                         p 35 A86-31024
  International Symposium on Aeroelasticity and Structural Dynamics, 2nd, Rheinisch-Westfaelische Technische
  Hochschule, Aachen, West Germany, April 1-3, 1985,
  Collected Papers
 [DGLR BERICHT 85-02]
                                         p 93 A86-33226
    Test and analysis correlation for structural dynamic
                                         p 37 A86-33284
    Dynamic verification of very large space structures
                                         p 37 A86-33285
    Structural dynamic testing and analysis; Aerospace
  Technology Conference and Exposition, Long Beach, CA,
  October 14-17, 1985, Technical Papers
  [SAE SP-635]
                                        p 94 A86-38540
    A global technique for estimation of modal parameters
  from measured data --- of spacecraft structures vibration
                                        p 39 A86-38542
s and Materials
 [SAE PAPER 851926]
 Structures, Structural Dynamics and Materials
Conference, 27th, San Antonio, TX, May 19-21, 1986,
Technical Papers. Parts 1 & 2 p 94 A86-38801
    A Taylor-Galerkin finite element algorithm for transient
  nonlinear thermal-structural analysis
 [AIAA PAPER 86-0911]
                                         p 31 A86-38823
    Error estimation and compensation in reduced dynamic
  models of large space structures
 [AIAA PAPER 86-0837]
                                          p 25 A86-38885
```

Dynamic analysis and experiment methods for a generic

Characteristic wave approach in controlled large space

Multidisciplinary capability for analysis of the dynamics

Structural dynamic analysis of the Large Deployable

Dynamics and control of large structures; Proceedings

A matrix approach to dynamics formulation of complex

Active vibration damping experiments at VPI & SU Overview and recent results p 46 A86-39504

techniques for beam/rod/cable element structures

Iverview and recent results p 46 A86-39504
Preload modeling, analysis, and optimal design

Failure detection and accommodation in structural

On the dynamics of beam type structural members during

Traveling wave control for large spacecraft structures

Integrated design of space structures using lattice plate

Control-motivated dynamic tailoring of truss-work

Dynamics of a deformable pointing spacecraft by Kane's

Experimenal and analytical generic space staion

Dynamic characteristics of power-tower space stations

Analysis of in-orbit performance of mechanisms within

Solar array deployment simulation using ADAMS pftware p 60 N86-27360

method, and telescope's image-stability evaluation

Emulating structural motion by array processors [AIAA PAPER 86-1988] p 56 A86-

dynamics systems using analytic redundancy --- in large space structures p 49 A86-42938

Estimation of frequencies of vibration using lattices

deployment --- of space platforms [AAS PAPER 85-392]

On modeling the dynamics

of the Fifth Symposium, Blacksburg, VA, June 12-14,

Flexibility formulation in Structural Control

p 40 A86-38886

p 40 A86-38887

p 42 A86-38933

p 42 A86-38951

p 95 A86-39476

p 44 A86-39489

p 45 A86-39496

p 25 A86-41742

p 49 A86-42960

p 50 A86-43214

p 51 A86-43215

p 53 A86-46463

p 21 A86-46465

p 56 A86-47471

p 56 A86-47474

p 56 A86-47510

p 58 N86-22997

p 60 N86-26357

p 84 N86-27358

large space

space station model

structures

Reflector

[AIAA PAPER 86-0838]

[AIAA PAPER 86-0839]

[AIAA PAPER 86-0961]

[AIAA PAPER 86-0004]

space structures

manipulators

finite elements

dynamic models

NASA-TM-876961

[NASA-TM-87684]

large structures

with 15-foot truss bays

structures

IAAS PAPER 85-3931

[AIAA PAPER 86-2190]

[AIAA PAPER 86-2194]

and control of flexible space structures

p 78 N86-30768 Analytical investigation of the dynamics of tethered constellations in Earth orbit, phase 2 [NASA-CR-178901] p 65 N86-32513 DYNAMIC TESTS Experimental verification of distributed piezoelectric actuators for use in precision space structures [AIAA PAPER 86-0878] p 19 A86-38813 Some considerations on earthbound dynamic testing of large space structures
[AIAA PAPER 86-0908] p 42 A86-38918 DYNAMICAL SYSTEMS Effects of noise on ERA-identified modal parameters - Eigensystem Realization Algorithm [AAS PAPER 85-422] p 52 A86-43222 An Eigensystem Realization Algorithm in Frequency Domain for modal parameter identification [AIAA PAPER 86-2048] p 54 A86-47431 E EARTH OBSERVATIONS (FROM SPACE) A payload for utilization of space platform in the field of communication and earth observation p 4 A86-37862 Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228 Viewing the earth from Space - Towards the Space Station polar platform p 9 A86-45642 EARTH ORBITAL ENVIRONMENTS The Shuttle glow as an indicator of material changes in space [AD-A167300] p 71 A86-30323 Motion trajectories of particles inside and outside an orbiting Space Shuttle p 93 A86-34574 Parametric design and preliminary mission analysis of a proposed Hybrid OTV with TOS/AMS (TM) solid-fuel boosters, and ring-cusp ion return engines [AAS PAPER 85-304] p 88 A86-43206 The Slinger - An in-orbit booster facility
[AIAA PAPER 86-2175] p 100 A86-47931 SIRTF and the Space Station --- Space InfraRed Telescope Facility [AIAA PAPER 86-2353] p 12 A86-50266 Development of composite tube protective coatings p 76 N86-29989 [NASA-CR-178116] Effects of the low Earth orbital environment on p 77 N86-30595 spacecraft materials **FARTH ORBITS** Reaction of high-velocity atomic oxygen with carbon p 71 A86-32977 Modelling of the hoop-column antenna and design of p 46 A86-39501 nonlinear control law in orbit Analytical investigation of the dynamics of tethered constellations in Earth orbit, phase 2

p 61 N86-27650 ECONOMIC FACTORS An economics perspective of the 21st century Space Station [AIAA PAPER 86-2348]

Dynamics of tethered constellations in Earth orbit

p 58 N86-23629

EIGENVALUES

[NASA-CR-178754]

Effects of noise on modal parameters identified by the Eigensystem Realization Algorithm p 42 A86-39036 Effects of noise on ERA-identified modal parameters -- Figensystem Realization Algorithm

p 52 A86-43222 (AAS PAPER 85-422) An Eigensystem Realization Algorithm in Frequency Domain for modal parameter identification p 54 A86-47431 [AIAA PAPER 86-2048]

FLASTIC DEFORMATION

Some problems related to the thermally induced deformations of large space structures p 30 A86-36673

Maneuvering of flexible spacecraft with application to SCOLE --- Spacecraft Control Laboratory Experiment p 47 A86-39508

Traveling wave control for large spacecraft structures	EMISSIVITY	RIT-10 low-thrust control of Eureca's orbital decay
p 53 A86-46463 ELASTIC PROPERTIES	Measurement of the thermo-optical properties of varying paint thickness on carbon fiber composites in spacecraft	p 88 A86-44447 Accommodation study of the CRHESUS cryostat on the
Dynamics and control of flexible spacecraft during and	structures p 74 N86-22620	EURECA platform
after slewing maneuvers	EMITTANCE	[SNIAS-1048ACA/LL/V] p 26 N86-22630
[NASA-CR-177027] p 62 N86-28983 ELASTIC SYSTEMS	Measurement of the thermo-optical properties of varying paint thickness on carbon fiber composites in spacecraft	EUROPEAN COMMUNICATIONS SATELLITE
Experiments on the end-point control of a two-link robot	structures p 74 N86-22620	The degradation and contamination experiment flown on the first European Communication Satellite ECS-1:
with elastic drives	END EFFECTORS	Preliminary results on contamination p 74 N86-22623
[AIAA PAPER 86-1977] p 83 A86-47404	Experiments on the end-point control of a two-link robot with elastic drives	EUROPEAN SPACE AGENCY
ELASTODYNAMICS Transient dynamics during the extension of flexible	[AIAA PAPER 86-1977] p 83 A86-47404	The Columbus preparatory programme supporting technology of the European Space Agency
members of space platforms p 46 A86-39499	ENERGY CONVERSION EFFICIENCY	p 4 A86-37856
ELASTOSTATICS	Solar energy conversion systems for power plants in space - A comparative analysis and prospects for	Space - Technology and opportunity; Proceedings of
Dynamic characteristics of statically determinate space-truss platforms p 48 A86-41741	development p 66 A86-36671	the Conference, Geneva, Switzerland, May 28-30, 1985
space-truss platforms p 48 A86-41741  ELECTRIC ARCS	ENERGY DISSIPATION	p 98 A86-44526 Status of ESA's planning for the Space Station
Charge accumulation and arc discharges on spacecraft	The effect of energy dissipation due to friction at the joint of a simple beam structure	p 8 A86-44530
materials and components	[AD-A163975] p 58 N86-24739	A step towards an ESA composites design handbook
[AD-A166216] p 70 N86-29893	ENERGY LEVELS	for space structure applications p 79 N86-30799
ELECTRIC CHARGE Status of critical issues in the area of spacecraft	Charge accumulation and arc discharges on spacecraft materials and components	Control loops with human operators in space operations.
charging p 67 A86-47336	[AD-A166216] p 70 N86-29893	Part 4: Research requirements for human-in-the-loop space teleoperator development
A new instrument to measure charged and neutral	ENERGY STORAGE	[NLR-TR-84116-L-PT-4] p 17 N86-32109
cometary dust particles at low and high impact velocities	Development of a simulation code for a latent heat	Preparing for the future: The ESA technological research
p 70 N86-30590 ELECTRIC DISCHARGES	thermal energy storage system in a space station [DE86-010070] p 70 N86-31113	and development program 1986-1988
Design, fabricate and test Spacecraft Automatic Active	ENERGY TECHNOLOGY	[ESA-SP-1079] p 80 N86-32347 EUROPEAN SPACE PROGRAMS
Discharge System (SAADS)	Conversion of solar energy p 86 A86-36668	European space platform developments
[AD-A166559] p 70 N86-30802	ENGINE TESTING LABORATORIES	[DGLR PAPER 85-123] p 3 A86-35173
ELECTRIC POWER A steerable radiator for spacecraft application	Space Station propulsion test bed - A complete system	Air and space travel - Tasks for the future
[AIAA PAPER 86-1298] p 100 A86-49597	[AIAA PAPER 86-1402] p 87 A86-42615	p 3 A86-35518
ELECTRIC POWER SUPPLIES	ENVIRONMENT EFFECTS	ESA-sponsored developments in the field of deployable masts for pushing out solar arrays and antennas
Electrical power system integration for the Space	Space environment effects on spacecraft surface materials p 71 A86-32406	p 24 A86-36029
Station [AIAA PAPER 86-2351] p 67 A86-49561	ENVIRONMENTAL TESTS	Columbus - The European participation in international
[AIAA PAPER 86-2351] p 67 A86-49561  ELECTRIC PROPULSION	Tethered constellations, their utilization as microgravity	space stations p 3 A86-37854
Parametric design and preliminary mission analysis of	platforms and relevant features p 103 N86-27645	Inflatable technology in orbit demonstration within the
a proposed Hybrid OTV with TOS/AMS (TM) solid-fuel	Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator	European Space Agency programs p 4 A86-37863  Developing the final frontier: International cooperation
boosters, and ring-cusp ion return engines	[NASA-TM-88839] p 80 N86-31634	in the peaceful uses of outer space Book
[AAS PAPER 85-304] p 88 A86-43206  ELECTRODYNAMICS	EPOXY RESINS	p 96 A86-42236
Applications of Tethers in Space: Workshop	Hygrothermal characteristics of antenna materials	European experience and perspectives
proceedings, volume 1	spacecraft antennas p 77 N86-30760 EQUATIONS OF MOTION	p 97 A86-43336 Space - Technology and opportunity; Proceedings of
[NASA-CP-2422-VOL-1] p 104 N86-28407	An orthogonal decomposition approach to modal	the Conference, Geneva, Switzerland, May 28-30, 1985
Electrodynamic interactions p 69 N86-28414	synthesis p 39 A86-36216	p 98 A86-44526
ELECTROMAGNETIC INTERACTIONS Electrodynamic interactions p 69 N86-28414	A multibody dynamics equation formulation by momentum principle for tree-configured	Status of ESA's planning for the Space Station
ELECTROMAGNETIC MEASUREMENT	hinge-connected rigid systems	p 8 A86-44530 The European Space Station programme
A correction for continuous rotation in measurements	[AAS PAPER 85-391] p 50 A86-43213	p 8 A86-45627
of the near field p 67 A86-46578	Control of dynamic response of a continuum model of	The Columbus Programme concept and its initial
ELECTROMAGNETIC PROPERTIES  Measurement apparation and procedure for the	a large space structure p 52 A86-43772 EQUIPMENT SPECIFICATIONS	implementation steps p 9 A86-45628 The role of Columbus in a future Space Station
determination of surface emissivities	Shuttle Remote Manipulator collision-avoidance	scenario p 12 A86-49565
[NASA-CASE-LAR-13455-1] p 75 N86-24880	system p 82 A86-43885	Towards Columbus and Space Station; Proceedings of
Thermal and electromagnetic damping analysis and its	ERROR ANALYSIS Optimizing accuracy in triangulation for geometrical	the International Symposium, Bonn, West Germany,
application p 34 N86-27677	verification of large space structures p 19 A86-38061	October 2-4, 1985 [DGLR BERICHT 85-03] p 100 A86-50334
Integrated thermal-structural-electromagnetic design optimization of large space antenna reflectors	Error estimation and compensation in reduced dynamic	Columbus technology - Status and plans
[NASA-TM-87713] p 35 N86-28984	models of large space structures [AIAA PAPER 86-0837] p 25 A86-38885	p 12 A86-50338
ELECTROMAGNETIC RADIATION	[AIAA PAPER 86-0837] p 25 A86-38885 Orbit transfer error analysis for multiple finite perigee	An overview of European space transportation systems
Radiation effects on high performance polymers	burn, ascent trajectories	[NASA-TM-77683] p 13 N86-25398
[NASA-CR-177191] p 76 N86-28195 Spontaneous radiation emitted by moving tethered	[AAS PAPER 85-302] p 97 A86-43204	Space mechanisms development in the ESA
systems p 34 N86-28427	ERROR DETECTION CODES  Generalized parity relations for large space structures	technological research program p 103 N86-27397
ELECTROMAGNETIC WAVE TRANSMISSION	with uncertain parameters	Spacebus: Multimission communication satellites [SNIAS-861-422-119] p 16 N86-31637
System engineering study of electrodynamic tether as	[NASA-CR-176762] p 34 N86-24730	Preparing for the future: The ESA technological research
a spaceborne generator and radiator of electromagnetic waves in the ULF/ELF frequency band	ERRORS	and development program 1986-1988
[NASA-CR-176749] p 68 N86-25689	Effects of model error on control of large flexible space antenna with comparisons of decoupled and linear	[ESA-SP-1079] p 80 N86-32347 Deployable antenna reflector
ELECTROMECHANICAL DEVICES	quadratic regulator control procedures	[SNIAS-861-422-117] p.81 N86-32537
Vibration control of flexible structures using member	[NASA-TP-2604] p 64 N86-30801	EXHAUST GASES
dampers p 49 A86-42941	Reliability issues in active control of large flexible space	Theoretical study on the effect of the design of small
ELECTRON BEAMS  Electrostatic charging and arc discharges on satellite	structures [NASA-CR-179758] p 65 N86-32512	(milli-Newton) thruster jets on molecular contamination for the space station
dielectrics simulated by electron beam	ESA SATELLITES	[NASA-CR-177263] p 90 N86-26358
[AIAA PAPER 86-1191] p 66 A86-40597	Olympus, the spacecraft of the future	EXPANDABLE STRUCTURES
Spacecraft materials test in a continuous, broad energy-spectrum electron beam p 73 A86-47337	p 8 A86-43705 ETHERS	Fluid recirculation, deployment and retraction of an
energy-spectrum electron beam p 73 A86-47337  ELECTROSTATIC CHARGE	Radiation effects on high performance polymers	expandable pulse power radiator for spacecraft power supplies
Electrostatic charging and arc discharges on satellite	[NASA-CR-177191] p 76 N86-28195	[AIAA PAPER 86-1322] p 25 A86-39923
dielectrics simulated by electron beam	EULER-LAGRANGE EQUATION  Management of flowible processes with application to	Conceptual design of an 1 m long 'roll out fin' type
[AIAA PAPER 86-1191] p 66 A86-40597 ELECTROSTATIC PROBES	Maneuvering of flexible spacecraft with application to SCOLE Spacecraft Control Laboratory Experiment	expandable space radiator [AIAA PAPER 86-1323] p 20 A86-39924
Design, fabricate and test Spacecraft Automatic Active		
besign, labilitate and test opacecian Automatic Active	p 47 A86-39508	Deployable geodesic truss structure AOT
Discharge System (SAADS)	EURECA (ESA)	Deployable geodesic truss structure A01 [NASA-CASE-LAR-13113-1] p 26 N86-24867
Discharge System (SAADS) [AD-A166559] p 70 N86-30802	EURECA (ESA) EURECA concept and its potential evolution within the	[NASA-CASE-LAR-13113-1] p 26 N86-24867 Personnel occupied woven envelope robot
Discharge System (SAADS) [AD-A166559] p 70 N86-30802 <b>ELECTROSTATICS</b>	EURECA (ESA)	[NASA-CASE-LAR-13113-1] p 26 N86-24867 Personnel occupied woven envelope robot [NASA-CR-176832] p 14 N86-25401
Discharge System (SAADS) [AD-A166559] p 70 N86-30802  ELECTROSTATICS The use of electrostatic noise to control high-voltage differential charging of spacecraft p 66 A86-41018	EURECA (ESA) EURECA concept and its potential evolution within the Space Station era [AAS PAPER 85-398] p 97 A86-43230 Orbit manoeuvre and determination strategy for the	[NASA-CASE-LAR-13113-1] p 26 N86-24867 Personnel occupied woven envelope robot [NASA-CR-176832] p 14 N86-25401 Synchronously deployable truss structure [NASA-CASE-LAR-13117-1] p 27 N86-25789
Discharge System (SAADS) [AD-A166559] p 70 N86-30802  ELECTROSTATICS The use of electrostatic noise to control high-voltage	EURECA (ESA)  EURECA concept and its potential evolution within the Space Station era  [AAS PAPER 85-398] p 97 A86-43230	[NASA-CASE-LAR-13113-1] p 26 N86-24867 Personnel occupied woven envelope robot [NASA-CR-176832] p 14 N86-25401 Synchronously deployable truss structure

#### Reliability issues in active control of large flexible space EXPENDABLE STAGES (SPACECRAFT) On correlation between thermal stresses, elastic strain energy and debonding in thermally loaded fiber-reinforced Weights assessment for orbit-on-demand vehicles structures p 3 A86-35217 [NASA-CR-179758] ISAWE PAPER 16741 p 65 N86-32512 composite materials p 79 N86-30780 Space platform design options - A comparison, for Nondestructive testing of fiber reinforced composites **FAINT OBJECT CAMERA** High voltage potting for the Faint Object Camera cost-effectiveness, of expendable, reusable using X-ray fine structure procedures p 79 N86-30784 p 8 A86-44531 serviceable spacecraft FIBER STRENGTH p 74 N86-22619 EXPERT SYSTEMS **FATIGUE TESTS** Damping characteristics of metal matrix composites State of the art in intelligent/brilliant robots p 75 N86-24762 Fatigue and damage in fibre reinforced nylon p 82 A86-43884 FILAMENT WINDING p 77 N86-30761 Design for a goal-oriented telerobotic system Winding with thermoplastic polymers --- spacecraft **FAULT TOLERANCE** p 83 A86-47440 [AIAA PAPER 86-2090] structures Fault-tolerant control of large space structures using the NASA/American Society for Engineering Education (ASEE) Summer Faculty Fellowship Program, 1985 --p 80 N86-30804 [SNIAS-861-430-106] stable factorization approach **FILTERS** p 58 N86-23343 [NASA-CR-3964] Space Stations and Their Environments Transfer of alignment and calibration of multiple sensors Reliability issues in active control of large flexible space p 105 N86-31409 in flexible systems [NASA-CR-171931] p 50 A86-43003 structures **EXTENSIONS** FINE STRUCTURE INASA-CR-1797581 p 65 N86-32512 Transient dynamics during the extension of flexible Nondestructive testing of fiber reinforced composites FEEDBACK p 46 A86-39499 members --- of space platforms using X-ray fine structure procedures p 79 N86-30784 FINITE ELEMENT METHOD Theoretical and experimental investigations of sensor EXTERNAL TANKS ocation for optimal aeroelastic system state estimation External tank/aft cargo carrier on orbit applications Finite element analysis of subregions using a specified p 99 A86-46855 EXTRATERRESTRIAL INTELLIGENCE A comparative [NASA-CR-177115] p 62 N86-29272 p 18 A86-36866 boundary stiffness method FEEDBACK CONTROL Large space structural models by combination of finite A comparative analysis of space Variable-structure control of spacecraft large-angle elements and transfer matrix methods p 5 A86-38168 p 36 A86-31666 maneuvers enternrises p 18 A86-37861 **EXTRATERRESTRIAL RESOURCES** Compensating structure and parameter optimization for A finite element model for the thermoelastic analysis attitude control of a flexible spacecraft Strategies to minimize Delta V costs of extraterrestrial of large composite space structures p 36 A86-31668 [AIAA PAPER 86-0875] resources p 1 A86-32536 p.31 A86-38811 Enabling technologies for transition to utilization of A Taylor-Galerkin finite element algorithm for transient Stability of multiloop LQ regulators with nonlinearities. onlinear thermal-structural analysis space-based resources and operations - Regions of attraction. II - Regions of ultimate p 93 A86-34992 p 38 A86-36074 [AIAA PAPER 86-0911] p 31 A86-38823 boundedness **EXTRAVEHICULAR ACTIVITY** Synthesis of structures with multiple frequency Closed-loop stability of large space structures with Evolutionary paths for artificial intelligence technologies constraints reduced-order controllers p 45 A86-39493 [AIAA PAPER 86-0951] in operator interactions with space station robots D 40 A86-38844 Active vibration damping experiments at VPI & SU p 81 A86-34971 Comparison of tension stabilized structures for large Overview and recent results p 46 A86-39504 p 20 A86-40521 space antenna reflectors EVA suit glove design Modelling and design of nonlinear feedback control law [AIAA PAPER 86-0876] Advanced EVA operation on-orbit tasks and services p 25 A86-38881 for a large space hoop-column antenna [AIAA PAPER 86-1175] A global-local approach to solving vibration of large truss p 96 A86-40585 p 48 A86-42909 Zero-G simulation verifies EVA servicing of space station structures Control of symmetrizable distributed parameter [AIAA PAPER 86-0872] modules p 41 A86-38907 [AIAA PAPER 86-2312] p 99 A86-46942 systems p 49 A86-42921 Multidisciplinary capability for analysis of the dynamics Improved flexibility of an EVA glove Vibration control of flexible structures using member and control of flexible space structures p 49 A86-42941 dampers p 21 A86-48713 [AIAA PAPER 86-0961] p 42 A86-38933 Nonlinear deformation analysis of the Olympus Materials considerations in the design of a metal-hydride A nonlinear attitude control law for a satellite with flexible p 49 A86-42989 heat pump for an advanced extravehicular mobility p 21 A86-43756 appendages Astromast p 80 N86-31427 EXTRAVEHICULAR MOBILITY UNITS Materials consider Integrated design of space structures using lattice plate Integrated design of space structures using lattice plate finite elements p 21 A86-46465 p 21 A86-46465 finite elements Materials considerations in the design of a metal-hydride Control effectiveness characterization for Design of dynamic output feedback controllers with estimation and control on a highly flexible grid [AIAA PAPER 86-2142] p 55 A86-47454 heat pump for an advanced extravehicular mobility unit arameter variation insensitivity p 80 N86-31427 [AIAA PAPER 86-2050] p 54 A86-47433 **EXTREMELY LOW RADIO FREQUENCIES** Simplified lattice beam elements for geometrically Attitude control system synthesis for the Hoop/Column System engineering study of electrodynamic tether as a spaceborne generator and radiator of electromagnetic antenna using the LQG/LTR method --- loop transfer nonlinear static, dynamic, and postbuckling analysis p 26 A86-49818 recovery waves in the ULF/ELF frequency band Modal assignment effects on decentralized control of [AIAA PAPER 86-2139] p 55 A86-47452 p 68 N86-25689 (NASA-CR-1767491 Multi-criterion approaches to optimization of linear a large space structure [AD-A163977] p 59 N86-25402 regulators [AIAA PAPER 86-2198] FIR FILTERS p 56 A86-47478 Robust multivariable control of large space structures Adaptive control of large space structures using recursive lattice filters using positivity F-104 AIRCRAFT NASA-CR-177270] [AIAA PAPER 86-2125] p 60 N86-27401 p 57 A86-47925 A survey of handling qualities criteria and their The detumbling of an axially symmetric satellite with FLEXIBLE BODIES applications to high performance aircraft Flexibility control of solar battery arrays of spacecrafts an orbital maneuvering vehicle by nonlinear feedback [NASA-CR-179654] p 85 A86-33203 control **FABRICATION** [AD-A163989] p 58 N86-24717 Control of traveling waves in flexible structures Optical Fabrication and Testing Workshop: Large p 44 A86-39487 Control of large flexible systems by spatial modal Telescope Optics, Albuquerque, NM, March 4-8, 1985, Demonstration of vibration control of a flexible truss input-distribution control Proceedings p 44 A86-39488 AD-A166912] p 64 N86-30803 structure [SPIE-542] p 92 A86-32407 Flexibility formulation in Structural Control FEEDFORWARD CONTROL A 10,000 hour life multipropellant engine for Space p 44 A86-39489 Feedforward control of waves in lattice elements Station applications AD-A164009] Reduced order models for distributed systems based p 59 N86-26222 [AIAA PAPER 86-1403] on Hankel-norm approximations p 87 A86-42616 p 19 A86-39490 FIBER COMPOSITES Control of Flexible Structures (COFS) Flight Experiment **FABRICS** Continuous fiber composite hoops p 72 A86-40503 rogram p 5 A86-39502 Experiments in optimal control of a flexible arm with Personnel occupied woven envelope robot FIBER ORIENTATION Program [NASA-CR-176832] p 14 N86-25401 Damping characteristics of metal matrix composites [AD-A167792] p 80 N86-31668 p 82 A86-39503 passive damping FACTORIZATION p 80 N86-31668 Fault-tolerant control of large space structures using the FIBER REINFORCED COMPOSITES Active vibration damping experiments at VPI & SU stable factorization approach Design preparations for large space structures --- from Overview and recent results p 46 A86-39504 p 58 N86-23343 p 32 A86-40496 [NASA-CR-3964] fiber-reinforced composites Spline-based Rayleigh-Ritz methods for the **FAILURE ANALYSIS** The thermal and mechanical stability of composite approximation of the natural modes of vibration for flexible p 73 A86-40530 materials for space structures beams with tip bodies p 48 A86-40843 Actuator failure detection in the control of distributed Effect of degradation of material properties on the systems p 47 A86-39507 Vibration control of flexible structures using member dynamic response of large space structures p 49 A86-42941 Failure detection and accommodation in structural p 73 A86-41740 dynamics systems using analytic redundancy --- in large space structures p 49 A86-42938 Model reference adaptive control under uncertainty of Thermal stresses in composite tubes nonlinear flexible manipulators p 33 A86-50115 [AIAA PAPER 86-1976] Reliability models applicable to space telescope solar p 53 A86-47403 Damping characteristics of metal matrix composites array assembly system p 21 N86-24541 Control-motivated dynamic tailoring of truss-work [AD-A163569] p 75 N86-24762 Generalized parity relations for large space structures structures Fatigue and damage in fibre reinforced nylon [AIAA PAPER 86-2190] p 56 A86-47471 with uncertain parameters p 77 N86-30761 Emulating structural motion by array processors [NASA-CR-176762] p 34 N86-24730 p 78 N86-30764 Damping of composites

The strength of bolted joints in Kevlar RP --- reinforced

Adequate fiber reinforced structural elements in load

Damage zone fracture analysis of fibrous composites

introduction area of fiber reinforced shells

p 28 N86-30765

p 78 N86-30770

p 78 N86-30778

plastic (RP)

[AIAA PAPER 86-1988]

controlled elastic systems

[AD-A162385]

Mathematical

[NASA-TM-87720]

Nonlinear dynamics and chaotic motions in feedback

correlation of modal

identification methods via system realization theory

p 56 A86-47510

p 84 N86-24294

p 59 N86-25019

parameter

INASA-CR-1797581

Space Structures), part 1

**FAILURE MODES** 

[AD-A1662081

Reliability issues in active control of large flexible space

Failure propagation in continuum models of LSS (Large

p 65 N86-32512

p 63 N86-29892

Modal assignment effects on decentralized control of	Robust attitude and shape control of third generation	FLIGHT TESTS
a large space structure	spacecraft	
[AD-A163977] p 59 N86-25402	[AAS PAPER 85-425] p 52 A86-43224	Long-term performance of thermal control coatings a geosynchronous altitude
Nonlinear dynamic analysis of deploying flexible space	On-off attitude control of flexible satellites	[AIAA PAPER 86-1356] p 71 A86-3995
booms	p 53 A86-46470	Canadarm - A review of its flights p 83 A86-4705
[NASA-TM-87617] p 61 N86-28981	Modified LTR robust control for flexible structures	
Effects of model error on control of large flexible space	[AIAA PAPER 86-2051] p 55 A86-47434	FLOW MEASUREMENT
antenna with comparisons of decoupled and linear	Robust reduced-order control of flexible structures using	A 3-component laser-Doppler velocimeter data
quadratic regulator control procedures	the optimal projection/maximum entropy design	acquisition and reduction system
[NASA-TP-2604] p 64 N86-30801	methodology	[NASA-CR-176929] p 104 N86-3013
FLEXIBLE SPACECRAFT	[AIAA PAPER 86-2052] p 55 A86-47435	FLOW VELOCITY
	A parametric examination of the stability robustness	A 3-component laser-Doppler velocimeter data
Uniform damping control of spacecraft	characteristics of two decoupled controllers designed for	acquisition and reduction system
p 36 A86-31664	large space structure control	[NASA-CR-176929] p 104 N86-3013
Robust beam-pointing and attitude control of a flexible	[AIAA PAPER 86-2053] p 55 A86-47436	FLUID DYNAMICS
spacecraft p 36 A86-31665	Flight results from the gravity-gradient-controlled RAE-1	Fluid management and its role in the future of Space
Compensating structure and parameter optimization for	satellite	Station
attitude control of a flexible spacecraft	[AIAA PAPER 86-2140] p 11 A86-47453	[AIAA PAPER 86-2301] p 89 A86-4955
p 36 A86-31668	Control effectiveness characterization for state	Tethered elevator: A unique opportunity for space
Single-step optimal control of the RPL experiment	estimation and control on a highly flexible grid	processing p 103 N86-27649
[AAS PAPER 85-045] p 37 A86-31796	[AIAA PAPER 86-2142] p 55 A86-47454	FLUID MANAGEMENT
Controller design of flexible spacecraft attitude control	On-orbit manipulators - Sensory and control	Analysis and modeling of fluid transfer in orbit
p 37 A86-33204	approaches	[AIAA PAPER 86-1718] p 32 A86-42809
Minimum-fuel control of high-order systems	[AIAA PAPER 86-2185] p 83 A86-47467	A design for fluid management in space
p 86 A86-34174	Dynamics and control of slew maneuver of large flexible	p 89 A86-47969
Testing of a failure accommodation system on a highly	spacecraft	Fluid management and its role in the future of Space
flexible grid p 38 A86-35390	[AIAA PAPER 86-2192] p 56 A86-47472	Station
Multiple boundary condition test (MBCT) approach to	Maneuvering of flexible spacecraft Variable Structure	[AIAA PAPER 86-2301] p 89 A86-49553
update mathematical models of large flexible structures	Control	FLUID MECHANICS
[SAE PAPER 851933] p 39 A86-38546	[AIAA PAPER 86-2193] p 56 A86-47473	SECTAM XII - Proceedings of the Twelfth Southeastern
Synthesis of discrete passive vibration dampers	Dynamics of a deformable pointing spacecraft by Kane's	Conference on Theoretical and Applied Mechanics, Pine
[SAE PAPER 851935] p 39 A86-38548	method, and telescope's image-stability evaluation	Mountain, GA, May 10, 11, 1984. Volume 2
Error estimation and compensation in reduced dynamic	[AIAA PAPER 86-2194] p 56 A86-47474	p 91 A86-31259
models of large space structures	The development of an environmental disturbance	FOLDING STRUCTURES
[AIAA PAPER 86-0837] p 25 A86-38885	model for large space structures after the onset of thermal	An evaluation of foldable elastic tubes for application
Variable Structure Control System (VSCS) maneuvering	shock	in space structures p 24 A86-34634
of flexible spacecraft	[AIAA PAPER 86-2123] p 32 A86-47924	Shuttle-launch triangular space station
[AIAA PAPÉR 86-0840] p 40 A86-38888	Some considerations of actuator dynamics in the attitude	[NASA-CASE-MSC-20676-1] p 26 N86-24729
Equations for the vibration of a slewing flexible	control of a flexible beam	Deployable geodesic truss structure A01
spacecraft	[AIAA PAPER 86-2124] p 57 A86-47955	[NASA-CASE-LAR-13113-1] p 26 N86-24867
[AIAA PAPER 86-0906] p 41 A86-38916	Simplified lattice beam elements for geometrically	Synchronously deployable truss structure
Multidisciplinary capability for analysis of the dynamics	nonlinear static, dynamic, and postbuckling analysis	[NASA-CASE-LAR-13117-1] p 27 N86-25789
and control of flexible space structures	p 26 A86-49818	Protective telescoping shield for solar concentrator
[AIAA PAPER 86-0961] p 42 A86-38933	Moving-bank multiple model adaptive algorithms applied	[NASA-CASE-NPO-16236-1] p 103 N86-27706
Dynamics and control of large structures; Proceedings	to flexible spacecraft control	Deployable M-braced truss structure
of the Fifth Symposium, Blacksburg, VA, June 12-14,	[AD-A164016] p 59 N86-24740	[NASA-CASE-LAR-13081-1] p 29 N86-32737
1985 p 95 A86-39476	Mathematical correlation of modal parameter	FORCE DISTRIBUTION
Frequency domain solutions to multi-degree-of-freedom,	identification methods via system realization theory	Microprocessor controlled force actuator
dry friction damped systems under periodic excitation	[NASA-TM-87720] p 59 N86-25019	[AIAA PAPER 86-0916] p 40 A86-38827
p 44 A86-39485	Mathematical models of flexible spacecraft dynamics:	FORCED VIBRATION
Uniform damping control of spacecraft	A survey of order reduction approaches aircraft	Reconstruction of forcing functions based on measured
p 44 A86-39486	tracking	structural responses p 63 N86-30684
Balanced Augmented Controller Reduction	[NLR-MP-85004-U] p 60 N86-26367	FORMING TECHNIQUES
p 44 A86-39491	Control of flexible structures with respect to infinity	Continuous forming of thin-walled CFRP pipes for
Dynamics of gyroelastic vehicles flexible spacecraft	flexible spacecraft p 60 N86-27359	large-space structure p 72 A86-40371
p 45 A86-39494	Integrated sensor and actuator system for flexible space	FRACTURE STRENGTH
Transient dynamics during the extension of flexible	structure experiments space applications	Delamination fracture toughness of composite
members of space platforms p 46 A86-39499	p 102 N86-27385	spacecraft structures p 78 N86-30777
A robust nonlinear attitude control law for space stations	Numerical experiments on a controlled flexible structure	Damage zone fracture analysis of fibrous composites
with flexible structural components p 46 A86-39500	using DCAF flexible spacecraft simulation	p 78 N86-30778
Control of Flexible Structures (COFS) Flight Experiment	[ESA-CR(P)-2159] p 61 N86-28116	FRANCO
		FRAMES
Program p 5 A86-39502	ACOSS eleven (Active Control Of Space Structures) s	Space frame optimization subject to frequency
Program p.5 A86-39502 Vibration control of flexible beams using an active	ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890	Space frame optimization subject to frequency constraints
Program p.5 A86-39502 Vibration control of flexible beams using an active hinge p.46 A86-39505	ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Stiffness control of large space structures	Space frame optimization subject to frequency constraints [AIAA PAPER 86-0877] p 40 A86-38812
Program p.5 A86-39502 Vibration control of flexible beams using an active p.46 A86-39505 Maneuvering of flexible spacecraft with application to	ACOSS eleven (Active Control Of Space Structures) s  [AD-A165864] p 62 N86-29890  Stiffness control of large space structures p 63 N86-30652	Space frame optimization subject to frequency constraints [AIAA PAPER 86-0877] p 40 A86-38812 Control/structures interaction study of two 300 KW
Program p.5 A86-39502 Vibration control of flexible beams using an active p.46 A86-39505 Maneuvering of flexible spacecraft with application to SCOLE Spacecraft Control Laboratory Experiment	ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Stiffness control of large space structures p 63 N86-30652 Application of the LQG/LTR technique to robust	Space frame optimization subject to frequency constraints [AIAA PAPER 86-0877] p 40 A86-38812 Control/structures interaction study of two 300 KW dual-keel space station concepts
Program p 5 A86-39502 Vibration control of flexible beams using an active hinge p 46 A86-39505 Maneuvering of flexible spacecraft with application to SCOLE Spacecraft Control Laboratory Experiment p 47 A86-39508	ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Stiffness control of large space structures p 63 N86-30652 Application of the LQG/LTR technique to robust controller synthesis for a large flexible space antenna	Space frame optimization subject to frequency constraints  [AIAA PAPER 86-0877] p 40 A86-38812  Control/structures interaction study of two 300 KW dual-keel space station concepts  [NASA-TM-87679] p 61 N86-28113
Program p 5 A86-39502 Vibration control of flexible beams using an active hinge p 46 A86-39505 Maneuvering of flexible spacecraft with application to SCOLE Spacecraft Control Laboratory Experiment p 47 A86-39508 A slewing control experiment for flexible structures	ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Stiffness control of large space structures p 63 N86-30652 Application of the LOG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800	Space frame optimization subject to frequency constraints [AIAA PAPER 86-0877] p 40 A86-38812 Control/structures interaction study of two 300 KW dual-keel space station concepts [NASA-TM-87679] p 61 N86-28113 FREE FLIGHT
Program p 5 A86-39502 Vibration control of flexible beams using an active p 46 A86-39505 Maneuvering of flexible spacecraft with application to SCOLE Spacecraft Control Laboratory Experiment p 47 A86-39508 A slewing control experiment for flexible structures p 47 A86-39509	ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Stiffness control of large space structures p 63 N86-30652 Application of the LQG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800 Dynamics of flexible spacecraft: An analysis of	Space frame optimization subject to frequency constraints  [AIAA PAPER 86-0877] p 40 A86-38812  Control/structures interaction study of two 300 KW dual-keel space station concepts  [NASA-TM-87679] p 61 N86-28113  FREE FLIGHT  Power and thermal management concepts for free-flying
Program p 5 A86-39502 Vibration control of flexible beams using an active p 46 A86-39505 Maneuvering of flexible spacecraft with application to SCOLE Spacecraft Control Laboratory Experiment p 47 A86-39508 A slewing control experiment for flexible structures p 47 A86-39509 Implementation problems associated with simultaneous	ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Stiffness control of large space structures p 63 N86-30652 Application of the LQG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800 Dynamics of flexible spacecraft: An analysis of approaches towards mathematical model order reduct	Space frame optimization subject to frequency constraints  [AIAA PAPER 86-0877] p 40 A86-38812  Control/structures interaction study of two 300 KW dual-keel space station concepts  [NASA-TM-87679] p 61 N86-28113  FREE FLIGHT  Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990
Program p 5 A86-39502 Vibration control of flexible beams using an active hinge p 46 A86-39505 Maneuvering of flexible spacecraft with application to SCOLE Spacecraft Control Laboratory Experiment p 47 A86-39508 A slewing control experiment for flexible structures p 47 A86-39509 Implementation problems associated with simultaneous maneuver and vibration suppression of flexible	ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Stiffness control of large space structures p 63 N86-30652 Application of the LOG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800 Dynamics of flexible spacecraft: An analysis of approaches towards mathematical model order reduct ion	Space frame optimization subject to frequency constraints [AIAA PAPER 86-0877] p 40 A86-38812 Control/structures interaction study of two 300 KW dual-keel space station concepts [NASA-TM-97679] p 61 N86-28113 FREE FLIGHT Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990 FREE MOLECULAR FLOW
Program p 5 A86-39502 Vibration control of flexible beams using an active hinge p 46 A86-39505 Maneuvering of flexible spacecraft with application to SCOLE Spacecraft Control Laboratory Experiment p 47 A86-39508 A slewing control experiment for flexible structures p 47 A86-39509 Implementation problems associated with simultaneous maneuver and vibration suppression of flexible spacecraft p 47 A86-39511	ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Stiffness control of large space structures p 63 N86-30652 Application of the LQG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800 Dynamics of flexible spacecraft: An analysis of approaches towards mathematical model order reduct	Space frame optimization subject to frequency constraints [AIAA PAPER 86-0877] p 40 A86-38812 Control/structures interaction study of two 300 KW dual-keel space station concepts [NASA-TM-87679] p 61 N86-28113 FREE FLIGHT Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990 FREE MOLECULAR FLOW Shuttle Tethered Aerothermodynamics Research
Program p 5 A86-39502 Vibration control of flexible beams using an active hinge p 46 A86-39505 Maneuvering of flexible spacecraft with application to SCOLE Spacecraft Control Laboratory Experiment p 47 A86-39508 A slewing control experiment for flexible structures p 47 A86-39509 Implementation problems associated with simultaneous maneuver and vibration suppression of flexible spacecraft p 47 A86-39511 Robust control of a flexible non-symmetrical	ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Stiffness control of large space structures p 63 N86-30652 Application of the LGG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800 Dynamics of flexible spacecraft: An analysis of approaches towards mathematical model order reduct ion [NLR-TR-85068-U] p 65 N86-31643 Influence of structural parameter uncertainties on flexible	Space frame optimization subject to frequency constraints  [AIAA PAPER 86-0877] p 40 A86-38812 Control/structures interaction study of two 300 KW dual-keel space station concepts [NASA-TM-97679] p 61 N86-28113  FREE FLIGHT Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990  FREE MOLECULAR FLOW Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653
Program Vibration control of flexible beams using an active hinge p 46 A96-39505 Maneuvering of flexible spacecraft with application to SCOLE Spacecraft Control Laboratory Experiment p 47 A86-39508 A slewing control experiment for flexible structures p 47 A86-39509 Implementation problems associated with simultaneous maneuver and vibration suppression of flexible spacecraft p 47 A86-39511 Robust control of a flexible non-symmetrical spacecraft p 47 A86-39569	ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Stiffness control of large space structures p 63 N86-30652 Application of the LQG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] Dynamics of flexible spacecraft: An analysis of approaches towards mathematical model order reduct ion [NLR-TR-85068-U] p 65 N86-31643 Influence of structural parameter uncertainties on flexible space structural control performances	Space frame optimization subject to frequency constraints  [AIAA PAPER 86-0877] p 40 A86-38812  Control/structures interaction study of two 300 KW dual-keel space station concepts  [NASA-TM-97679] p 61 N86-28113  FREE FLIGHT  Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990  FREE MOLECULAR FLOW  Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653  FREE VIBRATION
Program p 5 A86-39502 Vibration control of flexible beams using an active hinge p 46 A86-39505 Maneuvering of flexible spacecraft with application to SCOLE Spacecraft Control Laboratory Experiment p 47 A86-39508 A slewing control experiment for flexible structures p 47 A86-39509 Implementation problems associated with simultaneous maneuver and vibration suppression of flexible spacecraft p 47 A86-39511 Robust control of a flexible non-symmetrical spacecraft p 47 A86-39569 Simultaneous plant parameter and state estimation by	ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Stiffness control of large space structures p 63 N86-30652 Application of the LGG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800 Dynamics of flexible spacecraft: An analysis of approaches towards mathematical model order reduct ion [NLR-TR-85068-U] p 65 N86-31643 Influence of structural parameter uncertainties on flexible	Space frame optimization subject to frequency constraints [AIAA PAPER 86-0877] p 40 A86-38812 Control/structures interaction study of two 300 KW dual-keel space station concepts [NASA-TM-87679] p 61 N86-28113 FREE FLIGHT Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990 FREE MOLECULAR FLOW Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653 FREE VIBRATION Verification of large beam-type space structures
Program p 5 A86-39502 Vibration control of flexible beams using an active hinge p 46 A86-39505 Maneuvering of flexible spacecraft with application to SCOLE Spacecraft Control Laboratory Experiment p 47 A86-39508 A slewing control experiment for flexible structures p 47 A86-39509 Implementation problems associated with simultaneous maneuver and vibration suppression of flexible spacecraft p 47 A86-39511 Robust control of a flexible non-symmetrical spacecraft Simultaneous plant parameter and state estimation by a successive states method for flexible spacecraft	ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Stiffness control of large space structures p 63 N86-30652 Application of the LQG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800 Dynamics of flexible spacecraft: An analysis of approaches towards mathematical model order reduct ion [NLR-TR-85068-U] p 65 N86-31643 Influence of structural parameter uncertainties on flexible space structural control performances	Space frame optimization subject to frequency constraints  [AIAA PAPER 86-0877] p 40 A86-38812  Control/structures interaction study of two 300 KW dual-keel space station concepts [NASA-TM-87679] p 61 N86-28113  FREE FLIGHT  Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990  FREE MOLECULAR FLOW  Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653  FREE VIBRATION  Verification of large beam-type space structures [AIAA PAPER 86-0860] p 24 A86-38809
Program Vibration control of flexible beams using an active hinge p 46 A86-39502 Maneuvering of flexible spacecraft with application to SCOLE Spacecraft Control Laboratory Experiment p 47 A86-39508 A slewing control experiment for flexible structures p 47 A86-39509 Implementation problems associated with simultaneous maneuver and vibration suppression of flexible spacecraft p 47 A86-39511 Robust control of a flexible non-symmetrical spacecraft p 47 A86-39569 Simultaneous plant parameter and state estimation by a successive states method for flexible spacecraft attitude control p 48 A86-40769	ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Stiffness control of large space structures p 63 N86-30652 Application of the LOG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800 Dynamics of flexible spacecraft: An analysis of approaches towards mathematical model order reduct ion [NLR-TR-85068-U] p 65 N86-31643 Influence of structural parameter uncertainties on flexible space structural control performances [SNIAS-861-440-104] p 65 N86-32516	Space frame optimization subject to frequency constraints  [AIAA PAPER 86-0877] p 40 A86-38812  Control/structures interaction study of two 300 KW dual-keel space station concepts  [NASA-TM-87679] p 61 N86-28113  FREE FLIGHT  Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990  FREE MOLECULAR FLOW  Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653  FREE VIBRATION  Verification of large beam-type space structures  [AIAA PAPER 86-0860] p 24 A86-38809  Vibration of a large space beam under gravity effect
Program Vibration control of flexible beams using an active hinge p 46 A86-39502 Maneuvering of flexible spacecraft with application to SCOLE Spacecraft Control Laboratory Experiment p 47 A86-39508 A slewing control experiment for flexible structures p 47 A86-39509 Implementation problems associated with simultaneous maneuver and vibration suppression of flexible spacecraft p 47 A86-39511 Robust control of a flexible non-symmetrical spacecraft p 47 A86-39569 Simultaneous plant parameter and state estimation by a successive states method for flexible spacecraft titlude control p 48 A86-40769 Modelling and design of nonlinear feedback control law	ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Stiffness control of large space structures p 63 N86-30652 Application of the LQG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800 Dynamics of flexible spacecraft: An analysis of approaches towards mathematical model order reduct ion [NLR-TR-85068-U] p 65 N86-31643 Influence of structural parameter uncertainties on flexible space structural control performances [SNIAS-861-440-104] p 65 N86-32516 FLIGHT CONTROL	Space frame optimization subject to frequency constraints [AIAA PAPER 86-0877] p 40 A86-38812 Control/structures interaction study of two 300 KW dual-keel space station concepts [NASA-TM-87679] p 61 N86-28113 FREE FLIGHT Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990 FREE MOLECULAR FLOW Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653 FREE VIBRATION Verification of large beam-type space structures [AIAA PAPER 86-0860] p 24 A86-38809 Vibration of a large space beam under gravity effect [AIAA PAPER 86-0907] p 41 A86-38907
Program Vibration control of flexible beams using an active hinge p 46 A86-39505  Maneuvering of flexible spacecraft with application to SCOLE Spacecraft Control Laboratory Experiment p 47 A86-39508  A slewing control experiment for flexible structures p 47 A86-39509  Implementation problems associated with simultaneous maneuver and vibration suppression of flexible spacecraft p 47 A86-39511  Robust control of a flexible non-symmetrical spacecraft p 47 A86-39569  Simultaneous plant parameter and state estimation by a successive states method for flexible spacecraft attitude control p 48 A86-40769  Modelling and design of nonlinear feedback control law for a large space hoop-column antenna	ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Stiffness control of large space structures p 63 N86-30652 Application of the LGG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800 Dynamics of flexible spacecraft: An analysis of approaches towards mathematical model order reduct ion [NLR-TR-85068-U] p 65 N86-31643 Influence of structural parameter uncertainties on flexible space structural control performances [SNIAS-861-440-104] p 65 N86-32516 FLIGHT CONTROL Preliminary evaluation of a reaction control system for	Space frame optimization subject to frequency constraints  [AIAA PAPER 86-0877] p 40 A86-38812  Control/structures interaction study of two 300 KW dual-keel space station concepts [NASA-TM-87679] p 61 N86-28113  FREE FLIGHT  Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990  FREE MOLECULAR FLOW  Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653  FREE VIBRATION  Verification of large beam-type space structures [AIAA PAPER 86-0860] p 24 A86-38809  Vibration of a large space beam under gravity effect [AIAA PAPER 86-0907] p 41 A86-38917  FRENCH SPACE PROGRAMS
Program Vibration control of flexible beams using an active hinge p 46 A86-39502 Maneuvering of flexible spacecraft with application to SCOLE Spacecraft Control Laboratory Experiment p 47 A86-39508 A slewing control experiment for flexible structures p 47 A86-39509 Implementation problems associated with simultaneous maneuver and vibration suppression of flexible spacecraft p 47 A86-39511 Robust control of a flexible non-symmetrical p 47 A86-39569 Simultaneous plant parameter and state estimation by a successive states method for flexible spacecraft attitude control p 48 A86-40769 Modelling and design of nonlinear feedback control law for a large space hoop-column antenna p 48 A86-42909	ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Stiffness control of large space structures p 63 N86-30652 Application of the LOG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800 Dynamics of flexible spacecraft: An analysis of approaches towards mathematical model order reduct ion [NLR-TR-8508-U] p 65 N86-31643 Influence of structural parameter uncertainties on flexible space structural control performances [SNIAS-861-440-104] p 65 N86-32516 FLIGHT CONTROL Preliminary evaluation of a reaction control system for a Space Station	Space frame optimization subject to frequency constraints  [AIAA PAPER 86-0877] p 40 A86-38812  Control/structures interaction study of two 300 KW dual-keel space station concepts  [NASA-TM-87679] p 61 N86-28113  FREE FLIGHT  Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990  FREE MOLECULAR FLOW  Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653  FREE VIBRATION  Verification of large beam-type space structures  [AIAA PAPER 86-0807] p 24 A86-38809  Vibration of a large space beam under gravity effect  [AIAA PAPER 86-0907] p 41 A86-38917  FRENCH SPACE PROGRAMS  French views on Columbus - Preparation of its utilization
Program Vibration control of flexible beams using an active hinge p 46 A86-39502 Maneuvering of flexible spacecraft with application to SCOLE Spacecraft Control Laboratory Experiment p 47 A86-39508 A slewing control experiment for flexible structures p 47 A86-39509 Implementation problems associated with simultaneous maneuver and vibration suppression of flexible spacecraft p 47 A86-39511 Robust control of a flexible non-symmetrical spacecraft p 47 A86-39569 Simultaneous plant parameter and state estimation by a successive states method for flexible spacecraft attitude control p 48 A86-40769 Modelling and design of nonlinear feedback control law for a large space hoop-column antenna p 48 A86-42909 A nonlinear attitude control law for a satellite with flexible	ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Stiffness control of large space structures p 63 N86-30652 Application of the LQG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800 Dynamics of flexible spacecraft: An analysis of approaches towards mathematical model order reduct ion [NLR-TR-85068-U] p 65 N86-31643 Influence of structural parameter uncertainties on flexible space structural control performances [SNIAS-861-440-104] p 65 N86-32516 FLIGHT CONTROL Preliminary evaluation of a reaction control system for a Space Station [AIAA PAPER 86-2152] p 89 A86-47460 FLIGHT MANAGEMENT SYSTEMS	Space frame optimization subject to frequency constraints [AIAA PAPER 86-0877] p 40 A86-38812 Control/structures interaction study of two 300 KW dual-keel space station concepts [NASA-TM-87679] p 61 N86-28113 FREE FLIGHT Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990 FREE MOLECULAR FLOW Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653 FREE VIBRATION Verification of large beam-type space structures [AIAA PAPER 86-0860] p 24 A86-38809 Vibration of a large space beam under gravity effect [AIAA PAPER 86-0907] p 41 A86-38917 FRENCH SPACE PROGRAMS French views on Columbus - Preparation of its utilization relations with other programs p 10 A86-45647
Program Vibration control of flexible beams using an active hinge p 46 A86-39505 Maneuvering of flexible spacecraft with application to SCOLE Spacecraft Control Laboratory Experiment p 47 A86-39508 A slewing control experiment for flexible structures p 47 A86-39509 Implementation problems associated with simultaneous maneuver and vibration suppression of flexible spacecraft p 47 A86-39511 Robust control of a flexible non-symmetrical spacecraft p 47 A86-39569 Simultaneous plant parameter and state estimation by a successive states method for flexible spacecraft attitude control p 48 A86-40769 Modelling and design of nonlinear feedback control law for a large space hoop-column antenna p 48 A86-42909 A nonlinear attitude control law for a satellite with flexible appendages p 49 A86-42989	ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-2890 Stiffness control of large space structures p 63 N86-30652 Application of the LQG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800 Dynamics of flexible spacecraft: An analysis of approaches towards mathematical model order reduct ion [NLR-TR-85068-U] p 65 N86-31643 Influence of structural parameter uncertainties on flexible space structural control performances [SNIAS-861-440-104] p 65 N86-32516  FLIGHT CONTROL Preliminary evaluation of a reaction control system for a Space Station [AIAA PAPER 86-2152] p 89 A86-47460	Space frame optimization subject to frequency constraints [AIAA PAPER 86-0877] p 40 A86-38812 Control/structures interaction study of two 300 KW dual-keel space station concepts [NASA-TM-87679] p 61 N86-28113 FREE FLIGHT Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990 FREE MOLECULAR FLOW Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653 FREE VIBRATION Verification of large beam-type space structures [AIAA PAPER 86-0860] p 24 A86-38809 Vibration of a large space beam under gravity effect [AIAA PAPER 86-0907] FRENCH SPACE PROGRAMS French views on Columbus - Preparation of its utilization relations with other programs p 10 A86-45647 FREQUENCY STABILITY
Program Vibration control of flexible beams using an active hinge p 46 A86-39505 Maneuvering of flexible spacecraft with application to SCOLE Spacecraft Control Laboratory Experiment p 47 A86-39508 A slewing control experiment for flexible structures p 47 A86-39509 Implementation problems associated with simultaneous maneuver and vibration suppression of flexible spacecraft p 47 A86-39511 Robust control of a flexible non-symmetrical spacecraft p 47 A86-39569 Simultaneous plant parameter and state estimation by a successive states method for flexible spacecraft attitude control p 48 A86-40769 Modelling and design of nonlinear feedback control law for a large space hoop-column antenna  A nonlinear attitude control law for a satellitie with flexible appendages Computer aided modelling/compensator design for a	ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Stiffness control of large space structures p 63 N86-30652 Application of the LOG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800 Dynamics of flexible spacecraft: An analysis of approaches towards mathematical model order reduct ion [NLR-TR-85088-U] p 65 N86-31643 Influence of structural parameter uncertainties on flexible space structural control performances [SNIAS-861-440-104] p 65 N86-32516 FLIGHT CONTROL Preliminary evaluation of a reaction control system for a Space Station [AIAA PAPER 86-2152] p 89 A86-47460 FLIGHT MANAGEMENT SYSTEMS Momentum management concepts for a Space	Space frame optimization subject to frequency constraints  [AIAA PAPER 86-0877] p 40 A86-38812  Control/structures interaction study of two 300 KW dual-keel space station concepts  [NASA-TM-87679] p 61 N86-28113  FREE FLIGHT  Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990  FREE MOLECULAR FLOW  Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653  FREE VIBRATION  Verification of large beam-type space structures  [AIAA PAPER 86-0860] p 24 A86-38809  Vibration of a large space beam under gravity effect [AIAA PAPER 86-0907] p 41 A86-38917  FRENCH SPACE PROGRAMS  French views on Columbus - Preparation of its utilization relations with other programs p 10 A86-45647  FREQUENCY STABILITY  The effect of energy dissipation due to friction at the
Program Vibration control of flexible beams using an active hinge p 46 A86-39505 Maneuvering of flexible spacecraft with application to SCOLE Spacecraft Control Laboratory Experiment p 47 A86-39508 A slewing control experiment for flexible structures p 47 A86-39509 Implementation problems associated with simultaneous maneuver and vibration suppression of flexible spacecraft p 47 A86-39511 Robust control of a flexible non-symmetrical spacecraft p 47 A86-39569 Simultaneous plant parameter and state estimation by a successive states method for flexible spacecraft attitude control p 48 A86-40769 Modelling and design of nonlinear feedback control law for a large space hoop-column antenna  p 48 A86-42909 A nonlinear attitude control law for a satellite with flexible appendages p 49 A86-42989 Computer aided modelling/compensator design for a flexible space antenna p 96 A86-42993	ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Stiffness control of large space structures p 63 N86-30652 Application of the LQG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800 Dynamics of flexible spacecraft: An analysis of approaches towards mathematical model order reduct ion [NLR-TR-85068-U] p 65 N86-31643 Influence of structural parameter uncertainties on flexible space structural control performances [SNIAS-861-440-104] p 65 N86-32516  FLIGHT CONTROL Preliminary evaluation of a reaction control system for a Space Station [AIAA PAPER 86-2152] p 89 A86-47460  FLIGHT MANAGEMENT SYSTEMS Momentum management concepts for a Space Station [AIAA PAPER 86-2047] p 54 A86-47430	Space frame optimization subject to frequency constraints  [AIAA PAPER 86-0877] p 40 A86-38812  Control/structures interaction study of two 300 KW dual-keel space station concepts  [NASA-TM-97679] p 61 N86-28113  FREE FLIGHT  Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990  FREE MOLECULAR FLOW  Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653  FREE VIBRATION  Verification of large beam-type space structures  [AIAA PAPER 86-0860] p 24 A86-38809  Vibration of a large space beam under gravity effect [AIAA PAPER 86-0907] p 41 A86-38917  FRENCH SPACE PROGRAMS  French views on Columbus - Preparation of its utilization relations with other programs p 10 A86-45647  FREQUENCY STABILITY  The effect of energy dissipation due to friction at the joint of a simple beam structure
Program Vibration control of flexible beams using an active hinge p 46 A86-39505 Maneuvering of flexible spacecraft with application to SCOLE Spacecraft Control Laboratory Experiment p 47 A86-39508 A slewing control experiment for flexible structures p 47 A86-39508 A slewing control experiment for flexible structures p 47 A86-39509 Implementation problems associated with simultaneous maneuver and vibration suppression of flexible spacecraft p 47 A86-39511 Robust control of a flexible non-symmetrical spacecraft p 47 A86-39569 Simultaneous plant parameter and state estimation by a successive states method for flexible spacecraft tatitude control p 48 A86-40769 Modelling and design of nonlinear feedback control law for a large space hoop-column antenna p 48 A86-42909 A nonlinear attitude control law for a satellite with flexible appendages p 49 A86-42989 Computer aided modelling/compensator design for a flexible space antenna p 9 A86-42993 Reduced order compensator design for an experimental	ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Stiffness control of large space structures p 63 N86-30652 Application of the LOG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800 Dynamics of flexible spacecraft: An analysis of approaches towards mathematical model order reduct ion [NLR-TR-85068-U] p 65 N86-31643 Influence of structural parameter uncertainties on flexible space structural control performances [SNIAS-861-440-104] p 65 N86-32516  FLIGHT CONTROL Preliminary evaluation of a reaction control system for a Space Station [AIAA PAPER 86-2152] p 89 A86-47460  FLIGHT MANAGEMENT SYSTEMS Momentum management concepts for a Space Station	Space frame optimization subject to frequency constraints [AIAA PAPER 86-0877] p 40 A86-38812 Control/structures interaction study of two 300 KW dual-keel space station concepts [NASA-TM-87679] p 61 N86-28113 FREE FLIGHT Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990 FREE MOLECULAR FLOW Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653 FREE VIBRATION Verification of large beam-type space structures [AIAA PAPER 86-0860] p 24 A86-38809 Vibration of a large space beam under gravity effect [AIAA PAPER 86-0907] p 41 A86-38917 FRENCH SPACE PROGRAMS French views on Columbus - Preparation of its utilization relations with other programs p 10 A86-45647 FREQUENCY STABILITY The effect of energy dissipation due to friction at the joint of a simple beam structure [AD-A163975] p 58 N86-24739
Program Vibration control of flexible beams using an active hinge p 46 A86-39505 Maneuvering of flexible spacecraft with application to SCOLE Spacecraft Control Laboratory Experiment p 47 A86-39508 A slewing control experiment for flexible structures p 47 A86-39509 Implementation problems associated with simultaneous maneuver and vibration suppression of flexible spacecraft p 47 A86-39511 Robust control of a flexible non-symmetrical spacecraft p 47 A86-39569 Simultaneous plant parameter and state estimation by a successive states method for flexible spacecraft attitude control flexible spacecraft attitude control spacecraft p 48 A86-40769 Modelling and design of nonlinear feedback control law for a large space hoop-column antenna p 48 A86-42909 A nonlinear attitude control law for a satellitie with flexible appendages computer aided modelling/compensator design for a flexible space antenna p 96 A86-42999 Reduced order compensator design for a experimental large flexible structure p 50 A86-42995	ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Stiffness control of large space structures p 63 N86-30652 Application of the LOG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800 Dynamics of flexible spacecraft: An analysis of approaches towards mathematical model order reduct ion [NLR-TR-85068-U] p 65 N86-31643 Influence of structural parameter uncertainties on flexible space structural control performances [SNIAS-861-440-104] p 65 N86-32516 FLIGHT CONTROL Preliminary evaluation of a reaction control system for a Space Station [AIAA PAPER 86-2152] p 89 A86-47460 FLIGHT MANAGEMENT SYSTEMS Momentum management concepts for a Space Station [AIAA PAPER 86-2047] p 54 A86-47430 FLIGHT OPERATIONS	Space frame optimization subject to frequency constraints  [AIAA PAPER 86-0877] p 40 A86-38812  Control/structures interaction study of two 300 KW dual-keel space station concepts  [NASA-TM-87679] p 61 N86-28113  FREE FLIGHT  Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990  FREE MOLECULAR FLOW  Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653  FREE VIBRATION  Verification of large beam-type space structures  [AIAA PAPER 86-0860] p 24 A86-38809  Vibration of a large space beam under gravity effect [AIAA PAPER 86-0907] p 41 A86-38917  FRENCH SPACE PROGRAMS  French views on Columbus - Preparation of its utilization relations with other programs p 10 A86-45647  FREQUENCY STABILITY  The effect of energy dissipation due to friction at the joint of a simple beam structure  [AD-A163975] p 58 N86-24739  FRETTING
Program Vibration control of flexible beams using an active hinge p 46 A86-39505 Maneuvering of flexible spacecraft with application to SCOLE Spacecraft Control Laboratory Experiment p 47 A86-39508 A slewing control experiment for flexible structures p 47 A86-39509 Implementation problems associated with simultaneous maneuver and vibration suppression of flexible spacecraft p 47 A86-39511 Robust control of a flexible non-symmetrical spacecraft p 47 A86-39569 Simultaneous plant parameter and state estimation by a successive states method for flexible spacecraft attitude control p 48 A86-40769 Modelling and design of nonlinear feedback control law for a large space hoop-column antenna p 48 A86-42909 A nonlinear attitude control law for a satellite with flexible appendages Computer aided modelling/compensator design for a flexible space antenna p 96 A86-42993 Reduced order compensator design for an experimental large flexible structure p 50 A86-42995 Decentralized control of sequentially assembled large	ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Stiffness control of large space structures p 63 N86-30652 Application of the LQG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800 Dynamics of flexible spacecraft: An analysis of approaches towards mathematical model order reduct ion [NLR-TR-85068-U] p 65 N86-31643 Influence of structural parameter uncertainties on flexible space structural control performances [SNIAS-861-440-104] p 65 N86-32516  FLIGHT CONTROL Preliminary evaluation of a reaction control system for a Space Station [AIAA PAPER 86-2152] p 89 A86-47460  FLIGHT MANAGEMENT SYSTEMS Momentum management concepts for a Space Station [AIAA PAPER 86-2047] p 54 A86-47430 FLIGHT OPERATIONS Spacecraft design and operational problems: Proceedings of the Aerospace Technology Conference	Space frame optimization subject to frequency constraints  [AIAA PAPER 86-0877] p 40 A86-38812  Control/structures interaction study of two 300 KW dual-keel space station concepts  [NASA-TM-87679] p 61 N86-28113  FREE FLIGHT  Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990  FREE MOLECULAR FLOW  Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653  FREE VIBRATION  Verification of large beam-type space structures  [AIAA PAPER 86-0860] p 24 A86-38809  Vibration of a large space beam under gravity effect [AIAA PAPER 86-0907] p 41 A86-38917  FRENCH SPACE PROGRAMS  French views on Columbus - Preparation of its utilization relations with other programs p 10 A86-45647  FREQUENCY STABILITY  The effect of energy dissipation due to friction at the joint of a simple beam structure  [AD-A163975] p 58 N86-24739  FRETTING  Coatings against fretting space applications
Program Vibration control of flexible beams using an active hinge p 46 A86-39505 Maneuvering of flexible spacecraft with application to SCOLE Spacecraft Control Laboratory Experiment p 47 A86-39508 A slewing control experiment for flexible structures p 47 A86-39509 Implementation problems associated with simultaneous maneuver and vibration suppression of flexible spacecraft Robust control of a flexible non-symmetrical spacecraft p 47 A86-39511 Robust control of a flexible non-symmetrical spacecraft p 47 A86-39569 Simultaneous plant parameter and state estimation by a successive states method for flexible spacecraft attitude control p 48 A86-40769 Modelling and design of nonlinear feedback control law for a large space hoop-column antenna p 48 A86-42909 A nonlinear attitude control law for a satellite with flexible appendages p 49 A86-42989 Computer aided modelling/compensator design for a flexible space antenna Reduced order compensator design for an experimental large flexible structure p 50 A86-42999 Space structures p 82 A86-42997	ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Stiffness control of large space structures p 63 N86-30652 Application of the LOG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800 Dynamics of flexible spacecraft: An analysis of approaches towards mathematical model order reduct ion [NLR-TR-85068-U] p 65 N86-31643 Influence of structural parameter uncertainties on flexible space structural control performances [SNIAS-861-440-104] p 65 N86-32516 FLIGHT CONTROL Preliminary evaluation of a reaction control system for a Space Station [AIAA PAPER 86-2152] p 89 A86-47460 FLIGHT MANAGEMENT SYSTEMS Momentum management concepts for a Space Station [AIAA PAPER 86-2047] p 54 A86-47430 FLIGHT OPERATIONS Spacecraft design and operational problems:	Space frame optimization subject to frequency constraints  [AIAA PAPER 86-0877] p 40 A86-38812 Control/structures interaction study of two 300 KW dual-keel space station concepts [NASA-TM-87679] p 61 N86-28113  FREE FLIGHT Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990  FREE MOLECULAR FLOW Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653 FREE VIBRATION Verification of large beam-type space structures [AIAA PAPER 86-0860] p 24 A86-38909 Vibration of a large space beam under gravity effect [AIAA PAPER 86-0907] p 41 A86-38917  FRENCH SPACE PROGRAMS French views on Columbus - Preparation of its utilization relations with other programs p 10 A86-45647  FREQUENCY STABILITY The effect of energy dissipation due to friction at the joint of a simple beam structure [AD-A163975] p 58 N86-24739  FRETTING Coatings against fretting space applications
Program Vibration control of flexible beams using an active hinge p 46 A86-39505 Maneuvering of flexible spacecraft with application to SCOLE Spacecraft Control Laboratory Experiment p 47 A86-39508 A slewing control experiment for flexible structures p 47 A86-39509 Implementation problems associated with simultaneous maneuver and vibration suppression of flexible spacecraft p 47 A86-39509 Implementation problems associated with simultaneous maneuver and vibration suppression of flexible spacecraft p 47 A86-39519 Simultaneous plant parameter and state estimation by a successive states method for flexible spacecraft attitude control p 48 A86-40769 Modelling and design of nonlinear feedback control law for a large space hoop-column antenna  A nonlinear attitude control law for a satellite with flexible appendages p 49 A86-42999 Computer aided modelling/compensator design for a flexible space antenna p 96 A86-42995 Decentralized control of sequentially assembled large space structure p 50 A86-42995 Decentralized control of sequentially assembled large space structures p 82 A86-42997 Transfer of alignment and calibration of multiple sensors	ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Stiffness control of large space structures p 63 N86-30652 Application of the LOG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800 Dynamics of flexible spacecraft: An analysis of approaches towards mathematical model order reduct ion [NLR-TR-85088-U] p 65 N86-31643 Influence of structural parameter uncertainties on flexible space structural control performances [SNIAS-861-440-104] p 65 N86-32516 FLIGHT CONTROL Preliminary evaluation of a reaction control system for a Space Station [AIAA PAPER 86-2152] p 89 A86-47460 FLIGHT MANAGEMENT SYSTEMS Momentum management concepts for a Space Station [AIAA PAPER 86-2047] p 54 A86-47430 FLIGHT OPERATIONS Spacecraft design and operational problems: Proceedings of the Aerospace Technology Conference and Exposition, Long Beach, CA, October 14-17, 1985 [SAE SP-636] p 94 A86-38551	Space frame optimization subject to frequency constraints  [AIAA PAPER 86-0877] p 40 A86-38812  Control/structures interaction study of two 300 KW dual-keel space station concepts  [NASA-TM-87679] p 61 N86-28113  FREE FLIGHT  Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990  FREE MOLECULAR FLOW  Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653  FREE VIBRATION  Verification of large beam-type space structures  [AIAA PAPER 86-0860] p 24 A86-38809  Vibration of a large space beam under gravity effect [AIAA PAPER 86-0907] p 41 A86-38917  FRENCH SPACE PROGRAMS  French views on Columbus - Preparation of its utilization relations with other programs p 10 A86-45647  FREQUENCY STABILITY  The effect of energy dissipation due to friction at the joint of a simple beam structure  [AD-A163975] p 58 N86-24739  FRETTING  Coatings against fretting space applications p 76 N86-27377
Program Vibration control of flexible beams using an active hinge p 46 A86-39502 Maneuvering of flexible spacecraft with application to SCOLE Spacecraft Control Laboratory Experiment p 47 A86-39508 A slewing control experiment for flexible structures p 47 A86-39509 Implementation problems associated with simultaneous maneuver and vibration suppression of flexible spacecraft p 47 A86-39511 Robust control of a flexible non-symmetrical spacecraft p 47 A86-39569 Simultaneous plant parameter and state estimation by a successive states method for flexible spacecraft attitude control p 48 A86-40769 Modelling and design of nonlinear feedback control law for a large space hoop-column antenna  p 48 A86-42909 A nonlinear attitude control law for a satellite with flexible appendages Computer aided modelling/compensator design for a flexible space antenna p 96 A86-42993 Reduced order compensator design for a experimental large flexible structure p 50 A86-42995 Decentralized control of sequentially assembled large space structures p 82 A86-42997 Transfer of alignment and calibration of multiple sensors in flexible systems p 50 A86-43003	ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-28890 Stiffness control of large space structures p 63 N86-30652 Application of the LQG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800 Dynamics of flexible spacecraft: An analysis of approaches towards mathematical model order reduct ion [NLR-TR-85068-U] p 65 N86-31643 Influence of structural parameter uncertainties on flexible space structural control performances [SNIAS-861-440-104] p 65 N86-32516  FLIGHT CONTROL Preliminary evaluation of a reaction control system for a Space Station [AIAA PAPER 86-2152] p 89 A86-47460  FLIGHT MANAGEMENT SYSTEMS Momentum management concepts for a Space Station [AIAA PAPER 86-2047] p 54 A86-47430  FLIGHT OPERATIONS  Spacecraft design and operational problems: Proceedings of the Aerospace Technology Conference and Exposition, Long Beach, CA, October 14-17, 1985 [SAE SP-636] p 94 A86-38551  FLIGHT SIMULATION	Space frame optimization subject to frequency constraints  [AIAA PAPER 86-0877] p 40 A86-38812  Control/structures interaction study of two 300 KW dual-keel space station concepts  [NASA-TM-87679] p 61 N86-28113  FREE FLIGHT  Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990  FREE MOLECULAR FLOW  Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653  FREE VIBRATION  Verification of large beam-type space structures  [AIAA PAPER 86-0860] p 24 A86-38909  Vibration of a large space beam under gravity effect [AIAA PAPER 86-0907] p 41 A86-38917  FRENCH SPACE PROGRAMS  French views on Columbus - Preparation of its utilization relations with other programs p 10 A86-45647  FREQUENCY STABILITY  The effect of energy dissipation due to friction at the joint of a simple beam structure  [AD-A163975] p 58 N86-24739  FRETTING  Coatings against fretting space applications p 76 N86-27377  FRICTION  The effect of energy dissipation due to friction at the
Program Vibration control of flexible beams using an active hinge p 46 A86-39505 Maneuvering of flexible spacecraft with application to SCOLE Spacecraft Control Laboratory Experiment p 47 A86-39508 A slewing control experiment for flexible structures p 47 A86-39509 Implementation problems associated with simultaneous maneuver and vibration suppression of flexible spacecraft p 47 A86-39511 Robust control of a flexible non-symmetrical spacecraft p 47 A86-39511 Robust control of a flexible non-symmetrical spacecraft p 47 A86-39569 Simultaneous plant parameter and state estimation by a successive states method for flexible spacecraft attitude control p 48 A86-40769 Modelling and design of nonlinear feedback control law for a large space hoop-column antenna p 48 A86-42909 A nonlinear attitude control law for a satellite with flexible appendages p 49 A86-42909 Computer aided modelling/compensator design for a flexible space antenna p 96 A86-42993 Reduced order compensator design for an experimental large flexible structure p 96 A86-42997 Transfer of alignment and calibration of multiple sensors in flexible systems p 50 A86-43003 A mathematical formulation of a large space structure	ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Stiffness control of large space structures p 63 N86-30652 Application of the LQG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800 Dynamics of flexible spacecraft: An analysis of approaches towards mathematical model order reduct ion [NLR-TR-85068-U] p 65 N86-31643 Influence of structural parameter uncertainties on flexible space structural control performances [SNIAS-861-440-104] p 65 N86-32516  FLIGHT CONTROL Preliminary evaluation of a reaction control system for a Space Station [AIAA PAPER 86-2152] p 89 A86-47460  FLIGHT MANAGEMENT SYSTEMS Momentum management concepts for a Space Station [AIAA PAPER 86-2047] p 54 A86-47430  FLIGHT OPERATIONS Spacecraft design and operational problems: Proceedings of the Aerospace Technology Conference and Exposition, Long Beach, CA, October 14-17, 1985 [SAE SP-636] p 94 A86-38551  FLIGHT SIMULATION Aerospace simulation II; Proceedings of the Second	Space frame optimization subject to frequency constraints  [AIAA PAPER 86-0877] p 40 A86-38812 Control/structures interaction study of two 300 KW dual-keel space station concepts [NASA-TM-87679] p 61 N86-28113  FREE FLIGHT Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990  FREE MOLECULAR FLOW Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653  FREE VIBRATION Verification of large beam-type space structures [AIAA PAPER 86-0860] p 24 A86-38909 Vibration of a large space beam under gravity effect [AIAA PAPER 86-0907] p 41 A86-38917  FRENCH SPACE PROGRAMS French views on Columbus - Preparation of its utilization relations with other programs p 10 A86-45647  FREQUENCY STABILITY The effect of energy dissipation due to friction at the joint of a simple beam structure [AD-A163975] p 58 N86-24739  FREITING Coatings against fretting space applications p 76 N86-27377  FRICTION The effect of energy dissipation due to friction at the joint of a simple beam structure
Program Vibration control of flexible beams using an active hinge p 46 A86-39505 Maneuvering of flexible spacecraft with application to SCOLE Spacecraft Control Laboratory Experiment p 47 A86-39508 A slewing control experiment for flexible structures p 47 A86-39509 Implementation problems associated with simultaneous maneuver and vibration suppression of flexible spacecraft p 47 A86-39511 Robust control of a flexible non-symmetrical spacecraft p 47 A86-39569 Simultaneous plant parameter and state estimation by a successive states method for flexible spacecraft attitude control Modelling and design of nonlinear feedback control law for a large space hoop-column antenna p 48 A86-42909 A nonlinear attitude control law for a satellitie with flexible appendages p 49 A86-42999 Computer aided modelling/compensator design for a flexible space antenna p 96 A86-42999 Reduced order compensator design for an experimental large flexible structure p 50 A86-42995 Decentralized control of sequentially assembled large space structures Transfer of alignment and calibration of multiple sensors in flexible systems p 50 A86-43003 A mathematical formulation of a large space structure control problem p 50 A86-43005	ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-28890 Stiffness control of large space structures p 63 N86-30652 Application of the LQG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800 Dynamics of flexible spacecraft: An analysis of approaches towards mathematical model order reduct ion [NLR-TR-85068-U] p 65 N86-31643 Influence of structural parameter uncertainties on flexible space structural control performances [SNIAS-861-440-104] p 65 N86-32516  FLIGHT CONTROL Preliminary evaluation of a reaction control system for a Space Station [AIAA PAPER 86-2152] p 89 A86-47460  FLIGHT MANAGEMENT SYSTEMS Momentum management concepts for a Space Station [AIAA PAPER 86-2047] p 54 A86-47430  FLIGHT OPERATIONS  Spacecraft design and operational problems: Proceedings of the Aerospace Technology Conference and Exposition, Long Beach, CA, October 14-17, 1985 [SAE SP-636] p 94 A86-38551  FLIGHT SIMULATION	Space frame optimization subject to frequency constraints  [AIAA PAPER 86-0877] p 40 A86-38812  Control/structures interaction study of two 300 KW dual-keel space station concepts  [NASA-TM-87679] p 61 N86-28113  FREE FLIGHT  Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990  FREE MOLECULAR FLOW  Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653  FREE VIBRATION  Verification of large beam-type space structures  [AIAA PAPER 86-0860] p 24 A86-38809  Vibration of a large space beam under gravity effect [AIAA PAPER 86-0907] p 41 A86-38917  FRENCH SPACE PROGRAMS  French views on Columbus - Preparation of its utilization relations with other programs p 10 A86-45647  FREQUENCY STABILITY  The effect of energy dissipation due to friction at the joint of a simple beam structure  [AD-A163975] p 58 N86-24739  FRICTION  The effect of energy dissipation due to friction at the joint of a simple beam structure  [AD-A163975] p 58 N86-24739
Program Vibration control of flexible beams using an active hinge p 46 A86-39502 Maneuvering of flexible spacecraft with application to SCOLE Spacecraft Control Laboratory Experiment p 47 A86-39508 A slewing control experiment for flexible structures p 47 A86-39509 A slewing control experiment for flexible structures p 47 A86-39509 Implementation problems associated with simultaneous maneuver and vibration suppression of flexible spacecraft p 47 A86-39511 Robust control of a flexible non-symmetrical spacecraft p 47 A86-39569 Simultaneous plant parameter and state estimation by a successive states method for flexible spacecraft attitude control p 48 A86-40769 Modelling and design of nonlinear feedback control law for a large space hoop-column antenna p 48 A86-42909 A nonlinear attitude control law for a satellite with flexible appendages Computer aided modelling/compensator design for a flexible space antenna p 96 A86-42993 Reduced order compensator design for an experimental large flexible structure p 50 A86-42995 Decentralized control of sequentially assembled large space structures p 82 A86-42003 A mathematical formulation of a large space structure control problem p 50 A86-43003 Modeling, estimation and identification methods for	ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Stiffness control of large space structures p 63 N86-30652 Application of the LOG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800 Dynamics of flexible spacecraft: An analysis of approaches towards mathematical model order reduct ion [NLR-TR-85068-U] p 65 N86-31643 Influence of structural parameter uncertainties on flexible space structural control performances [SNIAS-861-440-104] p 65 N86-32516 FLIGHT CONTROL Preliminary evaluation of a reaction control system for a Space Station [AIAA PAPER 86-2152] p 89 A86-47460 FLIGHT MANAGEMENT SYSTEMS Momentum management concepts for a Space Station [AIAA PAPER 86-2047] p 54 A86-47430 FLIGHT OPERATIONS Spacecraft design and operational problems: Proceedings of the Aerospace Technology Conference and Exposition, Long Beach, CA, October 14-17, 1985 [SAE SP-636] p 94 A86-38551 FLIGHT SIMULATION Aerospace simulation II; Proceedings of the Second Conference, San Diego, CA, January 23-25, 1986	Space frame optimization subject to frequency constraints  [AIAA PAPER 86-0877] p 40 A86-38812  Control/structures interaction study of two 300 KW dual-keel space station concepts [NASA-TM-87679] p 61 N86-28113  FREE FLIGHT  Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990  FREE MOLECULAR FLOW  Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653  FREE VIBRATION  Verification of large beam-type space structures [AIAA PAPER 86-0860] p 24 A86-38809  Vibration of a large space beam under gravity effect [AIAA PAPER 86-0907] p 41 A86-38917  FRENCH SPACE PROGRAMS  French views on Columbus - Preparation of its utilization relations with other programs p 10 A86-45647  FREQUENCY STABILITY  The effect of energy dissipation due to friction at the joint of a simple beam structure [AD-A163975] p 58 N86-24739  FRICTION  The effect of energy dissipation due to friction at the joint of a simple beam structure [AD-A163975] p 58 N86-24739  FRICTION  The effect of energy dissipation due to friction at the joint of a simple beam structure [AD-A163975] p 58 N86-24739  FRICTION  The effect of energy dissipation due to friction at the joint of a simple beam structure [AD-A163975] p 58 N86-24739  FRICTION p 58 N86-24739
Program Vibration control of flexible beams using an active hinge p 46 A86-39505 Maneuvering of flexible spacecraft with application to SCOLE Spacecraft Control Laboratory Experiment p 47 A86-39508 A slewing control experiment for flexible structures p 47 A86-39509 Implementation problems associated with simultaneous maneuver and vibration suppression of flexible spacecraft p 47 A86-39511 Robust control of a flexible non-symmetrical spacecraft p 47 A86-39569 Simultaneous plant parameter and state estimation by a successive states method for flexible spacecraft attitude control Modelling and design of nonlinear feedback control law for a large space hoop-column antenna p 48 A86-42909 A nonlinear attitude control law for a satellitie with flexible appendages p 49 A86-42999 Computer aided modelling/compensator design for a flexible space antenna p 96 A86-42999 Reduced order compensator design for an experimental large flexible structure p 50 A86-42995 Decentralized control of sequentially assembled large space structures Transfer of alignment and calibration of multiple sensors in flexible systems p 50 A86-43003 A mathematical formulation of a large space structure control problem p 50 A86-43005	ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Stiffness control of large space structures	Space frame optimization subject to frequency constraints  [AIAA PAPER 86-0877] p 40 A86-38812 Control/structures interaction study of two 300 KW dual-keel space station concepts [NASA-TM-87679] p 61 N86-28113  FREE FLIGHT Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990 FREE MOLECULAR FLOW Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653 FREE VIBRATION Verification of large beam-type space structures [AIAA PAPER 86-0860] p 24 A86-38909 Vibration of a large space beam under gravity effect [AIAA PAPER 86-0907] p 41 A86-38917 FRENCH SPACE PROGRAMS French views on Columbus - Preparation of its utilization relations with other programs p 10 A86-45647 FREQUENCY STABILITY The effect of energy dissipation due to friction at the joint of a simple beam structure [AD-A163975] p 58 N86-24739 FRETTING Coatings against fretting space applications p 76 N86-27377 FRICTION The effect of energy dissipation due to friction at the joint of a simple beam structure [AD-A163975] p 58 N86-24739 FRICTION FACTOR Galileo inflight friction identification for the scan platform
Program Vibration control of flexible beams using an active hinge p 46 A86-39505 Maneuvering of flexible spacecraft with application to SCOLE Spacecraft Control Laboratory Experiment p 47 A86-39508 A slewing control experiment for flexible structures p 47 A86-39509 Implementation problems associated with simultaneous maneuver and vibration suppression of flexible spacecraft p 47 A86-39511 Robust control of a flexible non-symmetrical spacecraft p 47 A86-39569 Simultaneous plant parameter and state estimation by a successive states method for flexible spacecraft attitude control p 48 A86-40769 Modelling and design of nonlinear feedback control law for a large space hoop-column antenna  p 48 A86-42909 A nonlinear attitude control law for a satellite with flexible appendages p 49 A86-42989 Computer aided modelling/compensator design for a flexible space antenna Reduced order compensator design for an experimental large flexible structure p 50 A86-42993 Transfer of alignment and calibration of multiple sensors in flexible systems p 50 A86-42997 Transfer of alignment and calibration of multiple sensors in flexible systems p 50 A86-43005 Modeling, estimation and identification methods for static shape determination of flexible structures p 50 A86-43005	ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Stiffness control of large space structures p 63 N86-30652 Application of the LOG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800 Dynamics of flexible spacecraft: An analysis of approaches towards mathematical model order reduct ion [NLR-TR-85068-U] p 65 N86-31643 Influence of structural parameter uncertainties on flexible space structural control performances [SNIAS-861-440-104] p 65 N86-32516 FLIGHT CONTROL Preliminary evaluation of a reaction control system for a Space Station [AIAA PAPER 86-2152] p 89 A86-47460 FLIGHT MANAGEMENT SYSTEMS Momentum management concepts for a Space Station [AIAA PAPER 86-2047] p 54 A86-47430 FLIGHT OPERATIONS Spacecraft design and operational problems: Proceedings of the Aerospace Technology Conference and Exposition, Long Beach, CA, October 14-17, 1985 [SAE SP-636] p 94 A86-38551 FLIGHT SIMULATION Aerospace simulation II; Proceedings of the Second Conference, San Diego, CA, January 23-25, 1986	Space frame optimization subject to frequency constraints  [AIAA PAPER 86-0877] p 40 A86-38812  Control/structures interaction study of two 300 KW dual-keel space station concepts [NASA-TM-87679] p 61 N86-28113  FREE FLIGHT  Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990  FREE MOLECULAR FLOW  Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653  FREE VIBRATION  Verification of large beam-type space structures [AIAA PAPER 86-0860] p 24 A86-38809  Vibration of a large space beam under gravity effect [AIAA PAPER 86-0907] p 41 A86-38917  FRENCH SPACE PROGRAMS  French views on Columbus - Preparation of its utilization relations with other programs p 10 A86-45647  FREQUENCY STABILITY  The effect of energy dissipation due to friction at the joint of a simple beam structure [AD-A163975] p 58 N86-24739  FRICTION  The effect of energy dissipation due to friction at the joint of a simple beam structure [AD-A163975] p 58 N86-24739  FRICTION  The effect of energy dissipation due to friction at the joint of a simple beam structure [AD-A163975] p 58 N86-24739  FRICTION  The effect of energy dissipation due to friction at the joint of a simple beam structure [AD-A163975] p 58 N86-24739  FRICTION p 58 N86-24739

FRICTION FACTOR

HONEYCOMB CORES

Thermal stability of sandwich reflectors --- spacecraft p 35 N86-30774

FUEL CONTROL	Communications platform payload definition study,	HARMONIC ANALYSIS
Minimum-fuel control of high-order systems p 86 A86-34174	executive summary [NASA-CR-174985] p 14 N86-27407	Frequency domain solutions to multi-degree-of-freedom, dry friction damped systems under periodic excitation
FUEL TANKS	GIMBALS	p 44 A86-39485
Analysis and modeling of fluid transfer in orbit	Conceptual design of pointing control systems for Space	HARMONIC OSCILLATION  Evaluation of solar array flight experiment response
[AIAA PAPER 86-1718] p 32 A86-42809 FULL SCALE TESTS	Station gimballed payloads [AIAA PAPER 86-1986] p 53 A86-47411	during flight for extension/retraction phase
Extension for ground-based testing for large space	GIOTTO MISSION	[NASA-TM-86551] p 29 N86-31606
structures p 37 A86-32944 FUNCTIONAL ANALYSIS	The Giotto spacecraft's performance during the geostationary transfer orbit and near-earth mission	HEAT FLUX  Some problems related to the thermally induced
Moving-bank multiple model adaptive algorithms applied	phases p 3 A86-36035	deformations of large space structures
to flexible spacecraft control [AD-A164016] p 59 N86-24740	The Giotto assembly, integration and verification	p 30 A86-36673 HEAT PIPES
FURLABLE ANTENNAS	programme p 5 A86-38273 Giotto despin mechanism subsystem: General loop	The share flight experiment - An advanced heat pipe
The Extendable and Retractable Mast (ERM) flexible spacecraft p 27 N86-27364	design and pointing aspects flexible spacecraft	radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905
Development of an antenna structure for a deployable	p 60 N86-27361	Heat pipe radiator technology for space power
offset antenna p 29 N86-30797	GLOVES EVA suit glove design p 20 A86-40521	systems [AIAA PAPER 86-1300] p 31 A86-39907
Offset unfurlable antenna, phase 1 communication satellites	GOVERNMENT PROCUREMENT	Development of an Advanced Trapezoidal Axially
[MBB-RX11] p 29 N86-32622	Initiation of the next step - The acquisition of a Space Station Program p 2 A86-34962	Grooved (ATAG) heat pipe for Space Station
C	GOVERNMENT/INDUSTRY RELATIONS	[AIAA PAPER 86-1342] p 31 A86-39941 Design and test of a space deployable radiator
G	Initiation of the next step - The acquisition of a Space	[SNIAS-861-440-103] p 23 N86-31640
GALERKIN METHOD	Station Program p 2 A86-34962 Commerical use of space - Status and prospects	HEAT PUMPS Application of capillary pumped loop heat transport
A Taylor-Galerkin finite element algorithm for transient nonlinear thermal-structural analysis	p 6 A86-41154	systems to large spacecraft
[AIAA PAPER 86-0911] p 31 A86-38823	GRAPHITE-EPOXY COMPOSITES  Development of composite tube protective coatings	[AIAA PAPER 86-1295] p 31 A86-39903
Finite dimensional stabilization of linear Distributed	[NASA-CR-178116] p 76 N86-29989	Materials considerations in the design of a metal-hydride heat pump for an advanced extravehicular mobility unit
Parameter Systems via Galerkin's technique p 45 A86-39492	GRAVITATIONAL EFFECTS	p 80 N86-31427
Spline-based Rayleigh-Ritz methods for the	Verification of large beam-type space structures [AIAA PAPER 86-0860] p 24 A86-38809	HEAT RADIATORS  Heat pipe radiator technology for space power
approximation of the natural modes of vibration for flexible beams with tip bodies p 48 A86-40843	Vibration of a large space beam under gravity effect	systems
GALILEO SPACECRAFT	[AIAA PAPER 86-0907] p 41 A86-38917	[AIAA PAPER 86-1300] p 31 A86-39907
The Galileo scan platform pointing control system - A modern control theoretic viewpoint	Some considerations on earthbound dynamic testing of large space structures	Liquid droplet radiator program at the NASA Lewis Research Center
[AAS PAPER 85-044] p 36 A86-31795	[AIAA PAPER 86-0908] p 42 A86-38918	[ASMÉ PAPER 86-HT-15] p 32 A86-49621
Subsystem testing of Galileo's attitude and articulation control fault protection	Vibration of a large space beam under gravity effect p 52 A86-44884	HEAT STORAGE  Development of a simulation code for a latent heat
[AIAA PAPER 86-9783] p 91 A86-32117	Tethered elevator: A unique opportunity for space	thermal energy storage system in a space station
Galileo inflight friction identification for the scan platform control loop	processing p 103 N86-27649	[DE86-010070] p 70 N86-31113
[AAS PAPER 85-383] p 97 A86-43274	GRAVITY GRADIENT SATELLITES Flight results from the gravity-gradient-controlled RAE-1	HEAT TRANSFER Application of capillary pumped loop heat transport
GAMMA RAY ASTRONOMY Workshop on Cosmic Ray and High Energy Gamma Ray	satellite	systems to large spacecraft
Experiments for the Space Station Era, Louisiana State	[AIAA PAPER 86-2140] p 11 A86-47453 Tether fundamentals p 104 N86-28410	[AIAA PAPER 86-1295] p 31 A86-39903 Fluid recirculation, deployment and retraction of an
University, Baton Rouge, October 17-20, 1984, Proceedings p 99 A86-46851	GROOVES	expandable pulse power radiator for spacecraft power
GANTRY CRANES	Development of an Advanced Trapezoidal Axially	supplies [AIAA PAPER 86-1322] p 25 A86-39923
Mobile gantry robots for large structures in space p 81 A86-32929	Grooved (ATAG) heat pipe for Space Station [AIAA PAPER 86-1342] p 31 A86-39941	Fluid management and its role in the future of Space
GAS TURBINE ENGINES	GROUND SUPPORT SYSTEMS	Station
Operation and control of space-based solar energy power plants with CCGT using helium as a working medium	Space Station - The Canadian contribution p 12 A86-49563	[AIAA PAPER 86-2301] p 89 A86-49553 NASA/American Society for Engineering Education
closed cycle gas turbine	GROUND TESTS	(ASEE) Summer Faculty Fellowship Program, 1985
[ASME PAPER 86-GT-152] p 89 A86-48206	Extension for ground-based testing for large space structures p 37 A86-32944	Space Stations and Their Environments [NASA-CR-171931] p 105 N86-31409
GAS-SOLID INTERACTIONS  The Shuttle glow as an indicator of material changes	structures p 37 A86-32944  Dynamic verification of very large space structures	HELIUM
in space	p 37 A86-33285	Operation and control of space-based solar energy
[AD-A167300] p 71 A86-30323 Reaction of high-velocity atomic oxygen with carbon	Multiple boundary condition test (MBCT) approach to update mathematical models of large flexible structures	power plants with CCGT using helium as a working medium closed cycle gas turbine
p 71 A86-32977	[SAE PAPER 851933] p 39 A86-38546	[ASME PAPER 86-GT-152] p 89 A86-48206
GASEOUS ROCKET PROPELLANTS A long-life 50 lbf H2/O2 thruster for Space Station	Multiple Boundary Condition Tests (MBCT) for	An overview of European space transportation
auxiliary propulsion	verification of large space structures [AIAA PAPER 86-0905] p 41 A86-38915	systems
[AIAA PAPER 86-1404] p 87 A86-42617 Oxygen/hydrogen Space Station propulsion system	Vibration of a large space beam under gravity effect	[NASA-TM-77683] p 13 N86-25398 HIGH RESOLUTION
concept definition for IOC	[AIAA PAPER 86-0907] p 41 A86-38917 Some considerations on earthbound dynamic testing of	High resolution remote sensing missions of a tethered
[AIAA PAPER 86-1561] p 87 A86-42714 GEARS	large space structures	satellite p 15 N86-28424
Definition and testing of gears for space robotics	[AIAA PAPER 86-0908] p 42 A86-38918	HIGH VOLTAGES  The use of electrostatic noise to control high-voltage
space applications p 22 N86-27375 Surface-treated titanium alloy gears for space	Dynamic verification of very large space structures p 63 N86-30683	differential charging of spacecraft p 66 A86-41018
mechanisms space applications p 76 N86-27378	Vibration qualification at the David Florida Laboratory	High voltage potting for the Faint Object Camera (FOC) p 74 N86-22619
Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382	spacecraft p 63 N86-30687  GUIDANCE (MOTION)	HILBERT SPACE
GEOMETRIC ACCURACY	Guidance and control 1985; Proceedings of the Eighth	Stable direct adaptive control in Hilbert space
Optimizing accuracy in triangulation for geometrical verification of large space structures p 19 A86-38061	Annual Rocky Mountain Conference, Keystone, CO, February 2-6, 1985 p 91 A86-31776	p 43 A86-39483 HINGES
GEOSYNCHRONOUS ORBITS	Guidance, Navigation and Control Conference,	Vibration control of flexible beams using an active
Long-term performance of thermal control coatings at geosynchronous altitude	Williamsburg, VA, August 18-20, 1986, Technical Papers p 99 A86-47401	hinge p 46 A86-39505 HOLOGRAPHIC INTERFEROMETRY
[AIAA PAPER 86-1356] p 71 A86-39951	p 33 7.33 17 10 1	Deformation measurements on antennas under
A new understanding of breakdowns in the day sections	Н	simulated outer space conditions using holographic
of geosynchronous orbit p 67 A86-47335  Reduced risk two stage transfers to geosynchronous		interferometry [DGLR PAPER 85-150] p 30 A86-35186
orbit by use of an optimized intermediate transfer orbit	HALLEY'S COMET The Giotto assembly, integration and verification	Holographic interferometry for distortion measurements
[AIAA PAPER 86-2063] p 89 A86-47910 Communication Platform Payload Definition (CPPD)	programme p 5 A86-38273	of antennas p 23 N86-30776 HOMOGENIZING
study. Volume 1: Executive summary	HANDBOOKS A step towards an ESA composites design handbook	Homogenization and control of lattice structures
[NASA-CR-174928] p 22 N86-27403	for space structure applications p 79 N86-30799	p 45 A86-39495

HANKEL FUNCTIONS

Reduced order models for distributed systems based on Hankel-norm approximations p 19 A86-39490

Communication Platform Payload Definition (CPPD) study. Volume 3: Addendum [NASA-CR-174930] p 22 N86-27405

HOOP COLUMN ANTENNAS		
Evaluation of performance characteristics	for a sp	oace
antenna system subjected to stochastic distr	urbances	;
p 43	A86-39	482
Linear regulator control of the hoop-colum	n antenn	a

disturbances 43 A86-39482 olumn antenna ---

deployable large space structure design p 45 A86-39498

Modelling of the hoop-column antenna and design of nonlinear control law in orbit p 46 A86-39501 Modelling and design of nonlinear feedback control law

for a large space hoop-column antenna p 48 A86-42909 Attitude control system synthesis for the Hoop/Column

antenna using the LQG/LTR method --- loop transfer recovery [AIAA PAPER 86-2139] p 55 A86-47452

Latching mechanism for deployable/re-stowable columns useful in satellite construction [NASA-CASE-LAR-13169-1] p 101 N86-25791

Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for

[NASA-CR-178061] p 69 N86-28973 Near-field testing of the 15-meter model of the hoop column antenna

p 69 N86-29115 [NASA-CR-178059] Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds

p 69 N86-29877 [NASA-CR-178060] Application of the LQG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800

Effects of model error on control of large flexible space antenna with comparisons of decoupled and linear quadratic regulator control procedures

[NASA-TP-2604] p 64 N86-30801 HÒOPS

Continuous fiber composite hoops p 72 A86-40503 HORN ANTENNAS

Millimeter-wave range for the quick evaluation of large reflector antennas with complex feeds

p 65 A86-30714 HOT PRESSING

The production and properties of composite materials with light alloy matrices reinforced with continuous fibers (C, SiČ) p 72 A86-40378

HUBBLE SPACE TELESCOPE

Analyses of spacecraft polymeric materials p 73 A86-41750

High voltage potting for the Faint Object Camera (FOC) p 74 N86-22619 A study of 35-ghz radar-assisted orbital maneuvering vehicle/space telescope docking p 101 N86-24537

Reliability models applicable to space telescope solar p 21 N86-24541 array assembly system Features of the solar array drive mechanism for the

p 102 N86-27356 Space Telescope **HUMAN FACTORS ENGINEERING** 

Aerospace Behavioral Engineering Technology Conference, 4th, Long Beach, CA, October 14-17, 1985,

p 93 A86-35426 Spacecraft architecture [NASA-TM-77908] p 101 N86-24736

Control loops with human operators in space operations. Part 1: Human engineering analysis, synthesis and evaluation techniques [NLR-TR-84116-L-PT-1] p 16 N86-32107

Control loops with human operators in space operations. Part 4: Research requirements for human-in-the-loop space teleoperator development

p 17 N86-32109 [NLR-TR-84116-L-PT-4] Control loops with human operators in space operations. Part 5: Executive summary

[NLR-TR-84116-L-PT-5] p 17 N86-32110 Control loops with human operators in space operations. Part 2: Robotics operations and manual control

experiment [NLR-TR-84116-L-PT-2] n 85 N86-33024

HYBRID CIRCUITS

Advanced Printed Wiring Board (PWB) materials for surface mounted devices in aerospace applications p 74 N86-22617

HYDRAZINE ENGINES Monopropellant hydrazine systems for space station

IAIAA PAPER 86-15621 p 88 A86-42715

HYDROGEN OXYGEN ENGINES

A long-life 50 lbf H2/O2 thruster for Space Station auxiliary propulsion [AIAA PAPER 86-1404] p 87 A86-42617

A proven 25-lbF H2/O2 thruster for Space Station auxiliary propulsion
[AIAA PAPER 86-1560] p 87 A86-42713

Oxygen/hydrogen Space Station propulsion system concept definition for IOC

[AIAA PAPER 86-1561] p 87 A86-42714 Space station propulsion technology

[NASA-CR-178897] p 90 N86-31647 Proven, long-life hydrogen/oxygen thrust chambers for space station propulsion p 90 N86-32522

HYDROGEN OXYGÉN FUEL CELLS

NASA/American Society for Engineering Education (ASEE) Summer Faculty Fellowship Program, 1985 ---Space Stations and Their Environments

[NASA-CR-171931] p 105 N86-31409 HYGRAL PROPERTIES

Hygrothermal characteristics of antenna materials --spacecraft antennas p 77 N86-30760 New prediction methods for composites hygrothermal behavior p 78 N86-30771

HYPERSONIC AIRCRAFT

Selections from Flug Revue und Flugwelt International A. On the border of Time-hypersonic flight. B. NASA programs pave the way for the hypersonic aircraft. C. Shuttle flight 61-B; construction in space. D. Faster than a bullet; hypersonic military aircraft [NASA-TM-88418]

p 26 N86-24652 HYPERSONIC BOUNDARY LAYER

Shuttle Tethered Aerothermodynamics Research Facilty (STARFAC) instrumentation requirements p 34 N86-27652

HYPERSONIC FLIGHT

Selections from Flug Revue und Flugwelt International. A. On the border of Time-hypersonic flight. B. NASA programs pave the way for the hypersonic aircraft. C. Shuttle flight 61-B; construction in space. D. Faster than a bullet; hypersonic military aircraft p 26 N86-24652

[NASA-TM-88418] HYPERSPACES

Maneuvering of flexible spacecraft --- Variable Structure Control

[AIAA PAPER 86-2193]

IMAGE ANALYSIS

Dynamics of a deformable pointing spacecraft by Kane's method, and telescope's image-stability evaluation p 56 A86-47474 [AIAA PAPER 86-2194]

IMAGE ENHANCEMENT

NASA/American Society for Engineering Education (ASEE) Summer Faculty Fellowship Program, 1985 ---Space Stations and Their Environments

[NASA-CR-171931] p 105 N86-31409 IMPACT DAMAGE

Tether fundamentals

p 104 N86-28410 IMPACT LOADS Characteristic wave approach in controlled large space

structures [AIAA PAPER 86-0839] p 40 A86-38887

IN-FLIGHT MONITORING

Galileo inflight friction identification for the scan platform control loop [AAS PAPER 85-383] p 97 A86-43274

Prospects for intelligent aerospace structures [AIAA PAPER 86-1139] p 25 A86-43328 INDIAN SPACECRAFT

Modeling and simulation of spacecraft solar array deployment [AIAA PAPER 86-2122] p 84 A86-47923

INERTIA Optimization of mass placement in Space Station

applications [SAWE PAPER 1672] p 24 A86-35215

INFLATABLE STRUCTURES

tors for mobile p 23 A86-33921 Inflatable, space-rigidized reflectors missions Inflatable technology in orbit demonstration within the p 4 A86-37863 European Space Agency programs

INFRARED ASTRONOMY Structural dynamic analysis of the Large Deployable

[AIAA PAPER 86-0004] p 42 A86-38951

INSTRUMENT PACKAGES

The Galileo scan platform pointing control system - A modern control theoretic viewpoint p 36 A86-31795 [AAS PAPER 85-044]

INTELSAT SATELLITES

Modeling and simulation of spacecraft solar array deployment AJAA PAPER 86-21221 p 84 A86-47923

INTERACTIVE CONTROL

Interactive computer graphics and its role in control system design of large space structures n 21 A86-47115 INTERFACE STABILITY

The effect of energy dissipation due to friction at the joint of a simple beam structure [AD-A163975] p.58 N86-24739

INTERFACIAL ENERGY

The effect of energy dissipation due to friction at the joint of a simple beam structure (AD-A163975) p 58 N86-24739

INTERNAL PRESSURE

Improved flexibility of an EVA glove p 21 A86-48713

INTERNATIONAL COOPERATION

Columbus - The European participation in international space stations p 3 A86-37854 Assessment of international payload requirements on

the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618

Developing the final frontier: International cooperation in the peaceful uses of outer space --- Book

p 96 A86-42236

Space stations: Legal aspects of scientific and commercial use in a framework of transatlantic cooperation; Proceedings of the International Colloquium, Hamburg, West Germany, October 3, 4, 1984

p 97 A86-43335 European experience and perspectives

p 97 A86-43336 American experiences and perspectives - International cooperation on a permanently manned Space Station

p 7 A86-43337 p 8 A86-44402 Space Station - The new frontier The changing face of international space cooperation - One view of NASA p 8 A86-44405

Joining forces in space - NASA's view p8 A86-44528 Columbus I; Proceedings of the First Columbus Workshop Utilization Aspects, Capri, Italy, June 17-21,

p 98 A86-45626 1985 The European Space Station programme

p 8 A86-45627 French views on Columbus - Preparation of its utilization relations with other programs p 10 A86-45647

The U.S. civil space program: A Review of the major issues Report of an AIAA Workshop, Alexandria, VA, July 22. 23. 1986 --- Book p 99 A86-47648

INTERNATIONAL RELATIONS

NASA finds the way toward building a Station fraught with legal hurdles p 6 A86-41679

INTERPLANETARY DUST

Trajectory determinations and collection of micrometeoroids on the space station. Report of the Workshop on Micrometeorite Capture Experiments

p 104 N86-30584 [NASA-CR-1773031 A new instrument to measure charged and neutral cometary dust particles at low and high impact velocities p 70 N86-30590

INTERPLANETARY SPACECRAFT

Mars missions and bases - A recent look p 2 A86-32548

INTERSTELLAR TRAVEL

A comparative analysis of space colonization nterprises p 5 A86-38168 enterprises

Nuclear powered ion engine orbit transfer vehicle design and operational effectiveness

[AIAA PAPER 86-1391] ρ 86 A86-42608 Plasma thruster development: Magnetoplasmadynamic

propulsion, status and basic problems [AD-A165945] p 90 N86-28991 ION IMPACT

Charge accumulation and arc discharges on spacecraft materials and components

AD-A166216] p 70 N86-29893 IONOSPHERIC CONDUCTIVITY

Electrodynamic interactions p 69 N86-28414 Spontaneous radiation emitted by moving tethered p 34 N86-28427

JOINTS (JUNCTIONS)

The detumbling of an axially symmetric satellite with an orbital maneuvering vehicle by nonlinear feedback control

[AD-A163989] p 58 N86-24717 Design of bonded structural joints for spacecraft

[SNIAS-861-430-105] p 22 N86-28118 Feasibility study of a discrete bearing/roller drive rotary

joint for the space station [NASA-TM-88800] p 27 N86-30206 Preloaded space structural coupling joints [NASA-CASE-LAR-13489-1] p 29

p 29 N86-31630

~	884	M	EII	.TE	DC

Testing of a failure accommodation system on a highly p 38 A86-35390 flexible arid The optimal projection equations for reduced-order,

discrete-time modeling, estimation, and control p 42 A86-39035

Kalman-like estimation for static distributed systems Antenna shape from radiation measurements

p 66 A86-39480 Control effectiveness characterization for state estimation and control on a highly flexible grid

[AIAA PAPER 86-2142] p 55 A86-47454 KEVLAR (TRADEMARK)

The strength of bolted joints in Kevlar RP --- reinforced p 28 N86-30765 plastic (RP)

KINEMATIC EQUATIONS

Nonlinear dynamic analysis of deploying flexible space booms

INASA-TM-87617]

p 61 N86-28981 KINETIC ENERGY

Impacts of free-floating objects: Unique space station p 14 N86-27162 experiments

#### LABORATORY EQUIPMENT

Experiment manipulators for automatic sample handling p 84 N86-27386

LAMINATES

On the defect sensitivity of spacecraft typical thin CFRP p 79 N86-30782 LAND MOBILE SATELLITE SERVICE

Inflatable, space-rigidized reflectors for mobile p 23 A86-33921 LAP JOINTS

The strength of bolted joints in Kevlar RP --- reinforced lastic (RP) p 28 N86-30765
Design and development testing of the bonded joint plastic (RP) between a typical launch vehicle attachment ring and CFRP

LARGE SPACE STRUCTURES

Single-step optimal control of the RPL experiment [AAS PAPER 85-045] p 37

Optical Fabrication and Testing Workshop: Large Telescope Optics, Albuquerque, NM, March 4-8, 1985,

p 92 A86-32407 (SPIE-542) An overview of optical telescope technology

A86-32413 ACCESS (Assembly Concept for Construction of Erectable Space Structure) - A Shuttle flight experiment p 1 A86-32540

Mobile gantry robots for large structures --- in space p 81 A86-32929

Predicted temperature field in a thermomechanically heated viscoplastic space truss structure

p 30 A86-32943 Extension for ground-based testing for large space p 37 A86-32944

Stiffness control of large space structures p 37 A86-33254

Aspects of active isolation as applied to a satellite structure with shape precision payload

p 37 A86-33255 Test and analysis correlation for structural dynamic p 37 A86-33284 systems

Dynamic verification of very large space structures p 37 A86-33285 Low frequency design verification of large spacecraft

p 38 A86-33288 structures Inflatable, space-rigidized reflectors for mobile missions

p 23 A86-33921 Space reflector supported by radiation pressure --- for telecommunication p 30 A86-33942

An evaluation of foldable elastic tubes for application space structures p 24 A86-34634 in space structures An investigation of adaptive control techniques for space p 38 A86-35333

Some problems related to the thermally induced deformations of large space structures

p 30 A86-36673 Construction and control of large space structures

p 39 A86-37060 Large space structural models by combination of finite elements and transfer matrix methods

p 18 A86-37861 Optimizing accuracy in triangulation for geometrical verification of large space structures p 19 A86-38061

Multiple boundary condition test (MBCT) approach to update mathematical models of large flexible structures (SAE PAPER 851933) p 39 A86-38546

Synthesis of discrete passive vibration dampers (SAE PAPER 851935) p 39 A86-38548

Verification of large beam-type space structures [AIAA PAPER 86-0860] p 24 A86-38809

A finite element model for the thermoelastic analysis of large composite space structures
[AIAA PAPER 86-0875]

p 31 A86-38811 Experimental verification of distributed piezoelectric actuators for use in precision space structures

p 19 A86-38813 [AIAA PAPER 86-0878] Microprocessor controlled force actuator

p 40 A86-38827 IAIAA PAPER 86-09161 Optimum design of large structures with multiple

p 19 A86-38845 [AIAA PAPER 86-0952] Reduced modeling and analysis of large repetitive space structures via continuum/discrete concepts

p 24 A86-38879 (AIAA PAPER 86-1022) Comparison of tension stabilized structures for large

space antenna reflectors p 25 A86-38881 [AIAA PAPER 86-0876]

Error estimation and compensation in reduced dynamic models of large space structures

[AIAA PAPER 86-0837] p 25 A86-38885 Dynamic analysis and experiment methods for a generic space station model

p 40 A86-38886 [AIAA PAPER 86-0838] Characteristic wave approach in controlled large space

p 40 A86-38887 [AIAA PAPER 86-0839] A singular-solution approach for controlling the nonlinear response of a continuum model of a large space

[AIAA PAPER 86-0841] p 41 A86-38889 Mode localization phenomena in large space

[AIAA PAPER 86-0903] p 41 A86-38914 Multiple Boundary Condition Tests (MBCT) for

rerification of large space structures p 41 A86-38915 [AIAA PAPER 86-0905] Vibration of a large space beam under gravity effect

[AIAA PAPER 86-0907] p 41 Some considerations on earthbound dynamic testing of large space structures

[AIAA PAPER 86-0908] p 42 A86-38918 Multidisciplinary capability for analysis of the dynamics and control of flexible space structures

[AIAA PAPER 86-0961] p 42 A86-38933 Spline-based distributed system identification with application to large space antennas p 42 A86-39037 Dynamics and control of large structures; Proceedings of the Fifth Symposium, Blacksburg, VA, June 12-14, 1985 p 95 A86-39476

Kalman-like estimation for static distributed systems Antenna shape from radiation measurements p 66 A86-39480

Evaluation of performance characteristics for a space antenna system subjected to stochastic disturbances p 43 A86-39482

Frequency domain solutions to multi-degree-of-freedom.

dry friction damped systems under periodic excitation p 44 A86-39485 Demonstration of vibration control of a flexible truss

p 44 A86-39488 Closed-loop stability of large space structures with reduced-order controllers p 45 A86-39493 A matrix approach to dynamics formulation of complex

p 45 A86-39496 The effects of structural perturbations on modal p 45 A86-39497

suppression Linear regulator control of the hoop-column antenna --deployable large space structure design p 45 A86-39498

Active vibration damping experiments at VPI & SU hyerview and recent results p 46 A86-39504
Active structural control with decentralized and Overview and recent results colocated control units p 46 A86-39506 A slewing control experiment for flexible structures p 47 A86-39509

Continuous forming of thin-walled CFRP pipes for p 72 A86-40371 large-space structure Magnesium matrix composite materials processing and p 72 A86-40384 applications

Design preparations for large space structures --- from fiber-reinforced composites p 32 A86-40496 Results of the ACCESS space construction Shuttle flight

[AIAA PAPER 86-1186] n 6 A86-40593 Integrated analysis tools for trade studies of spacecraft controller and sensor locations

[AIAA PAPER 86-1192] p 20 A86-40613 Material damping of simple structures in a simulated p 48 A86-41739 space environment Effect of degradation of material properties on the dynamic response of large space structures

p 73 A86-41740 Dynamic characteristics of statically determinate pace-truss platforms p 48 A86-41741 space-truss platforms

Preload modeling, analysis, and optimal design techniques for beam/rod/cable element structures

p 25 A86-41742 Singular perturbation methods for discrete time p 48 A86-42855

Modelling and design of nonlinear feedback control law for a large space hoop-column antenna

p 48 A86-42909 Failure detection and accommodation in structural dynamics systems using analytic redundancy --- in large space structures p 49 A86-42938 Integration of structures and controls - Some p 49 A86-42938 computational issues --- for large space structure vibration

suppression p 49 A86-42939 Reduced order compensator design for an experimental large flexible structure p 50 A86-42995 Decentralized control of sequentially assembled large space structures p 82 A86-42997

A mathematical formulation of a large space structure control problem p 50 A86-43005 On the dynamics of beam type structural members during

deployment --- of space platforms [AAS PAPER 85-392] p 50 A86-43214 On modeling the dynamics large space

manipulators [AAS PAPER 85-393] p 51 A86-43215

Electronic compensation for structural deformations of large space antennas

[AAS PAPER 85-395] p 20 A86-43216 Modeling, estimation and identification methods for static shape determination of flexible structures --- for large space structure design

[AAS PAPER 85-424] p 20 A86-43223 Robust attitude and shape control of third generation spacecraft

[AAS PAPER 85-425] Control of dynamic response of a continuum model of a large space structure p 52 A86-43772

Vibration of a large space beam under gravity effect p 52 A86-44884 Estimation of distributed parameter systems - Some closed-form solutions p 52 A86-46455

Traveling wave control for large spacecraft structures p 53 A86-46463 Integrated design of space structures using lattice plate

p 21 A86-46465 Verification of large space structures using scale

p 53 A86-47088 modelling laws Interactive computer graphics and its role in control system design of large space structures

p 21 A86-47115 A square root method for the identification of large space

[AIAA PAPER 86-2049] p 54 A86-47432 Modified LTR robust control for flexible structures

p 55 A86-47434 [AIAA PAPER 86-2051] A parametric examination of the stability robustness characteristics of two decoupled controllers designed for large space structure control

[AIAA PAPER 86-2053] p 55 A86-47436 Model reduction and modal assignment in decoupled control

[AIAA PAPER 86-2137] p.55 A86-47451 Attitude control system synthesis for the Hoop/Column antenna using the LQG/LTR method --- loop transfer recovery

[AIAA PAPER 86-2139] p 55 A86-47452 Dynamics and control of slew maneuver of large flexible spacecraft

[AIAA PAPER 86-2192] p 56 A86-47472 Issues of order reduction in active control system desian

[AIAA PAPER 86-2138] p 57 A86-47515 The development of an environmental disturbance model for large space structures after the onset of thermal

[AIAA PAPER 86-2123] p 32 A86-47924 Robust multivariable control of large space structures

usina positivity [AIAA PAPER 86-2125] p 57 A86-47925 Large space reflector technology on the Space Station

[AIAA PAPER 86-2302] p 11 A86-49554 A steerable radiator for spacecraft application

[AIAA PAPER 86-1298] p 100 A86-49597 Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599 Simplified lattice beam elements for geometrically

nonlinear static, dynamic, and postbuckling analysis p 26 A86-49818 Experimenal and analytical generic space staion

dynamic models p 58 N86-22997 [NASA-TM-87696] Fault-tolerant control of large space structures using the

stable factorization approach p 58 N86-23343 [NASA-CR-3964]

Method of packaging and deployment of large membranes in space	Effects of model error on control of large flexible space	Multi-criterion approaches to optimization of linear
[ISAS-618] p 26 N86-23624	antenna with comparisons of decoupled and linear quadratic regulator control procedures	regulators [AIAA PAPER 86-2198] p 56 A86-47478
A model for predicting thermomechanical response of	[NASA-TP-2604] p 64 N86-30801 Preloaded space structural coupling joints	Influence of structural parameter uncertainties on flexible
large space structures [AD-A162139] p 33 N86-23631	[NASA-CASE-LAR-13489-1] p 29 N86-31630	space structural control performances [SNIAS-861-440-104] p 65 N86-32516
Generalized parity relations for large space structures	Dynamics of flexible spacecraft: An analysis of	LINEAR VIBRATION
with uncertain parameters [NASA-CR-176762] p 34 N86-24730	approaches towards mathematical model order reduct ion	Frequencies of longitudinal oscillations of tethered satellite systems
[NASA-CR-176762] p 34 N86-24730 Deployable geodesic truss structure A01	[NLR-TR-85068-U] p 65 N86-31643	[AIAA PAPER 86-2274] p 57 A86-47942
[NASA-CASE-LAR-13113-1] p 26 N86-24867	Influence of structural parameter uncertainties on flexible space structural control performances	LIQUID FUELS
Satellite voice broadcast. Volume 1: Executive	[SNIAS-861-440-104] p 65 N86-32516	Space platform expendables resupply concept definition study
summary [NASA-CR-175016] p 13 N86-24875	Deployable antenna reflector	[NASA-CR-178819] p 13 N86-24732
Satellite voice broadcast. Volume 2: System study	[SNIAS-861-422-117] p 81 N86-32537 LASER DOPPLER VELOCIMETERS	LIQUID PHASES
[NASA-CR-175017] p 13 N86-24876	A 3-component laser-Doppler velocimeter data	Magnesium matrix composite materials processing and applications p 72 A86-40384
Satellite voice broadcast system study, volume 2 [NASA-CR-174905] p 68 N86-24877	acquisition and reduction system [NASA-CR-176929] p 104 N86-30135	LITHIUM ALLOYS
Measurement apparation and procedure for the	LATCHES	New aluminum alloys for satellite structures
determination of surface emissivities [NASA-CASE-LAR-13455-1] p 75 N86-24880	Latching mechanism for deployable/re-stowable columns useful in satellite construction	[SNIAS-861-440-111] p 80 N86-31641 LOADS (FORCES)
Mathematical correlation of modal parameter	[NASA-CASE-LAR-13169-1] p 101 N86-25791	Integrated thermal-structural-electromagnetic design
identification methods via system realization theory	A Dornier latch design for a docking mechanism in	optimization of large space antenna reflectors
[NASA-TM-87720] p 59 N86-25019	space p 22 N86-27387 A SENER latch design for docking mechanisms	[NASA-TM-87713] p 35 N86-28984 LOGISTICS MANAGEMENT
Personnel occupied woven envelope robot [NASA-CR-176832] p 14 N86-25401	p 85 N86-27388	Orbital transfer vehicle launch operations study:
Modal assignment effects on decentralized control of	LATTICES  Reduced modeling and analysis of large repetitive space	Manpower summary and facility requirements, volume 5 [NASA-CR-179705] p 17 N86-32504
a large space structure	structures via continuum/discrete concepts	[NASA-CR-179705] p 17 N86-32504 LONG DURATION SPACE FLIGHT
[AD-A163977] p 59 N86-25402 Behavior of very large short pulse antennas. Revision	[AIAA PAPER 86-1022] p 24 A86-38879	Sealing for long-term space application
1	Homogenization and control of lattice structures p 45 A86-39495	p 92 A86-32909
[DE86-004180] p 68 N86-25680	LATTICES (MATHEMATICS)	LONG TERM EFFECTS  Long-term performance of thermal control coatings at
Synchronously deployable truss structure [NASA-CASE-LAR-13117-1] p 27 N86-25789	Estimation of frequencies of vibration using lattices	geosynchronous altitude
Latching mechanism for deployable/re-stowable	p 49 A86-42960 Adaptive control of large space structures using	[AIAA PAPER 86-1356] p 71 A86-39951
columns useful in satellite construction	recursive lattice filters	LONGERONS  Nonlinear deformation analysis of the Olympus
[NASA-CASE-LAR-13169-1] p 101 N86-25791	[NASA-CR-177270] p 60 N86-27401	Astromast p 21 A86-43756
Tine domain design of robust controllers for LQG (Linear Quadratic Gaussian); application to large space	LAUNCH VEHICLES  Design and development testing of the bonded joint	Deployable geodesic truss structure A01
structures	between a typical launch vehicle attachment ring and CFRP	[NASA-CASE-LAR-13113-1] p 26 N86-24867
[AD-A163635] p 59 N86-26074	thrust cone p 28 N86-30790  LAUNCHING SITES	Latching mechanism for deployable/re-stowable columns useful in satellite construction
Dynamic characteristics of power-tower space stations with 15-foot truss bays	Proceedings of the 2nd Annual Conference on	[NASA-CASE-LAR-13169-1] p 101 N86-25791
[NASA-TM-87684] p 60 N86-26357	NASA/University Advanced Space Design Program	LONGITUDINAL STABILITY
Mathematical models of flexible spacecraft dynamics:	[NASA-TM-89399] p 104 N86-29888 <b>LEAST SQUARES METHOD</b>	Frequencies of longitudinal oscillations of tethered satellite systems
A survey of order reduction approaches aircraft tracking	Estimation of frequencies of vibration using lattices	[AIAA PAPER 86-2274] p 57 A86-47942
[NLR-MP-85004-U] p 60 N86-26367	p 49 A86-42960	LOW FREQUENCIES
Adaptive control of large space structures using	LIBRATION  A three-dimensional dynamic analysis and libration study	Low frequency design verification of large spacecraft structures p 38 A86-33288
recursive lattice filters [NASA-CR-177270] p 60 N86-27401	of a tethered satellites system	LOW THRUST PROPULSION
Control/structures interaction study of two 300 KW	[AAS PAPER 85-340] p 50 A86-43208	RIT-10 low-thrust control of Eureca's orbital decay
dual-keel space station concepts	LIBRATIONAL MOTION Tether fundamentals p 104 N86-28410	p 88 A86-44447 Theoretical study on the effect of the design of small
[NASA-TM-87679] p 61 N86-28113  Radiation effects on high performance polymers	LIFE (DURABILITY)	(milli-Newton) thruster jets on molecular contamination for
[NASA-CR-177191] p 76 N86-28195	NASA electrothermal auxiliary propulsion technology [AIAA PAPER 86-1703] p 88 A86-42799	the space station
Near-field testing of the 15-meter model of the hoop	LIFE CYCLE COSTS	[NASA-CR-177263] p 90 N86-26358 LUBRICANTS
column antenna. Volume 3: Near- and far-field plots for the JPL feed	Life Cycle Cost methodology for space station propulsion	Index of aerospace mechanisms symposia proceedings
[NASA-CR-178061] p 69 N86-28973	system [AIAA PAPER 86-1405] p 87 A86-42618	1-19
Nonlinear dynamic analysis of deploying flexible space	Primer on operating and support (O and S) costs for	[NASA-TM-88205] p 102 N86-26650 LUMINESCENCE
booms [NASA-TM-87617] p 61 N86-28981	space systems	Charge accumulation and arc discharges on spacecraft
	[AD-A162381] p 12 N86-24588	
Dynamics and control of flexible spacecraft during and	Satellite voice proagcast, volume it executive	materials and components
Dynamics and control of flexible spacecraft during and after slewing maneuvers	Satellite voice broadcast. Volume 1: Executive summary	[AD-A166216] p 70 N86-29893
after slewing maneuvers [NASA-CR-177027] p 62 N86-28983	summary [NASA-CR-175016] p 13 N86-24875	[AD-A166216] p 70 N86-29893 LUNAR BASES Lunar bases and space activities of the 21st century
after slewing maneuvers [NASA-CR-177027] p 62 N86-28983 Integrated thermal-structural-electromagnetic design	summary	[AD-A166216] p 70 N86-29893 <b>LUNAR BASES</b> Lunar bases and space activities of the 21st century p 91 A86-30113
after slewing maneuvers [NASA-CR-177027] p 62 N86-28983 Integrated thermal-structural-electromagnetic design optimization of large space antenna reflectors [NASA-TM-87713] p 35 N86-28984	summary [NASA-CR-175016] p 13 N86-24875  LIGHTNING International Aerospace and Ground Conference on Lightning and Static Electricity, 10th, and Congres	[AD-A166216] p 70 N86-29893 LUNAR BASES Lunar bases and space activities of the 21st century
after slewing maneuvers [NASA-CR-177027] p 62 N86-28983 Integrated thermal-structural-electromagnetic design optimization of large space antenna reflectors [NASA-TM-87713] p 35 N86-28984 Near-field testing of the 15-meter model of the hoop	summary [NASA-CR-175016] p 13 N86-24875  LIGHTNING International Aerospace and Ground Conference on Lightning and Static Electricity, 10th, and Congres International Aeronautique, 17th, Paris, France, June	[AD-A166216] p 70 N86-29893  LUNAR BASES  Lunar bases and space activities of the 21st century p 91 A86-30113  Strategies for a permanent lunar base p 1 A86-30117  Lunar industralization and settlement - Birth of polyglobal
after slewing maneuvers [NASA-CR-177027] p 62 N86-28983 Integrated thermal-structural-electromagnetic design optimization of large space antenna reflectors [NASA-TM-87713] p 35 N86-28984	summary [NASA-CR-175016] p 13 N86-24875  LIGHTNING International Aerospace and Ground Conference on Lightning and Static Electricity, 10th, and Congres International Aeronautique, 17th, Paris, France, June 10-13, 1985, Proceedings p 99 A86-47292  LINE OF SIGHT	[AD-A166216] p 70 N86-29893  LUNAR BASES  Lunar bases and space activities of the 21st century p 91 A86-30113  Strategies for a permanent lunar base p 1 A86-30117  Lunar industralization and settlement - Birth of polyglobal civilization p 1 A86-30180
after slewing maneuvers [NASA-CR-177027] p 62 N86-28983 Integrated thermal-structural-electromagnetic design optimization of large space antenna reflectors [NASA-TM-87713] p 35 N86-28984 Near-field testing of the 15-meter model of the hoop column antenna [NASA-CR-178059] p 69 N86-29115 Near-field testing of the 15-meter model of the hoop	summary [NASA-CR-175016] p 13 N86-24875  LIGHTNING International Aerospace and Ground Conference on Lightning and Static Electricity, 10th, and Congres International Aeronautique, 17th, Paris, France, June 10-13, 1985, Proceedings p 99 A86-47292  LINE OF SIGHT Rapid torque-limited line-of-sight pointing of SCOLE	[AD-A166216] p 70 N86-29893  LUNAR BASES  Lunar bases and space activities of the 21st century p 91 A86-30113  Strategies for a permanent lunar base p 1 A86-30117  Lunar industralization and settlement - Birth of polyglobal
after slewing maneuvers [NASA-CR-177027] p 62 N86-28983 Integrated thermal-structural-electromagnetic design optimization of large space antenna reflectors [NASA-TM-87713] p 35 N86-28984 Near-field testing of the 15-meter model of the hoop column antenna [NASA-CR-178059] p 69 N86-29115 Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for	summary [NASA-CR-175016] p 13 N86-24875  LIGHTNING International Aerospace and Ground Conference on Lightning and Static Electricity, 10th, and Congres International Aeronautique, 17th, Paris, France, June 10-13, 1985, Proceedings p 99 A86-47292  LINE OF SIGHT  Rapid torque-limited line-of-sight pointing of SCOLE (Spacecraft Control Laboratory Experiment)	[AD-A166216] p 70 N86-29893  LUNAR BASES  Lunar bases and space activities of the 21st century p 91 A86-30113  Strategies for a permanent lunar base p 1 A86-30117  Lunar industralization and settlement - Birth of polyglobal civilization p 1 A86-30180  LUNAR SURFACE  Proceedings of the 2nd Annual Conference on NASA/University Advanced Space Design Program
after slewing maneuvers [NASA-CR-177027] p 62 N86-28983 Integrated thermal-structural-electromagnetic design optimization of large space antenna reflectors [NASA-TM-87713] p 95 N86-28984 Near-field testing of the 15-meter model of the hoop column antenna [NASA-CR-178059] p 69 N86-29115 Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877	summary [NASA-CR-175016] p 13 N86-24875  LIGHTNING International Aerospace and Ground Conference on Lightning and Static Electricity, 10th, and Congres International Aeronautique, 17th, Paris, France, June 10-13, 1985, Proceedings p 99 A86-47292  LINE OF SIGHT  Rapid torque-limited line-of-sight pointing of SCOLE (Spacecraft Control Laboratory Experiment) configuration [AIAA PAPER 86-1991] p 54 A86-47414	[AD-A166216] p 70 N86-29893  LUNAR BASES  Lunar bases and space activities of the 21st century p 91 A86-30113  Strategies for a permanent lunar base p 1 A86-30117  Lunar industralization and settlement - Birth of polyglobal civilization p 1 A86-30180  LUNAR SURFACE  Proceedings of the 2nd Annual Conference on
after slewing maneuvers [NASA-CR-177027] p 62 N86-28983 Integrated thermal-structural-electromagnetic design optimization of large space antenna reflectors [NASA-TM-87713] p 35 N86-28984 Near-field testing of the 15-meter model of the hoop column antenna [NASA-CR-178059] p 69 N86-29115 Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877 ACOSS eleven (Active Control Of Space Structures) s	summary [NASA-CR-175016] p 13 N86-24875  LIGHTNING International Aerospace and Ground Conference on Lightning and Static Electricity, 10th, and Congres International Aeronautique, 17th, Paris, France, June 10-13, 1985, Proceedings p 99 A86-47292  LINE OF SIGHT Rapid torque-limited line-of-sight pointing of SCOLE (Spacecraft Control Laboratory Experiment) configuration [AIAA PAPER 86-1991] p 54 A86-47414  Modal assignment effects on decentralized control of	[AD-A166216] p 70 N86-29893  LUNAR BASES  Lunar bases and space activities of the 21st century p 91 A86-30113  Strategies for a permanent lunar base p 1 A86-30117  Lunar industralization and settlement - Birth of polyglobal civilization p 1 A86-30180  LUNAR SURFACE  Proceedings of the 2nd Annual Conference on NASA/University Advanced Space Design Program  [NASA-TM-89399] p 104 N86-29888
after slewing maneuvers [NASA-CR-177027] p 62 N86-28983 Integrated thermal-structural-electromagnetic design optimization of large space antenna reflectors [NASA-TM-87713] p 95 N86-28984 Near-field testing of the 15-meter model of the hoop column antenna [NASA-CR-178059] p 69 N86-29115 Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877	summary [NASA-CR-175016] p 13 N86-24875  LIGHTNING International Aerospace and Ground Conference on Lightning and Static Electricity, 10th, and Congres International Aeronautique, 17th, Paris, France, June 10-13, 1985, Proceedings p 99 A86-47292  LINE OF SIGHT  Rapid torque-limited line-of-sight pointing of SCOLE (Spacecraft Control Laboratory Experiment) configuration [AIAA PAPER 86-1991] p 54 A86-47414	[AD-A166216] p 70 N86-29893  LUNAR BASES  Lunar bases and space activities of the 21st century p 91 A86-30113  Strategies for a permanent lunar base p 1 A86-30117  Lunar industralization and settlement - Birth of polyglobal civilization p 1 A86-30180  LUNAR SURFACE  Proceedings of the 2nd Annual Conference on NASA/University Advanced Space Design Program
after slewing maneuvers [NASA-CR-177027] p 62 N86-28983 Integrated thermal-structural-electromagnetic design optimization of large space antenna reflectors [NASA-TM-87713] p 35 N86-28984 Near-field testing of the 15-meter model of the hoop column antenna [NASA-CR-178059] p 69 N86-29115 Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877 ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Wave propagation measurements on two-dimensional lattice	summary [NASA-CR-175016] p 13 N86-24875  LIGHTNING International Aerospace and Ground Conference on Lightning and Static Electricity, 10th, and Congres International Aeronautique, 17th, Paris, France, June 10-13, 1985, Proceedings p 99 A86-47292  LINE OF SIGHT Rapid torque-limited line-of-sight pointing of SCOLE (Spacecraft Control Laboratory Experiment) configuration [AIAA PAPER 86-1991] p 54 A86-47414  Modal assignment effects on decentralized control of a large space structure [AD-A163977] p 59 N86-25402  LINEAR PROGRAMMING	[AD-A166216] p 70 N86-29893  LUNAR BASES  Lunar bases and space activities of the 21st century p 91 A86-30113  Strategies for a permanent lunar base p 1 A86-30117  Lunar industralization and settlement - Birth of polyglobal civilization p 1 A86-30180  LUNAR SURFACE Proceedings of the 2nd Annual Conference on NASA/University Advanced Space Design Program [NASA-TM-89399] p 104 N86-29888
after slewing maneuvers [NASA-CR-177027] p 62 N86-28983 Integrated thermal-structural-electromagnetic design optimization of large space antenna reflectors [NASA-TM-87713] p 35 N86-28984 Near-field testing of the 15-meter model of the hoop column antenna [NASA-CR-178059] p 69 N86-29115 Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877 ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Wave propagation measurements on two-dimensional lattice [AD-A166207] p 62 N86-29891	summary [NASA-CR-175016] p 13 N86-24875  LIGHTNING International Aerospace and Ground Conference on Lightning and Static Electricity, 10th, and Congres International Aeronautique, 17th, Paris, France, June 10-13, 1985, Proceedings p 99 A86-47292  LINE OF SIGHT  Rapid torque-limited line-of-sight pointing of SCOLE (Spacecraft Control Laboratory Experiment) configuration [AIAA PAPER 86-1991] p 54 A86-47414  Modal assignment effects on decentralized control of a large space structure [AD-A163977] p 59 N86-25402  LINEAR PROGRAMMING  Synthesis of structures with multiple frequency	[AD-A166216] p 70 N86-29893  LUNAR BASES  Lunar bases and space activities of the 21st century p 91 A86-30113  Strategies for a permanent lunar base p 1 A86-30117  Lunar industralization and settlement - Birth of polyglobal civilization p 1 A86-30180  LUNAR SURFACE  Proceedings of the 2nd Annual Conference on NASA/University Advanced Space Design Program [NASA-TM-89399] p 104 N86-29888  M  MAGNESIUM  Magnesium matrix composite materials processing and
after slewing maneuvers [NASA-CR-177027] p 62 N86-28983 Integrated thermal-structural-electromagnetic design optimization of large space antenna reflectors [NASA-TM-87713] p 55 N86-28984 Near-field testing of the 15-meter model of the hoop column antenna [NASA-CR-178059] p 69 N86-29115 Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877 ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Wave propagation measurements on two-dimensional lattice [AD-A166207] p 62 N86-29891 Failure propagation in continuum models of LSS (Large Space Structures), part 1	summary [NASA-CR-175016] p 13 N86-24875  LIGHTNING International Aerospace and Ground Conference on Lightning and Static Electricity, 10th, and Congres International Aeronautique, 17th, Paris, France, June 10-13, 1985, Proceedings p 99 A86-47292  LINE OF SIGHT Rapid torque-limited line-of-sight pointing of SCOLE (Spacecraft Control Laboratory Experiment) configuration [AIAA PAPER 86-1991] p 54 A86-47414 Modal assignment effects on decentralized control of a large space structure [AD-A163977] p 59 N86-25402  LINEAR PROGRAMMING Synthesis of structures with multiple frequency constraints [AIAA PAPER 86-0951] p 40 A86-38844	[AD-A166216] p 70 N86-29893  LUNAR BASES  Lunar bases and space activities of the 21st century p 91 A86-30113  Strategies for a permanent lunar base p 1 A86-30117  Lunar industralization and settlement - Birth of polyglobal civilization p 1 A86-30180  LUNAR SURFACE Proceedings of the 2nd Annual Conference on NASA/University Advanced Space Design Program [NASA-TM-89399] p 104 N86-29888
after slewing maneuvers [NASA-CR-177027] p 62 N86-28983 Integrated thermal-structural-electromagnetic design optimization of large space antenna reflectors [NASA-TM-87713] p 35 N86-28984 Near-field testing of the 15-meter model of the hoop column antenna [NASA-CR-178059] p 69 N86-29115 Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877 ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Wave propagation measurements on two-dimensional lattice [AD-A166207] p 62 N86-29891 Failure propagation in continuum models of LSS (Large Space Structures), part 1 [AD-A166208] p 63 N86-29892	summary [NASA-CR-175016] p 13 N86-24875  LIGHTNING International Aerospace and Ground Conference on Lightning and Static Electricity, 10th, and Congres International Aeronautique, 17th, Paris, France, June 10-13, 1985, Proceedings p 99 A86-47292  LINE OF SIGHT  Rapid torque-limited line-of-sight pointing of SCOLE (Spacecraft Control Laboratory Experiment) configuration [AIAA PAPER 86-1991] p 54 A86-47414  Modal assignment effects on decentralized control of a large space structure [AD-A163977] p 59 N86-25402  LINEAR PROGRAMMING  Synthesis of structures with multiple frequency constraints [AIAA PAPER 86-0951] p 40 A86-38844  LINEAR SYSTEMS	[AD-A166216] p 70 N86-29893  LUNAR BASES  Lunar bases and space activities of the 21st century p 91 A86-30113  Strategies for a permanent lunar base p 1 A86-30117  Lunar industralization and settlement - Birth of polyglobal civilization p 1 A86-30180  LUNAR SURFACE  Proceedings of the 2nd Annual Conference on NASA/University Advanced Space Design Program [NASA-TM-89399] p 104 N86-29888  M  MAGNESIUM  Magnesium matrix composite materials processing and applications p 72 A86-40384  MAGNETIC FIELDS  Electrodynamic interactions p 69 N86-28414
after slewing maneuvers [NASA-CR-177027] p 62 N86-28983 Integrated thermal-structural-electromagnetic design optimization of large space antenna reflectors [NASA-TM-87713] p 55 N86-28984 Near-field testing of the 15-meter model of the hoop column antenna [NASA-CR-178059] p 69 N86-29115 Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877 ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Wave propagation measurements on two-dimensional lattice [AD-A166207] p 62 N86-29891 Failure propagation in continuum models of LSS (Large Space Structures), part 1	summary [NASA-CR-175016] p 13 N86-24875  LIGHTNING  International Aerospace and Ground Conference on Lightning and Static Electricity, 10th, and Congres International Aeronautique, 17th, Paris, France, June 10-13, 1985, Proceedings p 99 A86-47292  LINE OF SIGHT  Rapid torque-limited line-of-sight pointing of SCOLE (Spacecraft Control Laboratory Experiment) configuration [AIAA PAPER 86-1991] p 54 A86-47414  Modal assignment effects on decentralized control of a large space structure [AD-A163977] p 59 N86-25402  LINEAR PROGRAMMING  Synthesis of structures with multiple frequency constraints [AIAA PAPER 86-0951] p 40 A86-38844  LINEAR SYSTEMS  Stability of multiloop LQ regulators with nonlinearities.	[AD-A166216] p 70 N86-29893  LUNAR BASES  Lunar bases and space activities of the 21st century p 91 A86-30113  Strategies for a permanent lunar base p 1 A86-30117  Lunar industralization and settlement - Birth of polyglobal civilization p 1 A86-30180  LUNAR SURFACE  Proceedings of the 2nd Annual Conference on NASA/University Advanced Space Design Program [NASA-TM-89399] p 104 N86-29888  M  MAGNESIUM  Magnesium matrix composite materials processing and applications p 72 A86-40384  MAGNETIC FIELDS  Electrodynamic interactions p 69 N86-28414  MAGNETOHYDRODYNAMIC WAVES
after slewing maneuvers [NASA-CR-177027] p 62 N86-28983 Integrated thermal-structural-electromagnetic design optimization of large space antenna reflectors [NASA-TM-87713] p 35 N86-28984 Near-field testing of the 15-meter model of the hoop column antenna [NASA-CR-178059] p 69 N86-29115 Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877 ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Wave propagation measurements on two-dimensional lattice [AD-A166207] p 62 N86-29891 Failure propagation in continuum models of LSS (Large Space Structures), part 1 [AD-A166208] p 63 N86-29892 Dynamic verification of very large space structures p 63 N86-30663 Low frequency design verification of large spaceatr	summary [NASA-CR-175016] p 13 N86-24875  LIGHTNING International Aerospace and Ground Conference on Lightning and Static Electricity, 10th, and Congres International Aeronautique, 17th, Paris, France, June 10-13, 1985, Proceedings p 99 A86-47292  LINE OF SIGHT  Rapid torque-limited line-of-sight pointing of SCOLE (Spacecraft Control Laboratory Experiment) configuration [AIAA PAPER 86-1991] p 54 A86-47414  Modal assignment effects on decentralized control of a large space structure [AD-A163977] p 59 N86-25402  LINEAR PROGRAMMING  Synthesis of structures with multiple frequency constraints [AIAA PAPER 86-0951] p 40 A86-38844  LINEAR SYSTEMS  Stability of multiloop LO regulators with nonlinearities. I - Regions of attraction. II - Regions of ultimate boundedness p 38 A86-36074	[AD-A166216] p 70 N86-29893  LUNAR BASES  Lunar bases and space activities of the 21st century p 91 A86-30113  Strategies for a permanent lunar base p 1 A86-30117  Lunar industralization and settlement - Birth of polyglobal civilization p 1 A86-30180  LUNAR SURFACE  Proceedings of the 2nd Annual Conference on NASA/University Advanced Space Design Program [NASA-TM-89399] p 104 N86-29888  M  MAGNESIUM  Magnesium matrix composite materials processing and applications p 72 A86-40384  MAGNETC FIELDS  Electrodynamic interactions p 69 N86-28414  MAGNETOHYDRODYNAMIC WAVES  Spontaneous radiation emitted by moving tethered systems
after slewing maneuvers [NASA-CR-177027] p 62 N86-28983 Integrated thermal-structural-electromagnetic design optimization of large space antenna reflectors [NASA-TM-87713] p 55 N86-28984 Near-field testing of the 15-meter model of the hoop column antenna [NASA-CR-178059] p 69 N86-29115 Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877 ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Wave propagation measurements on two-dimensional lattice [AD-A166207] p 62 N86-29891 Failure propagation in continuum models of LSS (Large Space Structures), part 1 [AD-A166208] p 63 N86-29892 Dynamic verification of very large space structures p 63 N86-30683 Low frequency design verification of large spacecraft structures p 28 N86-30686	summary [NASA-CR-175016] p 13 N86-24875  LIGHTNING International Aerospace and Ground Conference on Lightning and Static Electricity, 10th, and Congres International Aeronautique, 17th, Paris, France, June 10-13, 1985, Proceedings p 99 A86-47292  LINE OF SIGHT  Rapid torque-limited line-of-sight pointing of SCOLE (Spacecraft Control Laboratory Experiment) configuration [AIAA PAPER 86-1991] p 54 A86-47414  Modal assignment effects on decentralized control of a large space structure [AD-A163977] p 59 N86-25402  LINEAR PROGRAMMING  Synthesis of structures with multiple frequency constraints [AIAA PAPER 86-0951] p 40 A86-38844  LINEAR SYSTEMS  Stability of multiloop LQ regulators with nonlinearities. I - Regions of attraction. II - Regions of ultimate boundedness p 38 A86-36074 Finite dimensional stabilization of linear Distributed	[AD-A166216] p 70 N86-29893  LUNAR BASES  Lunar bases and space activities of the 21st century p 91 A86-30113  Strategies for a permanent lunar base p 1 A86-30117  Lunar industralization and settlement - Birth of polyglobal civilization p 1 A86-30180  LUNAR SURFACE  Proceedings of the 2nd Annual Conference on NASA/University Advanced Space Design Program [NASA-TM-89399] p 104 N86-29888  M  MAGNESIUM  Magnesium matrix composite materials processing and applications p 72 A86-40384  MAGNETIC FIELDS  Electrodynamic interactions p 69 N86-28414  MAGNETOHYDRODYNAMIC WAVES  Spontaneous radiation emitted by moving tethered systems p 34 N86-28427  MAGNETOHYDRODYNAMICS
after slewing maneuvers [NASA-CR-177027] p 62 N86-28983 Integrated thermal-structural-electromagnetic design optimization of large space antenna reflectors [NASA-TM-87713] p 35 N86-28984 Near-field testing of the 15-meter model of the hoop column antenna [NASA-CR-178059] p 69 N86-29115 Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877 ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Wave propagation measurements on two-dimensional lattice [AD-A166207] p 62 N86-29891 Failure propagation in continuum models of LSS (Large Space Structures), part 1 [AD-A166208] p 63 N86-29892 Dynamic verification of very large space structures p 63 N86-30663 Low frequency design verification of large spaceatr	summary [NASA-CR-175016] p 13 N86-24875  LIGHTNING International Aerospace and Ground Conference on Lightning and Static Electricity, 10th, and Congres International Aeronautique, 17th, Paris, France, June 10-13, 1985, Proceedings p 99 A86-47292  LINE OF SIGHT  Rapid torque-limited line-of-sight pointing of SCOLE (Spacecraft Control Laboratory Experiment) configuration [AIAA PAPER 86-1991] p 54 A86-47414  Modal assignment effects on decentralized control of a large space structure [AD-A163977] p 59 N86-25402  LINEAR PROGRAMMING  Synthesis of structures with multiple frequency constraints [AIAA PAPER 86-0951] p 40 A86-38844  LINEAR SYSTEMS  Stability of multiloop LO regulators with nonlinearities. I - Regions of attraction. II - Regions of ultimate boundedness p 38 A86-36074	[AD-A166216] p 70 N86-29893  LUNAR BASES  Lunar bases and space activities of the 21st century p 91 A86-30113  Strategies for a permanent lunar base p 1 A86-30117  Lunar industralization and settlement - Birth of polyglobal civilization p 1 A86-30180  LUNAR SURFACE  Proceedings of the 2nd Annual Conference on NASA/University Advanced Space Design Program [NASA-TM-89399] p 104 N86-29888  M  MAGNESIUM  Magnesium matrix composite materials processing and applications p 72 A86-40384  MAGNETC FIELDS  Electrodynamic interactions p 69 N86-28414  MAGNETOHYDRODYNAMIC WAVES  Spontaneous radiation emitted by moving tethered systems
after slewing maneuvers [NASA-CR-177027] p 62 N86-28983 Integrated thermal-structural-electromagnetic design optimization of large space antenna reflectors [NASA-TM-87713] p 55 N86-28984 Near-field testing of the 15-meter model of the hoop column antenna [NASA-CR-178059] p 69 N86-29115 Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877 ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Wave propagation measurements on two-dimensional lattice [AD-A166207] p 62 N86-29891 Failure propagation in continuum models of LSS (Large Space Structures), part 1 [AD-A166208] p 63 N86-29892 Dynamic verification of very large space structures p 63 N86-30683 Low frequency design verification of large spacecraft structures p 28 N86-30686 Design and manufacturing aspects of space trusses p 28 N86-30772 Application of the LQG/LTR technique to robust	summary [NASA-CR-175016] p 13 N86-24875  LIGHTNING International Aerospace and Ground Conference on Lightning and Static Electricity, 10th, and Congres International Aeronautique, 17th, Paris, France, June 10-13, 1985, Proceedings p 99 A86-47292  LINE OF SIGHT  Rapid torque-limited line-of-sight pointing of SCOLE (Spacecraft Control Laboratory Experiment) configuration [AIAA PAPER 86-1991] p 54 A86-47414  Modal assignment effects on decentralized control of a large space structure [AD-A163977] p 59 N86-25402  LINEAR PROGRAMMING  Synthesis of structures with multiple frequency constraints [AIAA PAPER 86-0951] p 40 A86-38844  LINEAR SYSTEMS  Stability of multiloop LO regulators with nonlinearities. I Regions of attraction. II Regions of ultimate boundedness p 38 A86-36074  Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39492  An Eigensystem Realization Algorithm in Frequency	[AD-A166216] p 70 N86-29893  LUNAR BASES  Lunar bases and space activities of the 21st century p 91 A86-30113  Strategies for a permanent lunar base p 1 A86-30117  Lunar industralization and settlement - Birth of polyglobal civilization p 1 A86-30180  LUNAR SURFACE proceedings of the 2nd Annual Conference on NASA/University Advanced Space Design Program [NASA-TM-89399] p 104 N86-29888  M  MAGNESIUM Magnesium matrix composite materials processing and applications p 72 A86-40384  MAGNETIC FIELDS  Electrodynamic interactions p 69 N86-28414  MAGNETOHYDRODYNAMIC WAVES  Spontaneous radiation emitted by moving tethered systems p 34 N86-28427  MAGNETOHYDRODYNAMICS  NASA electrothermal auxiliary propulsion technology [AIAA PAPER 86-1703] p 88 A86-42799  Plasma thruster development: Magnetoplasmadynamic
after slewing maneuvers [NASA-CR-177027] p 62 N86-28983 Integrated thermal-structural-electromagnetic design optimization of large space antenna reflectors [NASA-TM-87713] p 55 N86-28984 Near-field testing of the 15-meter model of the hoop column antenna [NASA-CR-178059] p 69 N86-29115 Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877 ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Wave propagation measurements on two-dimensional lattice [AD-A166207] p 62 N86-29891 Failure propagation in continuum models of LSS (Large Space Structures), part 1 [AD-A166208] p 63 N86-29892 Dynamic verification of very large space structures p 63 N86-30683 Low frequency design verification of large spacecraft structures p 28 N86-30686 Design and manufacturing aspects of space trusses p 28 N86-30772	summary [NASA-CR-175016] p 13 N86-24875  LIGHTNING International Aerospace and Ground Conference on Lightning and Static Electricity, 10th, and Congres International Aeronautique, 17th, Paris, France, June 10-13, 1985, Proceedings p 99 A86-47292  LINE OF SIGHT Rapid torque-limited line-of-sight pointing of SCOLE (Spacecraft Control Laboratory Experiment) configuration [AIAA PAPER 86-1991] p 54 A86-47414 Modal assignment effects on decentralized control of a large space structure [AD-A163977] p 59 N86-25402  LINEAR PROGRAMMING Synthesis of structures with multiple frequency constraints [AIAA PAPER 86-0951] p 40 A86-38844  LINEAR SYSTEMS Stability of multiloop LO regulators with nonlinearities. I - Regions of attraction. II - Regions of ultimate boundedness p 38 A86-36074 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39492	LUNAR BASES  Lunar bases and space activities of the 21st century p 91 A86-30113  Strategies for a permanent lunar base p 1 A86-30117  Lunar industralization and settlement - Birth of polyglobal civilization civilization LUNAR SURFACE Proceedings of the 2nd Annual Conference on NASA/University Advanced Space Design Program [NASA-TM-89399] p 104 N86-29888  M  MAGNESIUM Magnesium matrix composite materials processing and applications p 72 A86-40384  MAGNETOHYDRODYNAMIC WAVES Spontaneous radiation emitted by moving tethered systems NASA electrothermal auxiliary propulsion technology [AIAA PAPER 86-1703] p 88 A86-4279

MAGNETOSTRICTION		
MAGNETOSTRICTION Thermal and electromagnetic damping analysis and its	MANY BODY PROBLEM A multibody dynamics equation formulation by	MEASURING INSTRUMENTS
application p 34 N86-27677	momentum principle for tree-configured	International Instrumentation Diego, CA, May 6-9, 1985, Proce
MAINTAINABILITY	hinge-connected rigid systems	2.030, 0.1, 1100
Maintainability planning for the Space Station	[AAS PAPER 85-391] p 50 A86-43213	Theoretical and experimental
[AIAA PAPER 86-9754] p 91 A86-32095 MAN MACHINE SYSTEMS	MARS (PLANET)	location for optimal aeroelastic
Evolutionary paths for artificial intelligence technologies	Proceedings of the 2nd Annual Conference on NASA/University Advanced Space Design Program	[NASA-CR-177115] MECHANICAL DEVICES
in operator interactions with space station robots	(NASA-TM-89399) p 104 N86-29888	Mechanisms developed in the
p 81 A86-34971	MARS PROBES	spacecraft antennas
Aerospace Behavioral Engineering Technology	Mars missions and bases - A recent look	MECHANICAL DRIVES
Conference, 4th, Long Beach, CA, October 14-17, 1985, Proceedings	p 2 A86-32548	Experiments on the end-point of
(SAE P-168) p 93 A86-35426	MASS DISTRIBUTION Optimization of mass placement in Space Station	with elastic drives [AIAA PAPER 86-1977]
The system integration and verification testing of an	applications	Features of the solar array d
orbital maneuvering vehicle for an air bearing floor	[SAWE PAPER 1672] p 24 A86-35215	Space Telescope
[NASA-CR-178350] p 100 N86-24217 Impact of automation on the design of carbon fiber	MATERIALS RECOVERY  Fluid management and its role in the future of Space	MECHANICAL PROPERTIES  The production and properties
omega ribs satellite solar arrays	Station	with light alloy matrices reinforce
[SNIAS-861-422-101] p 76 N86-28633	[AIAA PAPER 86-2301] p 89 A86-49553	(C, SiC)
Control theoretic analysis of human operator mediated	MATERIALS SCIENCE	The thermal and mechanical
rendezvous and docking [NLR-MP-85020-U] p 16 N86-32106	Structures, Structural Dynamics and Materials	materials for space structures
Control loops with human operators in space operations.	Conference, 27th, San Antonio, TX, May 19-21, 1986, Technical Papers. Parts 1 & 2 p 94 A86-38801	High modulus composite prope [AIAA PAPER 86-1187]
Part 1: Human engineering analysis, synthesis and	The German programme on materials science in	Charge accumulation and arc of
evaluation techniques	space p 73 A86-45646	materials and components
[NLR-TR-84116-L-PT-1] p 16 N86-32107 Control loops with human operators in space operations.	MATERIALS TESTS	[AD-A166216]
Part 3: Rendezvous and docking operations and model	Spacecraft materials test in a continuous, broad energy-spectrum electron beam p 73 A86-47337	MECHANICS (PHYSICS) SECTAM XII - Proceedings of the
analysis of performance with human-in-the-loop	The AFML/Lockheed test method for characterizing	Conference on Theoretical and A
[NLR-TR-84116-L-PT-3] p 17 N86-32108	material outgassing and deposition kinetics	Mountain, GA, May 10, 11, 1984.
Control loops with human operators in space operations.  Part 4: Research requirements for human-in-the-loop	[AIAA PAPER 86-1279] p 74 A86-49595	
space teleoperator development	MATHEMATICAL MODELS  Test and analysis correlation for structural dynamic	MEMBRANE STRUCTURES  Method of packaging and
[NLR-TR-84116-L-PT-4] p 17 N86-32109	systems p 37 A86-33284	membranes in space
Control loops with human operators in space operations.	Multiple boundary condition test (MBCT) approach to	[ISAS-618]
Part 5: Executive summary	update mathematical models of large flexible structures	MESOSPHERE
[NLR-TR-84116-L-PT-5] p 17 N86-32110 Control loops with human operators in space operations.	[SAE PAPER 851933] p 39 A86-38546	Environmental criteria guideline
Part 2: Robotics operations and manual control	The optimal projection equations for reduced-order, discrete-time modeling, estimation, and control	space design METAL HYDRIDES
experiment	p 42 A86-39035	Materials considerations in the c
[NLR-TR-84116-L-PT-2] p 85 N86-33024	Modelling of the hoop-column antenna and design of	heat pump for an advanced extra
MANAGEMENT INFORMATION SYSTEMS Orbital transfer vehicle launch operations study:	nonlinear control law in orbit p 46 A86-39501	METAL MATRIX COMPOSITES
Manpower summary and facility requirements, volume 5	Analytical investigation of the dynamics of tethered constellations in Earth orbit, phase 2	METAL MATRIX COMPOSITES  The production and properties
[NASA-CR-179705] p 17 N86-32504	[NASA-CR-178754] p 58 N86-23629	with light alloy matrices reinforce
MANEUVERABLE SPACECRAFT	Mathematical models of flexible spacecraft dynamics:	(C, SiC)
The detumbling of an axially symmetric satellite with an orbital maneuvering vehicle by nonlinear feedback	A survey of order reduction approaches aircraft	Magnesium matrix composite n
control	tracking [NLR-MP-85004-U] p 60 N86-26367	applications  Damping characteristics of m
[AD-A163989] p 58 N86-24717	The development of optimal control laws for orbiting	[AD-A163569]
A proposed design for an interim space rescue ferry	tethered platform systems p 61 N86-27655	Damping characteristics of m
vehicle [AD-A164039] p 101 N86-24741	A review of tether induced dynamical features	[AD-A167792]
MANIPULATORS	p 61 N86-28411  Dynamics and control of flexible spacecraft during and	METAL OXIDES Oxidation protecting coatings for
Experiments in optimal control of a flexible arm with	after slewing maneuvers	[NASA-CASE-LEW-14072-3]
passive damping p 82 A86-39503	[NASA-CR-177027] p 62 N86-28983	METAL SHEETS
On modeling the dynamics of large space manipulators	Theoretical and experimental investigations of sensor	Non-destructive measurement of
[AAS PAPER 85-393] p 51 A86-43215	location for optimal aeroelastic system state estimation [NASA-CR-177115] p 62 N86-29272	METEOROLOGY
Model reference adaptive control under uncertainty of	[NASA-CR-177115] p 62 N86-29272 A simple nonlinear joint model	Plan for space station polar-orb
nonlinear flexible manipulators	[NASA-TM-87749] p 85 N86-30234	[AD-A164405]
[AIAA PAPER 86-1976] p 53 A86-47403 Experiments on the end-point control of a two-link robot	Test and analysis correlation for structural dynamic	MICROANALYSIS
with elastic drives	systems spacecraft structures p 63 N86-30682	Capacitor-type micrometeoroid
[AIAA PAPER 86-1977] p 83 A86-47404	Effects of model error on control of large flexible space antenna with comparisons of decoupled and linear	MICROGRAVITY APPLICATIONS
On-orbit manipulators - Sensory and control	quadratic regulator control procedures	A three-mass tethered system
approaches [AIAA PAPER 86-2185] p 83 A86-47467	[NASA-TP-2604] p 64 N86-30801	applications
A laboratory robot for space application research	Vibration and structureborne noise in space station [NASA-CR-177146] p 64 N86-31336	[AIAA PAPER 86-1990] A design for fluid management
[AIAA PAPER 86-2186] p 83 A86-47468	[NASA-CR-177146] p 64 N86-31336 An IBM PC-based math model for space station solar	A design for hold management
An adaptive vision-based manipulator control scheme	array simulation p 23 N86-31418	Tethered constellations, their ut
[AIAA PAPER 86-2187] p 83 A86-47469	Influence of structural parameter uncertainties on flexible	platforms and relevant features
Index of aerospace mechanisms symposia proceedings 1-19	space structural control performances	Tethered elevator: A unique
[NASA-TM-88205] p 102 N86-26650	[SNIAS-861-440-104] p 65 N86-32516  MATHEMATICAL PROGRAMMING	processing  Dynamics of tethered constellar
Control of a free-flying robot manipulator system	Optimum design of large structures with multiple	Dynamics of teniered constellar
[NASA-CR-179717] p 85 N86-33016	constraints	MICROMETEOROIDS
MANNED SPACE FLIGHT  Real fantasy Russian book on cosmonautics and	[AIAA PAPER 86-0952] p 19 A86-38845	Trajectory determinations
space exploration p 95 A86-39981	MATRIX METHODS  Large space structural models by combination of finite	micrometeoroids on the space s Workshop on Micrometeorite Cap
The impact of space debris on manned space	elements and transfer matrix methods	[NASA-CR-177303]
operations	p 18 A86-37861	Capacitor-type micrometeoroid

p 18 A86-37861 Identification of a damping matrix from model data

p 43 A86-39478 A matrix approach to dynamics formulation of complex

p 45 A86-39496 space structures Control of flexible structures with respect to infinity --flexible spacecraft p 60 N86-27359 ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890

**MAXIMUM ENTROPY METHOD** 

Robust reduced-order control of flexible structures using the optimal projection/maximum entropy design methodology [AIAA PAPER 86-2052] p 55 A86-47435 on Symposium, 31st, San ceedings

p 94 A86-38051 al investigations of sensor ic system state estimation p 62 N86-29272

the French space industry p 103 N86-27394

control of a two-link robot

p 83 A86-47404 drive mechanism for the p 102 N86-27356

es of composite materials ced with continuous fibers p 72 A86-40378 ical stability of composite p 73 A86-40530 perties

p 73 A86-40594 discharges on spacecraft p 70 N86-29893

the Twelfth Southeastern Applied Mechanics, Pine 4. Volume 2

p 91 A86-31259 d deployment of large

p 26 N86-23624

nes for space vehicle and p 18 A86-32553

design of a metal-hydride ravehicular mobility unit

p 80 N86-31427

es of composite materials ed with continuous fibers p 72 A86-40378 materials processing and

p 72 A86-40384 metal matrix composites p 75 N86-24762 metal matrix composites

p 80 N86-31668

for polymers p 75 N86-26434

of residual stresses

p 30 A86-32933

rbiting platform p 14 N86-25403

id detectors

p 104 N86-30606

m for micro-g/variable-g p 21 A86-47413

nt in space p 89 A86-47969

utilization as microgravity p 103 N86-27645 e opportunity for space p 103 N86-27649

lations in Earth orbit p 61 N86-27650

and collection

station. Report of the pture Experiments p 104 N86-30584 Capacitor-type micrometeoroid detectors

p 104 N86-30606

MICROPROCESSORS Microprocessor controlled force actuator

[AIAA PAPER 86-0916] AIAA PAPER 86-0916] p 40 A86-38827 Design, fabricate and test Spacecraft Automatic Active Discharge System (SAADS)

IAD-A1665591 p 70 N86-30802 MICROSTRIP TRANSMISSION LINES

Investigation of arrays of high-Q microstrip antennas p 66 A86-44733

MICROWAVE ANTENNAS

Investigation of arrays of high-Q microstrip antennas p 66 A86-44733

MANPOWER

[AIAA PAPER 86-1178]

[NASA-TM-77908]

applications missions

MANNED SPACECRAFT

[NASA-TM-88986]

Spacecraft architecture

The suitability of various spacecraft for future space

Orbital transfer vehicle launch operations study:

Manpower summary and facility requirements, volume 5 [NASA-CR-179705] p 17 N86-32504

Design for a goal-oriented telerobotic system [AIAA PAPER 86-2090] p 83 A

p 96 A86-40588

p 101 N86-24736

p 15 N86-27409

p 83 A86-47440

MILITARY OPERATIONS	MONOPROPELLANTS	NOAA SATELLITES
The impact of space debris on manned space	Monopropellant hydrazine systems for space station	Polar platform payload requirements in the 1990's
operations [AIAA PAPER 86-1178] p 96 A86-40588	applications [AIAA PAPER 86-1562] p 88 A86-42715	[AAS PAPER 85-396] p 7 A86-43228 NOISE MEASUREMENT
MILITARY SPACECRAFT	MOTION SIMULATION	Effects of noise on modal parameters identified by the
Future space transportation options - Overview	A review of tether induced dynamical features	Eigensystem Realization Algorithm p 42 A86-39036
[AIAA PAPER 86-1210] p 6 A86-40616	p 61 N86-28411 MOTION STABILITY	NOISE PROPAGATION
MILLIMETER WAVES Millimeter-wave range for the quick evaluation of large	Nonlinear dynamics and chaotic motions in feedback	Vibration and structureborne noise in space station [NASA-CR-177146] p 64 N86-31336
reflector antennas with complex feeds	controlled elastic systems	NOISE SPECTRA
p 65 A86-30714	[AD-A162385] p 84 N86-24294	Effects of noise on modal parameters identified by the
MIRRORS	MOTORS  A proposed design for an interim space rescue ferry	Eigensystem Realization Algorithm p 42 A86-39036
Space reflector supported by radiation pressure for	vehicle	NONDESTRUCTIVE TESTS  Non-destructive measurement of residual stresses
telecommunication p 30 A86-33942 MISSION PLANNING	[AD-A164039] p 101 N86-24741	p 30 A86-32933
Strategies for a permanent lunar base	MULTIBEAM ANTENNAS	Robotic nondestructive inspection of aerospace
p 1 A86-30117	A distributed array antenna system p 68 A86-50286  MULTIPLE ACCESS	structures p 95 A86-40509
Mars missions and bases - A recent look	A distributed array antenna system p 68 A86-50286	Prospects for intelligent aerospace structures [AIAA PAPER 86-1139] p 25 A86-43328
p 2 A86-32548	MULTISTAGE ROCKET VEHICLES	[AIAA PAPER 86-1139] p 25 A86-43328 Enhancements in the routine evaluation of composite
Enabling technologies for transition to utilization of	Two-stage earth-to-orbit vehicles with series and parallel	aerospace components using a microprocessor based
space-based resources and operations p 93 A86-34992	burn [AIAA PAPER 86-1413] p 87 A86-42623	equipment p 73 A86-47605
The Columbus preparatory programme supporting	[AIAA PAPER 86-1413] p 87 A86-42623 MULTIVARIATE STATISTICAL ANALYSIS	Scanning laser acoustic microscopy applied to the evaluation of material interconnections
technology of the European Space Agency	Tine domain design of robust controllers for LQG (Linear	p 75 N86-22624
p 4 A86-37856	Quadratic Gaussian); application to large space	Nondestructive testing of fiber reinforced composites
Mission requirements for coorbiting and polar platforms	structures	using X-ray fine structure procedures p 79 N86-30784
- A critical survey p 4 A86-37872	[AD-A163635] p 59 N86-26074	Developments in the nondestructive evaluation (NDE)
EURECA concept and its potential evolution within the Space Station era	A.	of composite materials p 79 N86-30785 NONLINEAR EQUATIONS
[AAS PAPER 85-398] p 97 A86-43230	N	A singular-solution approach for controlling the nonlinear
The Columbus Programme concept and its initial	NASA PROGRAMS	response of a continuum model of a large space
implementation steps p 9 A86-45628	Artificial intelligence - NASA robotics for Space	structure
Space Station polar orbiting platform - Mission analysis	Station p 17 A86-32538	[AIAA PAPER 86-0841] p 41 A86-38889
and planning	Space Station Advanced Development Program	NONLINEAR FEEDBACK
[AIAA PAPER 86-2178] p 11 A86-47960	p 2 A86-32543	Nonlinear dynamics and chaotic motions in feedback controlled elastic systems
Columbus technology - Status and plans	Geostationary communications platforms	[AD-A162385] p 84 N86-24294
p 12 A86-50338 MODAL RESPONSE	p 2 A86-32547 Future directions in materials and structures for space	NONLINEAR PROGRAMMING
Minimum-fuel control of high-order systems	applications	An improved multilevel optimization approach for the
p 86 A86-34174	[AIAA PAPER 86-1185] p 25 A86-40611	design of complex engineering systems [AIAA PAPER 86-0950] p 19 A86-38953
An orthogonal decomposition approach to modal	Future space transportation options - Overview	NONLINEAR SYSTEMS
synthesis p 39 A86-36216	[AIAA PAPER 86-1210] p 6 A86-40616	Buckling and non-linear response of imperfect
Structural parameter identification using modal response	The changing face of international space cooperation - One view of NASA p 8 A86-44405	three-legged truss columns
data p 43 A86-39479	Technology and test p 15 N86-28420	[AIAA PAPER 86-0974] p 24 A86-38854
The effects of structural perturbations on modal suppression p 45 A86-39497	NASA SPACE PROGRAMS	Modelling of the hoop-column antenna and design of nonlinear control law in orbit p 46 A86-39501
suppression p 45 A86-39497 Effects of noise on ERA-identified modal parameters	The NASA Flight Demonstration Program	Modelling and design of nonlinear feedback control law
Eigensystem Realization Algorithm	p 2 A86-32566	for a large space hoop-column antenna
[AAS PAPER 85-422] p 52 A86-43222	NASA space plans and scenarios to 2000 and beyond Book p 2 A86-34594	p 48 A86-42909
Mathematical correlation of modal parameter	The U.S. Space Station program p 3 A86-37853	A nonlinear attitude control law for a satellite with flexible
identification methods via system realization theory	United States scientific community views of the Space	appendages p 49 A86-42989
[NASA-TM-87720] p 59 N86-25019	Station p 4 A86-37869	Maneuvering of flexible spacecraft Variable Structure Control
Modal assignment effects on decentralized control of a large space structure	Control of Flexible Structures (COFS) Flight Experiment	[AIAA PAPER 86-2193] p 56 A86-47473
[AD-A163977] p 59 N86-25402	Program p 5 A86-39502	NONLINEARITY
MODEL REFERENCE ADAPTIVE CONTROL	Spacecraft technology requirements for future NASA	A simple nonlinear joint model
Model reference adaptive control under uncertainty of	missions [AIAA PAPER 86-1160] p 6 A86-40609	[NASA-TM-87749] p 85 N86-30234 NOTCH SENSITIVITY
nonlinear flexible manipulators	NASA finds the way toward building a Station fraught	On the defect sensitivity of spacecraft typical thin CFRP
[AIAA PAPER 86-1976] p 53 A86-47403	with legal hurdles p 6 A86-41679	laminates p 79 N86-30782
MODELS	Developing the final frontier: International cooperation	NOZZLE DESIGN
Impacts of free-floating objects: Unique space station experiments p 14 N86-27162	in the peaceful uses of outer space Book	Theoretical study on the effect of the design of small
MODULARITY	p 96 A86-42236	(milli-Newton) thruster jets on molecular contamination for the space station
Orbit Transfer Rocket Engine Technology Program:	European experience and perspectives	[NASA-CR-177263] p 90 N86-26358
Advanced engine study, task D.1/D.3	p 97 A86-43336 American experiences and perspectives - International	NÖZZLE FLOW
[NASA-CR-175084] p 90 N86-26369	cooperation on a permanently manned Space Station	Theoretical study on the effect of the design of small
MODULES Shuttle-launch triangular space station	p 7 A86-43337	(milli-Newton) thruster jets on molecular contamination for the space station
[NASA-CASE-MSC-20676-1] p 26 N86-24729	Joining forces in space - NASA's view	[NASA-CR-177263] p 90 N86-26358
Spacebus: Multimission communication satellites	p 8 A86-44528	NUCLEAR PHYSICS
[SNIAS-861-422-119] p 16 N86-31637	NASA's space station planning · An update	Workshop on Cosmic Ray and High Energy Gamma Ray
MOLDS	p 8 A86-44529	Experiments for the Space Station Era, Louisiana State
Autoclave, compression moulding p 72 A86-40495  MOLYBDENUM DISULFIDES	The European Space Station programme p 8 A86-45627	University, Baton Rouge, October 17-20, 1984, Proceedings p 99 A86-46851
The performance of unbonded MoS2 for space	p o A00-45027	
applications space applications p 76 N86-27376	•	NUCLEAR PROPULSION
Use of MoS2 applied by physical vapor deposition (PVD)	US status of Space Stations Phase B activities	NUCLEAR PROPULSION  Nuclear powered ion engine orbit transfer vehicle design
on space mechanisms space applications	US status of Space Stations Phase B activities p 9 A86-45630	Nuclear powered ion engine orbit transfer vehicle design and operational effectiveness
- 70 NOO 07070	US status of Space Stations Phase B activities	Nuclear powered ion engine orbit transfer vehicle design and operational effectiveness [AIAA PAPER 86-1391] p 86 A86-42608
p 76 N86-27379 Use of MoS2 applied by Physical Vapor Deposition (PVD)	US status of Space Stations Phase B activities p 9 A86-45630 Point of view of the U.S. science community on Space Station p 9 A86-45641 Technology base for the future of space	Nuclear powered ion engine orbit transfer vehicle design and operational effectiveness [AIAA PAPER 86-1391] p 86 A86-42608 NUMERICAL ANALYSIS
p 76 N86-27379 Use of MoS2 applied by Physical Vapor Deposition (PVD) on space mechanisms	US status of Space Stations Phase B activities p 9 A86-45630 Point of view of the U.S. science community on Space Station p 9 A86-45641 Technology base for the future of space p 10 A86-45709	Nuclear powered ion engine orbit transfer vehicle design and operational effectiveness [AIAA PAPER 86-1391] p 86 A86-42608  NUMERICAL ANALYSIS  Tine domain design of robust controllers for LQG (Linear
Use of MoS2 applied by Physical Vapor Deposition (PVD) on space mechanisms [SNIAS-861-440-101] p 80 N86-31639	US status of Space Stations Phase B activities p 9 A86-45630 Point of view of the U.S. science community on Space Station p 9 A86-45641 Technology base for the future of space p 10 A86-45709 A design for fluid management in space	Nuclear powered ion engine orbit transfer vehicle design and operational effectiveness [AIAA PAPER 86-1391] p 86 A86-42608 NUMERICAL ANALYSIS  Tine domain design of robust controllers for LQG (Linear Quadratic Gaussian); application to large space structures
Use of MoS2 applied by Physical Vapor Deposition (PVD) on space mechanisms [SNIAS-861-440-101] p 80 N86-31639  MOMENTUM	US status of Space Stations Phase B activities p 9 A86-45630 Point of view of the U.S. science community on Space Station p 9 A86-45641 Technology base for the future of space p 10 A86-45709 A design for fluid management in space p 89 A86-47969	Nuclear powered ion engine orbit transfer vehicle design and operational effectiveness  [AIAA PAPER 86-1391] p 86 A86-42608  NUMERICAL ANALYSIS  Tine domain design of robust controllers for LQG (Linear Quadratic Gaussian); application to large space structures  [AD-A163635] p 59 N86-26074
Use of MoS2 applied by Physical Vapor Deposition (PVD) on space mechanisms [SNIAS-861-440-101] p 80 N86-31639  MOMENTUM  Cosmic dust detection with large surface	US status of Space Stations Phase B activities p 9 A86-45630 Point of view of the U.S. science community on Space Station p 9 A86-45641 Technology base for the future of space p 10 A86-45709 A design for fluid management in space p 89 A86-47969 Planetary exploration through year 2000: An augmented	Nuclear powered ion engine orbit transfer vehicle design and operational effectiveness  [AIAA PAPER 86-1391] p 86 A86-42608  NUMERICAL ANALYSIS  Tine domain design of robust controllers for LQG (Linear Quadratic Gaussian); application to large space structures  [AD-A163635] p 59 N86-26074  NUTATION
Use of MoS2 applied by Physical Vapor Deposition (PVD) on space mechanisms [SNIAS-861-440-101] p 80 N86-31639  MOMENTUM	US status of Space Stations Phase B activities p 9 A86-45630 Point of view of the U.S. science community on Space Station p 9 A86-45641 Technology base for the future of space p 10 A86-45709 A design for fluid management in space p 89 A86-47969	Nuclear powered ion engine orbit transfer vehicle design and operational effectiveness [AIAA PAPER 86-1391] p 86 A86-42608  NUMERICAL ANALYSIS  Tine domain design of robust controllers for LQG (Linear Quadratic Gaussian); application to large space structures [AD-A163635] p 59 N86-26074  NUTATION  Nutational stability of a spinning spacecraft with internal
Use of MoS2 applied by Physical Vapor Deposition (PVD) on space mechanisms [SNIAS-861-440-101] p 80 N86-31639  MOMENTUM Cosmic dust detection with large surface piezoceramics p 16 N86-30604	US status of Space Stations Phase B activities p 9 A86-45630 Point of view of the U.S. science community on Space Station p 9 A86-45641 Technology base for the future of space p 10 A86-45709 A design for fluid management in space p 89 A86-47969 Planetary exploration through year 2000: An augmented program. Part two of a report by the Solar System Exploration Committee of the NASA Advisory Council [NASA-TM-89235] p 15 N86-28970	Nuclear powered ion engine orbit transfer vehicle design and operational effectiveness  [AIAA PAPER 86-1391] p 86 A86-42608  NUMERICAL ANALYSIS  Tine domain design of robust controllers for LQG (Linear Quadratic Gaussian); application to large space structures  [AD-A163635] p 59 N86-26074  NUTATION  Nutational stability of a spinning spacecraft with internal mass motion and axial thrust  [AIAA PAPER 86-2271] p 57 A86-47940
Use of MoS2 applied by Physical Vapor Deposition (PVD) on space mechanisms [SNIAS-861-440-101] p 80 N86-31639  MOMENTUM Cosmic dust detection with large surface piezoceramics p 16 N86-30604  MOMENTUM THEORY A multibody dynamics equation formulation by momentum principle for tree-configured	US status of Space Stations Phase B activities p 9 A86-45630 Point of view of the U.S. science community on Space Station p 9 A86-45641 Technology base for the future of space p 10 A86-45709 A design for fluid management in space p 89 A86-47969 Planetary exploration through year 2000: An augmented program. Part two of a report by the Solar System Exploration Committee of the NASA Advisory Council [NASA-TM-89235] p 15 N86-28970 NEAR FIELDS	Nuclear powered ion engine orbit transfer vehicle design and operational effectiveness [AIAA PAPER 86-1391] p 86 A86-42608  NUMERICAL ANALYSIS Tine domain design of robust controllers for LOG (Linear Quadratic Gaussian); application to large space structures [AD-A163635] p 59 N86-26074  NUTATION Nutational stability of a spinning spacecraft with internal mass motion and axial thrust [AIAA PAPER 86-2271] p 57 A86-47940  NUTATION DAMPERS
Use of MoS2 applied by Physical Vapor Deposition (PVD) on space mechanisms [SNIAS-861-440-101] p 80 N86-31639  MOMENTUM Cosmic dust detection with large surface piezoceramics p 16 N86-30604  MOMENTUM THEORY A multibody dynamics equation formulation by momentum principle for tree-configured hinge-connected rigid systems	US status of Space Stations Phase B activities p 9 A86-45630 Point of view of the U.S. science community on Space Station p 9 A86-45641 Technology base for the future of space p 10 A86-45709 A design for fluid management in space p 89 A86-47969 Planetary exploration through year 2000: An augmented program. Part two of a report by the Solar System Exploration Committee of the NASA Advisory Council [NASA-TM-89235] p 15 N86-28970 NEAR FIELDS A correction for continuous rotation in measurements	Nuclear powered ion engine orbit transfer vehicle design and operational effectiveness [AIAA PAPER 86-1391] p 86 A86-42608  NUMERICAL ANALYSIS Tine domain design of robust controllers for LQG (Linear Quadratic Gaussian); application to large space structures [AD-A163635] p 59 N86-26074  NUTATION Nutational stability of a spinning spacecraft with internal mass motion and axial thrust [AIAA PAPER 86-2271] p 57 A86-47940  NUTATION DAMPERS Damping synthesis for a spacecraft using substructure
Use of MoS2 applied by Physical Vapor Deposition (PVD) on space mechanisms [SNIAS-861-440-101] p 80 N86-31639  MOMENTUM Cosmic dust detection with large surface piezoceramics p 16 N86-30604  MOMENTUM THEORY A multibody dynamics equation formulation by momentum principle for tree-configured hinge-connected rigid systems [AAS PAPER 85-391] p 50 A86-43213	US status of Space Stations Phase B activities p 9 A86-45630 Point of view of the U.S. science community on Space Station p 9 A86-45641 Technology base for the future of space p 10 A86-45709 A design for fluid management in space p 89 A86-47969 Planetary exploration through year 2000: An augmented program. Part two of a report by the Solar System Exploration Committee of the NASA Advisory Council [NASA-TM-89235] p 15 N86-28970 NEAR FIELDS A correction for continuous rotation in measurements of the near field p 67 A86-46578	Nuclear powered ion engine orbit transfer vehicle design and operational effectiveness  [AIAA PAPER 86-1391] p 86 A86-42608  NUMERICAL ANALYSIS  Tine domain design of robust controllers for LQG (Linear Quadratic Gaussian); application to large space structures  [AD-A163635] p 59 N86-26074  NUTATION  Nutational stability of a spinning spacecraft with internal mass motion and axial thrust  [AIAA PAPER 86-2271] p 57 A86-47940  NUTATION DAMPERS  Damping synthesis for a spacecraft using substructure and component data p 37 A86-32940
Use of MoS2 applied by Physical Vapor Deposition (PVD) on space mechanisms [SNIAS-861-440-101] p 80 N86-31639  MOMENTUM Cosmic dust detection with large surface piezoceramics p 16 N86-30604  MOMENTUM THEORY A multibody dynamics equation formulation by momentum principle for tree-configured hinge-connected rigid systems [AAS PAPER 85-391] p 50 A86-43213  MOMENTUM TRANSFER	US status of Space Stations Phase B activities p 9 A86-45630 Point of view of the U.S. science community on Space Station p 9 A86-45641 Technology base for the future of space p 10 A86-45709 A design for fluid management in space p 89 A86-47969 Planetary exploration through year 2000: An augmented program. Part two of a report by the Solar System Exploration Committee of the NASA Advisory Council [NASA-TM-89235] p 15 N86-28970 NEAR FIELDS A correction for continuous rotation in measurements	Nuclear powered ion engine orbit transfer vehicle design and operational effectiveness [AIAA PAPER 86-2271] p 86 A86-42608  NUMERICAL ANALYSIS  Tine domain design of robust controllers for LOG (Linear Quadratic Gaussian); application to large space structures [AD-A163635] p 59 N86-26074  NUTATION  Nutational stability of a spinning spacecraft with internal mass motion and axial thrust [AIAA PAPER 86-2271] p 57 A86-47940  NUTATION DAMPERS  Damping synthesis for a spacecraft using substructure
Use of MoS2 applied by Physical Vapor Deposition (PVD) on space mechanisms [SNIAS-861-440-101] p 80 N86-31639  MOMENTUM Cosmic dust detection with large surface piezoceramics p 16 N86-30604  MOMENTUM THEORY A multibody dynamics equation formulation by momentum principle for tree-configured hinge-connected rigid systems [AAS PAPER 85-391] p 50 A86-43213	US status of Space Stations Phase B activities p 9 A86-45630 Point of view of the U.S. science community on Space Station p 9 A86-45641 Technology base for the future of space p 10 A86-45709 A design for fluid management in space p 89 A86-47969 Planetary exploration through year 2000: An augmented program. Part two of a report by the Solar System Exploration Committee of the NASA Advisory Council [NASA-TM-89235] p 15 N86-28970 NEAR FIELDS A correction for continuous rotation in measurements of the near field p 67 A86-45578 Near-field testing of the 15-meter model of the hoop	Nuclear powered ion engine orbit transfer vehicle design and operational effectiveness [AIAA PAPER 86-1391] p 86 A86-42608  NUMERICAL ANALYSIS Tine domain design of robust controllers for LOG (Linear Cuadratic Gaussian); application to large space structures [AD-A163635] p 59 N86-26074  NUTATION Nutational stability of a spinning spacecraft with internal mass motion and axial thrust [AIAA PAPER 86-2271] p 57 A86-47940  NUTATION DAMPERS Damping synthesis for a spacecraft using substructure and component data p 37 A86-32940  NYLON (TRADEMARK)

oc	EAN	OGI	RA	PHY

Plan for space station polar-orbiting platform p 14 N86-25403 (AD-A1644051

OFF-ON CONTROL

A nonlinear attitude control law for a satellite with flexible appendages p 49 A86-42989 On-off attitude control of flexible satellites A86-46470

p 53

ON-LINE SYSTEMS

Testing of a failure accommodation system on a highly flexible grid p 38 A86-35390 ONBOARD DATA PROCESSING

On-orbit parameter and disturbance identification for p 95 A86-39477 Space Station ONBOARD FOUIPMENT

Prospects for intelligent aerospace structures [AIAA PAPER 86-1139] p 25 A86-43328 p 82 A86-44550 Robotics in space

**OPERATING COSTS** 

Primer on operating and support (O and S) costs for space systems

p 12 N86-24588

OPERATOR PERFORMANCE

Control loops with human operators in space operations. Part 3: Rendezvous and docking operations and model analysis of performance with human-in-the-loop [NLR-TR-84116-L-PT-3] p 17 No p 17 N86-32108

Control loops with human operators in space operations. Part 2: Robotics operations and manual control experiment

INLR-TR-84116-L-PT-21

p 85 N86-33024

OPTICAL MEASUREMENT Space environment simulation to test satellite thermal

control coatings, volume 1 p 75 N86-22627 [ESA-TT-891-VOL-1] Space environment simulation to test satellite thermal

control coatings. Volume 2, appendix 1: Detailed results of optical measurements made after the various stages of the first test p 33 N86-22628 [ESA-TT-891-VOL-2]

Space environment simulation to test satellite thermal control coatings. Volume 2: Appendices 2, 3, and 4. Appendix 2: Detailed results of optical measurements made after the various stages of the second test. Appendix 3: Summary of optical results obtained during the first test. Appendix 4: Summary of optical results obtained during the second test

[ESA-TT-891-VOL-3] p 33 N86-22629 p 100 N86-24536 Machine vision and the OMV

OPTICAL PROPERTIES

Liquid droplet radiator program at the NASA Lewis Research Center

p 32 A86-49621 [ASME PAPER 86-HT-15]

OPTICS

Optical Fabrication and Testing Workshop: Large Telescope Optics, Albuquerque, NM, March 4-8, 1985, Proceedings

[SPIE-542] p 92 A86-32407

OPTIMAL CONTROL

Compensating structure and parameter optimization for attitude control of a flexible spacecraft p 36 A86-31668

Single-step optimal control of the RPL experiment [AAS PAPER 85-045] p 37 A86-31 p 37 A86-31796 Flexibility control of solar battery arrays of spacecrafts

p 85 A86-33203 Minimum-fuel control of high-order systems

p 86 A86-34174 In search of the optimal quadratic regulator

p 43 A86-39484 Linear regulator control of the hoop-column antenna ---

deployable large space structure design p 45 A86-39498

Experiments in optimal control of a flexible arm with p 82 A86-39503 passive damping The development of optimal control laws for orbiting

tethered platform systems p 51 A86-43217 [AAS PAPER 85-360]

An asymptotic perturbation method for nonlinear optimal control problems

[AAS PAPER 85-364] p 51 A86-43219 Dynamics and control characteristics for the WISP 300

m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220 Multi-criterion approaches to optimization of linear

[AIAA PAPER 86-2198] p 56 A86-47478

Optimum detumbling of space platforms via a dynamic programming algorithm [AIAA PAPER 86-2154] p 57 A86-47518

The development of optimal control laws for orbiting p 61 N86-27655 tethered platform systems

Control theoretic analysis of human operator mediated rendezvous and docking

[NLR-MP-85020-U] p 16 N86-32106 OPTIMIZATION

Optimization of mass placement in Space Station applications

[SAWE PAPER 1672] p 24 A86-35215 The optimal projection equations for reduced-order, discrete-time modeling, estimation, and control p 42 A86-39035

ORBIT CALCULATION

Orbit manoeuvre and determination strategy for the FURECA Mission

[AAS PAPER 85-408] p 7 A86-43259 ORBIT DECAY

RIT-10 low-thrust control of Eureca's orbital decay p 88 A86-44447

ORBIT PERTURBATION

p 104 N86-28410 Tether fundamentals

ORBIT SPECTRUM UTILIZATION

Communications platform payload definition study p 14 N86-27402 [NASA-CR-174986]

ORBIT TRANSFER VEHICLES

Weights assessment for orbit-on-demand vehicles [SAWE PAPER 1674] p 3 A86-35217 Thermal design of aeroassisted orbital transfer vehicles

p 30 A86-37041 Nuclear powered ion engine orbit transfer vehicle design and operational effectiveness

[AIAA PAPER 86-1391] p 86 A86-42608 Parametric design and preliminary mission analysis of a proposed Hybrid OTV with TOS/AMS (TM) solid-fuel boosters, and ring-cusp ion return engines

Maintaining and servicing a space-based Orbital Transfer vehicle (OTV) at the Space Station [AIAA PAPER 86-2332] p.10 A86-4605. The Slinger Asia

The Slinger - An in-orbit booster facility

p 100 A86-47931 (AIAA PAPER 86-2175) The system integration and verification testing of an orbital maneuvering vehicle for an air bearing floor

p 100 N86-24217 [NASA-CR-178350] Orbit Transfer Rocket Engine Technology Program: Advanced engine study, task D.1/D.3

p 90 N86-26369 [NASA-CR-175084] Orbital transfer vehicle launch operations study: Manpower summary and facility requirements, volume 5 p 17 N86-32504 [NASA-CR-179705] Orbital transfer vehicle launch operations study.

Processing flows. Volume 3

[NASA-CR-179766] p 17 N86-32505

ORBITAL ASSEMBLY

ACCESS (Assembly Concept for Construction of Erectable Space Structure) - A Shuttle flight experiment p 1 A86-32540

Application of solids modeling technology to space station conceptual design and on-orbit assembly p 81 A86-34970

Construction and control of large space structures p 39 A86-37060

Results of the ACCESS space construction Shuttle flight experiment [AIAA PAPER 86-1186] p 6 A86-40593

Control loops with human operators in space operations. Part 2: Robotics operations and manual control experiment [NLR-TR-84116-L-PT-2] p 85 N86-33024

ORBITAL LAUNCHING

Weights assessment for orbit-on-demand vehicles [SAWE PAPER 1674] p 3 A86-3 p 3 A86-35217

**ORBITAL MANEUVERING VEHICLES** 

Orbital maneuvering vehicle guidance, navigation and control

[AAS PAPER 85-043] p 36 A86-31794 An Orbital Maneuvering Vehicle simulator

p 5 A86-40515 Orbit manoeuvre and determination strategy for the

FURECA Mission [AAS PAPER 85-408] p 7 A86-43259 Space Station polar orbiting platform - Mission analysis

and planning [AIAA PAPER 86-2178] p 11 A86-47960 p 100 N86-24536 Machine vision and the OMV A study of 35-ghz radar-assisted orbital maneuvering

p 101 N86-24537 vehicle/space telescope docking The detumbling of an axially symmetric satellite with an orbital maneuvering vehicle by nonlinear feedback control

p 58 N86-24717 [AD-A163989] Space platform expendables resupply concept definition study. Volume 1: Executive summary

[NASA-CR-178820] p 13 N86-24733 Space platform expendables resupply concept definition study, volume 2

[NASA-CR-178821] p 13 N86-24734 Space platform expendables resupply concept definition study. Volume 3: Work breakdown structure and work breakdown structure dictionary

INASA-CR-1788221 p 13 N86-24735

ORBITAL MANEUVERS Control/structures interaction study of two 300 KW

dual-keel space station concepts [NASA-TM-87679] p 61 N86-28113

Analytical investigation of the dynamics of tethered constellations in Earth orbit, phase 2 [NASA-CR-178846] p 61 N86-28114

ORBITAL RENDEZVOUS

Control loops with human operators in space operations. Part 3: Rendezvous and docking operations and model analysis of performance with human-in-the-loop [NLR-TR-84116-L-PT-3] p 17 N p 17 N86-32108

ORBITAL SERVICING

A thermal control design for the Leasat F-3 salvage mission [AIAA PAPER 86-1340] p 31 A86-39939

Advanced EVA operation on-orbit tasks and services [AIAA PAPER 86-1175] p 96 A86-40585 Orbital consumables resupply requirements impact on the evolution of OSCRS

[AIAA PAPER 86-1603] p 96 A86-42743 Analysis and modeling of fluid transfer in orbit

p 32 A86-42809 p 82 A86-44550 [AIAA PAPER 86-1718] Robotics in space Maintaining and servicing a space-based Orbital Transfer vehicle (OTV) at the Space Station
[AIAA PAPER 86-2332] p 10 A86-46955

Space Station services provided to communications satellites

p 10 A86-46956 [AIAA PAPER 86-2333] Space Station - The Canadian contribution

p 12 A86-49563 Shuttle-launch triangular space station

[NASA-CASE-MSC-20676-1] p 26 N86-24729 NASA/American Society for Engineering Education (ASEE) Summer Faculty Fellowship Program, 1985 ---Space Stations and Their Environments

p 105 N86-31409 (NASA-CR-171931) ORBITAL SPACE STATIONS

Application of solids modeling technology to space station conceptual design and on-orbit assembly

p 81 A86-34970 Evolutionary paths for artificial intelligence technologies

in operator interactions with space station robots p 81 A86-34971 An investigation of adaptive control techniques for space p 38 A86-35333 stations

Space Station multidisciplinary analysis capability -

[AIAA PAPER 86-0954] n 19 A86-38847 On-orbit parameter and disturbance identification for Space Station p 95 A86-39477 Advanced EVA operation on-orbit tasks and services

[AIAA PAPER 86-1175] p 96 A86-40585 Identification of Space Station dynamics

p 49 A86-42965 Platform options for the Space Station program
AS PAPER 85-399] p 7 A86-43231 [AAS PAPER 85-399]

Space stations: Legal aspects of scientific and commercial use in a framework of transatlantic cooperation; Proceedings of the International Colloquium, Hamburg, West Germany, October 3, 4, 1984 p 97 A86-43335

American experiences and perspectives - International cooperation on a permanently manned Space Station

p 7 A86-43337 Space Station - The new frontier p 8 A86-44402 The changing face of international space cooperation
One view of NASA p 8 A86-44405 One view of NASA p 8 A86-44405
Columbus I; Proceedings of the First Columbus
Workshop Utilization Aspects, Capri, Italy, June 17-21, p 98 A86-45626

The European Space Station programme p 8 A86-45627

The Columbus Programme concept and its initial implementation steps p 9 A86-45628 Technology challenges for the Columbus Programme

p 9 A86-45629 US status of Space Stations Phase B activities

p 9 A86-45630 p 9 A86-45637 Space Station utilization

Point of view of the U.S. science community --- on Space Station p 9 A86-45641

Viewing the earth from Space - Towards the Space p 9 A86-45642 Station polar platform French views on Columbus - Preparation of its utilization

p 10 A86-45647 relations with other programs Workshop on Cosmic Ray and High Energy Gamma Ray Experiments for the Space Station Era, Louisiana State University, Baton Rouge, October 17-20, 1984, p 99 A86-46851

Proceedings

Zero-G simulation verifies EVA servicing of space station	P	PARTICULATE SAMPLING
modules [AIAA PAPER 86-2312] p 99 A86-46942	PACKAGING	The use of tethered satellites for the collection of cosmi- dust and the sampling of man made orbital debris far fror
Maintaining and servicing a space-based Orbital	Method of packaging and deployment of large	the space station p 15 N86-3058
Transfer vehicle (OTV) at the Space Station [AIAA PAPER 86-2332] p 10 A86-46955	membranes in space [ISAS-618] p 26 N86-23624	PAS Orbit transfer error analysis for multiple finite perige
Space Station services provided to communications	PAINTS	burn, ascent trajectories
satellites [AIAA PAPER 86-2333] p 10 A86-46956	Measurement of the thermo-optical properties of varying paint thickness on carbon fiber composites in spacecraft	[AAS PAPER 85-302] p 97 A86-4320 PAYLOAD CONTROL
Space Station polar orbiting platform - Mission analysis	structures p 74 N86-22620	Modeling of a tethered two-body system in space
and planning	New space paints p 74 N86-22621 PANELS	p 18 A86-3718
[AIAA PAPER 86-2178] p 11 A86-47960 Space Station evolution - The uncertainty principle	Analytical and experimental results of advanced	Design, fabricate and test Spacecraft Automatic Activities Discharge System (SAADS)
prevails p 11 A86-48373	composite stiffened panels under combined loads p 78 N86-30768	[AD-A166559] p 70 N86-3080
Fluid management and its role in the future of Space Station	Assessing the effects of delaminations on the	PAYLOAD DEPLOYMENT & RETRIEVAL SYSTEM  Tethered satellite design p 22 N86-2840
[AIAA PAPER 86-2301] p 89 A86-49553	postbuckling strength of CRFP panels aircraft structures p 79 N86-30781	PAYLOAD INTEGRATION
Space Station - The Canadian contribution	PARABOLIC ANTENNAS	Assessment of international payload requirements o
p 12 A86-49563 SIRTF and the Space Station Space InfraRed	Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for	the dual keel space station - A systems analysis capabilitie example
Telescope Facility	the JPL feed	[AIAA PAPER 86-1226] p 6 A86-4061
[AIAA PAPER 86-2353] p 12 A86-50266	[NASA-CR-178061] p 69 N86-28973 Near-field testing of the 15-meter model of the hoop	PAYLOAD STATIONS  Plan for space station polar-orbiting platform
Key design parameters for a very low gravity in-orbit facility orbital platforms	column antenna	[AD-A164405] p 14 N86-2540
[MATRA-EPT/DT/VT068/098] p 58 N86-22631	[NASA-CR-178059] p 69 N86-29115 PARABOLIC REFLECTORS	PAYLOAD TRANSFER Orbital transfer vehicle launch operations study
Space Station Systems: A bibliography with indexes (supplement 1)	Structural analysis, manufacturing and test evaluation	Processing flows. Volume 3
[NASA-SP-7056(01)] p 101 N86-24711	of a polarization sensitive reflector p 35 N86-30798	[NASA-CR-179766] p 17 N86-3250
Shuttle-launch triangular space station [NASA-CASE-MSC-20676-1] p 26 N86-24729	Deployable antenna reflector [SNIAS-861-422-117] p 81 N86-32537	PAYLOADS  Payload isolation and precision pointing for the 1990'
An overview of European space transportation	PARALLEL PROCESSING (COMPUTERS)	[AAS PAPER 85-010] p 36 A86-3178
systems	An improved multilevel optimization approach for the design of complex engineering systems	Weights assessment for orbit-on-demand vehicles [SAWE PAPER 1674] p 3 A86-3521
[NASA-TM-77683] p 13 N86-25398 Plan for space station polar-orbiting platform	[AIAA PAPER 86-0950] p 19 A86-38953	Future payload isolation and pointing system
[AD-A164405] p 14 N86-25403	PARAMETER IDENTIFICATION  Compensating structure and parameter optimization for	technology p 53 A86-4646
Theoretical study on the effect of the design of small (milli-Newton) thruster jets on molecular contamination for	attitude control of a flexible spacecraft	Canadarm - A review of its flights p 83 A86-4705 Conceptual design of pointing control systems for Spac
the space station	p 36 A86-31668 Effects of noise on modal parameters identified by the	Station gimballed payloads
[NASA-CR-177263] p 90 N86-26358	Eigensystem Realization Algorithm p 42 A86-39036	{AIAA PAPER 86-1986} p 53 A86-4741 PERFORMANCE PREDICTION
Growth capabilities of European retractable solar arrays space station power supplies	On-orbit parameter and disturbance identification for Space Station p 95 A86-39477	Dynamic verification of very large space structures
[ESA-CR(P)-2141] p 69 N86-26711	Identification of a damping matrix from model data	p 37 A86-3328
Cosmic dust collection with a sub-satellite tethered to a space station p 14 N86-27146	p 43 A86-39478 Structural parameter identification using modal response	Spacecraft structures design and verification p 23 A86-3328
Impacts of free-floating objects: Unique space station	data p 43 A86-39479	PERFORMANCE TESTS
experiments p 14 N86-27162  Dynamics of tethered constellations in Earth orbit	Simultaneous plant parameter and state estimation by a successive states method for flexible spacecraft	Optical Fabrication and Testing Workshop: Larg- Telescope Optics, Albuquerque, NM, March 4-8, 1985
p 61 N86-27650	attitude control p 48 A86-40769	Proceedings
Proceedings of the 2nd Annual Conference on NASA/University Advanced Space Design Program	Identification of Space Station dynamics p 49 A86-42965	[SPIE-542] p 92 A86-3240 A long-life 50 lbf H2/O2 thruster for Space Statio
[NASA-TM-89399] p 104 N86-29888	Effects of noise on ERA-identified modal parameters	auxiliary propulsion
Trajectory determinations and collection of micrometeoroids on the space station. Report of the	Eigensystem Realization Algorithm [AAS PAPER 85-422] p 52 A86-43222	[AIAA PAPER 86-1404] p 87 A86-4261 A proven 25-lbF H2/O2 thruster for Space Statio
Workshop on Micrometeorite Capture Experiments	An Eigensystem Realization Algorithm in Frequency	auxiliary propulsion
[NASA-CR-177303] p 104 N86-30584 Space station p 16 N86-30602	Domain for modal parameter identification [AIAA PAPER 86-2048] p 54 A86-47431	[AIAA PAPER 86-1560] p 87 A86-4271: Zero-G simulation verifies EVA servicing of space statio
Development of a simulation code for a latent heat	A square root method for the identification of large space	modules
thermal energy storage system in a space station [DE86-010070] p 70 N86-31113	structures [AIAA PAPER 86-2049] p 54 A86-47432	[AIAA PAPER 86-2312] p 99 A86-4694 Use of MoS2 applied by Physical Vapor Deposition (PVD
Vibration and structureborne noise in space station	Design of dynamic output feedback controllers with	on space mechanisms
[NASA-CR-177146] p 64 N86-31336 Orbital transfer vehicle launch operations study.	parameter variation insensitivity [AIAA PAPER 86-2050] p 54 A86-47433	[SNIAS-861-440-101] p 80 N86-3163 PERSONNEL
Processing flows. Volume 3	Control effectiveness characterization for state	A proposed design for an interim space rescue ferr
[NASA-CR-179766] p 17 N86-32505 DRBITAL SPACE TESTS	estimation and control on a highly flexible grid [AIAA PAPER 86-2142] p 55 A86-47454	vehicle [AD-A164039] p 101 N86-2474
Dynamic verification of very large space structures	Key design parameters for a very low gravity in-orbit	PERTURBATION THEORY
p 37 A86-33285 DRTHOGONALITY	facility orbital platforms [MATRA-EPT/DT/VT068/098] p 58 N86-22631	On-orbit parameter and disturbance identification for Space Station p 95 A86-3947
An orthogonal decomposition approach to modal	Mathematical correlation of modal parameter	Singular perturbation methods for discrete time
synthesis p 39 A86-36216 DUTGASSING	identification methods via system realization theory [NASA-TM-87720] p 59 N86-25019	systems p 48 A86-4285 An asymptotic perturbation method for nonlinear optima
The AFML/Lockheed test method for characterizing	[NASA-TM-87720] p 59 N86-25019 Theoretical and experimental investigations of sensor	control problems
material outgassing and deposition kinetics [AIAA PAPER 86-1279] p 74 A86-49595	location for optimal aeroelastic system state estimation	[AAS PAPER 85-364] p 51 A86-4321 PHASED ARRAYS
DXIDATION	[NASA-CR-177115] p 62 N86-29272 PARAMETERIZATION	A distributed array antenna system p 68 A86-5028
Oxidation protecting coatings for polymers [NASA-CASE-LEW-14072-3] p 75 N86-26434	Neumann series approach to random vibrations	Satellite voice broadcast system study, volume 2 [NASA-CR-174905] p 68 N86-2487
Effects of the low Earth orbital environment on	p 43 A86-39481 PARITY	Proceedings of the 1985 Antenna Application
spacecraft materials p 77 N86-30595  DXIDE FILMS	Generalized parity relations for large space structures	Symposium, Volume 2 [AD-A165535] p 103 N86-2752
Oxidation protecting coatings for polymers	with uncertain parameters [NASA-CR-176762] p 34 N86-24730	PHOTOVOLTAIC CELLS
[NASA-CASE-LEW-14072-3] p 75 N86-26434 DXYGEN ATOMS	PARTICLE MOTION	Design considerations for large photovoltaic system [DE86-002125] p 68 N86-2305
Reaction of high-velocity atomic oxygen with carbon	Motion trajectories of particles inside and outside an	Dynamic characteristics of power-tower space station
p 71 A86-32977 Protecting spacecraft from atomic oxygen	orbiting Space Shuttle p 93 A86-34574  PARTICLE SIZE DISTRIBUTION	with 15-foot truss bays [NASA-TM-87684] p 60 N86-2635
p 67 A86-45706	A new instrument to measure charged and neutral	Space station propulsion technology
Development of composite tube protective coatings [NASA-CR-178116] p 76 N86-29989	cometary dust particles at low and high impact velocities p 70 N86-30590	[NASA-CR-178897] p 90 N86-3164 PIEZOELECTRIC CERAMICS
Effects of the low Earth orbital environment on	PARTICLE TRAJECTORIES	Cosmic dust detection with large surface
spacecraft materials p 77 N86-30595	Trajectory determinations and collection of	piezoceramics p 16 N86-3060 PIEZOELECTRIC TRANSDUCERS
Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator	micrometeoroids on the space station. Report of the Workshop on Micrometeorite Capture Experiments	Cosmic dust detection with large surface
[NASA-TM-88839] p 80 N86-31634	[NASA-CR-177303] p 104 N86-30584	piezoceramics p 16 N86-3060

PIEZOELECTRICITY	POLYIMIDES	Attitude control of spacecraft: An overview of recent
Experimental verification of distributed piezoelectric	Oxidation protecting coatings for polymers	developments and research
actuators for use in precision space structures	[NASA-CASE-LEW-14072-3] p 75 N86-26434	[NLR-MP-85055-U] p 64 N86-31636
[AIAA PAPER 86-0878] p 19 A86-38813	Feasibility study of a discrete bearing/roller drive rotary	Preparing for the future: The ESA technological research
PILOT PERFORMANCE	joint for the space station	and development program 1986-1988
Aerospace Behavioral Engineering Technology	[NASA-TM-88800] , p 27 N86-30206	[ESA-SP-1079] p 80 N86-32347
Conference, 4th, Long Beach, CA, October 14-17, 1985,	POLYMER MATRIX COMPOSITES	PROJECT MANAGEMENT
Proceedings	Radiation effects on high performance polymers	The U.S. civil space program. A Review of the major
[SAE P-168] p 93 A86-35426	[NASA-CR-177191] p 76 N86-28195	issues Report of an AIAA Workshop, Alexandria, VA, July 22, 23, 1986 Book p 99 A86-47648
A survey of handling qualities criteria and their	Dynamic mechanical analysis as an aid to the	Technology and test p 15 N86-28420
applications to high performance aircraft	characterization of composite materials	PROJECT PLANNING
[NASA-CR-179654] p 77 N86-30738	p 77 N86-30763	Status of ESA's planning for the Space Station
PIPELINING (COMPUTERS)  Emulating structural motion by array processors	POLYMERIC FILMS	p 8 A86-44530
[AIAA PAPER 86-1988] p 56 A86-47510	Analyses of spacecraft polymeric materials	PROPELLANT TANKS
PIPES (TUBES)	p 73 A86-41750	Orbital consumables resupply requirements impact on
Continuous forming of thin-walled CFRP pipes for	POLYMERS	the evolution of OSCRS
large-space structure p 72 A86-40371	Oxidation protecting coatings for polymers	[AIAA PAPER 86-1603] p 96 A86-42743
The Collapsible Tube Mast (CTM) solar arrays,	[NASA-CASE-LEW-14072-3] p 75 N86-26434	PROPELLANT TESTS
spacecraft antennas p 27 N86-27365	POSITION SENSING	Space Station propulsion test bed - A complete
Development of composite tube protective coatings	On-orbit manipulators - Sensory and control	system
[NASA-CR-178116] p 76 N86-29989	approaches	[AIAA PAPER 86-1402] p 87 A86-42615
Dimensional stability of CFRP tubes for space	[AIAA PAPER 86-2185] p 83 A86-47467	Plasma thruster development: Magnetoplasmadynamic
structures p 35 N86-30775	A laboratory robot for space application research	propulsion, status and basic problems
PLANETARY BASES	[AIAA PAPER 86-2186] p 83 A86-47468	[AD-A165945] p 90 N86-28991
Mars missions and bases - A recent look	An adaptive vision-based manipulator control scheme	PROPELLANT TRANSFER
p 2 A86-32548	[AIAA PAPER 86-2187] p 83 A86-47469	Space platform expendables resupply concept definition
PLANETOLOGY	POSITIVE FEEDBACK	study
Impacts of free-floating objects: Unique space station	Robust multivariable control of large space structures	[NASA-CR-178819] p 13 N86-24732
experiments p 14 N86-27162	using positivity	Space platform expendables resupply concept definition
PLASMA ACCELERATORS	[AIAA PAPER 86-2125] p 57 A86-47925	study. Volume 1: Executive summary
Plasma thruster development: Magnetoplasmadynamic	POSTFLIGHT ANALYSIS	[NASA-CR-178820] p 13 N86-24733
propulsion, status and basic problems	Evaluation of solar array flight experiment response	Space platform expendables resupply concept definition
[AD-A165945] p 90 N86-28991	during flight for extension/retraction phase	study, volume 2
PLASMA COOLING	[NASA-TM-86551] p 29 N86-31606	[NASA-CR-178821] p 13 N86-24734
Plasma thruster development: Magnetoplasmadynamic	POTTING COMPOUNDS	Space platform expendables resupply concept definition
propulsion, status and basic problems	High voltage potting for the Faint Object Camera	study. Volume 3: Work breakdown structure and work
[AD-A165945] p 90 N86-28991	(FOC) p 74 N86-22619	breakdown structure dictionary [NASA-CR-178822] p 13 N86-24735
PLASMA INTERACTIONS	POWER CONDITIONING	PROPULSION SYSTEM CONFIGURATIONS
Effect of an oxygen plasma on the physical and chemical	Charge accumulation and arc discharges on spacecraft	Propulsion system concept assessment and technology
properties of several fluids for the liquid droplet radiator	materials and components	requirements for Space Station p 86 A86-34972
[NASA-TM-88839] p 80 N86-31634	[AD-A166216] p 70 N86-29893	Life Cycle Cost methodology for space station propulsion
PLASMAS (PHYSICS)	POWER CONVERTERS	system
Design, fabricate and test Spacecraft Automatic Active	Dynamic power - A Key to the promise of space	[AIAA PAPER 86-1405] p 87 A86-42618
Discharge System (SAADS)	p 86 A86-34994	• • • • • • • • • • • • • • • • • • • •
[AD-A166559] p 70 N86-30802	PREDICTION ANALYSIS TECHNIQUES	Monopropellant hydrazine systems for space station
PLATFORMS On the dynamics of beam time structural members during	A survey of handling qualities criteria and their	applications [AIAA PAPER 86-1562] p 88 A86-42715
On the dynamics of beam type structural members during	applications to high performance aircraft	• • • • • • • • • • • • • • • • • • • •
deployment of space platforms [AAS PAPER 85-392] p 50 A86-43214	[NASA-CR-179654] p 77 N86-30738 Damping of composites p 78 N86-30764	Preliminary evaluation of a reaction control system for
POINTING CONTROL SYSTEMS		a Space Station
Robust beam-pointing and attitude control of a flexible	PREDICTIONS Satellite voice broadcast. Volume 1: Executive	[AIAA PAPER 86-2152] p 89 A86-47460
spacecraft p 36 A86-31665	summary	Space station propulsion technology
Payload isolation and precision pointing for the 1990's	[NASA-CR-175016] p 13 N86-24875	[NASA-CR-178897] p 90 N86-31647
[AAS PAPER 85-010] p 36 A86-31781	Communication Platform Payload Definition (CPPD)	PROPULSION SYSTEM PERFORMANCE
The Galileo scan platform pointing control system - A	study. Volume 1: Executive summary	NASA electrothermal auxiliary propulsion technology
modern control theoretic viewpoint	[NASA-CR-174928] p 22 N86-27403	[AIAA PAPER 86-1703] p 88 A86-42799
[AAS PAPER 85-044] p 36 A86-31795	Communication Platform Payload Definition (CPPD)	PROTECTIVE COATINGS
· · · · · · · · · · · · · · · · · · ·	study. Volume 2: Technical report	Protecting spacecraft from atomic oxygen
Robust control of a flexible non-symmetrical	[NASA-CR-174929] p 22 N86-27404	p 67 A86-45706
spacecraft p 47 A86-39569	Communication Platform Payload Definition (CPPD)	Oxidation protecting coatings for polymers
Integrated analysis tools for trade studies of spacecraft	study. Volume 3: Addendum	[NASA-CASE-LEW-14072-3] p 75 N86-26434
controller and sensor locations [AIAA PAPER 86-1192] p 20 A86-40613	[NASA-CR-174930] p 22 N86-27405	Coatings against fretting space applications
· · · · · · · · · · · · · · · · · · ·	PRESIDENTIAL REPORTS	p 76 N86-27377
Galileo inflight friction identification for the scan platform	Pioneering the space frontier p 4 A86-38100	Surface-treated titanium alloy gears for space
control loop	PRESTRESSING	mechanisms space applications p 76 N86-27378
[AAS PAPER 85-383] p 97 A86-43274	Preload modeling, analysis, and optimal design	Development of composite tube protective coatings
Future payload isolation and pointing system	techniques for beam/rod/cable element structures	[NASA-CR-178116] p 76 N86-29989
technology p 53 A86-46464	p 25 A86-41742	Feasibility study of a discrete bearing/roller drive rotary
Conceptual design of pointing control systems for Space	Analysis of a single-fold deployable truss beam	joint for the space station
Station gimballed payloads	preloaded by extension of selected face diagonal	[NASA-TM-88800] p 27 N86-30206
[AIAA PAPER 86-1986] p 53 A86-47411	members	PROTECTORS
Rapid torque-limited line-of-sight pointing of SCOLE	[NASA-TM-87673] p 33 N86-23623	Protective telescoping shield for solar concentrator
(Spacecraft Control Laboratory Experiment)	PRINTED CIRCUITS  Advanced Brinted Wiring Roard (PWR) materials for	[NASA-CASE-NPO-16236-1] p 103 N86-27706
configuration	Advanced Printed Wiring Board (PWB) materials for	PULSES
[AIAA PAPER 86-1991] p 54 A86-47414	surface mounted devices in aerospace applications p 74 N86-22617	Behavior of very large short pulse antennas. Revision
Dynamics of a deformable pointing spacecraft by Kane's		1
method, and telescope's image-stability evaluation	Multilayer printed circuit board characterization by thermal analysis p 33 N86-22618	[DE86-004180] p 68 N86-25680
[AIAA PAPER 86-2194] p 56 A86-47474	thermal analysis p 33 N86-22618 PROBABILITY THEORY	
Giotto despin mechanism subsystem: General loop	Reliability models applicable to space telescope solar	^
design and pointing aspects flexible spacecraft	array assembly system p 21 N86-24541	Q
p 60 N86-27361	PROCUREMENT POLICY	
Mechanisms developed in the French space industry	Data for selection of space materials	QUADRATIC PROGRAMMING
spacecraft antennas p 103 N86-27394	[ESA-PSS-01-701-ISSUE-1] p 81 N86-32584	In search of the optimal quadratic regulator
POLAR ORBITS	PRODUCT DEVELOPMENT	p 43 A86-39484
Mission requirements for coorbiting and polar platforms	European space platform developments	
- A critical survey p 4 A86-37872	[DGLR PAPER 85-123] p 3 A86-35173	R
Viewing the earth from Space - Towards the Space	B 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1	

[DGLR PAPER 85-123] p 3 A86-35173 Development of an Advanced Trapezcidal Axially Grooved (ATAG) heat pipe --- for Space Station [AIAA PAPER 86-1342] p 31 A86-39941 Space mechanisms development in the ESA technological research program p 103 N86-27397 Design and development of the Advanced Rigid Array (ARA) solar panel --- composite structures

(ARA) solar panel --- composite structures
p 70 N86-30796

## RADAR REFLECTORS

A study of 35-ghz radar-assisted orbital maneuvering vehicle/space telescope docking p 101 N86-24537 RADAR TARGETS

A study of 35-ghz radar-assisted orbital maneuvering vehicle/space telescope docking p 101 N86-24537

POLITICS

Station polar platform

and planning [AIAA PAPER 86-2178]

Viewing the earth from Space - Towards the Space

Space Station polar orbiting platform - Mission analysis

The changing face of international space cooperation
- One view of NASA p 8 A86-44405

p 9 A86-45642

SUBJECT INDEX
RADIANT HEATING
Thermally-induced vibration and stability of booms with open cross section caused by unidirectional radian
heating p 35 A86-31024
RADIATION DAMAGE  Space environment effects on spacecraft surface
materials p 71 A86-32406
Status of critical issues in the area of spacecraf charging p 67 A86-47336
charging p 67 A86-47336  RADIATION EFFECTS
Radiation effects on high performance polymers
[NASA-CR-177191] p 76 N86-28195 RADIATION PRESSURE
Space reflector supported by radiation pressure for
telecommunication p 30 A86-33942  RADIATIVE HEAT TRANSFER
Some problems related to the thermally induced
deformations of large space structures p 30 A86-36673
RADIATIVE TRANSFER
Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599
[AIAA PAPER 86-1355] p 32 A86-49599  RADIO ASTRONOMY EXPLORER SATELLITE
Flight results from the gravity-gradient-controlled RAE-1
satellite [AIAA PAPER 86-2140] p 11 A86-47453
RADIO COMMUNICATION
SPACECOM '85; Space and Radiocommunications Symposium, 5th, Paris and Le Bourget, France, June 5-7
1985, Speakers' Papers p 98 A86-43701
RADIO FREQUENCIES  COMLINK proposal for future missions of tethered
satellite p 69 N86-27658
RADIO TRANSMISSION Satellite voice broadcase system study. Volume 1
Executive summary
[NASA-CR-174904] p 68 N86-24878  RADIOMETERS
Ultraviolet radiometers p 75 N86-22626
RADIOMETRIC RESOLUTION
High resolution remote sensing missions of a tethered satellite p 15 N86-28424
RANDOM VIBRATION
Neumann series approach to random vibrations p 43 A86-39481
Nonlinear response - A time domain approach with
applications to acoustic fatigue, spacecraft and composite materials
[AIAA PAPER 86-1934] p 52 A86-45423
RANGEFINDING A study of 35-ghz radar-assisted orbital maneuvering
vehicle/space telescope docking p 101 N86-24537
PANKINE CYCLE  Dynamic power - A Key to the promise of space
p 86 A86-34994
Machine vision and the OMV p 100 N86-24536
RAYLEIGH DISTRIBUTION
Spline-based Rayleigh-Ritz methods for the approximation of the natural modes of vibration for flexible
beams with tip bodies p 48 A86-40843 REACTION CONTROL
Preliminary evaluation of a reaction control system fo
a Space Station [AIAA PAPER 86-2152] p 89 A86-47460
REACTION KINETICS
Effects of the low Earth orbital environment or spacecraft materials p 77 N86-3059
REAL TIME OPERATION
Emulating structural motion by array processors [AIAA PAPER 86-1988] p 56 A86-47510
RECIRCULATIVE FLUID FLOW
Fluid recirculation, deployment and retraction of an expandable pulse power radiator for spacecraft power
supplies
[AIAA PAPER 86-1322] p 25 A86-39923 RECTANGULAR PANELS
Design and development of the Advanced Rigid Arra
(ARA) solar panel composite structures

RECURSIVE FUNCTIONS

ecursive lattice fitters

[AIAA PAPER 86-1718]

facility --- orbital platforms

[MATRA-EPT/DT/VT068/098]

INASA-CR-1772701

REDUCED GRAVITY

modelling laws

-- in space

Adaptive control of large space structures using

Verification of large space structures using scale

Key design parameters for a very low gravity in-orbit

Experiment manipulators for automatic sample handling

Analysis and modeling of fluid transfer in orbit

p 70 N86-30796

p 60 N86-27401

p 32 A86-42809

p 53 A86-47088

p 58 N86-22631

p 84 N86-27386

[NASA-CR-179717]

[NASA-CR-178819]

[NASA-CR-178820]

study. Volume 1: Executive summary

REMOTE HANDLING

study

```
Applications of Tethers in Space: Workshop
 proceedings, volume 2
[NASA-CP-2422-VOL-2]
                                                             study, volume 2
                                   p 103 N86-27644
                                                             [NASA-CR-178821]
REDUCED ORDER FILTERS
   Issues of order reduction in active control system
  design
 [AIAA PAPER 86-2138]
                                     p 57 A86-47515
                                                             [NASA-CR-178822]
REDUNDANCY
   Reliability issues in active control of large flexible space
                                                             --- in space
  structures
 [NASA-CR-179758]
                                     p 65 N86-32512
REFLECTOR ANTENNAS
   Millimeter-wave range for the guick evaluation of large
  reflector antennas with complex feeds
                                     p 65 A86-30714
    Some electrical properties of C.F.R.P. reflector
                                     p 65 A86-31923
                                                             system
  antennas
    Inflatable, space-rigidized reflectors for mobile
                                     p 23 A86-33921
  missions
    Inflatable technology in orbit demonstration within the
                                     p 4 A86-37863
                                                             [NASA-TM-89399]
  European Space Agency programs
   Comparison of tension stabilized structures for large
                                                           REMOTE SENSING
  space antenna reflectors
  [AIAA PAPER 86-0876]
                                     p 25 A86-38881
    Spline-based distributed system identification with
                                     p 42 A86-39037
  application to large space antennas
    CFRP support structure for high stability reflector
                                                             satellite
                                     p 26 A86-49988
  antennas
    Space reflector supported by radiation pressure --- for
                                                             satellite applications
  telecommunication
                                     p.30 A86-33942
                                                             [NASA-CR-178154]
    Structural dynamic analysis of the Large Deployable
                                                           REMOTE SENSORS
  [AIAA PAPER 86-0004]
                                     p 42 A86-38951
                                                             [AD-A164405]
   Large space reflector technology on the Space
  Station
  [AIAA PAPER 86-2302]
                                     p 11 A86-49554
                                                             rendezvous and docking
    Proceedings of the 1985 Antenna Applications
                                                             [NLR-MP-85020-U]
  Symposium, Volume 2
                                                           RESCUE OPERATIONS
  [AD-A1655351
                                    p 103 N86-27525
   Integrated thermal-structural-electromagnetic design
                                                             mission
  optimization of large space antenna reflectors
                                                             [AIAA PAPER 86-1340]
                                     p 35 N86-28984
  NASA-TM-877131
REFUELING
    Space platform expendables resupply concept definition
  study. Volume 1: Executive summary
                                     p 13 N86-24733
 [NASA-CR-178820]
                                                             vehicle
                                                             [AD-A1640391
    Space platform expendables resupply concept definition
  [NASA-CR-1788211
                                     p 13 N86-24734
    Space platform expendables resupply concept definition
  study. Volume 3: Work breakdown structure and work
  breakdown structure dictionary
  [NASA-CR-178822]
                                     n 13 N86-24735
RECIII ATORS
   Stability of multiloop LQ regulators with nonlinearities.
     Regions of attraction. II - Regions of ultimate
                                     p 38 A86-36074
  boundedness
    In search of the optimal quadratic regulator
                                     p 43 A86-39484
    Linear regulator control of the hoop-column antenna ---
                                                             development
  deployable large space structure design
                                     p 45 A86-39498
    Multi-criterion approaches to optimization of linear
  regulators
  [AIAA PAPER 86-2198]
                                     p 56 A86-47478
REINFORCEMENT (STRUCTURES)
    Adequate fiber reinforced structural elements in load
  introduction area of fiber reinforced shells
                                     p 78 N86-30770
                                                             applications
RELAY SATELLITES
                                                             [AIAA PAPER 86-1185]
    Satellite voice broadcase system study. Volume 1:
  Executive summary
                                     p 68 N86-24878
  INASA-CR-1749041
RELIABILITY ANALYSIS
    Reliability models applicable to space telescope solar
                                     p 21 N86-24541
                                                             Station
  array assembly system
RELIABILITY ENGINEERING
                                                             satellites
    Reliability models applicable to space telescope solar
                                                             [AIAA PAPER 86-2333]
                                     p 21 N86-24541
  array assembly system
    Orbit Transfer Rocket Engine Technology Program:
                                                             twenty-first century
[AIAA PAPER 86-2300]
  Advanced engine study, task D.1/D.3
                                     p 90 N86-26369
  [NASA-CR-175084]
REMOTE CONTROL
                                                             Station
    Machine vision and the OMV
                                    p 100 N86-24536
                                                             [AIAA PAPER 86-2301]
    Control of a free-flying robot manipulator system
```

p 85 N86-33016

p 13 N86-24732

p 13 N86-24733

Space platform expendables resupply concept definition

Space platform expendables resupply concept definition

Preparing for the future: The ESA technological research	Experiments on the end-point control of a two-link robot	ROLLER BEARINGS
and development program 1986-1988	with elastic drives	Feasibility study of a discrete bearing/roller drive rotary
[ESA-SP-1079] p 80 N86-32347	[AIAA PAPER 86-1977] p 83 A86-47404	joint for the space station
RESEARCH FACILITIES	Design for a goal-oriented telerobotic system	[NASA-TM-88800] p 27 N86-30206
Shuttle Tethered Aerothermodynamics Research Facility	[AIAA PAPER 86-2090] p 83 A86-47440	ROTARY STABILITY
(STARFAC) instrumentation requirements	A laboratory robot for space application research	The effect of energy dissipation due to friction at the
p 34 N86-27652	[AIAA PAPER 86-2186] p 83 A86-47468	joint of a simple beam structure IAD-A1639751 p 58 N86-24739
RESIDUAL STRENGTH Assessing the effects of delaminations on the	Automation and robotics for Space Station in the	[AD-A163975] p 58 N86-24739  ROTATING BODIES
postbuckling strength of CRFP panels aircraft	twenty-first century	The investigation of tethered satellite system
structures p 79 N86-30781	[AIAA PAPER 86-2300] p 84 A86-49552	dynamics
RESIDUAL STRESS	Nonlinear dynamics and chaotic motions in feedback	[NASA-CR-178895] p 64 N86-31631
Non-destructive measurement of residual stresses	controlled elastic systems	ROTATION
p 30 A86-32933	[AD-A162385] p 84 N86-24294	A correction for continuous rotation in measurements
Thermal residual stresses in symmetric and unsymmetric	Modeling and control of a lightweight robot flexible	of the near field p 67 A86-46578
carbon fiber reinforced plastics: Some tentative ways of	spacecraft p 84 N86-27363	Feasibility study of a discrete bearing/roller drive rotary
evaluation p 77 N86-30762	Experiment manipulators for automatic sample handling	joint for the space station
RESIN MATRIX COMPOSITES	in space p 84 N86-27386	[NASA-TM-88800] p 27 N86-30206
Dynamic mechanical analysis as an aid to the	Control of a free-flying robot manipulator system [NASA-CR-179717] p 85 N86-33016	ROTORS
characterization of composite materials p 77 N86-30763		Dynamics of gyroelastic vehicles flexible spacecraft p 45 A86-39494
RESISTOJET ENGINES	Control loops with human operators in space operations.  Part 2: Robotics operations and manual control	p 45 760-33434
A 10,000 hour life multipropellant engine for Space	experiment	c
Station applications	[NLR-TR-84116-L-PT-2] p 85 N86-33024	S
[AIAA PAPER 86-1403] p 87 A86-42616	ROBOTS	
NASA electrothermal auxiliary propulsion technology	Robot spacecraft survivability using a decision tree for	SAFETY MANAGEMENT
[AIAA PAPER 86-1703] p 88 A86-42799	data processing p 81 A86-32550	Space safety and rescue 1984-1985
Theoretical study on the effect of the design of small	Mobile gantry robots for large structures in space	p 98 A86-44326 SAMPLING
(milli-Newton) thruster jets on molecular contamination for	p 81 A86-32929	Cosmic dust collection with a sub-satellite tethered to
the space station	State of the art in intelligent/brilliant robots	a space station p 14 N86-27146
[NASA-CR-177263] p 90 N86-26358  RESONANT FREQUENCIES	p 82 A86-43884	SAN MARCO SATELLITES
Space frame optimization subject to frequency	Personnel occupied woven envelope robot	Mass property control of a spin stabilized spacecraft
constraints	[NASA-CR-176832] p 14 N86-25401 Definition and testing of gears for space robotics	with restrictive mission and weight constraints
[AIAA PAPER 86-0877] p 40 A86-38812	space applications p 22 N86-27375	[SAWE PAPER 1668] p 38 A86-35212
Estimation of frequencies of vibration using lattices	Experiment manipulators for automatic sample handling	SANDWICH STRUCTURES
p 49 A86-42960	in space p 84 N86-27386	Thermal stability of sandwich reflectors spacecraft
Frequencies of longitudinal oscillations of tethered	Control of a free-flying robot manipulator system	antennas p 35 N86-30774
satellite systems	[NASA-CR-179717] p 85 N86-33016	Structural analysis, manufacturing and test evaluation
[AIAA PAPER 86-2274] p 57 A86-47942	ROBUSTNESS (MATHEMATICS)	of a polarization sensitive reflector p 35 N86-30798
RESONANT VIBRATION	Uniform damping control of spacecraft	SATELLITE ANTENNAS  Some electrical properties of C.F.R.P. reflector
Evaluation of solar array flight experiment response	p 36 A86-31664	antennas p 65 A86-31923
during flight for extension/retraction phase	A robust nonlinear attitude control law for space stations	Extension for ground-based testing for large space
[NASA-TM-86551] p 29 N86-31606	with flexible structural components p 46 A86-39500	structures p 37 A86-32944
RETRACTABLE EQUIPMENT Second European Space Mechanisms and Tribology	Robust control of a flexible non-symmetrical	Inflatable, space-rigidized reflectors for mobile
Symposium	spacecraft p 47 A86-39569	missions p 23 A86-33921
[ESA-SP-231] p 102 N86-27353	Decentralized control of sequentially assembled large space structures p 82 A86-42997	Deformation measurements on antennas under
The Extendable and Retractable Mast (ERM) flexible	Robust attitude and shape control of third generation	simulated outer space conditions using holographic
spacecraft p 27 N86-27364	spacecraft	interferometry -
A deployable and retractable strongback structure	[AAS PAPER 85-425] p 52 A86-43224	[DGLR PAPER 85-150] p 30 A86-35186
p 27 N86-27389	Modified LTR robust control for flexible structures	Electronic compensation for structural deformations of
Evaluation of solar array flight experiment response	[AIAA PAPER 86-2051] p 55 A86-47434	large space antennas
during flight for extension/retraction phase	Robust reduced-order control of flexible structures using	[AAS PAPER 85-395] p 20 A86-43216
[NASA-TM-86551] p 29 N86-31606	the optimal projection/maximum entropy design	Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration
REUSABLE LAUNCH VEHICLES	methodology	[AAS PAPER 85-365] p 51 A86-43220
Weights assessment for orbit-on-demand vehicles	[AIAA PAPER 86-2052] p 55 A86-47435	CFRP support structure for high stability reflector
[SAWE PAPER 1674] p 3 A86-35217 REUSABLE SPACECRAFT	A parametric examination of the stability robustness	antennas p 26 A86-49988
EURECA concept and its potential evolution within the	characteristics of two decoupled controllers designed for	Giotto despin mechanism subsystem: General loop
Space Station era	large space structure control [AIAA PAPER 86-2053] p 55 A86-47436	design and pointing aspects flexible spacecraft
[AAS PAPER 85-398] p 97 A86-43230	Tine domain design of robust controllers for LQG (Linear	p 60 N86-27361
Space platform design options - A comparison, for	Quadratic Gaussian); application to large space	The Ulysses mechanisms former International Solar
cost-effectiveness, of expendable, reusable and	structures	Polar Mission (ISPM) p 27 N86-27368
serviceable spacecraft p 8 A86-44531	[AD-A163635] p 59 N86-26074	The Olympus antenna deployment subsystem design
REVERSED FLOW	Reliability issues in active control of large flexible space	and testing spacecraft antennas p 27 N86-27392 Proceedings of the 1985 Antenna Applications
A long-life 50 lbf H2/O2 thruster for Space Station	structures	Symposium, Volume 2
auxiliary propulsion	[NASA-CR-179758] p 65 N86-32512	[AD-A165535] p 103 N86-27525
[AIAA PAPER 86-1404] p 87 A86-42617 RIBS (SUPPORTS)	ROCKET ENGINE DESIGN	Offset unfurlable antenna, phase 1 communication
Impact of automation on the design of carbon fiber	A 10,000 hour life multipropellant engine for Space Station applications	satellites
omega ribs satellite solar arrays	[AIAA PAPER 86-1403] p 87 A86-42616	[MBB-RX11] p 29 N86-32622
[SNIAS-861-422-101] p 76 N86-28633	Two-stage earth-to-orbit vehicles with series and parallel	SATELLITE ATTITUDE CONTROL
RIGID STRUCTURES	burn	Spacecraft attitude dynamics and control - A personal
Maneuvering of flexible spacecraft with application to	[AIAA PAPER 86-1413] p 87 A86-42623	perspective on early developments p 35 A86-31651
SCOLE Spacecraft Control Laboratory Experiment	Orbit Transfer Rocket Engine Technology Program:	Robust beam-pointing and attitude control of a flexible
p 47 A86-39508	Advanced engine study, task D.1/D.3	spacecraft p 36 A86-31665 Damping synthesis for a spacecraft using substructure
Damping characteristics of metal matrix composites	[NASA-CR-175084] p 90 N86-26369	and component data p 37 A86-32940
[AD-A163569] p 75 N86-24762	ROCKET EXHAUST	Flexibility control of solar battery arrays of spacecrafts
RITZ AVERAGING METHOD Spline-based Rayleigh-Ritz methods for the	Alternative docking concepts for application to the Space	p 85 A86-33203
approximation of the natural modes of vibration for flexible	Station p 92 A86-32912 ROCKET PROPELLANTS	Controller design of flexible spacecraft attitude control
beams with tip bodies p 48 A86-40843	Orbital consumables resupply requirements impact on	p 37 A86-33204
ROBOTICS	the evolution of OSCRS	Robust control of a flexible non-symmetrical
Artificial intelligence - NASA robotics for Space	[AIAA PAPER 86-1603] p 96 A86-42743	spacecraft p 47 A86-39569
Station p 17 A86-32538	ROCKET TEST FACILITIES	Simultaneous plant parameter and state estimation by
Evolutionary paths for artificial intelligence technologies	Space Station propulsion test bed - A complete	a successive states method for flexible spacecraft attitude control p 48 A86-40769
in operator interactions with space station robots	system	A nonlinear attitude control law for a satellite with flexible
p 81 A86-34971	[AIAA PAPER 86-1402] p 87 A86-42615	appendages p 49 A86-42989
Space telerobotics - A few more hurdles p 81 A86-37047	ROCKET THRUST	On-off attitude control of flexible satellites
Robotic nondestructive inspection of aerospace	Monopropellant hydrazine systems for space station	p 53 A86-46470
structures p 95 A86-40509	applications [AIAA PAPER 86-1562] p 88 A86-42715	Attitude control system synthesis for the Hoop/Column
State of the art in intelligent/brilliant robots	Nutational stability of a spinning spacecraft with internal	antenna using the LQG/LTR method loop transfer
p 82 A86-43884	mass motion and axial thrust	recovery
Robotics in space p 82 A86-44550	[AIAA PAPER 86-2271] p 57 A86-47940	[AIAA PAPER 86-2139] p 55 A86-47452
•	•	

SOIL MOISTURE Some considerations of actuator dynamics in the attitude Zero-G simulation verifies EVA servicing of space station control of a flexible beam modules A design study for the use of a multiple aperture [AIAA PAPER 86-2124] p 57 A86-47955 [AIAA PAPER 86-2312] p 99 A86-46942 deployable antenna for soil moisture remote sensing Space platform expendables resupply concept definition Attitude control of spacecraft: An overview of recent satellite applications [NASA-CR-178154] p 16 N86-30933 developments and research p 13 N86-24732 [NASA-CR-178819] [NLR-MP-85055-U] p 64 N86-31636 **SOLAR ARRAYS** Space platform expendables resupply concept definition Flexibility control of solar battery arrays of spacecrafts SATELLITE CONTROL study. Volume 1: Executive summary Structural control requirements for the 1990s --- for p 85 A86-33203 [NASA-CR-178820] p 13 N86-24733 Nonlinear deformation analysis aerospace systems of the Olympus Space platform expendables resupply concept definition [AAS PAPER 85-420] p 21 A86-43756 Astromast Flight results from the gravity-gradient-controlled RAE-1 Modeling and simulation of spacecraft solar array p 13 N86-24734 [NASA-CR-178821] eatallita Space platform expendables resupply concept definition [AIAA PAPER 86-2140] p 11 A86-47453 [AIAA PAPER 86-2122] p 84 A86-47923 study. Volume 3: Work breakdown structure and work The detumbling of an axially symmetric satellite with Design considerations for large photovoltaic systems breakdown structure dictionary an orbital maneuvering vehicle by nonlinear feedback (DE86-0021251 p 68 N86-23053 [NASA-CR-178822] p 13 N86-24735 Alternative module configurations for advanced solar SHAPE CONTROL [AD-A163989] p 58 N86-24717 arrays on low orbit and extended lifetime missions (AMOC Dynamic characteristics of statically determinate Analytical investigation of the dynamics of tethered p 48 A86-41741 space-truss platforms [ESA-CR(P)-2129] constellations in Earth orbit, phase 2 p 89 N86-24025 Robust attitude and shape control of third generation p 61 N86-28114 INASA-CR-1788461 Reliability models applicable to space telescope solar spacecraft Tether fundamentals p 104 N86-28410 [AAS PAPER 85-425] p 52 A86-43224 array assembly system p 21 N86-24541 Growth capabilities of European retractable solar arrays A review of tether induced dynamical features Issues of order reduction in active control system p 61 N86-28411 space station power supplies [AIAA PAPER 86-2138] p 57 A86-47515 SATELLITE DESIGN [ESA-CR(P)-2141] p 69 N86-26711 Synchronously deployable truss structure Space Station Advanced Development Program Features of the solar array drive mechanism for the p 27 N86-25789 (NASA-CASE-LAR-13117-11 p 102 N86-27356 p 2 A86-32543 Space Telescope Design and test of a linear thermal actuator --- space Historical development of solar array drive mechanisms Communications platform payload definition study, p 34 N86-27380 by British Aerospace p 102 N86-27357 evecutive summan Aspects of active isolation as applied to a satellite Solar array deployment simulation using ADAMS INASA-CR-1749851 p 14 N86-27407 p 60 N86-27360 structure with shape precision payload software p 22 N86-28409 Tethered satellite design The Extendable and Retractable Mast (ERM) --- flexible p 63 N86-30653 SATELLITE DRAG SHEAR STRESS spacecraft p 27 N86-27364 Mass property control of a spin stabilized spacecraft Analytical and experimental results of advanced The Collapsible Tube Mast (CTM) --- solar arrays, with restrictive mission and weight constraints composite stiffened panels under combined loads p 27 N86-27365 p 38 A86-35212 spacecraft antennas (SAWE PAPER 1668) p 78 N86-30768 Speed regulators for space appendages deployment ---Quasi-analytical solutions for the dynamics of a class SHELL THEORY former International Solar Polar Mission (ISPM) of tethered satellites with Danby's aerodynamical drag Hand calculation method for buckling of composite shell p 84 N86-27369 p 52 A86-46383 p 28 N86-30769 structures Impact of automation on the design of carbon fiber SATELLITE NETWORKS SHORT CIRCUITS omega ribs --- satellite solar arrays Satellite voice broadcast system study, volume 2 Design, fabricate and test Spacecraft Automatic Active [SNIAS-861-422-101] p 76 N86-28633 [NASA-CR-174905] p 68 N86-24877 Discharge System (SAADS) Design and development of the Advanced Rigid Array SATELLITE OBSERVATION [AD-A166559] p 70 N86-30802 (ARA) solar panel --- composite structures High resolution remote sensing missions of a tethered SHUTTLE PALLET SATELLITES p 70 N86-30796 p 15 N86-28424 satellite Strength of carbon fiber composite/titanium bonded NASA/American Society for Engineering Education joints as used for SPAS-type structures A design study for the use of a multiple aperture (ASEE) Summer Faculty Fellowship Program, 1985 --- Space Stations and Their Environments p 79 N86-30794 deployable antenna for soil moisture remote sensing SIGNAL ENCODING p 105 N86-31409 satellite applications [NASA-CR-171931] p 16 N86-30933 System engineering study of electrodynamic tether as [NASA-CR-1781541 An IBM PC-based math model for space station solar SATELLITE ORBITS a spaceborne generator and radiator of electromagnetic array simulation p 23 N86-31418 waves in the ULF/ELF frequency band SDI orbital system timing constraints Evaluation of solar array flight experiment response [NASA-CR-176749] p 68 N86-25689 p 92 A86-32552 during flight for extension/retraction phase Satellite debris - Recent measurements SIGNAL PROCESSING [NASA-TM-86551] p 29 N86-31606 p 7 A86-41747 A 3-component laser-Doppler velocimeter data High power rigid solar array [SNIAS-861-440-110] acquisition and reduction system p 70 N86-31997 SATELLITE ROTATION [NASA-CR-176929] p 104 N86-30135 SOLAR BLANKETS Simultaneous plant parameter and state estimation by a successive states method --- for flexible spacecraft SIGNAL TO NOISE RATIOS High Power Solar Array (HPSA) study --- shuttle launched Effects of noise on ERA-identified modal parameters p 48 A86-40769 attitude control mission SATELLITE SOLAR ENERGY CONVERSION Eigensystem Realization Algorithm [FOK-TR-R-85-068] p 71 N86-31998 p 52 A86-43222 Modeling and simulation of spacecraft solar array **LAAS PAPER 85-4221** SOLAR CELLS SIGNAL TRANSMISSION deployment Alternative module configurations for advanced solar [AIAA PAPER 86-2122] System engineering study of electrodynamic tether as p 84 A86-47923 arrays on low orbit and extended lifetime missions (AMOC SATELLITE SOLAR POWER STATIONS a spaceborne generator and radiator of electromagnetic waves in the ULF/ELF frequency band (ÉSA-CR(P)-21291 Operation and control of space-based solar energy p 89 N86-24025 power plants with CCGT using helium as a working medium [NASA-CR-176749] p 68 N86-25689 SOLAR COLLECTORS --- closed cycle gas turbine [ASME PAPER 86-GT-152] SIMILI ATION Protective telescoping shield for solar concentrator [NASA-CASE-NPO-16236-1] p 103 N86-27706 p 89 A86-48206 The system integration and verification testing of an p 103 N86-27706 SATELLITE SURFACES orbital maneuvering vehicle for an air bearing floor SOLAR ENERGY CONVERSION p 100 N86-24217 [NASA-CR-178350] Space environment effects on spacecraft surface Conversion of solar energy p 86 A86-36668 An IBM PC-based math model for space station solar materials p 71 A86-32406 Solar energy conversion systems for power plants in p 23 N86-31418 SATELLITE TRANSMISSION space - A comparative analysis and prospects for SINGULARITY (MATHEMATICS) p 66 A86-36671 Geostationary platform - An application of the Space p 5 A86-40502 A singular-solution approach for controlling the nonlinear Station SOLAR GENERATORS Satellite voice broadcase system study. Volume 1: response of a continuum model of a large space Hybrid deployable/erectable solar dynamic box truss Executive summary structure system [AIAA PAPER 86-0841] [NASA-CR-174904] p 68 N86-24878 p 41 A86-38889 IAIAA PAPER 86-09551 p 25 A86-38883 Communications platform payload definition study SIZE DETERMINATION SOLAR POWER SATELLITES [NASA-CR-174986] detection with surface p 14 N86-27402 Cosmic dust large Solar energy conversion systems for power plants in p 16 N86-30604 SCALE (RATIO) piezoceramics space - A comparative analysis and prospects for development p 66 A86-36671 Verification of large space structures using scale development Equations for the vibration of a slewing flexible nodelling laws p 53 A86-47088 Method of packaging and deployment of large SCALING LAWS spacecraft membranes in space [AIAA PAPER 86-0906] Verification of large beam-type space structures (ISAS-618) p 26 N86-23624 [AIAA PAPER 86-0860] p 24 A86-38809 A slewing control experiment for flexible structures SOLAR RADIATION SHIELDING A86-39509 p 47 SEALING. Long-term performance of thermal control coatings at Dynamics and control of slew maneuver of large flexible Sealing for long-term space application geosynchronous altitude p 92 A86-32909 [AIAA PAPER 86-1356] p 71 A86-39951 TAIAA PAPER 86-21921 p 56 A86-47472 Protective telescoping shield for solar concentrator [NASA-CASE-NPO-16236-1] p 103 N86-27706 SELENOLOGY

Dynamics and control of flexible spacecraft during and

Coatings against fretting --- space applications

p 62 N86-28983

p 76 N86-27377

p 10 A86-45767

SOLAR REFLECTORS

Long term tests of contaminated Optical Solar Reflectors

The degradation and contamination experiment flown

on the first European Communication Satellite ECS-1:

Preliminary results on contamination p 74 N86-22623

(OSRs) under combined environment --- spacecraft

after slewing maneuvers

The Space Settlement Papers

[NASA-CR-177027]

SLIDING FRICTION

SOCIAL FACTORS

Lunar bases and space activities of the 21st century

Technology challenges for the Columbus Programme

Neumann series approach to random vibrations

SERIES (MATHEMATICS)

SERVICE MODULES

p 91 A86-30113

p 43 A86-39481

p 74 N86-22622

p 4 A86-37862

Space environment simulation to test satellite thermal Long term tests of contaminated Optical Solar Reflectors SPACE INFRARED TELESCOPE FACILITY control coatings, volume 1 (OSRs) under combined environment --- spacecraft SIRTF and the Space Station --- Space InfraRed [ESA-TT-891-VOL-1] p 74 N86-22622 p 75 N86-22627 reflectors elescope Facility I AIAA PAPER 86-23531 Space environment simulation to test satellite thermal Ultraviolet radiometers p 75 N86-22626 p 12 A86-50266 control coatings. Volume 2, appendix 1: Detailed results SPACE LABORATORIES Space environment simulation to test satellite thermal of optical measurements made after the various stages Experiment manipulators for automatic sample handling control coatings, volume 1 of the first test p 84 N86-27386 [ESA-TT-891-VOL-1] p 75 N86-22627 [ESA-TT-891-VOL-2] Analytical investigation of the dynamics of tethered p 33 N86-22628 Space environment simulation to test satellite thermal Space environment simulation to test satellite thermal constellations in Earth orbit, phase 2 control coatings. Volume 2, appendix 1: Detailed results control coatings. Volume 2: Appendices 2, 3, and 4. Appendix 2: Detailed results of optical measurements p 65 N86-32513 [NASA-CR-178901] of optical measurements made after the various stages SPACE LAW of the first test made after the various stages of the second test. Appendix NASA finds the way toward building a Station fraught [ESA-TT-891-VOL-2] p 33 N86-22628 3: Summary of optical results obtained during the first with legal hurdles Space environment simulation to test satellite thermal test. Appendix 4: Summary of optical results obtained Expectations in space law - A peek into the future control coatings. Volume 2: Appendices 2, 3, and 4. Appendix 2: Detailed results of optical measurements during the second test p 96 A86-41982 p 33 N86-22629 [ESA-TT-891-VOL-3] Space stations: Legal aspects of scientific and made after the various stages of the second test. Appendix Speed regulators for space appendages deployment --commercial use in a framework of transatlantic Summary of optical results obtained during the first former International Solar Polar Mission (ISPM) cooperation; Proceedings of the International Colloquium, test. Appendix 4: Summary of optical results obtained p 84 N86-27369 Hamburg, West Germany, October 3, 4, 1984 during the second test SOLAR THERMAL ELECTRIC POWER PLANTS p 97 A86-43335 [ESA-TT-891-VOL-3] p 33 N86-22629 Solar energy conversion systems for power plants in American experiences and perspectives - International Vibration qualification at the David Florida Laboratory space - A comparative analysis and prospects for cooperation on a permanently manned Space Station p 63 N86-30687 p 66 A86-36671 --- spacecraft p 7 A86-43337 Holographic interferometry for distortion measurements SOLID LUBRICANTS The Space Settlement Papers p 10 A86-45767 Use of MoS2 applied by physical vapor deposition (PVD) p 23 N86-30776 Space Station evolution - The uncertainty principle on space mechanisms --- space applications ESABASE extension to spacecraft charging prevails p 11 A86-48373 p 76 N86-27379 [MATRA-CMT-TS101/RT/16.85] N86-32517 SPACE LOGISTICS SOLIDS SPACE ERECTABLE STRUCTURES Enabling technologies for transition to utilization of A simple nonlinear joint model ACCESS (Assembly Concept for Construction of space-based resources and operations p 85 N86-30234 p 93 A86-34992 INASA-TM-877491 Erectable Space Structure) - A Shuttle flight experiment SPACE ADAPTATION SYNDROME Space Station - An integrated approach to operational p 1 A86-32540 NASA/American Society for Engineering Education logistics support Extension for ground-based testing for large space (ASEE) Summer Faculty Fellowship Program, 1985 --p 37 A86-32944 AIAA PAPER 86-23211 p 10 A86-46947 Space Stations and Their Environments ESA-sponsored developments in the field of deployable SPACE MAINTENANCE p 105 N86-31409 [NASA-CR-171931] Maintainability planning for the Space Station masts --- for pushing out solar arrays and antennas SPACE BASES [AIAA PAPER 86-9754] p 91 A86-32095 p 24 A86-36029 Enabling technologies for transition to utilization of Zero-G simulation verifies EVA servicing of space station Construction and control of large space structures space-based resources and operations p 39 A86-37060 p 93 A86-34992 Inflatable technology in orbit demonstration within the [AIAA PAPER 86-2312] p 99 A86-46942 **SPACE CHARGE** European Space Agency programs p 4 A86-37863 Maintaining and servicing a space-based Orbital Transfer vehicle (OTV) at the Space Station Design, fabricate and test Spacecraft Automatic Active Hybrid deployable/erectable solar dynamic box truss Discharge System (SAADS) [AIAA PAPER 86-2332] p 10 A86-46955 (AD-A166559) p 70 N86-30802 Canadarm - A review of its flights [AIAA PAPER 86-0955] p 25 A86-38883 p 83 A86-47053 SPACE COLONIES p 100 N86-24536 Thermal analysis of the ACCESS space truss ---Machine vision and the OMV Lunar industralization and settlement - Birth of polyglobal Assembly Concept for Construction of Erectable Space Orbit Transfer Rocket Engine Technology Program: civilization p 32 A86-40516 p 1 A86-30180 Advanced engine study, task D.1/D.3 Structure comparative analysis of space Results of the ACCESS space construction Shuttle flight [NASA-CR-175084] p 90 N86-26369 p 5 A86-38168 Control of a free-flying robot manipulator system enterprises experiment Technology base for the future of space [AIAA PAPER 86-1186] p 6 A86-40593 INASA-CR-1797171 p 85 N86-33016 p 10 A86-45709 Control loops with human operators in space operations. Method of packaging and deployment of large The Space Settlement Papers Part 2: Robotics operations and manual control p 10 A86-45767 nembranes in space p 26 N86-23624 SPACE COMMERCIALIZATION experiment [ISAS-618] INLR-TR-84116-L-PT-21 p 85 N86-33024 EASCON '85: National space strategy - A progress Space Station Systems: A bibliography with indexes SPACE MANUFACTURING report; Proceedings of the Eighteenth Annual Electronics (supplement 1) [NASA-SP-7056(01)] p 101 N86-24711 Mobile gantry robots for large structures --- in space and Aerospace Systems Conference, Washington, DC, p 81 A86-32929 p 92 A86-32526 Space station systems: A bibliography with indexes October 28-30, 1985 manufacturing utilizing the U.S. Opportunities in Space Conference; Proceedings (supplement 2) directional of the Second Annual Space Business Conference. [NASA-SP-7056(02)] p 103 N86-28105 electrostatic accretion process p 102 N86-27300 SPACE MECHANICS A simple nonlinear joint model Washington, DC, October 30-November 1, 1985 [NASA-TM-87749] p 85 N86-30234 Dynamics of gyroelastic vehicles --flexible spacecraft p 93 A86-34110 SPACE EXPLORATION p 45 A86-39494 Commerical use of space - Status and prospects SPACE MISSIONS Mars missions and bases - A recent look p 6 A86-41154 A86-32548 Strategies to minimize Delta V costs of extraterrestrial D 2 Business in orbit - The commercial use of space Air and space travel - Tasks for the future resources p 1 A86-32536 p 96 A86-41978 Spacecraft technology requirements for future NASA A86-35518 р3 Contracts of and with private enterprises concerning the Pioneering the space frontier A86-38100 p 4 development, the construction, and the assembly of space [AIAA PAPER 86-1160] p.6 A86-40609 Real fantasy --- Russian book on cosmonautics and vehicles p 82 A86-43341 Planetary exploration through year 2000: An augmented p 95 space exploration A86-39981 The exploitation of space: Policy trends in the military program. Part two of a report by the Solar System Developing the final frontier: International cooperation and commercial uses of outer space --- Book Exploration Committee of the NASA Advisory Council in the peaceful uses of outer space --- Book p 7 A86-43650 p 15 N86-28970 p 96 A86-42236 SPACE COMMUNICATION SPACE NAVIGATION The Space Settlement Papers p 10 A86-45767 SPACECOM '85; Space and Radiocommunications The suitability of various spacecraft for future space Orbital maneuvering vehicle guidance, navigation and Symposium, 5th, Paris and Le Bourget, France, June 5-7, control applications missions 1985, Speakers' Papers p 98 A86-43701 [AAS PAPER 85-043] p 36 A86-31794 SPACE DEBRIS Planetary exploration through year 2000: An augmented SPACE OBSERVATIONS (FROM EARTH) program. Part two of a report by the Solar System Design for space debris protection p 18 A86-32910 Satellite debris - Recent measurements Exploration Committee of the NASA Advisory Council p 7 A86-41747 The impact of space debris on manned space p 15 N86-28970 [NASA-TM-89235] SPACE PLASMAS Proceedings of the 2nd Annual Conference on [AIAA PAPER 86-1178] p 96 A86-40588 Spontaneous radiation emitted by moving tethered ystems p 34 N86-28427 NASA/University Advanced Space Design Program systems Satellite debris - Recent measurements p 104 N86-29888 [NASA-TM-89399] p 7 A86-41747 SPACE PLATFORMS SPACE FLIGHT Power and thermal management concepts for free-flying The use of tethered satellites for the collection of cosmic The NASA Flight Demonstration Program p 86 A86-34990 platforms in the Space Station ERA dust and the sampling of man made orbital debris far from A86-32566 European space platform developments [DGLR PAPER 85-123] p the space station p 15 The suitability of various spacecraft for future space p 3 A86-35173 SPACE ENVIRONMENT SIMULATION applications missions p 65 A86-35194 Deformation measurements on Alternative space power systems antennas under INASA-TM-889861 p 15 N86-27409 Columbus - The European participation in international simulated outer space conditions using holographic SPACE INDUSTRIALIZATION space stations p 3 A86-37854 Lunar industralization and settlement - Birth of polyglobal IDGLB PAPER 85-1501 p 30 A86-35186 The Columbus preparatory programme supporting p 1 A86-30180 civilization Electrostatic charging and arc discharges on satellite technology of the European Space Agency Enabling technologies for transition to utilization of p 4 A86-37856 dielectrics simulated by electron beam space-based resources and operations [AIAA PAPER 86-1191] p 66 A86-40597 A payload for utilization of space platform in the field p 93 A86-34992 Material damping of simple structures in a simulated Technology base for the future of space of communication and earth observation

A86-45709

p 10

space environment

p 48 A86-41739

Mission requirements for coorbiting and polar platforms	SPACE SHUTTLE MISSION 61-B	Theoretical study on the effect of the design of small
- A critical survey p 4 A86-37872	Selections from Flug Revue und Flugweit International.	(milli-Newton) thruster jets on molecular contamination for
Transient dynamics during the extension of flexible	A. On the border of Time-hypersonic flight, B. NASA	the space station
members of space platforms p 46 A86-39499	programs pave the way for the hypersonic aircraft. C.	[NASA-CR-177263] p 90 N86-26358
Dynamic characteristics of statically determinate	Shuttle flight 61-B; construction in space. D. Faster than	Space station propulsion technology
space-truss platforms p 48 A86-41741	a bullet; hypersonic military aircraft	[NASA-CR-178897] p 90 N86-31647
Advanced propulsion for polar-orbiting and coorbiting	[NASA-TM-88418] p 26 N86-24652	SPACE STATIONS
free flyers	SPACE SHUTTLE ORBITERS	Maintainability planning for the Space Station
[AIAA PAPER 86-1564] p 88 A86-42716	Motion trajectories of particles inside and outside an	[AIAA PAPER 86-9754] p 91 A86-32095
Platform options for the Space Station program	orbiting Space Shuttle p 93 A86-34574	Artificial intelligence - NASA robotics for Space
[AAS PAPER 85-399] p 7 A86-43231	Dynamics and control characteristics for the WISP 300	Station p 17 A86-32538
Olympus, the spacecraft of the future	m dipole antenna/Shuttle configuration	Space Station Advanced Development Program
p 8 A86-43705	[AAS PAPER 85-365] p 51 A86-43220	p 2 A86-32543
•	Canadarm - A review of its flights p 83 A86-47053	Alternative docking concepts for application to the Space
Space platform design options - A comparison, for	SPACE SHUTTLE PAYLOADS	Station p 92 A86-32912
cost-effectiveness, of expendable, reusable and	ACCESS (Assembly Concept for Construction of	Space and society - Progress and promise; Proceedings
serviceable spacecraft p 8 A86-44531	Erectable Space Structure) - A Shuttle flight experiment	of the Twenty-second Space Congress, Cocoa Beach, FL,
Columbus I; Proceedings of the First Columbus	p 1 A86-32540	April 23-26, 1985 p 93 A86-34951
Workshop Utilization Aspects, Capri, Italy, June 17-21,	The NASA Flight Demonstration Program	Initiation of the next step - The acquisition of a Space
1985 p 98 A86-45626	p 2 A86-32566	Station Program p 2 A86-34962
Technology challenges for the Columbus Programme	More space in space p 3 A86-35319	Propulsion system concept assessment and technology
p 9 A86-45629	Shuttle-launch triangular space station	requirements for Space Station p 86 A86-34972
Viewing the earth from Space - Towards the Space	[NASA-CASE-MSC-20676-1] p 26 N86-24729	Truss structure advanced development for Space
Station polar platform p 9 A86-45642	Cosmic dust collection with a sub-satellite tethered to	Station p 24 A86-34987
French views on Columbus - Preparation of its utilization	a space station p 14 N86-27146	Power and thermal management concepts for free-flying
relations with other programs p 10 A86-45647	Communication Platform Payload Definition (CPPD)	platforms in the Space Station ERA p 86 A86-34990
A three-mass tethered system for micro-g/variable-g	study. Volume 1: Executive summary	Alternative space power systems p 65 A86-35194
applications	[NASA-CR-174928] p 22 N86-27403	Optimization of mass placement in Space Station
[AIAA PAPER 86-1990] p 21 A86-47413	Communication Platform Payload Definition (CPPD)	applications
Optimum detumbling of space platforms via a dynamic	study. Volume 3: Addendum	[SAWE PAPER 1672] p 24 A86-35215
programming algorithm	[NASA-CR-174930] p 22 N86-27405	Space Station design-to-cost - A massive engineering
[AIAA PAPER 86-2154] p 57 A86-47518	Applications of Tethers in Space: Workshop	challenge
The Slinger - An in-orbit booster facility	proceedings, volume 2	[SAWE PAPER 1673] p 18 A86-35216
	[NASA-CP-2422-VOL-2] p 103 N86-27644	Space telerobotics - A few more hurdles
	Tethered satellite design p 22 N86-28409	p 81 A86-37047
Space Station polar orbiting platform - Mission analysis	Design and development testing of the bonded joint	Construction and control of large space structures
and planning	between a typical launch vehicle attachment ring and CFRP	p 39 A86-37060
[AIAA PAPER 86-2178] p 11 A86-47960	thrust cone p 28 N86-30790	Space Station dynamic modeling, control and
Space platform expendables resupply concept definition	High Power Solar Array (HPSA) study shuttle launched	simulation p 39 A86-37186
study	mission	International Conference on Space, 25th, Rome, Italy,
[NASA-CR-178819] p 13 N86-24732	[FOK-TR-R-85-068] p 71 N86-31998	March 26-28, 1985, Proceedings p 94 A86-37852
Communication Platform Payload Definition (CPPD)	SPACE SHUTTLES	The U.S. Space Station program p 3 A86-37853
study. Volume 2: Technical report	The Shuttle glow as an indicator of material changes	Columbus - The European participation in international
[NASA-CR-174929] p 22 N86-27404	in space	space stations p 3 A86-37854
Tethered constellations, their utilization as microgravity	[AD-A167300] p 71 A86-30323	Space Station utilization p 4 A86-37868
platforms and relevant features p 103 N86-27645	Thermal analysis of the ACCESS space truss	United States scientific community views of the Space
The development of optimal control laws for orbiting	Assembly Concept for Construction of Erectable Space	Station p 4 A86-37869
tethered platform systems p 61 N86-27655	Structure p 32 A86-40516 A mathematical formulation of a large space structure	Dynamic analysis and experiment methods for a generic
Space station systems: A bibliography with indexes		space station model
Space station systems: A bibliography with indexes (supplement 2)	control problem p 50 A86-43005	[AIAA PAPER 86-0838] p 40 A86-38886
(supplement 2)	control problem p 50 A86-43005 Shuttle Remote Manipulator collision-avoidance	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105	control problem p 50 A86-43005 Shuttle Remote Manipulator collision-avoidance system p 82 A86-43885	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105  SPACE POWER REACTORS	control problem p 50 A86-43005 Shuttle Remote Manipulator collision-avoidance system p 82 A86-43885 External tank/aft cargo carrier on orbit applications	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105 SPACE POWER REACTORS Nuclear power for earth orbit and beyond	control problem p 50 A86-43005 Shuttle Remote Manipulator collision-avoidance system p 82 A86-43885 External tank/aft cargo carrier on orbit applications p 99 A86-46855	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105  SPACE POWER REACTORS  Nuclear power for earth orbit and beyond p 86 A86-38623	control problem p 50 A86-43005 Shuttle Remote Manipulator collision-avoidance system p 82 A86-43885 External tank/aft cargo carrier on orbit applications p 99 A86-46855 Shuttle Tethered Aerothermodynamics Research Facilty	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105  SPACE POWER REACTORS  Nuclear power for earth orbit and beyond p 86 A86-38623  SPACE PROCESSING	control problem p 50 A86-43005 Shuttle Remote Manipulator collision-avoidance system p 82 A86-43885 External tank/aft cargo carrier on orbit applications p 99 A86-46855 Shuttle Tethered Aerothermodynamics Research Facilty (STARFAC) instrumentation requirements	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105  SPACE POWER REACTORS Nuclear power for earth orbit and beyond p 86 A86-38623  SPACE PROCESSING The German programme on materials science in	control problem p 50 A86-43005 Shuttle Remote Manipulator collision-avoidance system p 82 A86-43885 External tank/aft cargo carrier on orbit applications p 99 A86-46855 Shuttle Tethered Aerothermodynamics Research Facilty (STARFAC) instrumentation requirements p 34 N86-27652	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station p 5 A86-40502
(supplement 2)         [NASA-SP-7056(02)]         p 103         N86-28105           SPACE POWER REACTORS         Nuclear power for earth orbit and beyond p 86         A86-38623           SPACE PROCESSING         A86-38623           The German programme on materials science in space         p 73         A86-45646	control problem p 50 A86-43005 Shuttle Remote Manipulator collision-avoidance system p 82 A86-43885 External tank/aft cargo carrier on orbit applications p 99 A86-46855 Shuttle Tethered Aerothermodynamics Research Facilty (STARFAC) instrumentation requirements p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station p 5 A86-40502 Recent advances in teleoperation - Implications for the
(supplement 2)         [NASA-SP-7056(02)]         p 103         N86-28105           SPACE POWER REACTORS         Nuclear power for earth orbit and beyond p 86         A86-38623           SPACE PROCESSING           The German programme on materials science in space         p 73         A86-45646           Applications of Tethers in Space:         Workshop	control problem p 50 A86-43005 Shuttle Remote Manipulator collision-avoidance system p 82 A86-43885 External tank/aft cargo carrier on orbit applications p 99 A86-46855 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) instrumentation requirements p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station p 5 A86-40502 Recent advances in teleoperation - Implications for the Space Station p 82 A86-40508
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105 SPACE POWER REACTORS Nuclear power for earth orbit and beyond p 86 A86-38623 SPACE PROCESSING The German programme on materials science in space p 73 A86-45646 Applications of Tethers in Space: Workshop proceedings, volume 2	control problem p 50 A86-43005 Shuttle Remote Manipulator collision-avoidance system p 82 A86-43885 External tank/aft cargo carrier on orbit applications p 99 A86-46855 Shuttle Tethered Aerothermodynamics Research Facilty (STARFAC) instrumentation requirements p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653 COMLINK proposal for future missions of tethered	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station Recent advances in teleoperation - Implications for the Space Station p 82 A86-40508 Communications and tracking - The keys to Space
(supplement 2)         p 103         N86-28105           SPACE POWER REACTORS         p 86         A86-38623           Nuclear power for earth orbit and beyond p 86         A86-38623           SPACE PROCESSING         materials science in p 73         A86-45646           Applications of Tethers in Space: proceedings, volume 2         NSA-CP-2422-VOL-2]         p 103         N86-27644	control problem Shuttle Remote Manipulator collision-avoidance system p 82 A86-43885 External tank/aft cargo carrier on orbit applications p 99 A86-46855 Shuttle Tethered Aerothermodynamics Research Facilty (STARFAC) instrumentation requirements p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27655 COMLINK proposal for future missions of tethered satellite p 69 N86-27658	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station p 5 A86-40502 Recent advances in teleoperation - Implications for the Space Station p 82 A86-40508 Communications and tracking - The keys to Space Station utilization p 66 A86-40529
(supplement 2)         [NASA-SP-7056(02)]         p 103         N86-28105           SPACE POWER REACTORS         Nuclear power for earth orbit and beyond p 86         A86-38623           SPACE PROCESSING         The German programme on materials science in space p 73         A86-45646           Applications of Tethers in Space: Workshop proceedings, volume 2         Workshop proceedings, volume 2           [NASA-CP-2422-VOL-2]         p 103         N86-27644           Tethered elevator: A unique opportunity for space	control problem Shuttle Remote Manipulator p 50 A86-43005 Shuttle Remote Manipulator p 82 A86-43005 External tank/aft cargo carrier on orbit applications p 99 A86-48855 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) instrumentation requirements p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653 COMLINK proposal for future missions of tethered satellite p 69 N86-27658	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station p 5 A86-40502 Recent advances in teleoperation - Implications for the Space Station p 82 A86-40508 Communications and tracking - The keys to Space Station utilization p 66 A86-40529 A linear quadratic tracker for Control Moment Gyro based
(supplement 2)         p 103         N86-28105           SPACE POWER REACTORS         p 86         A86-38623           Nuclear power for earth orbit and beyond p 86         p 86         A86-38623           SPACE PROCESSING         The German programme on materials science in p 73         A86-45646           Applications of Tethers in Space: Workshop proceedings, volume 2         Workshop proceedings, volume 2         N86-27644           Instance Processing         p 103         N86-27644         N86-27644	control problem p 50 A86-43005 Shuttle Remote Manipulator collision-avoidance system p 82 A86-43885 External tank/aft cargo carrier on orbit applications p 99 A86-48855 Shuttle Tethered Aerothermodynamics Research Facilty (STARFAC) instrumentation requirements p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653 COMLINK proposal for future missions of tethered satellite p 69 N86-27658 Design of spacecraft [ISBN-2-225-80732-9] p 23 N86-31629	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station p 5 A86-40502 Recent advances in teleoperation - Implications for the Space Station p 82 A86-40508 Communications and tracking - The keys to Space Station utilization p 66 A86-40529 A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105  SPACE POWER REACTORS Nuclear power for earth orbit and beyond p 86 A86-38623  SPACE PROCESSING The German programme on materials science in space proceedings, volume 2 [NASA-CP-2422-VOL-2] p 103 N86-27644 Tethered elevator: A unique opportunity for space processing p 103 N86-27649  SPACE PROGRAMS	control problem Shuttle Remote Manipulator collision-avoidance system External tank/aft cargo carrier on orbit applications p 99 A86-48855 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) instrumentation requirements  p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) COMLINK proposal for future missions of tethered satellite Design of spacecraft [ISBN-2-225-80732-9]  P 30 N86-31629  SPACE STATION POWER SUPPLIES	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station Recent advances in teleoperation - Implications for the Space Station p 82 A86-40508 Communications and tracking - The keys to Space Station utilization - p 66 A86-40529 A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607
(supplement 2)         [NASA-SP-7056(02)]         p 103         N86-28105           SPACE POWER REACTORS         Nuclear power for earth orbit and beyond p 86         A86-38623           SPACE PROCESSING         The German programme on materials science in p 73         A86-45646           Applications of Tethers in Space: Workshop proceedings, volume 2 [NASA-CP-2422-VOL-2]         p 103         N86-27644           Tethered elevator: A unique opportunity for space processing         p 103         N86-27649           SPACE PROGRAMS         Strategies for a permanent lunar base	control problem Shuttle Remote Manipulator system External tank/aft cargo carrier on orbit applications p 99 A86-43885  External tank/aft cargo carrier on orbit applications p 99 A86-4885  Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) instrumentation requirements p 34 N86-27652  Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) COMLINK proposal for future missions of tethered satellite Design of spacecraft [ISBN-2-225-80732-9] P 23 N86-31629  SPACE STATION POWER SUPPLIES Hybrid deployable/erectable solar dynamic box truss	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station P 5 A86-40502 Recent advances in teleoperation - Implications for the Space Station Communications and tracking - The keys to Space Station utilization P 66 A86-40529 A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] P 48 A86-40607 Assessment of international payload requirements on
(supplement 2)         p 103         N86-28105           SPACE POWER REACTORS         p 86         A86-38623           Nuclear power for earth orbit and beyond p 86         p 86         A86-38623           SPACE PROCESSING         The German programme on materials science in p 73         A86-45646           Applications of Tethers in Space: Workshop proceedings, volume 2         Workshop proceedings, volume 2         N86-27644           Tethered elevator: A unique opportunity for space processing processing p 103         N86-27649         N86-27649           SPACE PROGRAMS         Strategies for a permanent lunar base         p 1         A86-30117	control problem Shuttle Remote Manipulator collision-avoidance system External tank/aft cargo carrier on orbit applications p 99 A86-48855 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) instrumentation requirements  p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) COMLINK proposal for future missions of tethered satellite Design of spacecraft [ISBN-2-225-80732-9]  P 30 N86-31629  SPACE STATION POWER SUPPLIES	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station Recent advances in teleoperation - Implications for the Space Station p 5 A86-40502 Communications and tracking - The keys to Space Station utilization p 66 A86-40529 A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105  SPACE POWER REACTORS Nuclear power for earth orbit and beyond p 86 A86-38623  SPACE PROCESSING The German programme on materials science in space proceedings, volume 2 [NASA-CP-2422-VOL-2] p 103 N86-27644 Tethered elevator: A unique opportunity for space processing p 103 N86-27649  SPACE PROGRAMS Strategies for a permanent lunar base p 1 A86-30117 EASCON '85: National space strategy - A progress	control problem Shuttle Remote Manipulator collision-avoidance system External tank/aft cargo carrier on orbit applications p 99 A86-43885  Shuttle Tethered Aerothermodynamics Research Facilty (STARFAC) instrumentation requirements p 34 N86-27652  Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27652  Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27652  COMLINK proposal for future missions of tethered satellite p 69 N86-27658  Design of spacecraft [ISBN-2-225-80732-9] p 23 N86-31629  SPACE STATION POWER SUPPLIES  Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] p 25 A86-38883	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station P 5 A86-40502 Recent advances in teleoperation - Implications for the Space Station D 82 A86-40508 Communications and tracking - The keys to Space Station utilization D 66 A86-40529 A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105  SPACE POWER REACTORS Nuclear power for earth orbit and beyond p 86 A86-38623  SPACE PROCESSING  The German programme on materials science in space proceedings, volume 2 [NASA-CP-2422-VOL-2] p 103 N86-27644  Tethered elevator: A unique opportunity for space processing p 103 N86-27649  SPACE PROCRAMS  Strategies for a permanent lunar base p 1 A86-30117  EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics	control problem p 50 A86-43005 Shuttle Remote Manipulator collision-avoidance system p 82 A86-43885 External tank/aft cargo carrier on orbit applications p 99 A86-48855 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) instrumentation requirements p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27652 COMLINK proposal for future missions of tethered satellite p 69 N86-27658 Design of spacecraft [ISBN-2-225-80732-9] p 23 N86-31629 SPACE STATION POWER SUPPLIES Hybrid deployable/erectable solar dynamic box truss system	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station p 5 A86-40502 Recent advances in teleoperation - Implications for the Space Station Communications and tracking - The keys to Space Station utilization p 66 A86-40529 A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105  SPACE POWER REACTORS Nuclear power for earth orbit and beyond p 86 A86-38623  SPACE PROCESSING The German programme on materials science in space proceedings, volume 2 [NASA-CP-2422-VOL-2] p 103 N86-27644  Tethered elevator: A unique opportunity for space processing p 103 N86-27649  SPACE PROGRAMS Strategies for a permanent lunar base p 1 A86-30117  EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC	control problem Shuttle Remote Manipulator system p 82 A86-43005 External tank/aft cargo carrier on orbit applications p 99 A86-4885 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) instrumentation requirements p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653 COMLINK proposal for future missions of tethered satellite Design of spacecraft [ISBN-2-225-80732-9] p 23 N86-31629 SPACE STATION POWER SUPPLIES Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] p 25 A86-38883 Electrical power system integration for the Space Station	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station Recent advances in teleoperation - Implications for the p 82 A86-40502 Communications and tracking - The keys to Space Station utilization A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 NASA finds the way toward building a Station fraught
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105  SPACE POWER REACTORS Nuclear power for earth orbit and beyond p 86 A86-38623  SPACE PROCESSING  The German programme on materials science in space proceedings, volume 2 [NASA-CP-2422-VOL-2] p 103 N86-27644 Tethered elevator: A unique opportunity for space processing p 103 N86-27649  SPACE PROGRAMS  Strategies for a permanent lunar base p 1 A86-30117 EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 p 92 A86-32526	control problem p 50 A86-43005 Shuttle Remote Manipulator collision-avoidance system p 82 A86-43885 External tank/aft cargo carrier on orbit applications p 99 A86-48855 Shuttle Tethered Aerothermodynamics Research Facilty (STARFAC) instrumentation requirements  P 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653 COMLINK proposal for future missions of tethered satellite p 69 N86-27658 Design of spacecraft [ISBN-2-225-80732-9] p 23 N86-31629 SPACE STATION POWER SUPPLIES Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] p 25 A86-38883 Electrical power system integration for the Space Station [AIAA PAPER 86-2351] p 67 A86-49561	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station p 5 A86-40502 Recent advances in teleoperation - Implications for the Space Station p 82 A86-40508 Communications and tracking - The keys to Space Station utilization p 66 A86-40529 A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 NASA finds the way toward building a Station fraught with legal hurdles
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105  SPACE POWER REACTORS Nuclear power for earth orbit and beyond p 86 A86-38623  SPACE PROCESSING  The German programme on materials science in space proceedings, volume 2 [NASA-CP-2422-VOL-2] p 103 N86-27644  Tethered elevator: A unique opportunity for space processing p 103 N86-27649  SPACE PROCRAMS  Strategies for a permanent lunar base p 1 A86-30117  EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 p 92 A86-32526 Pioneering the space frontier p 4 A86-38100	control problem Shuttle Remote Manipulator collision-avoidance system p 82 A86-43885 External tank/aft cargo carrier on orbit applications p 99 A86-48855 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) instrumentation requirements p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) COMLINK proposal for future missions of tethered satellite Design of spacecraft [ISBN-2-225-80732-9] PACE STATION POWER SUPPLIES Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] P 25 A86-38883 Electrical power system integration for the Space Station [AIAA PAPER 86-2351] A steerable radiator for spacecraft application	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station Recent advances in teleoperation - Implications for the Space Station Communications and tracking - The keys to Space Station utilization p 66 A86-40529 A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 NASA finds the way toward building a Station fraught with legal hurdles p 66 A86-41679 NASA electrothermal auxiliary propulsion technology
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105  SPACE POWER REACTORS Nuclear power for earth orbit and beyond p 86 A86-38623  SPACE PROCESSING The German programme on materials science in space proceedings, volume 2 [NASA-CP-2422-VOL-2] p 103 N86-27644  Tethered elevator: A unique opportunity for space processing p 103 N86-27649  SPACE PROGRAMS Strategies for a permanent lunar base p 1 A86-30117  EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 Pioneering the space frontier p 4 A86-38100 Assessment of international payload requirements on	control problem Shuttle Remote Manipulator system p 82 A86-43005 External tank/aft cargo carrier on orbit applications p 99 A86-48855 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) instrumentation requirements p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653 COMLINK proposal for future missions of tethered satellite p 69 N86-27658 Design of spacecraft [ISBN-2-225-80732-9] PACE STATION POWER SUPPLIES Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] Electrical power system integration for the Space Station [AIAA PAPER 86-2351] A steerable radiator for spacecraft application [AIAA PAPER 86-1298] p 100 A86-49597	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station Recent advances in teleoperation - Implications for the p 82 A86-40502 Recent advances in teleoperation - Implications for the Space Station Communications and tracking - The keys to Space Station utilization A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 NASA finds the way toward building a Station fraught with legal hurdles p 6 A86-41679 NASA electrothermal auxiliary propulsion technology [AIAA PAPER 86-1703] p 88 A86-42799
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105  SPACE POWER REACTORS Nuclear power for earth orbit and beyond p 86 A86-38623  SPACE PROCESSING The German programme on materials science in space proceedings, volume 2 [NASA-CP-2422-VOL-2] p 103 N86-27644 Tethered elevator: A unique opportunity for space processing p 103 N86-27649  SPACE PROGRAMS Strategies for a permanent lunar base p 1 A86-30117 EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 p 92 A86-32526 Pioneering the space frontier p 4 A86-38100 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities	control problem p 50 A86-43005 Shuttle Remote Manipulator collision-avoidance system p 82 A86-43885 External tank/aft cargo carrier on orbit applications p 99 A86-46855 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) instrumentation requirements p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653 COMLINK proposal for future missions of tethered satellite p 69 N86-27658 Design of spacecraft [ISBN-2-225-80732-9] p 23 N86-31629 SPACE STATION POWER SUPPLIES Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] p 25 A86-38883 Electrical power system integration for the Space Station [AIAA PAPER 86-2351] p 67 A86-49561 A steerable radiator for spacecraft application [AIAA PAPER 86-1298] p 10 A86-49597 An IBM PC-based math model for space station solar	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station p 5 A86-40502 Recent advances in teleoperation - Implications for the Space Station utilization p 58 A86-40508 Communications and tracking - The keys to Space Station utilization p 66 A86-40529 A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 NASA finds the way toward building a Station fraught with legal hurdles p 68 A86-42799 NASA electrothermal auxiliary propulsion technology [AIAA PAPER 86-1703] p 88 A86-42799 The development of optimal control laws for orbiting
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105  SPACE POWER REACTORS Nuclear power for earth orbit and beyond p 86 A86-38623  SPACE PROCESSING  The German programme on materials science in space Applications of Tethers in Space: Workshop proceedings, volume 2 [NASA-CP-2422-VOL-2] p 103 N86-27644 Tethered elevator: A unique opportunity for space processing p 103 N86-27649  SPACE PROGRAMS Strategies for a permanent lunar base p 1 A86-30117 EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 p 92 A86-32526 Pioneering the space frontier p 4 A86-38100 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example	control problem Shuttle Remote Manipulator collision-avoidance system p 82 A86-43885 External tank/aft cargo carrier on orbit applications p 93 A86-48855 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) instrumentation requirements p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) COMLINK proposal for future missions of tethered satellite Design of spacecraft [ISBN-2-225-80732-9] P 23 N86-31629 SPACE STATION POWER SUPPLIES Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] [AIAA PAPER 86-2351] A steerable radiator for spacecraft application [AIAA PAPER 86-1298] A 19 A86-49561 A steerable radiator for spacecraft application [AIAA PAPER 86-1298] P 100 A86-49597 An IBM PC-based math model for space station solar array simulation	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station Recent advances in teleoperation - Implications for the Space Station p 5 A86-40508 Communications and tracking - The keys to Space Station utilization p 66 A86-40529 A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 NASA finds the way toward building a Station fraught with legal hurdles p 6 A86-41679 NASA electrothermal auxiliary propulsion technology [AIAA PAPER 86-1703] p 88 A86-42799 The development of optimal control laws for orbiting tethered platform systems
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105 SPACE POWER REACTORS Nuclear power for earth orbit and beyond p 86 A86-38623 SPACE PROCESSING The German programme on materials science in space proceedings, volume 2 [NASA-CP-2422-VOL-2] p 103 N86-27644 Tethered elevator: A unique opportunity for space processing p 103 N86-27649 SPACE PROGRAMS Strategies for a permanent lunar base p 1 A86-30117 EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 Pioneering the space frontier p 4 A86-38100 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618	control problem Shuttle Remote Manipulator system p 82 A86-43005 External tank/aft cargo carrier on orbit applications p 99 A86-48855 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) instrumentation requirements p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653 COMLINK proposal for future missions of tethered satellite p 69 N86-27658 Design of spacecraft [ISBN-2-225-80732-9] P 23 N86-31629 SPACE STATION POWER SUPPLIES Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] Lettrical power system integration for the Space Station [AIAA PAPER 86-2351] A steerable radiator for spacecraft application [AIAA PAPER 86-1298] A steerable radiator for spacecraft application [AIAA PAPER 86-1298] A steerable radiator for spacecraft application [AIAA PAPER 86-1298] A p 100 A86-49597 An IBM PC-based math model for space station solar array simulation  SPACE STATION PROPULSION	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station Recent advances in teleoperation - Implications for the Space Station p 5 A86-40502 Recent advances in teleoperation - Implications for the Space Station utilization p 6 A86-40508 Communications and tracking - The keys to Space Station utilization p 66 A86-40529 A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 NASA finds the way toward building a Station fraught with legal hurdles p 6 A86-41679 NASA electrothermal auxiliary propulsion technology [AIAA PAPER 86-1703] p 88 A86-42799 The development of optimal control laws for orbiting tethered platform systems [AAS PAPER 86-3560] p 51 A86-43217
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105  SPACE POWER REACTORS Nuclear power for earth orbit and beyond p 86 A86-38623  SPACE PROCESSING The German programme on materials science in space proceedings, volume 2 [NASA-CP-2422-VOL-2] p 103 N86-27644 Tethered elevator: A unique opportunity for space processing p 103 N86-27649  SPACE PROGRAMS Strategies for a permanent lunar base p 1 A86-30117 EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 p 92 A86-32526 Pioneering the space frontier p 4 A86-38100 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 The exploitation of space: Policy trends in the military	control problem Shuttle Remote Manipulator collision-avoidance system p 82 A86-43885 External tank/aft cargo carrier on orbit applications p 93 A86-48855 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) instrumentation requirements p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) COMLINK proposal for future missions of tethered satellite Design of spacecraft [ISBN-2-225-80732-9] P 23 N86-31629 SPACE STATION POWER SUPPLIES Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] [AIAA PAPER 86-2351] A steerable radiator for spacecraft application [AIAA PAPER 86-1298] A 19 A86-49561 A steerable radiator for spacecraft application [AIAA PAPER 86-1298] P 100 A86-49597 An IBM PC-based math model for space station solar array simulation	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station P 5 A86-40502 Recent advances in teleoperation - Implications for the Space Station utilization p 52 A86-40508 Communications and tracking - The keys to Space Station utilization p 66 A86-40529 A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 NASA finds the way toward building a Station fraught with legal hurdles p 6 A86-41679 NASA electrothermal auxiliary propulsion technology [AIAA PAPER 86-1703] p 88 A86-42799 The development of optimal control laws for orbiting tethered platform systems [AAS PAPER 85-360] p 51 A86-43217 Polar platform payload requirements in the 1990's
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105 SPACE POWER REACTORS Nuclear power for earth orbit and beyond p 86 A86-38623 SPACE PROCESSING The German programme on materials science in space proceedings, volume 2 [NASA-CP-2422-VOL-2] p 103 N86-27644 Tethered elevator: A unique opportunity for space processing p 103 N86-27649 SPACE PROGRAMS Strategies for a permanent lunar base p 1 A86-30117 EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 Pioneering the space frontier p 4 A86-38100 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618	control problem Shuttle Remote Manipulator collision-avoidance system p 82 A86-43885 External tank/aft cargo carrier on orbit applications p 99 A86-48855 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) instrumentation requirements p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653 COMLINK proposal for future missions of tethered satellite p 69 N86-27658 Design of spacecraft [ISBN-2-225-80732-9] p 23 N86-31629 SPACE STATION POWER SUPPLIES Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] p 25 A86-38883 Electrical power system integration for the Space Station [AIAA PAPER 86-1298] p 100 A86-49561 A steerable radiator for spacecraft application [AIAA PAPER 86-1298] p 100 A86-49597 An IBM PC-based math model for space station solar array simulation  SPACE STATION PROPULSION Space Station propulsion test bed - A complete	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station Recent advances in teleoperation - Implications for the Space Station p 5 A86-40508 Communications and tracking - The keys to Space Station utilization p 66 A86-40529 A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 NASA finds the way toward building a Station fraught with legal hurdles p 6 A86-41679 NASA electrothermal auxiliary propulsion technology [AIAA PAPER 86-1703] p 88 A86-4279 The development of optimal control laws for orbiting tethered platform systems [AAS PAPER 85-360] p 51 A86-43217 Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105 SPACE POWER REACTORS Nuclear power for earth orbit and beyond p 86 A86-38623 SPACE PROCESSING The German programme on materials science in space proceedings, volume 2 [NASA-CP-2422-VOL-2] p 103 N86-27644 Tethered elevator: A unique opportunity for space processing p 103 N86-27649 SPACE PROGRAMS Strategies for a permanent lunar base p 1 A86-30117 EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 Pioneering the space frontier p 4 A86-38100 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 The exploitation of space: Policy trends in the military and commercial uses of outer space Book p 7 A86-43650	control problem Shuttle Remote Manipulator collision-avoidance system p 82 A86-43005 External tank/aft cargo carrier on orbit applications p 93 A86-4885 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) instrumentation requirements p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) COMLINK proposal for future missions of tethered satellite p 69 N86-27658 Design of spacecraft [ISBN-2-225-80732-9] PACE STATION POWER SUPPLIES Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] [AIAA PAPER 86-2351] A steerable radiator for spacecraft application [AIAA PAPER 86-1298] An IBM PC-based math model for space station solar array simulation Space Station propulsion test bed - A complete system	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station Recent advances in teleoperation - Implications for the Space Station p 5 A86-40502 Recent advances in teleoperation - Implications for the Space Station utilization p 66 A86-40529 A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 NASA finds the way toward building a Station fraught with legal hurdles p 6 A86-41679 NASA electrothermal auxiliary propulsion technology [AIAA PAPER 86-1703] p 88 A86-42799 The development of optimal control laws for orbiting tethered platform systems [AAS PAPER 85-360] p 51 A86-43217 Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228 EURECA concept and its potential evolution within the
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105  SPACE POWER REACTORS Nuclear power for earth orbit and beyond p 86 A86-38623  SPACE PROCESSING The German programme on materials science in space p 73 A86-45646  Applications of Tethers in Space: Workshop proceedings, volume 2 [NASA-CP-2422-VOL-2] p 103 N86-27644  Tethered elevator: A unique opportunity for space processing p 103 N86-27649  SPACE PROGRAMS  Strategies for a permanent lunar base p 1 A86-30117  EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 p 92 A86-32526  Pioneering the space frontier p 4 A86-38100 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 The exploitation of space: Policy trends in the military and commercial uses of outer space Book	control problem Shuttle Remote Manipulator collision-avoidance system p 82 A86-43885 External tank/aft cargo carrier on orbit applications p 99 A86-48855 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) instrumentation requirements p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653 COMLINK proposal for future missions of tethered satellite p 69 N86-27658 Design of spacecraft [ISBN-2-225-80732-9] p 23 N86-31629 SPACE STATION POWER SUPPLIES Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-2351] p 25 A86-38883 Electrical power system integration for the Space Station [AIAA PAPER 86-1298] p 100 A86-49561 A steerable radiator for spacecraft application [AIAA PAPER 86-1298] p 100 A86-49597 An IBM PC-based math model for space station solar array simulation SPACE STATION PROPULSION Space Station propulsion test bed - A complete system [AIAA PAPER 86-1402] p 87 A86-42615	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station Recent advances in teleoperation - Implications for the Space Station utilization p 5 A86-40508 Communications and tracking - The keys to Space Station utilization p 66 A86-40529 A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 NASA finds the way toward building a Station fraught with legal hurdles p 6 A86-41679 NASA electrothermal auxiliary propulsion technology [AIAA PAPER 86-1703] p 88 A86-42799 The development of optimal control laws for orbiting tethered platform systems [AAS PAPER 85-360] p 5 1 A86-43217 Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228 EURECA concept and its potential evolution within the Space Station era
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105 SPACE POWER REACTORS Nuclear power for earth orbit and beyond p 86 A86-38623 SPACE PROCESSING The German programme on materials science in space proceedings, volume 2 [NASA-CP-2422-VOL-2] p 103 N86-27644 Tethered elevator: A unique opportunity for space processing p 103 N86-27649 SPACE PROGRAMS Strategies for a permanent lunar base p 1 A86-30117 EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 Pioneering the space frontier p 4 A86-38100 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 The exploitation of space: Policy trends in the military and commercial uses of outer space Book p 7 A86-43650	control problem Shuttle Remote Manipulator collision-avoidance system p 82 A86-43885 External tank/aft cargo carrier on orbit applications p 99 A86-48855 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) instrumentation requirements p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653 COMLINK proposal for future missions of tethered satellite p 69 N86-27658 Design of spacecraft [ISBN-2-225-80732-9] p 23 N86-31629 SPACE STATION POWER SUPPLIES Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] p 25 A86-38883 Electrical power system integration for the Space Station [AIAA PAPER 86-1298] p 100 A86-49561 A steerable radiator for spacecraft application [AIAA PAPER 86-1298] p 100 A86-49597 An IBM PC-based math model for space station solar array simulation  SPACE STATION PROPULSION Space Station propulsion test bed - A complete system [AIAA PAPER 86-1402] p 87 A86-42615 A 10,000 hour life multipropellant engine for Space	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station Recent advances in teleoperation - Implications for the Space Station utilization p 5 A86-40508 Communications and tracking - The keys to Space Station utilization p 66 A86-40529 A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 NASA finds the way toward building a Station fraught with legal hurdles p 6 A86-41679 NASA electrothermal auxiliary propulsion technology [AIAA PAPER 86-1703] p 88 A86-42799 The development of optimal control laws for orbiting tethered platform systems [AAS PAPER 85-360] p 5 1 A86-43217 Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228 EURECA concept and its potential evolution within the Space Station era
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105  SPACE POWER REACTORS Nuclear power for earth orbit and beyond p 86 A86-38623  SPACE PROCESSING The German programme on materials science in space p 73 A86-45646  Applications of Tethers in Space: Workshop proceedings, volume 2 [NASA-CP-2422-VOL-2] p 103 N86-27644  Tethered elevator: A unique opportunity for space processing p 103 N86-27649  SPACE PROGRAMS  Strategies for a permanent lunar base p 1 A86-30117  EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 Pioneering the space frontier p 4 A86-38100 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 The exploitation of space: Policy trends in the military and commercial uses of outer space Book p 7 A86-43650  Columbus I; Proceedings of the First Columbus Workshop Utilization Aspects, Capri, Italy, June 17-21, 1985 p 98 A86-45626	control problem Shuttle Remote Manipulator collision-avoidance system p 82 A86-43885 External tank/aft cargo carrier on orbit applications p 99 A86-46855 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) instrumentation requirements p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) COMLINK proposal for future missions of tethered satellite p 69 N86-27653 COMLINK proposal for future missions of tethered satellite p 89 N86-27658 Design of spacecraft [ISBN-2-225-80732-9] P 23 N86-31629 SPACE STATION POWER SUPPLIES Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] p 25 A86-38883 Electrical power system integration for the Space Station [AIAA PAPER 86-2351] A steerable radiator for spacecraft application [AIAA PAPER 86-1298] P 100 A86-49567 An IBM PC-based math model for space station solar array simulation P 23 N86-31418 SPACE STATION PROPULSION Space Station propulsion test bed - A complete system [AIAA PAPER 86-1402] P 87 A86-42615 A 10,000 hour life multipropellant engine for Space Station applications	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station Recent advances in teleoperation - Implications for the Space Station p 5 A86-40508 Communications and tracking - The keys to Space Station utilization p 66 A86-40529 A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 NASA finds the way toward building a Station fraught with legal hurdles p 6 A86-41679 NASA electrothermal auxiliary propulsion technology [AIAA PAPER 86-1703] p 88 A86-42679 The development of optimal control laws for orbiting tethered platform systems [AAS PAPER 85-380] p 51 A86-43217 Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228 EURECA concept and its potential evolution within the Space Station era [AAS PAPER 85-388] p 9 7 A86-43230
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105  SPACE POWER REACTORS Nuclear power for earth orbit and beyond p 86 A86-38623  SPACE PROCESSING The German programme on materials science in space proceedings, volume 2 [NASA-CP-2422-VOL-2] p 103 N86-27644 Tethered elevator: A unique opportunity for space processing p 103 N86-27649  SPACE PROGRAMS Strategies for a permanent lunar base p 1 A86-30117  EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 p 92 A86-32526 Pioneering the space frontier p 4 A86-38100 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 The exploitation of space: Policy trends in the military and commercial uses of outer space Book p 7 A86-43650 Columbus I: Proceedings of the First Columbus Workshop Utilization Aspects, Capri, Italy, June 17-21,	control problem Shuttle Remote Manipulator collision-avoidance system p 82 A86-43885 External tank/aft cargo carrier on orbit applications p 99 A86-48855 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) instrumentation requirements p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) COMLINK proposal for future missions of tethered satellite Design of spacecraft [ISBN-2-225-80732-9] P 23 N86-31629 SPACE STATION POWER SUPPLIES Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] [AIAA PAPER 86-2351] A steerable radiator for spacecraft application [AIAA PAPER 86-1298] An IBM PC-based math model for space station solar array simulation P 23 N86-31418 SPACE STATION PROPULSION Space Station propulsion test bed - A complete system [AIAA PAPER 86-1402] [AIAA PAPER 86-1402] [AIAA PAPER 86-1403] [AIAA PAPER 86-1403] [AIAA PAPER 86-1406] [AIAA PAPER 86-1406] [AIAA PAPER 86-1403] [AIAA PAPER 86-1405] [AIAA PAPER 86-1406] [AIAA PAPER 86-1406] [AIAA PAPER 86-1406] [AIAA PAPER 86-1406] [AIAA PAPER 86-1407] [AIAA PAPER 86-1408] [AIAA PAPER 86-1408] [AIAA PAPER 86-1409]	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station Recent advances in teleoperation - Implications for the Space Station p 5 A86-40502 Recent advances in teleoperation - Implications for the Space Station utilization p 66 A86-40529 A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 NASA finds the way toward building a Station fraught with legal hurdles p 6 A86-41679 NASA electrothermal auxiliary propulsion technology [AIAA PAPER 86-1703] p 88 A86-42799 The development of optimal control laws for orbiting tethered platform systems [AAS PAPER 85-360] p 51 A86-43217 Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228 EURECA concept and its potential evolution within the Space Station era [AAS PAPER 85-398] p 97 A86-43230 NASA's space station planning - An update
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105  SPACE POWER REACTORS Nuclear power for earth orbit and beyond p 86 A86-38623  SPACE PROCESSING The German programme on materials science in space p 73 A86-45646  Applications of Tethers in Space: Workshop proceedings, volume 2 [NASA-CP-2422-VOL-2] p 103 N86-27649  Tethered elevator: A unique opportunity for space processing p 103 N86-27649  SPACE PROGRAMS Strategies for a permanent lunar base p 1 A86-30117  EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 p 92 A86-32526  Pioneering the space frontier p 4 A86-38100 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 The exploitation of space: Policy trends in the military and commercial uses of outer space Book Vorkshop Utilization Aspects, Capri, Italy, June 17-21, 1985 p 8 A86-45626 The German programme on materials science in	control problem Shuttle Remote Manipulator collision-avoidance system p 82 A86-43885 External tank/aft cargo carrier on orbit applications p 99 A86-46855 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) instrumentation requirements p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) COMLINK proposal for future missions of tethered satellite p 69 N86-27658 Design of spacecraft [ISBN-2-225-80732-9] PACE STATION POWER SUPPLIES Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] Electrical power system integration for the Space Station [AIAA PAPER 86-2351] A steerable radiator for spacecraft application [AIAA PAPER 86-2351] P 67 A86-49561 A steerable radiator for spacecraft application [AIAA PAPER 86-1298] P 100 A86-49597 An IBM PC-based math model for space station solar array simulation  SPACE STATION PROPULSION Space Station propulsion test bed - A complete system [AIAA PAPER 86-1402] P 87 A86-42615 A 10,000 hour life multipropellant engine for Space Station applications [AIAA PAPER 86-1403] P 87 A86-42616 A long-life 50 lbf H2/O2 thruster for Space Station	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station Recent advances in teleoperation - Implications for the p 82 A86-40502 Recent advances in teleoperation - Implications for the p 82 A86-40508 Communications and tracking - The keys to Space Station utilization p 66 A86-40508 Alinear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40518 NASA finds the way toward building a Station fraught with legal hurdles p 6 A86-41679 NASA electrothermal auxiliary propulsion technology [AIAA PAPER 86-1703] p 88 A86-42799 The development of optimal control laws for orbiting tethered platform systems [AAS PAPER 85-396] p 5 A86-43217 Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228 EURECA concept and its potential evolution within the Space Station era [AAS PAPER 85-398] p 9 A86-43230 NASA's space station planning - An update p 8 A86-44529
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105  SPACE POWER REACTORS Nuclear power for earth orbit and beyond p 86 A86-38623  SPACE PROCESSING The German programme on materials science in space p 73 A86-45646  Applications of Tethers in Space: Workshop proceedings, volume 2 [NASA-CP-2422-VOL-2] p 103 N86-27649  Tethered elevator: A unique opportunity for space processing p 103 N86-27649  SPACE PROGRAMS  Strategies for a permanent lunar base p 1 A86-30117  EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 Pioneering the space frontier p 4 A86-38100 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 The exploitation of space: Policy trends in the military and commercial uses of outer space Book p 7 A86-43650 Columbus I; Proceedings of the First Columbus Workshop Utilization Aspects, Capri, Italy, June 17-21, 1985 p 98 A86-45626 The German programme on materials science in space The U.S. civil space program: A Review of the major	control problem Shuttle Remote Manipulator collision-avoidance system p 82 A86-43885 External tank/aft cargo carrier on orbit applications p 99 A86-46855 Shuttle Tethered Aerothermodynamics Research Facilty (STARFAC) instrumentation requirements p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) COMLINK proposal for future missions of tethered satellite p 69 N86-27653 COMLINK proposal for future missions of tethered satellite p 69 N86-27658 Design of spacecraft [ISBN-2-225-80732-9] PACE STATION POWER SUPPLIES Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-2351] A steerable radiator for spacecraft application [AIAA PAPER 86-1298] A n IBM PC-based math model for space station solar array simulation P 30 N86-31418 SPACE STATION PROPULSION Space Station propulsion test bed - A complete system [AIAA PAPER 86-1402] P 87 A86-42615 A 10,000 hour life multipropellant engine for Space Station applications [AIAA PAPER 86-1403] P 87 A86-42616 A long-life 50 lbf H2/O2 thruster for Space Station auxiliary propulsion	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station Recent advances in teleoperation - Implications for the Space Station p 5 A86-40508 Communications and tracking - The keys to Space Station utilization p 66 A86-40529 A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 NASA finds the way toward building a Station fraught with legal hurdles p 6 A86-41679 NASA electrothermal auxiliary propulsion technology [AIAA PAPER 86-1703] p 88 A86-42679 The development of optimal control laws for orbiting tethered platform systems [AAS PAPER 85-360] p 51 A86-43217 Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228 EURECA concept and its potential evolution within the Space Station era [AAS PAPER 85-398] p 97 A86-43230 NASA's space station planning - An update p 8 A86-44529 Status of ESA's planning for the Space Station
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105  SPACE POWER REACTORS Nuclear power for earth orbit and beyond p 86 A86-38623  SPACE PROCESSING The German programme on materials science in space proceedings, volume 2 [NASA-CP-2422-VOL-2] p 103 N86-27644 Tethered elevator: A unique opportunity for space processing p 103 N86-27649  SPACE PROGRAMS Strategies for a permanent lunar base p 1 A86-30117 EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 P 99 A86-32526 Pioneering the space frontier p 4 A86-38100 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] The exploitation of space: Policy trends in the military and commercial uses of outer space Book p 7 A86-43650 Columbus I; Proceedings of the First Columbus Workshop Utilization Aspects, Capri, Italy, June 17-21, 1985 p 98 A86-45626 The German programme on materials science in space p 73 A86-45646	control problem Shuttle Remote Manipulator collision-avoidance system p 82 A86-43885 External tank/aft cargo carrier on orbit applications p 99 A86-48855 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) instrumentation requirements p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) COMLINK proposal for future missions of tethered satellite p 69 N86-27658 COMLINK proposal for future missions of tethered satellite p 69 N86-27658 Design of spacecraft [ISBN-2-225-80732-9] P 23 N86-31629  SPACE STATION POWER SUPPLIES Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] p 25 A86-38883 Electrical power system integration for the Space Station [AIAA PAPER 86-1298] A steerable radiator for spacecraft application [AIAA PAPER 86-1298] P 100 A86-49561 A steerable radiator for spacecraft application [AIAA PAPER 86-1402] P 87 A86-42615 A 10,000 hour life multipropellant engine for Space Station applications [AIAA PAPER 86-1403] P 87 A86-42616 A long-life 50 lbf Hz/O2 thruster for Space Station auxiliary propulsion [AIAA PAPER 86-1404] P 87 A86-42617	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station Recent advances in teleoperation - Implications for the Space Station p 5 A86-40502 Recent advances in teleoperation - Implications for the Space Station p 66 A86-40508 Communications and tracking - The keys to Space Station utilization p 66 A86-40529 A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 NASA finds the way toward building a Station fraught with legal hurdles p 6 A86-41679 NASA electrothermal auxiliary propulsion technology [AIAA PAPER 86-1703] p 88 A86-42799 The development of optimal control laws for orbiting tethered platform systems [AAS PAPER 85-360] p 51 A86-43217 Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228 EURECA concept and its potential evolution within the Space Station era [AAS PAPER 85-398] p 97 A86-43230 NASA's space station planning - An update p 8 A86-44529 Status of ESA's planning for the Space Station
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105  SPACE POWER REACTORS Nuclear power for earth orbit and beyond p 86 A86-38623  SPACE PROCESSING The German programme on materials science in space p 73 A86-45646  Applications of Tethers in Space: Workshop proceedings, volume 2 [NASA-CP-2422-VOL-2] p 103 N86-27649  Tethered elevator: A unique opportunity for space processing p 103 N86-27649  SPACE PROGRAMS Strategies for a permanent lunar base p 1 A86-30117  EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 p 92 A86-32526  Pioneering the space frontier p 4 A86-38100 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 The exploitation of space: Policy trends in the military and commercial uses of outer space Book Vorkshop Utilization Aspects, Capri, Italy, June 17-21, 1985 The German programme on materials science in space The U.S. civil space program: A Review of the major issues Report of an AIAA Workshop, Alexandria, VA, July	control problem Shuttle Remote Manipulator collision-avoidance system p 82 A86-43005 External tank/aft cargo carrier on orbit applications p 99 A86-46855 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) instrumentation requirements p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653 COMLINK proposal for future missions of tethered satellite p 69 N86-27658 Design of spacecraft [ISBN-2-225-80732-9] PACE STATION POWER SUPPLIES Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] Electrical power system integration for the Space Station [AIAA PAPER 86-2351] A steerable radiator for spacecraft application [AIAA PAPER 86-2351] P 67 A86-49561 A steerable radiator for spacecraft application [AIAA PAPER 86-1298] P 100 A86-49597 An IBM PC-based math model for space station solar array simulation PACE STATION PROPULSION Space Station propulsion test bed - A complete system [AIAA PAPER 86-1402] P 87 A86-42615 A 10,000 hour life multipropellant engine for Space Station applications [AIAA PAPER 86-1403] P 87 A86-42616 A long-life 50 lbf H2/O2 thruster for Space Station auxiliary propulsion [AIAA PAPER 86-1404] P 87 A86-42617 Life Cycle Cost methodology for space station propulsion	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station Recent advances in teleoperation - Implications for the p 82 A86-40502 Recent advances in teleoperation - Implications for the p 82 A86-40508 Communications and tracking - The keys to Space Station utilization A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 NASA finds the way toward building a Station fraught with legal hurdles p 6 A86-41679 NASA electrothermal auxiliary propulsion technology [AIAA PAPER 86-1703] p 88 A86-42799 The development of optimal control laws for orbiting tethered platform systems [AAS PAPER 85-380] p 51 A86-43217 Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228 EURECA concept and its potential evolution within the Space Station era [AAS PAPER 85-398] p 9 A86-43230 NASA's space station planning - An update p 8 A86-44529 Status of ESA's planning for the Space Station P 8 A86-44530 Predictive momentum management for the Space
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105  SPACE POWER REACTORS Nuclear power for earth orbit and beyond p 86 A86-38623  SPACE PROCESSING The German programme on materials science in space p 73 A86-45646  Applications of Tethers in Space: Workshop proceedings, volume 2 [NASA-CP-2422-VOL-2] p 103 N86-27649  Tethered elevator: A unique opportunity for space processing p 103 N86-27649  SPACE PROGRAMS Strategies for a permanent lunar base p 1 A86-30117  EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 Pioneering the space frontier p 4 A86-38100 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 The exploitation of space: Policy trends in the military and commercial uses of outer space Book p 7 A86-43650 Columbus I; Proceedings of the First Columbus Workshop Utilization Aspects, Capri, Italy, June 17-21, 1985 p 98 A86-45626 The German programme on materials science in space The U.S. civil space program: A Review of the major issues Report of an AIAA Workshop, Alexandria, VA, July 22, 23, 1986 Book Projections of space systems opportunities and	control problem Shuttle Remote Manipulator collision-avoidance system p 82 A86-43885 External tank/aft cargo carrier on orbit applications p 99 A86-46855 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) instrumentation requirements p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) COMLINK proposal for future missions of tethered satellite p 69 N86-27653 COMLINK proposal for future missions of tethered satellite p 89 N86-27658 Design of spacecraft [ISBN-2-225-80732-9] PACE STATION POWER SUPPLIES Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] [AIAA PAPER 86-2351] A steerable radiator for spacecraft application [AIAA PAPER 86-1298] A IBM PC-based math model for space station solar array simulation P 30 N86-31418 SPACE STATION PROPULSION Space Station propulsion test bed - A complete system [AIAA PAPER 86-1402] A 10,000 hour life multipropellant engine for Space Station applications [AIAA PAPER 86-1403] P 87 A86-42616 A long-life 50 lbf H2/O2 thruster for Space Station auxiliary propulsion [AIAA PAPER 86-1404] P 87 A86-42617 Life Cycle Cost methodology for space station propulsion system	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station Recent advances in teleoperation - Implications for the Space Station utilization p 5 A86-40508 Communications and tracking - The keys to Space Station utilization p 66 A86-40529 A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 NASA finds the way toward building a Station fraught with legal hurdles p 6 A86-41679 NASA electrothermal auxiliary propulsion technology [AIAA PAPER 86-1703] p 88 A86-42679 The development of optimal control laws for orbiting tethered platform systems [AAS PAPER 85-360] p 51 A86-43217 Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228 EURECA concept and its potential evolution within the Space Station era [AAS PAPER 85-398] p 97 A86-43230 NASA's space station planning - An update p 8 A86-44529 Status of ESA's planning for the Space Station p 8 A86-44530 Predictive momentum management for the Space Station
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105  SPACE POWER REACTORS Nuclear power for earth orbit and beyond p 86 A86-38623  SPACE PROCESSING The German programme on materials science in space Applications of Tethers in Space: Workshop proceedings, volume 2 [NASA-CP-2422-VOL-2] p 103 N86-27644 Tethered elevator: A unique opportunity for space processing p 103 N86-27649  SPACE PROGRAMS Strategies for a permanent lunar base P 1 A86-30117 EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 p 92 A86-32526 Pioneering the space frontier p 4 A86-38100 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 The exploitation of space: Policy trends in the military and commercial uses of outer space Book p 7 A86-43650 Columbus I; Proceedings of the First Columbus Workshop Utilization Aspects, Capri, Italy, June 17-21, 1985 p 98 A86-45626 The German programme on materials science in space p 98 A86-45646 The German programme on materials science in space p 99 A86-45646 The German programme on materials science in space p 99 A86-45646 The U.S. civil space program: A Review of the major issues Report of an AIAA Workshop, Alexandria, VA, July 22, 23, 1986 Book p 99 A86-47648 Projections of space systems opportunities and technologies for the 2000 to 2030 time period	control problem Shuttle Remote Manipulator collision-avoidance system p 82 A86-43885 External tank/aft cargo carrier on orbit applications p 99 A86-48855 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) instrumentation requirements p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) COMLINK proposal for future missions of tethered satellite Design of spacecraft [ISBN-2-225-80732-9] P 23 N86-31629 SPACE STATION POWER SUPPLIES Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] P 25 A86-38883 Electrical power system integration for the Space Station [AIAA PAPER 86-1298] A steerable radiator for spacecraft application [AIAA PAPER 86-1298] P 100 A86-49561 A steerable radiator for spacecraft application [AIAA PAPER 86-1298] P 27 A86-42511 SPACE STATION PROPULSION Space Station propulsion test bed - A complete system [AIAA PAPER 86-1402] A 10,000 hour life multipropellant engine for Space Station applications [AIAA PAPER 86-1403] A 10,001 hour life multipropellant engine for Space Station applications [AIAA PAPER 86-1404] A 10,001 hour life multipropellant engine for Space Station auxiliary propulsion [AIAA PAPER 86-1404] Life Cycle Cost methodology for space station propulsion system [AIAA PAPER 86-1405] P 87 A86-42618	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station Recent advances in teleoperation - Implications for the p 82 A86-40502 Recent advances in teleoperation - Implications for the p 82 A86-40508 Communications and tracking - The keys to Space Station utilization p 66 A86-40529 A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 NASA finds the way toward building a Station fraught with legal hurdles p 6 A86-41679 NASA electrothermal auxiliary propulsion technology [AIAA PAPER 86-1703] p 88 A86-42799 The development of optimal control laws for orbiting tethered platform systems [AAS PAPER 85-396] p 51 A86-43228 [AAS PAPER 85-396] p 7 A86-43228 EURECA concept and its potential evolution within the Space Station era [AAS PAPER 85-398] p 7 A86-43230 NASA's space station planning - An update p 8 A86-44529 Status of ESA's planning for the Space Station p 8 A86-44530 Predictive momentum management for the Space Station p 52 A86-4662 Space Station communication networks [AIAA PAPER 86-2307] p 67 A86-46939
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105  SPACE POWER REACTORS Nuclear power for earth orbit and beyond p 86 A86-38623  SPACE PROCESSING The German programme on materials science in space p 73 A86-45646  Applications of Tethers in Space: Workshop proceedings, volume 2 [NASA-CP-2422-VOL-2] p 103 N86-27649  Tethered elevator: A unique opportunity for space processing p 103 N86-27649  SPACE PROGRAMS  Strategies for a permanent lunar base p 1 A86-30117  EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 p 92 A86-32526  Pioneering the space frontier p 4 A86-38100 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 The exploitation of space: Policy trends in the military and commercial uses of outer space Book p 7 A86-43650  Columbus I; Proceedings of the First Columbus Workshop Utilization Aspects, Capri, Italy, June 17-21, 1985 The German programme on materials science in space The U.S. civil space program: A Review of the major issues Report of an AIAA Workshop, Alexandria, VA, July 22, 23, 1986 Book Projections of space systems opportunities and technologies for the 2000 to 2030 time period	control problem  Shuttle Remote Manipulator collision-avoidance system  p 82 A86-43885  External tank/aft cargo carrier on orbit applications p 99 A86-48855  Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) instrumentation requirements p 34 N86-27652  Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653  COMLINK proposal for future missions of tethered satellite p 69 N86-27658  Design of spacecraft [ISBN-2-225-80732-9]  PACE STATION POWER SUPPLIES  Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] A steerable radiator for spacecraft application [AIAA PAPER 86-2351] A steerable radiator for spacecraft application [AIAA PAPER 86-2351] P 67 A86-49561 A steerable radiator for spacecraft application [AIAA PAPER 86-1298] P 100 A86-49597 An IBM PC-based math model for space station solar array simulation  SPACE STATION PROPULSION  Space Station propulsion test bed - A complete system [AIAA PAPER 86-1402] P 87 A86-42615 A 10,000 hour life multipropellant engine for Space Station applications [AIAA PAPER 86-1403] P 87 A86-42616 A long-life 50 lbf H2/O2 thruster for Space Station auxiliary propulsion [AIAA PAPER 86-1404] P 87 A86-42617 Life Cycle Cost methodology for space station propulsion system [AIAA PAPER 86-1405] P 87 A86-42618 A proven 25-lbF H2/O2 thruster for Space Station	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station Recent advances in teleoperation - Implications for the Space Station p 5 A86-40508 Communications and tracking - The keys to Space Station utilization p 66 A86-40529 A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 NASA finds the way toward building a Station fraught with legal hurdles p 6 A86-41679 NASA electrothermal auxiliary propulsion technology [AIAA PAPER 86-1703] p 88 A86-42799 The development of optimal control laws for orbiting tethered platform systems [AAS PAPER 85-396] p 51 A86-43217 Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228 EURECA concept and its potential evolution within the Space Station era [AAS PAPER 85-398] p 7 A86-43230 NASA's space station planning - An update p 8 A86-44529 Status of ESA's planning for the Space Station P 8 A86-44530 Predictive momentum management for the Space Station Space Station communication networks
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105  SPACE POWER REACTORS Nuclear power for earth orbit and beyond p 86 A86-38623  SPACE PROCESSING The German programme on materials science in space proceedings, volume 2 [NASA-CP-2422-VOL-2] p 103 N86-27644  Tethered elevator: A unique opportunity for space processing p 103 N86-27649  SPACE PROGRAMS Strategies for a permanent lunar base p 1 A86-30117  EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 Pioneering the space frontier p 4 A86-32526 Pioneering the space frontier p 4 A86-38100 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 The exploitation of space: Policy trends in the military and commercial uses of outer space Book p 7 A86-43650 Columbus I; Proceedings of the First Columbus Workshop Utilization Aspects, Capri, Italy, June 17-21, 1985 p 8 A86-45626 The U.S. civil space program: A Review of the major issues Report of an AIAA Workshop, Alexandria, VA, July 22, 23, 1986 Book p 99 A86-47648 Projections of space systems opportunities and technologies for the 2000 to 2030 time period p 11 A86-48451	control problem Shuttle Remote Manipulator collision-avoidance system p 82 A86-43885 External tank/aft cargo carrier on orbit applications p 99 A86-46855 Shuttle Tethered Aerothermodynamics Research Facilty (STARFAC) instrumentation requirements p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) COMLINK proposal for future missions of tethered satellite p 69 N86-27653 COMLINK proposal for future missions of tethered satellite p 69 N86-27658 Design of spacecraft [ISBN-2-225-80732-9] PACE STATION POWER SUPPLIES Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] [AIAA PAPER 86-2351] [AIAA PAPER 86-2351] [AIAA PAPER 86-2351] [AIAA PAPER 86-1298] [AIIAA PAPER 86-1298] [AIIAA PAPER 86-1298] [AIIAA PAPER 86-1298] [AIIAA PAPER 86-1403] [AIIAA PAPER 86-1402] [AIIAA PAPER 86-1403] [AIIAA PAPER 86-1404] [AIIAA PAPER 86-1404] [AIIAA PAPER 86-1405] [AIIAA PAPER 86-140	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station Recent advances in teleoperation - Implications for the Space Station utilization p 66 A86-40508 Communications and tracking - The keys to Space Station utilization p 66 A86-40529 A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 NASA finds the way toward building a Station fraught with legal hurdles p 6 A86-41679 NASA electrothermal auxiliary propulsion technology [AIAA PAPER 86-1703] p 88 A86-42799 The development of optimal control laws for orbiting tethered platform systems [AAS PAPER 85-396] p 51 A86-43217 Polar platform psystems [AAS PAPER 85-396] p 7 A86-43228 EURECA concept and its potential evolution within the Space Station era [AAS PAPER 85-398] p 97 A86-43230 NASA's space station planning - An update p 8 A86-44529 Status of ESA's planning for the Space Station P 8 A86-44530 Predictive momentum management for the Space Station Space Station - An integrated approach to operational logistics support
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105  SPACE POWER REACTORS Nuclear power for earth orbit and beyond p 86 A86-38623  SPACE PROCESSING The German programme on materials science in space Applications of Tethers in Space: Workshop proceedings, volume 2 [NASA-CP-2422-VOL-2] p 103 N86-27644 Tethered elevator: A unique opportunity for space processing p 103 N86-27649  SPACE PROGRAMS Strategies for a permanent lunar base P 1 A86-30117 EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 p 92 A86-32526 Pioneering the space frontier p 4 A86-38100 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 The exploitation of space: Policy trends in the military and commercial uses of outer space Book p 7 A86-43650 Columbus I; Proceedings of the First Columbus Workshop Utilization Aspects, Capri, Italy, June 17-21, 1985 p 98 A86-45626 The German programme on materials science in space p 98 A86-45646 The German programme on materials science in space p 99 A86-45646 The German programme on materials science in space p 99 A86-45646 The U.S. civil space program: A Review of the major issues Report of an AIAA Workshop, Alexandria, VA, July 22, 23, 1986 Book p 99 A86-47648 Projections of space systems opportunities and technologies for the 2000 to 2030 time period	control problem Shuttle Remote Manipulator collision-avoidance system p 82 A86-43885 External tank/aft cargo carrier on orbit applications p 99 A86-48855 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) instrumentation requirements p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653 COMLINK proposal for future missions of tethered satellite Design of spacecraft [ISBN-2-225-80732-9] p 23 N86-31629 SPACE STATION POWER SUPPLIES Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] p 25 A86-38883 Electrical power system integration for the Space Station [AIAA PAPER 86-1298] p 100 A86-49561 A steerable radiator for spacecraft application [AIAA PAPER 86-1298] p 100 A86-49597 An IBM PC-based math model for space station solar array simulation p 23 N86-31418 SPACE STATION PROPULSION Space Station propulsion test bed - A complete system [AIAA PAPER 86-1402] p 87 A86-42615 A 10,000 hour life multipropellant engine for Space Station applications [AIAA PAPER 86-1403] p 87 A86-42616 A long-life 50 lbf H2/O2 thruster for Space Station auxiliary propulsion [AIAA PAPER 86-1405] p 87 A86-42617 Life Cycle Cost methodology for space station propulsion system [AIAA PAPER 86-1560] p 87 A86-42713	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station Recent advances in teleoperation - Implications for the Space Station utilization p 66 A86-40508 Communications and tracking - The keys to Space Station utilization p 66 A86-40529 A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 NASA finds the way toward building a Station fraught with legal hurdles p 6 A86-41679 NASA electrothermal auxiliary propulsion technology [AIAA PAPER 86-1703] p 88 A86-42799 The development of optimal control laws for orbiting tethered platform systems [AAS PAPER 85-396] p 51 A86-43217 Polar platform psystems [AAS PAPER 85-396] p 7 A86-43228 EURECA concept and its potential evolution within the Space Station era [AAS PAPER 85-398] p 97 A86-43230 NASA's space station planning - An update p 8 A86-44529 Status of ESA's planning for the Space Station P 8 A86-44530 Predictive momentum management for the Space Station Space Station - An integrated approach to operational logistics support
(supplement 2) [NASA-SP-7056(02)] p 103 N86-28105  SPACE POWER REACTORS Nuclear power for earth orbit and beyond p 86 A86-38623  SPACE PROCESSING The German programme on materials science in space p 73 A86-45646  Applications of Tethers in Space: Workshop proceedings, volume 2 [NASA-CP-2422-VOL-2] p 103 N86-27649  Tethered elevator: A unique opportunity for space processing p 103 N86-27649  SPACE PROGRAMS  Strategies for a permanent lunar base p 1 A86-30117  EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 Pioneering the space frontier p 4 A86-38100 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 The exploitation of space: Policy trends in the military and commercial uses of outer space Book Workshop Utilization Aspects, Capri, Italy, June 17-21, 1985 The German programme on materials science in space The U.S. civil space program: A Review of the major issues Report of an AIAA Workshop, Alexandria, VA, July 22, 23, 1986 Book Projections of space systems opportunities and technologies for the 2000 to 2030 time period p 11 A86-48451  SPACE SHUTTLE MISSION 31-D Analyses of spacecraft polymeric materials	control problem Shuttle Remote Manipulator collision-avoidance system p 82 A86-43885 External tank/aft cargo carrier on orbit applications p 99 A86-48855 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) instrumentation requirements p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653 COMLINK proposal for future missions of tethered satellite p 69 N86-27658 Design of spacecraft [ISBN-2-225-80732-9] P 23 N86-31629 SPACE STATION POWER SUPPLIES Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] P 25 A86-38883 Electrical power system integration for the Space Station [AIAA PAPER 86-2351] A steerable radiator for spacecraft application [AIAA PAPER 86-1298] P 100 A86-49597 An IBM PC-based math model for space station solar array simulation SPACE STATION PROPULSION Space Station propulsion test bed - A complete system [AIAA PAPER 86-1402] A 10,000 hour life multipropellant engine for Space Station applications [AIAA PAPER 86-1403] P 87 A86-42616 A long-life 50 lbf H2/O2 thruster for Space Station auxiliary propulsion [AIAA PAPER 86-1404] P 87 A86-42617 Life Cycle Cost methodology for space station propulsion system [AIAA PAPER 86-1405] P 87 A86-42713 Oxygen/hydrogen Space Station propulsion system	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station Recent advances in teleoperation - Implications for the Space Station p 5 A86-40502 Recent advances in teleoperation - Implications for the Space Station utilization p 66 A86-40529 A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 NASA finds the way toward building a Station fraught with legal hurdles p 6 A86-41679 NASA electrothermal auxiliary propulsion technology [AIAA PAPER 86-1703] p 88 A86-42799 The development of optimal control laws for orbiting tethered platform systems [AAS PAPER 85-396] p 51 A86-43228 EURECA concept and its potential evolution within the Space Station era [AAS PAPER 85-398] p 7 A86-43228 EURECA concept and its potential evolution within the Space Station era [AAS PAPER 85-398] p 9 7 A86-43230 Predictive momentum management for the Space Station p 8 A86-44530 Predictive momentum management for the Space Station p 52 A86-46462 Space Station - An integrated approach to operational logistics support [AIAA PAPER 86-2321] p 10 A86-46947
(supplement 2) [NASA-SP-7056(02)] [NASA-SP-7056(02)]  SPACE POWER REACTORS Nuclear power for earth orbit and beyond p 86 A86-38623  SPACE PROCESSING  The German programme on materials science in space proceedings, volume 2 [NASA-CP-2422-VOL-2] p 103 N86-27644 Tethered elevator: A unique opportunity for space processing p 103 N86-27649  SPACE PROGRAMS Strategies for a permanent lunar base p 1 A86-30117 EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 p 92 A86-32526 Pioneering the space frontier p 4 A86-38100 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] The exploitation of space: Policy trends in the military and commercial uses of outer space Book p 7 A86-43650 Columbus I; Proceedings of the First Columbus Workshop Utilization Aspects, Capri, Italy, June 17-21, 1985 p 98 A86-45626 The German programme on materials science in space p 73 A86-45646 The U.S. civil space program: A Review of the major issues Report of an AIAA Workshop, Alexandria, VA, July 22, 23, 1986 Book p 10 A86-47648 Projections of space systems opportunities and technologies for the 2000 to 2030 time period p 11 A86-48451  SPACE SHUTTLE MISSION 31-D Analyses of spacecraft polymeric materials	control problem Shuttle Remote Manipulator collision-avoidance system p 82 A86-43885 External tank/aft cargo carrier on orbit applications p 99 A86-46855 Shuttle Tethered Aerothermodynamics Research Facilty (STARFAC) instrumentation requirements p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) COMLINK proposal for future missions of tethered satellite p 69 N86-27653 COMLINK proposal for future missions of tethered satellite p 69 N86-27658 Design of spacecraft [ISBN-2-225-80732-9] PACE STATION POWER SUPPLIES Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] [AIAA PAPER 86-2351] [AIAA PAPER 86-2351] [AIAA PAPER 86-2351] [AIAA PAPER 86-1298] [AIIAA PAPER 86-1298] [AIIAA PAPER 86-1298] [AIIAA PAPER 86-1298] [AIIAA PAPER 86-1403] [AIIAA PAPER 86-1402] [AIIAA PAPER 86-1403] [AIIAA PAPER 86-1404] [AIIAA PAPER 86-1404] [AIIAA PAPER 86-1405] [AIIAA PAPER 86-1560] [AIIAA PAPER 86-156	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station Recent advances in teleoperation - Implications for the Space Station utilization p 5 A86-40508 Communications and tracking - The keys to Space Station utilization p 66 A86-40529 A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 NASA finds the way toward building a Station fraught with legal hurdles p 6 A86-41679 NASA electrothermal auxiliary propulsion technology [AIAA PAPER 86-1703] p 88 A86-42799 The development of optimal control laws for orbiting tethered platform systems [AAS PAPER 85-360] p 51 A86-43217 Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43217 Polar platform payload requirements in the 1990's [AAS PAPER 85-398] p 9 7 A86-43228 EURECA concept and its potential evolution within the Space Station era [AAS PAPER 85-398] p 9 7 A86-43230 NASA's space station planning - An update p 8 A86-44529 Status of ESA's planning for the Space Station p 8 A86-44530 Predictive momentum management for the Space Station Space Station - An integrated approach to operational logistics support [AIAA PAPER 86-2321] p 10 A86-46947 Space Station operations in the twenty-first century
(supplement 2) [NASA-SP-7056(02)] [NASA-SP-7056(02)]  SPACE POWER REACTORS Nuclear power for earth orbit and beyond p 86 A86-38623  SPACE PROCESSING The German programme on materials science in space proceedings, volume 2 [NASA-CP-2422-VOL-2] p 103 N86-27644 Tethered elevator: A unique opportunity for space processing p 103 N86-27649  SPACE PROGRAMS Strategies for a permanent lunar base p 1 A86-30117 EASCON '85: National space strategy - A progress report; Proceedings of the Eighteenth Annual Electronics and Aerospace Systems Conference, Washington, DC, October 28-30, 1985 Pioneering the space frontier p 4 A86-38100 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] The exploitation of space: Policy trends in the military and commercial uses of outer space Book p 7 A86-43650 Columbus I; Proceedings of the First Columbus Workshop Utilization Aspects, Capri, Italy, June 17-21, 1985 p 98 A86-45646 The U.S. civil space program: A Review of the major issues Report of an AIAA Workshop, Alexandria, VA, July 22, 23, 1986 Book Projections of space systems opportunities and technologies for the 2000 to 2030 time period p 11 A86-48451  SPACE SHUTTLE MISSION 31-D Analyses of spacecraft polymeric materials p 73 A86-41750	control problem Shuttle Remote Manipulator System p 82 A86-43005 External tank/aft cargo carrier on orbit applications p 99 A86-4885 External tank/aft cargo carrier on orbit applications p 99 A86-48855 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) instrumentation requirements p 34 N86-27652 Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) COMLINK proposal for future missions of tethered satellite Design of spacecraft [ISBN-2-225-80732-9] P 23 N86-31629 SPACE STATION POWER SUPPLIES Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] P 25 A86-38883 Electrical power system integration for the Space Station [AIAA PAPER 86-2351] A steerable radiator for spacecraft application [AIAA PAPER 86-1298] An IBM PC-based math model for space station solar array simulation P 23 N86-31418 SPACE STATION PROPULSION Space Station propulsion test bed - A complete system [AIAA PAPER 86-1402] P 87 A86-42615 A 10,000 hour life multipropellant engine for Space Station applications [AIAA PAPER 86-1403] P 87 A86-42616 A 10,001 hour life multipropellant engine for Space Station applications [AIAA PAPER 86-1404] P 87 A86-42616 A 10,001 hour life multipropellant engine for Space Station auxiliary propulsion [AIAA PAPER 86-1404] P 87 A86-42617 Life Cycle Cost methodology for space station propulsion system [AIAA PAPER 86-1405] P 87 A86-42618 A proven 25-libF H2/O2 thruster for Space Station auxiliary propulsion [AIAA PAPER 86-1560] P 87 A86-42713 Oxygen/hydrogen Space Station propulsion system concept definition for IOC [AIAA PAPER 86-1561] P 87 A86-42714	[AIAA PAPER 86-0838] p 40 A86-38886 A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905 Geostationary platform - An application of the Space Station Recent advances in teleoperation - Implications for the Space Station utilization p 56 A86-40508 Communications and tracking - The keys to Space Station utilization p 66 A86-40529 A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607 Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities example [AIAA PAPER 86-1226] p 6 A86-40618 NASA finds the way toward building a Station fraught with legal hurdles p 6 A86-41679 NASA electrothermal auxiliary propulsion technology [AIAA PAPER 86-1703] p 88 A86-42799 The development of optimal control laws for orbiting tethered platform systems [AAS PAPER 85-360] p 51 A86-43217 Polar platform payload requirements in the 1990's [AS PAPER 85-396] p 7 A86-43228 EURECA concept and its potential evolution within the Space Station era [AAS PAPER 85-398] p 97 A86-43230 NASA's space station planning - An update p 8 A86-44529 Status of ESA's planning for the Space Station P 8 A86-44530 Predictive momentum management for the Space Station - An integrated approach to operational logistics support [AIAA PAPER 86-2307] p 67 A86-4662 Space Station - An integrated approach to operational logistics support [AIAA PAPER 86-2321] p 10 A86-46937 Space Station operations in the twenty-first century [AIAA PAPER 86-2328] p 10 A86-46955

p 88 A86-42715

p 31 A86-39939

	O	The use of electropistic union to posted high culture
Al applications for the Space Station program -	Spacecraft design and operational problems:	The use of electrostatic noise to control high-voltage
Technology, design and integration challenges	Proceedings of the Aerospace Technology Conference	differential charging of spacecraft p 66 A86-4101
[AIAA PAPER 86-2315] p 21 A86-47048	and Exposition, Long Beach, CA, October 14-17, 1985	A new understanding of breakdowns in the day section
Conceptual design of pointing control systems for Space	[SAE SP-636] p 94 A86-38551	of geosynchronous orbit p 67 A86-4733
Station gimballed payloads	Future space transportation options - Overview	Status of critical issues in the area of spacecraft
[AIAA PAPER 86-1986] p 53 A86-47411	[AIAA PAPER 86-1210] p 6 A86-40616	charging p 67 A86-4733
A three-mass tethered system for micro-g/variable-g	· ·	Spacecraft materials test in a continuous, broad
applications	The U.S. civil space program: A Review of the major	energy-spectrum electron beam p 73 A86-4733
	issues Report of an AIAA Workshop, Alexandria, VA, July	ESABASE extension to spacecraft charging
[AIAA PAPER 86-1990] p 21 A86-47413	22, 23, 1986 Book p 99 A86-47648	
Momentum management concepts for a Space	An overview of European space transportation	[MATRA-CMT-TS101/RT/16.85] p 71 N86-3251
Station	systems	SPACECRAFT COMMUNICATION
[AIAA PAPER 86-2047] p 54 A86-47430	[NASA-TM-77683] p 13 N86-25398	Communications and tracking - The keys to Space
Design for a goal-oriented telerobotic system	, ,	Station utilization p 66 A86-4052
[AIAA PAPER 86-2090] p 83 A86-47440	A design study for the use of a multiple aperture	Exploring autonomy - The T(2)C(2) system Telemetry
Preliminary evaluation of a reaction control system for	deployable antenna for soil moisture remote sensing	Timing, Command and Control
	satellite applications	
a Space Station	[NASA-CR-178154] p 16 N86-30933	[AIAA PAPER 86-1184] p 5 A86-4059
[Alaa PAPER 86-2152] p 89 A86-47460	SPACE TRANSPORTATION SYSTEM FLIGHTS	Measurement apparation and procedure for the
Automation and robotics for Space Station in the		determination of surface emissivities
twenty-first century	The share flight experiment - An advanced heat pipe	[NASA-CASE-LAR-13455-1] p 75 N86-2488
[AIAA PAPER 86-2300] p 84 A86-49552	radiator for Space Station	System engineering study of electrodynamic tether a
Large space reflector technology on the Space	[AIAA PAPER 86-1297] p 5 A86-39905	a spaceborne generator and radiator of electromagnetic
Station	SPACE WEAPONS	waves in the ULF/ELF frequency band
	SDI orbital system timing constraints	[NASA-CR-176749] p 68 N86-2568
	p 92 A86-32552	
The role of Columbus in a future Space Station	·	Communication Platform Payload Definition (CPPD
scenario p 12 A86-49565	The exploitation of space: Policy trends in the military	study. Volume 1: Executive summary
A distributed array antenna system p 68 A86-50286	and commercial uses of outer space Book	[NASA-CR-174928] p 22 N86-27403
Towards Columbus and Space Station; Proceedings of	p 7 A86-43650	Communication Platform Payload Definition (CPPD
the International Symposium, Bonn, West Germany,	SPACEBORNE EXPERIMENTS	study. Volume 2: Technical report
October 2-4, 1985	ACCESS (Assembly Concept for Construction of	[NASA-CR-174929] p 22 N86-2740-
[DGLR BERICHT 85-03] p 100 A86-50334		Communication Platform Payload Definition (CPPD
	Erectable Space Structure) - A Shuttle flight experiment	study. Volume 3: Addendum
Concepts on Columbus flight operations	p 1 A86-32540	
p 12 A86-50337	More space in space p 3 A86-35319	[NASA-CR-174930] p 22 N86-2740
Columbus technology - Status and plans	Control of Flexible Structures (COFS) Flight Experiment	Communications platform payload definition study
p 12 A86-50338	Program p 5 A86-39502	executive summary
Experimenal and analytical generic space staion	The German programme on materials science in	[NASA-CR-174985] p 14 N86-2740
dynamic models	space p 73 A86-45646	COMLINK proposal for future missions of tethered
[NASA-TM-87696] p 58 N86-22997	Cosmic dust collection with a sub-satellite tethered to	satellite p 69 N86-2765
		SPACECRAFT COMPONENTS
Structural performance of space station trusses with	a space station p 14 N86-27146	
missing members	Impacts of free-floating objects: Unique space station	Transient dynamics during the extension of flexible
[NASA-TM-87715] p 34 N86-24731	experiments p 14 N86-27162	members of space platforms p 46 A86-3949
Proceedings of a Workshop on Applications of Tethers	Evaluation of solar array flight experiment response	Second European Space Mechanisms and Tribolog
in Space: Executive Summary	during flight for extension/retraction phase	Symposium
[NASA-CP-2422] p 101 N86-25794	[NASA-TM-86551] p 29 N86-31606	[ESA-SP-231] p 102 N86-2735
Dynamic characteristics of power-tower space stations	SPACEBORNE TELESCOPES	Development and testing of a dual-wound dc moto
with 15-foot truss bays		gearhead space applications p 102 N86-2738
	An overview of optical telescope technology	Mechanisms developed in the French space industr
[NASA-TM-87684] p 60 N86-26357	p 1 A86-32413	
Applications of Tethers in Space: Workshop	Structural dynamic analysis of the Large Deployable	spacecraft antennas p 103 N86-2739
proceedings, volume 2	Reflector	Space mechanisms development in the ESA
[NASA-CP-2422-VOL-2] p 103 N86-27644	[AIAA PAPER 86-0004] p 42 A86-38951	technological research program p 103 N86-2739
Tethered elevator: A unique opportunity for space	Dynamics of a deformable pointing spacecraft by Kane's	Charge accumulation and arc discharges on spacecraft
processing p 103 N86-27649	method, and telescope's image-stability evaluation	materials and components
Space station systems: A bibliography with indexes		[AD-A166216] p 70 N86-2989
		Design, fabricate and test Spacecraft Automatic Active
(supplement 2)	High-stability telescope structures spaceborne	
[NASA-SP-7056(02)] p 103 N86-28105	telescopes p 28 N86-30773	Discharge System (SAADS)
Control/structures interaction study of two 300 KW	SPACECRAFT	[AD-A166559] p 70 N86-3080
dual-keel space station concepts	A SENER latch design for docking mechanisms	SPACECRAFT CONFIGURATIONS
[NASA-TM-87679] p 61 N86-28113	p 85 N86-27388	Modal assignment effects on decentralized control of
Development of composite tube protective coatings	SPACECRAFT ANTENNAS	a large space structure
[NASA-CR-178116] p 76 N86-29989		[AD-A163977] p 59 N86-2540
Feasibility study of a discrete bearing/roller drive rotary	Spline-based distributed system identification with	SPACECRAFT CONSTRUCTION MATERIALS
	application to large space antennas p 42 A86-39037	
joint for the space station	Integrated analysis tools for trade studies of spacecraft	Application and potential future of advanced composite
[NASA-TM-88800] p 27 N86-30206	controller and sensor locations	in space p 71 A86-3291
NASA/American Society for Engineering Education	[AlAA PAPER 86-1192] p 20 A86-40613	Experimental verification of distributed piezoelectri
(ASEE) Summer Faculty Fellowship Program, 1985	Computer aided modelling/compensator design for a	actuators for use in precision space structures
Space Stations and Their Environments	flexible space antenna p 96 A86-42993	[AIAA PAPER 86-0878] p 19 A86-3881
[NASA-CR-171931] p 105 N86-31409		Experiences in FRG in aerospace application of
Materials considerations in the design of a metal-hydride	A mathematical formulation of a large space structure	carbon fiber reinforced plastics p 72 A86-4049
	control problem p 50 A86-43005	The thermal and mechanical stability of composit
heat pump for an advanced extravehicular mobility unit	Modeling, estimation and identification methods for	
p 80 N86-31427	static shape determination of flexible structures for large	
Analytical investigation of the dynamics of tethered	space structure design	Future directions in materials and structures for space
constellations in Earth orbit, phase 2	[AAS PAPER 85-424] p 20 A86-43223	applications
[NASA-CR-178901] p 65 N86-32513	The Collapsible Tube Mast (CTM) solar arrays,	[AIAA PAPER 86-1185] p 25 A86-4061
Proven, long-life hydrogen/oxygen thrust chambers for	spacecraft antennas p 27 N86-27365	Effect of degradation of material properties on th
space station propulsion	Design and test of a linear thermal actuator space	dynamic response of large space structures
[NASA-TM-88822] p 90 N86-32522		p 73 A86-4174
	applications p 34 N86-27380	Analyses of spacecraft polymeric materials
Control of a free-flying robot manipulator system	Thermal vacuum inclinometry: A test facility for antenna	
[NASA-CR-179717] p 85 N86-33016	pointing mechanisms spacecraft antennas	p 73 A86-4175
SPACE SUITS	p 102 N86-27391	A 10,000 hour life multipropellant engine for Space
EVA suit glove design p 20 A86-40521	Hygrothermal characteristics of antenna materials	Station applications
SPACE SURVEILLANCE (GROUND BASED)	spacecraft antennas p 77 N86-30760	[AIAA PAPER 86-1403] p 87 A86-4261
Satellite debris - Recent measurements	Thermal stability of sandwich reflectors spacecraft	Decreased creep for increased space power
p 7 A86-41747	antennas p 35 N86-30774	p 66 A86-4490
SPACE TECHNOLOGY EXPERIMENTS		Protecting spacecraft from atomic oxygen
	Holographic interferometry for distortion measurements	p 67 A86-4570
Space station systems: A bibliography with indexes	of antennas p 23 N86-30776	
(supplement 2)	Development of an antenna structure for a deployable	Spacecraft materials test in a continuous, broat
[NASA-SP-7056(02)] p 103 N86-28105	offset antenna p 29 N86-30797	energy-spectrum electron beam p 73 A86-4733
SPACE TRANSPORTATION	Structural analysis, manufacturing and test evaluation	Enhancements in the routine evaluation of composi-
EASCON '85: National space strategy - A progress	of a polarization sensitive reflector p 35 N86-30798	aerospace components using a microprocessor base
report; Proceedings of the Eighteenth Annual Electronics	SPACECRAFT CABINS	equipment p 73 A86-4760
and Aerospace Systems Conference, Washington, DC,		The AFML/Lockheed test method for characterizing
		material outgassing and deposition kinetics
	Spacecraft architecture	[AIAA PAPER 86-1279] p 74 A86-4959
Pioneering the space frontier p 4 A86-38100	[NASA-TM-77908] p 101 N86-24736	
SPACE TRANSPORTATION SYSTEM	SPACECRAFT CHARGING	Oxidation protecting coatings for polymers
Space and society - Progress and promise; Proceedings	Electrostatic charging and arc discharges on satellite	[NASA-CASE-LEW-14072-3] p 75 N86-2643
		Established the law Earth artifal and incommant of
of the Twenty-second Space Congress, Cocoa Beach, FL,	dielectrics simulated by electron beam	Effects of the low Earth orbital environment of spacecraft materials p 77 N86-3059

SUBJECT INDEX SPACECRAFT DESIGN

Equations for the vibration of a slewing flexible Application of the LQG/LTR technique to robust Proceedings of a Workshop on Composites Design for controller synthesis for a large flexible space antenna Space Applications --- conference pacecraft [AIAA PAPER 86-0906] NASA-TP-25601 p 64 N86-30800 [FSA-SP-243] n 105 N86-30758 p 41 A86-38916 Dynamics and control of large structures; Proceedings Control of large flexible systems by spatial modal The application of composites to space structures: of the Fifth Symposium, Blacksburg, VA, June 12-14, input-distribution control Guidelines on important aspects for the designer N86-30759 1985 p 95 A86-39476 [AD-A166912] n 64 N86-30803 Uniform damping control of spacecraft Control theoretic analysis of human operator mediated Fatigue and damage in fibre reinforced nylon p 44 A86-39486 p 77 N86-30761 rendezvous and docking Balanced Augmented Controller Reduction [NLR-MP-85020-U] p 16 N86-32106 Thermal residual stresses in symmetric and unsymmetric p 44 A86-39491 Control loops with human operators in space operations. carbon fiber reinforced plastics: Some tentative ways of Dynamics of gyroelastic vehicles --- flexible spacecraft Part 3: Rendezvous and docking operations and model p 77 N86-30762 evaluation p 45 A86-39494 analysis of performance with human-in-the-loop Dynamic mechanical analysis as an aid to the A robust nonlinear attitude control law for space stations [NLR-TR-84116-L-PT-3] p 17 N86-32108 characterization of composite materials p 46 A86-39500 with flexible structural components Control loops with human operators in space operations. p 77 N86-30763 Advanced propulsion for polar-orbiting and coorbiting Part 4: Research requirements for human-in-the-loop p 78 N86-30764 Damping of composites space teleoperator development The strength of bolted joints in Kevlar RP --- reinforced [AIAA PAPER 86-1564] p 88 A86-42716 [NLR-TR-84116-L-PT-4] p 17 N86-32109 plastic (RP) p 28 N86-30765 Singular perturbation methods for discrete time Control loops with human operators in space operations. On correlation between thermal stresses, elastic strain p 48 A86-42855 Part 5: Executive summary energy and debonding in thermally loaded fiber-reinforced Failure detection and accommodation in structural [NLR-TR-84116-L-PT-5] p 17 N86-32110 p 79 N86-30780 dynamics systems using analytic redundancy --- in large composite materials SPACECRAFT DEFENSE space structures A86-42938 p 49 New aluminum alloys for satellite structures Primer on operating and support (O and S) costs for p 80 N86-31641 Identification of Space Station dynamics [SNIAS-861-440-111] p 49 A86-42965 Damping characteristics of metal matrix composites p 12 N86-24588 EAD-A1623811 Decentralized control of sequentially assembled large SPACECRAFT DESIGN [AD-A167792] p 80 N86-31668 p 82 A86-42997 space structures Data for selection of space materials Environmental criteria guidelines for space vehicle and p 81 N86-32584 A mathematical formulation of a large space structure p 18 A86-32553 p 18 A86-32910 [ESA-PSS-01-701-ISSUE-1] space design control problem p 50 A86-43005 SPACECRAFT CONTAMINATION Design for space debris protection An asymptotic perturbation method for nonlinear optimal Long term tests of contaminated Optical Solar Reflectors Spacecraft structures design and verification control problems p 23 A86-33287 (OSRs) under combined environment --- spacecraft reflectors p 74 N86-22622 [AAS PAPER 85-364] p 51 A86-43219 Low frequency design verification of large spacecraft A86-33288 Robust attitude and shape control of third generation The degradation and contamination experiment flown p 38 on the first European Communication Satellite ECS-1: spacecraft Application of solids modeling technology to space p 52 A86-43224 1AAS PAPER 85-4251 station conceptual design and on-orbit assembly Preliminary results on contamination p 74 N86-22623 Space environment simulation to test satellite thermal RIT-10 low-thrust control of Eureca's orbital decay p 81 A86-34970 p 88 A86-44447 control coatings, volume 1 European space platform developments [DGLR PAPER 85-123] p.3 systems - Some Estimation of distributed parameter p3 A86-35173 IESA-TT-891-VOL-11 p 75 N86-22627 p 52 A86-46455 closed-form solutions Space environment simulation to test satellite thermal Space Station design-to-cost - A massive engineering Predictive momentum management for the Space challenge control coatings. Volume 2, appendix 1: Detailed results p 52 A86-46462 [SAWE PAPER 1673] n 18 A86-35216 of optical measurements made after the various stages Guidance, Navigation and Control Conference, Thermal design of aeroassisted orbital transfer vehicles of the first test p 33 N86-22628 Williamsburg, VA, August 18-20, 1986, Technical Papers [ESA-TT-891-VOL-2] --- Book p 30 A86-37041 p 99 A86-47401 Space environment simulation to test satellite thermal control coatings. Volume 2: Appendices 2, 3, and 4. Large space structural models by combination of finite elements and transfer matrix methods Conceptual design of pointing control systems for Space Appendix 2: Detailed results of optical measurements Station gimballed payloads p 18 A86-37861 [AIAA PAPER 86-1986] p 53 A86-47411 Mission requirements for coorbiting and polar platforms made after the various stages of the second test. Appendix Variable structure control of spacecraft reorientation p 4 A86-37872 Summary of optical results obtained during the first A critical survey test. Appendix 4: Summary of optical results obtained maneuvers Space frame optimization subject to frequency [AIAA PAPER 86-1987] p 53 A86-47412 constraints during the second test p 40 A86-38812 [ESA-TT-891-VOL-3] p 33 N86-22629 Rapid torque-limited line-of-sight pointing of SCOLE [AIAA PAPER 86-0877] Control Laboratory (Spacecraft Experiment) Theoretical study on the effect of the design of small Space Station multidisciplinary analysis capability -(milli-Newton) thruster jets on molecular contamination for p 19 A86-38847 [AIAA PAPER 86-1991] p 54 A86-47414 [AIAA PAPER 86-0954] the space station p 90 N86-26358 Maneuver and vibration control of SCOLE Development of a generalized radiator weight optimization design code for high power spacecraft INASA-CR-1772631 p 54 A86-47415 NASA/American Society for Engineering Education (ASEE) Summer Faculty Fellowship Program, 1985 ---[AIAA PAPER 86-1993] Momentum management concepts for a Space applications [AIAA PAPER 86-1268] p 20 A86-39888 Space Stations and Their Environments Station [NASA-CR-171931] p 105 N86-31409 [AIAA PAPER 86-2047] Conceptual design of an 1 m long 'roll out fin' type p 54 A86-47430 SPACECRAFT CONTROL Modified LTR robust control for flexible structures expandable space radiator p 55 A86-47434 [AIAA PAPER 86-2051] [AIAA PAPER 86-1323] p 20 A86-39924 Spacecraft attitude dynamics and control - A personal Model reduction and modal assignment in decoupled Nuclear powered ion engine orbit transfer vehicle design perspective on early developments p 35 A86-31651 control and operational effectiveness Uniform damping control of spacecraft p 36 A86-31664 [AIAA PAPER 86-2137] p 55 A86-47451 [AIAA PAPER 86-1391] p 86 A86-42608 Control effectiveness characterization for state Parametric design and preliminary mission analysis of Variable-structure control of spacecraft large-angle estimation and control on a highly flexible grid a proposed Hybrid OTV with TOS/AMS (TM) solid-fuel p 36 A86-31666 p 55 A86-47454 [AIAA PAPER 86-2142] Compensating structure and parameter optimization for boosters, and ring-cusp ion return engines [AAS PAPER 85-304] p 88 A86-43206 attitude control of a flexible spacecraft On-orbit manipulators and control p 36 A86-31668 approaches EURECA concept and its potential evolution within the p 83 A86-47467 [AIAA PAPER 86-2185] Guidance and control 1985; Proceedings of the Eighth Annual Rocky Mountain Conference, Keystone, CO, Space Station era A laboratory robot for space application research [AAS PAPER 85-398] p 97 A86-43230 p 83 A86-47468 February 2-6, 1985 p 91 [AIAA PAPER 86-2186] Space platform design options - A comparison, for Dynamics and control of slew maneuver of large flexible cost-effectiveness, of expendable, reusable Orbital maneuvering vehicle guidance, navigation and and p 8 A86-44531 serviceable spacecraft control [AIAA PAPER 86-2192] Al applications for the Space Station program -[AAS PAPER 85-043] p.56 A86-47472 p 36 A86-31794 Technology, design and integration challenges [AIAA PAPER 86-2315] p 21 A Single-step optimal control of the RPL experiment Maneuvering of flexible spacecraft --- Variable Structure p 21 A86-47048 [AAS PAPER 85-045] p 37 A86-31796 Control Subsystem testing of Galileo's attitude and articulation p 56 A86-47473 Space Station evolution - The uncertainty principle [AIAA PAPER 86-2193] Dynamics of a deformable pointing spacecraft by Kane's p 11 A86-48373 control fault protection prevails Integrated structure/control design [AIAA PAPER 86-97831 p.91 A86-32117 method, and telescope's image-stability evaluation p 56 A86-47474 methodology and future opportunities Controller design of flexible spacecraft attitude control [AIAA PAPER 86-2194] p 37 A86-33204 p 58 A86-49094 Moving-bank multiple model adaptive algorithms applied The role of Columbus in a future Space Station Minimum-fuel control of high-order systems to flexible spacecraft control p 12 A86-49565 p 86 A86-34174 (AD-A164016) p 59 N86-24740 Spacecraft architecture Mass property control of a spin stabilized spacecraft Modal assignment effects on decentralized control of with restrictive mission and weight constraints [NASA-TM-77908] p 101 N86-24736 a large space structure [AD-A163977] [SAWE PAPER 1668] p 38 A86-35212 An overview of European space transportation p 59 N86-25402 Testing of a failure accommodation system on a highly systems Control of flexible structures with respect to infinity [NASA-TM-77683] p 13 N86-25398 flexible grid p 38 A86-35390 p 60 N86-27359 flexible spacecraft Integrated sensor and actuator system for flexible space Stability of multiloop LQ regulators with nonlinearities. Effects of damping on the control dynamics of the space structure experiments --- space applications I - Regions of attraction. II - Regions of ultimate boundedness p 38 A86-36074 p 61 N86-27656 shuttle based on tethered systems p 102 N86-27385 Stiffness control of large space structures The suitability of various spacecraft for future space Space Station dynamic modeling, control

p 63 N86-30652

p 63 N86-30653

Aspects of active isolation as applied to a satellite

structure with shape precision payload

applications missions

[SNIAS-861-430-105]

Design of bonded structural joints for spacecraft

p 39 A86-37186

p 40 A86-38888

Variable Structure Control System (VSCS) maneuvering

simulation

of flexible spacecraft
[AIAA PAPER 86-0840]

p 15 N86-27409

p 22 N86-28118

Spacecraft structures design and verification	Space manufacturing utilizing the directional electrostatic accretion process p 102 N86-27300	Heat pipe radiator technology for space powe systems
p 28 N86-30685 Design of spacecraft	electrostatic accretion process p 102 N86-27300  SPACECRAFT MANEUVERS	[AIAA PAPER 86-1300] p 31 A86-3990]
[ISBN-2-225-80732-9] p 23 N86-31629	Variable-structure control of spacecraft large-angle	Fluid recirculation, deployment and retraction of a
Use of MoS2 applied by Physical Vapor Deposition (PVD)	maneuvers p 36 A86-31666	expandable pulse power radiator for spacecraft powe
on space mechanisms	Variable Structure Control System (VSCS) maneuvering	supplies
[SNIAS-861-440-101] p 80 N86-31639	of flexible spacecraft	[AIAA PAPER 86-1322] p 25 A86-39923
Design and test of a space deployable radiator	[AIAA PAPER 86-0840] p 40 A86-38888	Decreased creep for increased space power p 66 A86-44906
[SNIAS-861-440-103] p 23 N86-31640 New aluminum alloys for satellite structures	Equations for the vibration of a slewing flexible spacecraft	Operation and control of space-based solar energy
[SNIAS-861-440-111] p 80 N86-31641	[AIAA PAPER 86-0906] p 41 A86-38916	power plants with CCGT using helium as a working medium
Space station propulsion technology	Maneuvering of flexible spacecraft with application to	closed cycle gas turbine
[NASA-CR-178897] p 90 N86-31647	SCOLE Spacecraft Control Laboratory Experiment	[ASME PAPER 86-GT-152] p 89 A86-48206
High power rigid solar array	p 47 A86-39508	Liquid droplet radiator program at the NASA Lewis
[SNIAS-861-440-110] p 70 N86-31997	Single step optimization strategies for constrained	Research Center
Control loops with human operators in space operations.	retargeting maneuvers of spacecraft	[ASME PAPER 86-HT-15] p 32 A86-4962: Alternative module configurations for advanced sola
Part 1: Human engineering analysis, synthesis and evaluation techniques	p 47 A86-39510 Implementation problems associated with simultaneous	arrays on low orbit and extended lifetime missions (AMOC
[NLR-TR-84116-L-PT-1] p 16 N86-32107	maneuver and vibration suppression of flexible	1)
Influence of structural parameter uncertainties on flexible	spacecraft p 47 A86-39511	[ESA-CR(P)-2129] p 89 N86-24025
space structural control performances	On-off attitude control of flexible satellites	Growth capabilities of European retractable solar arrays
[SNIAS-861-440-104] p 65 N86-32516	p 53 A86-46470	space station power supplies
SPACECRAFT DOCKING	Variable structure control of spacecraft reorientation	[ESA-CR(P)-2141] p 69 N86-26711
Alternative docking concepts for application to the Space Station p 92 A86-32912	maneuvers	Historical development of solar array drive mechanisms by British Aerospace p 102 N86-27357
Station p 92 A86-32912 An investigation of adaptive control techniques for space	[AIAA PAPER 86-1987] p 53 A86-47412 Maneuver and vibration control of SCOLE	Design and development of the Advanced Rigid Array
stations p 38 A86-35333	[AIAA PAPER 86-1993] p 54 A86-47415	(ARA) solar panel composite structures
Machine vision and the OMV p 100 N86-24536	Dynamics and control of slew maneuver of large flexible	p 70 N86-30796
A study of 35-ghz radar-assisted orbital maneuvering	spacecraft	Development of a simulation code for a latent hear
vehicle/space telescope docking p 101 N86-24537	[AIAA PAPER 86-2192] p 56 A86-47472	thermal energy storage system in a space station
Index of aerospace mechanisms symposia proceedings	Maneuvering of flexible spacecraft Variable Structure	[DE86-010070] p 70 N86-31113
1-19	Control	High power rigid solar array [SNIAS-861-440-110] p 70 N86-31997
[NASA-TM-88205] p 102 N86-26650	[AIAA PAPER 86-2193] p 56 A86-47473	High Power Solar Array (HPSA) study shuttle launched
A Dornier latch design for a docking mechanism in space p 22 N86-27387	A proposed design for an interim space rescue ferry vehicle	mission
Control theoretic analysis of human operator mediated	[AD-A164039] p 101 N86-24741	[FOK-TR-R-85-068] p 71 N86-31998
rendezvous and docking	SPACECRAFT MODELS	SPACECRAFT PROPULSION
[NLR-MP-85020-U] p 16 N86-32106	Space Station dynamic modeling, control and	Propulsion system concept assessment and technology
Control loops with human operators in space operations.	simulation p 39 A86-37186	requirements for Space Station p 86 A86-34972
Part 3: Rendezvous and docking operations and model	Identification of Space Station dynamics	Nuclear power for earth orbit and beyond
analysis of performance with human-in-the-loop [NLR-TR-84116-L-PT-3] p 17 N86-32108	p 49 A86-42965	p 86 A86-38623 A proven 25-lbF H2/O2 thruster for Space Station
[NLR-TR-84116-L-PT-3] p 17 N86-32108 SPACECRAFT ENVIRONMENTS	Model reduction and modal assignment in decoupled	auxiliary propulsion
Space environment effects on spacecraft surface	control [AIAA PAPER 86-2137] p 55 A86-47451	[AIAA PAPER 86-1560] p 87 A86-42713
materials p 71 A86-32406	Moving-bank multiple model adaptive algorithms applied	Advanced propulsion for polar-orbiting and coorbiting
NASA/American Society for Engineering Education	to flexible spacecraft control	free flyers
(ASEE) Summer Faculty Fellowship Program, 1985	[AD-A164016] p 59 N86-24740	[AIAA PAPER 86-1564] p 88 A86-42716
Space Stations and Their Environments	Mathematical models of flexible spacecraft dynamics:	Plasma thruster development: Magnetoplasmadynamic
[NASA-CR-171931] p 105 N86-31409	A survey of order reduction approaches aircraft	propulsion, status and basic problems [AD-A165945] p 90 N86-28991
SPACECRAFT GUIDANCE Orbital maneuvering vehicle guidance, navigation and	tracking	Design of spacecraft
control	[NLR-MP-85004-U] p 60 N86-26367 Test and analysis correlation for structural dynamic	[ISBN-2-225-80732-9] p 23 N86-31629
[AAS PAPER 85-043] p 36 A86-31794	systems spacecraft structures p 63 N86-30682	SPACECRAFT RADIATORS
SPACECRAFT INSTRUMENTS	Dynamic verification of very large space structures	Development of a generalized radiator weigh
Payload isolation and precision pointing for the 1990's	p 63 N86-30683	optimization design code for high power spacecraf
[AAS PAPER 85-010] p 36 A86-31781	Control of large flexible systems by spatial modal	applications
Future payload isolation and pointing system	input-distribution control	[AIAA PAPER 86-1268] p 20 A86-39888 The share flight experiment - An advanced heat pipe
technology p 53 A86-46464  SPACECRAFT LAUNCHING	[AD-A166912] p 64 N86-30803 SPACECRAFT MODULES	radiator for Space Station
New prediction methods for composites hygrothermal	More space in space p 3 A86-35319	[AIAA PAPER 86-1297] p 5 A86-39905
behavior p 78 N86-30771	SPACECRAFT MOTION	Fluid recirculation, deployment and retraction of ar
Orbital transfer vehicle launch operations study.	A three-dimensional dynamic analysis and libration study	expandable pulse power radiator for spacecraft power
Processing flows. Volume 3	of a tethered satellites system	supplies
[NASA-CR-179766] p 17 N86-32505	[AAS PAPER 85-340] p 50 A86-43208	[AIAA PAPER 86-1322] p 25 A86-39923
SPACECRAFT LUBRICATION	On modeling the dynamics of large space	Conceptual design of an 1 m long 'roll out fin' type
Second European Space Mechanisms and Tribology Symposium	manipulators	expandable space radiator [AIAA PAPER 86-1323] p 20 A86-39924
[ESA-SP-231] p 102 N86-27353	[AAS PAPER 85-393] p 51 A86-43215 The development of optimal control laws for orbiting	Development of an Advanced Trapezoidal Axially
The performance of unbonded MoS2 for space	tethered platform systems	Grooved (ATAG) heat pipe for Space Station
applications space applications p 76 N86-27376	[AAS PAPER 85-360] p 51 A86-43217	[AIAA PAPER 86-1342] p 31 A86-3994
Surface-treated titanium alloy gears for space	Dynamics and control characteristics for the WISP 300	A steerable radiator for spacecraft application
mechanisms space applications p 76 N86-27378	m dipole antenna/Shuttle configuration	[AIAA PAPER 86-1298] p 100 A86-4959
Use of MoS2 applied by physical vapor deposition (PVD)	[AAS PAPER 85-365] p 51 A86-43220	Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599
on space mechanisms space applications	Optimum detumbling of space platforms via a dynamic	Effect of an oxygen plasma on the physical and chemica
p 76 N86-27379	programming algorithm [AIAA PAPER 86-2154] p 57 A86-47518	properties of several fluids for the liquid droplet radiato
Some recent experiences of mechanism performance	[AIAA PAPER 86-2154] p 57 A86-47518 Analytical investigation of the dynamics of tethered	[NASA-TM-88839] p 80 N86-3163-
and component assessment in thermal vacuum tests at	constellations in Earth orbit, phase 2	Design and test of a space deployable radiator
ESTL spacecraft structures p 85 N86-27390	[NASA-CR-178846] p 61 N86-28114	[SNIAS-861-440-103] p 23 N86-3164
Use of MoS2 applied by Physical Vapor Deposition (PVD) on space mechanisms	SPACECRAFT ORBITS	SPACECRAFT RECOVERY
[SNIAS-861-440-101] p 80 N86-31639	The detumbling of an axially symmetric satellite with	A thermal control design for the Leasat F-3 salvage
SPACECRAFT MAINTENANCE	an orbital maneuvering vehicle by nonlinear feedback	mission [AIAA PAPER 86-1340] p 31 A86-3993
Maintaining and servicing a space-based Orbital	Control (AD A163090) DEP NR6 34717	Machine vision and the OMV p 100 N86-2453
Transfer vehicle (OTV) at the Space Station	[AD-A163989] p 58 N86-24717 SPACECRAFT PERFORMANCE	A study of 35-ghz radar-assisted orbital maneuvering
[AIAA PAPER 86-2332] p 10 A86-46955	The Giotto spacecraft's performance during the	vehicle/space telescope docking p 101 N86-2453
Space platform expendables resupply concept definition	geostationary transfer orbit and near-earth mission	Definition and testing of gears for space robotics
study. Volume 1: Executive summary	phases p 3 A86-36035	space applications p 22 N86-2737
[NASA-CR-178820] p 13 N86-24733	Concepts on Columbus flight operations	SPACECRAFT RELIABILITY
Space platform expendables resupply concept definition	p 12 A86-50337	Subsystem testing of Gatileo's attitude and articulatio
study, volume 2 [NASA-CR-178821] p 13 N86-24734	SPACECRAFT POWER SUPPLIES	control fault protection [AIAA PAPER 86-9783] p 91 A86-3211
[NASA-CR-178821] p 13 N86-24734 Space platform expendables resupply concept definition	Power and thermal management concepts for free-flying	Protecting spacecraft from atomic oxygen
study. Volume 3: Work breakdown structure and work	platforms in the Space Station ERA p 86 A86-34990  Dynamic power - A Key to the promise of space	p 67 A86-4570
breakdown structure dictionary	p 86 A86-34994	SPACECRAFT SHIELDING
[NASA-CR-178822] p 13 N86-24735	Alternative space power systems p 65 A86-35194	Design for space debris protection p 18 A86-3291

STIFFNESS SUBJECT INDEX

SPIN STABILIZATION Solar array deployment simulation using ADAMS oftware p 60 N86-27360 Reaction of high-velocity atomic oxygen with carbon Spacecraft attitude dynamics and control - A personal perspective on early developments p 35 A86-31651 p 71 A86-32977 software Speed regulators for space appendages deployment ---former International Solar Polar Mission (ISPM) Long-term performance of thermal control coatings at Mass property control of a spin stabilized spacecraft geosynchronous altitude [AIAA PAPER 86-1356] p 84 N86-27369 with restrictive mission and weight constraints p 71 A86-39951 [SAWE PAPER 1668] p 38 A86-35212 Nutational stability of a spinning spacecraft with internal Coatings against fretting --- space applications SPACECRAFT STABILITY p 76 N86-27377 Damping synthesis for a spacecraft using substructure and component data p 37 A86-32940 Design and test of a linear thermal actuator --- space mass motion and axial thrust p 34 N86-27380 [AIAA PAPER 86-2271] p 57 A86-47940 A robust nonlinear attitude control law for space stations The detumbling of an axially symmetric satellite with A deployable and retractable strongback structure with flexible structural components p 27 N86-27389 an orbital maneuvering vehicle by nonlinear feedback The development of optimal control laws for orbiting Test and analysis correlation for structural dynamic control tethered platform systems p 63 N86-30682 [AD-A163989] p 58 N86-24717 systems --- spacecraft structures IAAS PAPER 85-3601 Reconstruction of forcing functions based on measured SPLINE FUNCTIONS A parametric examination of the stability robustness p 63 N86-30684 Spline-based distributed system identification with structural responses characteristics of two decoupled controllers designed for application to large space antennas p 42 A86-39037
Spline-based Rayleigh-Ritz methods for the approximation of the natural modes of vibration for flexible Spacecraft structures design and verification large space structure control p 28 N86-30685 p 55 A86-47436 [AIAA PAPER 86-2053] Vibration qualification at the David Florida Laboratory Design study for a high stability large centrifuge test p 63 N86-30687 p 48 A86-40843 beams with tip bodies --- spacecraft bed Proceedings of a Workshop on Composites Design for SPONTANEOUS EMISSION p 11 A86-47445 [AIAA PAPER 86-2100] Space Applications --- conference Spontaneous radiation emitted by moving tethered ystems p 34 N86-28427 Optimum detumbling of space platforms via a dynamic p 105 N86-30758 [ESA-SP-243] systems programming algorithm The application of composites to space structures: p 57 A86-47518 [AIAA PAPER 86-2154] Use of MoS2 applied by physical vapor deposition (PVD) on space mechanisms --- space applications Guidelines on important aspects for the designer Nutational stability of a spinning spacecraft with internal p 77 mass motion and axial thrust p 76 N86-27379 New prediction methods for composites hygrothermal p.57 A86-47940 [AIAA PAPER 86-2271] p 78 N86-30771 STABILITY DERIVATIVES behavior The effect of energy dissipation due to friction at the Fault-tolerant control of large space structures using the Dimensional stability of CFRP tubes for space joint of a simple beam structure p 35 N86-30775 stable factorization approach p 58 N86-24739 [AD-A163975] Delamination fracture toughness of composite pacecraft structures p 78 N86-30777 INASA-CR-39641 p 58 N86-23343 composite Analytical investigation of the dynamics of tethered constellations in Earth orbit, phase 2 spacecraft structures STABILITY TESTS On the defect sensitivity of spacecraft typical thin CFRP Design study for a high stability large centrifuge test p 61 N86-28114 [NASA-CR-178846] p 79 N86-30782 Design of spacecraft [ISBN-2-225-80732-9] Design and development testing of the bonded joint [AIAA PAPER 86-2100] p 11 A86-47445 p 23 N86-31629 between a typical launch vehicle attachment ring and CFRP SPACECRAFT STRUCTURES p 28 N86-30790 thrust cone Comparison of tension stabilized structures for large Thermally-induced vibration and stability of booms with On the development of a corrugated CFRP central space antenna reflectors open cross section caused by unidirectional radiant p 28 N86-30791 [AIAA PAPER 86-0876] cylinder for satellites p 25 A86-38881 p 35 A86-31024 A step towards an ESA composites design handbook STABILIZED PLATFORMS Sealing for long-term space application for space structure applications p 79 N86-30799 Galileo inflight friction identification for the scan platform p 92 A86-32909 Winding with thermoplastic polymers --- spacecraft control loop Non-destructive measurement of residual stresses IAAS PAPER 85-383 p 97 A86-43274 p 30 A86-32933 structures [SNIAS-861-430-106] p 80 N86-30804 STAGE SEPARATION Predicted temperature field in a thermomechanically Index of aerospace mechanisms symposia proceedings Design of spacecraft heated viscoplastic space truss structure p 23 N86-31629 p 30 A86-32943 (ISBN-2-225-80732-91 1-19 [NASA-TM-88205] p 102 N86-26650 Aspects of active isolation as applied to a satellite High power rigid solar array [SNIAS-861-440-110] p 70 N86-31997 STATE ESTIMATION structure with shape precision payload SPACECRAFT SURVIVABILITY The optimal projection equations for reduced-order, p 37 A86-33255 Robot spacecraft survivability using a decision tree for discrete-time modeling, estimation, and control Spacecraft structures design and verification p 42 A86-39035 p 23 A86-33287 data processing p 81 A86-32550 SPACECRAFT TEMPERATURE Kalman-like estimation for static distributed systems An evaluation of foldable elastic tubes for application Antenna shape from radiation measurements Application of capillary pumped loop heat transport p 24 A86-34634 in space structures p 66 A86-39480 systems to large spacecraft Truss structure advanced development for Space Simultaneous plant parameter and state estimation by a successive states method --- for flexible spacecraft p 24 A86-34987 p.31 A86-39903 [AIAA PAPER 86-1295] SPACECREWS Thermal engineering of spacecraft p 48 A86-40769 Space safety and rescue 1984-1985 p 30 A86-37107 STATIC FLECTRICITY p 98 A86-44326 Structural dynamic testing and analysis; Aerospace Technology Conference and Exposition, Long Beach, CA, International Aerospace and Ground Conference on **SPACETENNAS** Comparison of tension stabilized structures for large Lightning and Static Electricity, 10th, and Congres International Aeronautique, 17th, Paris, France, June October 14-17, 1985, Technical Papers space antenna reflectors p 94 A86-38540 [SAE SP-635] p 99 A86-47292 [AIAA PAPER 86-0876] p 25 A86-38881 10-13, 1985, Proceedings A global technique for estimation of modal parameters Preload modeling, analysis, and optimal design techniques for beam/rod/cable element structures STATIC MODELS from measured data --- of spacecraft structures vibration
[SAE PAPER 851926] p 39 A86-38542 AE PAPER 851926] p 39 A86-38542 Continuous fiber composite hoops p 72 A86-40503 Kalman-like estimation for static distributed systems p 25 A86-41742 Antenna shape from radiation measurements p 66 A86-39480 Attitude control system synthesis for the Hoop/Column Robotic nondestructive inspection of aerospace Modeling, estimation and identification methods for static shape determination of flexible structures --- for large p 95 A86-40509 antenna using the LQG/LTR method --- loop transfer structures Prospects for intelligent aerospace structures recovery p 55 A86-47452 space structure design AIAA PAPER 86-1139] p 25 A86-43328 Nonlinear deformation analysis of the Olympus [AIAA PAPER 86-2139] [AIAA PAPER 86-1139] p 20 A86-43223 (AAS PAPER 85-4241 SPECTRAL METHODS STATIONKEEPING Characteristic wave approach in controlled large space p 21 A86-43756 Dynamics of tethered constellations in Earth orbit Nonlinear response - A time domain approach --- with p 61 N86-27650 [AIAA PAPER 86-0839] p 40 A86-38887 applications to acoustic fatigue, spacecraft and composite Analytical investigation of the dynamics of tethered SPECTRAL REFLECTANCE constellations in Earth orbit, phase 2 [NASA-CR-178846] Measurement of the thermo-optical properties of varying [AIAA PAPER 86-1934] p 52 A86-45423 p 61 N86-28114 Measurement of the thermo-optical properties of varying paint thickness on carbon fiber composites in spacecraft p 74 N86-22620 Tethered satellite design p 22 N86-28409 paint thickness on carbon fiber composites in spacecraft structures SPECTRUM ANALYSIS STATISTICAL ANALYSIS Reliability models applicable to space telescope solar array assembly system p 21 N86-24541 structures p 74 N86-22620 p 74 N86-22621 Wave propagation measurements on two-dimensional New space paints p 21 N86-24541 lattice Key design parameters for a very low gravity in-orbit p 62 N86-29891 STEEPEST DESCENT METHOD [AD-A166207] facility --- orbital platforms Design of dynamic output feedback controllers with [MATRA-EPT/DT/VT068/098] p 58 N86-22631 SPECULAR REFLECTION parameter variation insensitivity Specular and direct radiative loads on space structure Selections from Flug Revue und Flugwelt International. p 32 A86-49599 [AIAA PAPER 86-1355] [AIAA PAPER 86-2050] p 54 A86-47433 A. On the border of Time-hypersonic flight. B. NASA programs pave the way for the hypersonic aircraft. C. STIFFENING SPEED REGULATORS Speed regulators for space appendages deployment ---Near-field testing of the 15-meter model of the hoop Shuttle flight 61-B; construction in space. D. Faster than former International Solar Polar Mission (ISPM) column antenna a bullet; hypersonic military aircraft [NASA-TM-88418] p 69 N86-29115 p 84 N86-27369 [NASA-CR-178059] p 26 N86-24652 Near-field testing of the 15-meter model of the hoop SPIN DYNAMICS Tine domain design of robust controllers for LQG (Linear The detumbling of an axially symmetric satellite with column antenna. Volume 2: Near- and far-field plots for Quadratic Gaussian); application to large space an orbital maneuvering vehicle by nonlinear feedback the LaRC feeds structures [NASA-CR-178060] p 69 N86-29877 [AD-A163635] control p 59 N86-26074 p 58 N86-24717 [AD-A163989] STIFFNESS Second European Space Mechanisms and Tribology Finite element analysis of subregions using a specified SPIN REDUCTION Symposium Giotto despin mechanism subsystem: General loop design and pointing aspects --- flexible spacecraft boundary stiffness method p 18 A86-36866

p 102 N86-27353

Analysis of in-orbit performance of mechanisms within

large structures

p 43 A86-39481

Neumann series approach to random vibrations

p 60 N86-27361

Control/structures interaction study of two 300 KW	Tine domain design of robust controllers for LQG (Linear	STRUCTURAL MEMBERS
dual-keel space station concepts	Quadratic Gaussian); application to large space	Structural performance of space station trusses with
[NASA-TM-87679] p 61 N86-28113 Stiffness control of large space structures	structures [AD-A163635] p 59 N86-26074	missing members [NASA-TM-87715] p 34 N86-24731
p 63 N86-30652	Wave propagation measurements on two-dimensional	A simple nonlinear joint model
STIFFNESS MATRIX Stiffness control of large space structures	lattice [AD-A166207] p 62 N86-29891	[NASA-TM-87749] p 85 N86-30234 STRUCTURAL RELIABILITY
p 37 A86-33254	Failure propagation in continuum models of LSS (Large	Structural performance of space station trusses with
STIRLING CYCLE Liquid droplet radiator program at the NASA Lewis	Space Structures), part 1	missing members
Research Center	[AD-A166208] p 63 N86-29892 Theoretical and experimental behavior of carbon fiber	[NASA-TM-87715] p 34 N86-24731 STRUCTURAL STABILITY
[ASME PAPER 86-HT-15] p 32 A86-49621	reinforced plastics under mechanical and thermal load	Closed-loop stability of large space structures with
STOCHASTIC PROCESSES  Evaluation of performance characteristics for a space	p 78 N86-30767	reduced-order controllers p 45 A86-39493 Control/structures interaction study of two 300 KW
antenna system subjected to stochastic disturbances	Developments in the nondestructive evaluation (NDE) of composite materials p 79 N86-30785	dual-keel space station concepts
p 43 A86-39482 Reliability models applicable to space telescope solar	Structural analysis, manufacturing and test evaluation	[NASA-TM-87679] p 61 N86-28113 Stiffness control of large space structures
array assembly system p 21 N86-24541	of a polarization sensitive reflector p 35 N86-30798	p 63 N86-30652
STRAIN ENERGY METHODS	STRUCTURAL DESIGN Optimization of mass placement in Space Station	Deployable M-braced truss structure
On correlation between thermal stresses, elastic strain energy and debonding in thermally loaded fiber-reinforced	applications	[NASA-CASE-LAR-13081-1] p 29 N86-32737 STRUCTURAL VIBRATION
composite materials p 79 N86-30780	[SAWE PAPER 1672] p 24 A86-35215	Thermally-induced vibration and stability of booms with
STRATOSPHERE Environmental criteria guidelines for space vehicle and	Synthesis of structures with multiple frequency constraints	open cross section caused by unidirectional radiant heating p 35 A86-31024
space design p 18 A86-32553	[AIAA PAPER 86-0951] p 40 A86-38844	Uniform damping control of spacecraft
STRESS ANALYSIS	Optimum design of large structures with multiple	p 36 A86-31664 Stiffness control of large space structures
Buckling and non-linear response of imperfect three-legged truss columns	constraints [AIAA PAPER 86-0952] p 19 A86-38845	p 37 A86-33254
[AIAA PAPER 86-0974] p 24 A86-38854	Preload modeling, analysis, and optimal design	An orthogonal decomposition approach to modal
Prospects for intelligent aerospace structures	techniques for beam/rod/cable element structures p 25 A86-41742	synthesis p 39 A86-36216 Structural dynamic testing and analysis; Aerospace
[AIAA PAPER 86-1139] p 25 A86-43328 Wave propagation measurements on two-dimensional	Structural control requirements for the 1990s for	Technology Conference and Exposition, Long Beach, CA,
lattice	aerospace systems	October 14-17, 1985, Technical Papers
[AD-A166207] p 62 N86-29891	[AAS PAPER 85-420] p 51 A86-43221 Control-motivated dynamic tailoring of truss-work	[SAE SP-635] p 94 A86-38540 A global technique for estimation of modal parameters
Industrial calculation of damage tolerance and stress	structures	from measured data of spacecraft structures vibration
allowables in components made of composite materials using the PAM-FISS/biphase material model	[AIAA PAPER 86-2190] p 56 A86-47471	[SAE PAPER 851926] p 39 A86-38542
p 78 N86-30779	Integrated structure/control design - Present methodology and future opportunities	Synthesis of discrete passive vibration dampers [SAE PAPER 851935] p 39 A86-38548
STRESS MEASUREMENT	p 58 A86-49094	Space frame optimization subject to frequency
Non-destructive measurement of residual stresses p 30 A86-32933	Thermal stresses in composite tubes	constraints
STRESS WAVES	p 33 A86-50115 Analysis of in-orbit performance of mechanisms within	[AIAA PAPER 86-0877] p 40 A86-38812 A global-local approach to solving vibration of large truss
Feedforward control of waves in lattice elements	large structures p 84 N86-27358	structures
[AD-A164009] p 59 N86-26222 STRESS-STRAIN RELATIONSHIPS	Design of bonded structural joints for spacecraft	[AIAA PAPER 86-0872] p 41 A86-38907
Theoretical and experimental behavior of carbon fiber	[SNIAS-861-430-105] p 22 N86-28118 Proceedings of a Workshop on Composites Design for	Equations for the vibration of a slewing flexible spacecraft
reinforced plastics under mechanical and thermal load	Space Applications conference	[AIAA PAPER 86-0906] p 41 A86-38916
p 78 N86-30767 STRINGERS	[ESA-SP-243] p 105 N86-30758	Vibration of a large space beam under gravity effect [AIAA PAPER 86-0907] p 41 A86-38917
Preloaded space structural coupling joints	The application of composites to space structures:  Guidelines on important aspects for the designer	Neumann series approach to random vibrations
[NASA-CASE-LAR-13489-1] p 29 N86-31630	p 77 N86-30759	p 43 A86-39481
STRIP TRANSMISSION LINES Proceedings of the 1985 Antenna Applications	Design and manufacturing aspects of space trusses p 28 N86-30772	Control of traveling waves in flexible structures p 44 A86-39487
Symposium, Volume 2	High-stability telescope structures spaceborne	Demonstration of vibration control of a flexible truss
(AD-A165535) p 103 N86-27525	telescopes p 28 N86-30773	structure p 44 A86-39488 Homogenization and control of lattice structures
STRUCTURAL ANALYSIS	Design and development testing of the bonded joint between a typical launch vehicle attachment ring and CFRP	p 45 A86-39495
SECTAM XII - Proceedings of the Twelfth Southeastern Conference on Theoretical and Applied Mechanics, Pine	thrust cone p 28 N86-30790	Vibration control of flexible beams using an active
Mountain, GA, May 10, 11, 1984. Volume 2	Comparison of classical and cocuring manufacturing	hinge p 46 A86-39505 Spline-based Rayleigh-Ritz methods for the
p 91 A86-31259	techniques for a CFRP honeycomb central tube satellite central tube p 29 N86-30792	approximation of the natural modes of vibration for flexible
Finite element analysis of subregions using a specified boundary stiffness method p 18 A86-36866	Design and development of the Advanced Rigid Array	beams with tip bodies p 48 A86-40843
Large space structural models by combination of finite	(ARA) solar panel composite structures p 70 N86-30796	Material damping of simple structures in a simulated space environment p 48 A86-41739
elements and transfer matrix methods	A step towards an ESA composites design handbook	Dynamic characteristics of statically determinate
p 18 A86-37861 Optimum design of large structures with multiple	for space structure applications p 79 N86-30799	space-truss platforms p 48 A86-41741 Integration of structures and controls - Some
opinion coolgii or large orradiance min manipic		
constraints	Influence of structural parameter uncertainties on flexible space structural control performances	computational issues for large space structure vibration
[AIAA PAPER 86-0952] p 19 A86-38845	space structural control performances [SNIAS-861-440-104] p 65 N86-32516	computational issues for large space structure vibration suppression p 49 A86-42939
[AIAA PAPER 86-0952] p 19 A86-38845 Reduced modeling and analysis of large repetitive space	space structural control performances [SNIAS-861-440-104] p 65 N86-32516 STRUCTURAL DESIGN CRITERIA	computational issues for large space structure vibration suppression p 49 A86-42939 Estimation of frequencies of vibration using lattices
[AIAA PAPER 86-0952] p 19 A86-38845	space structural control performances [SNIAS-861-440-104] p 65 N86-32516 STRUCTURAL DESIGN CRITERIA Space frame optimization subject to frequency	computational issues for large space structure vibration suppression p 49 A86-42939 Estimation of frequencies of vibration using lattices p 49 A86-42960
[AIAA PAPER 86-0952] p 19 A86-38845 Reduced modeling and analysis of large repetitive space structures via continuum/discrete concepts [AIAA PAPER 86-1022] p 24 A86-38879 A global-local approach to solving vibration of large truss	space structural control performances [SNIAS-861-440-104] p 65 N86-32516  STRUCTURAL DESIGN CRITERIA Space frame optimization subject to frequency constraints [AIAA PAPER 86-0877] p 40 A86-38812	computational issues for large space structure vibration suppression p 49 A86-42939 Estimation of frequencies of vibration using lattices
[AIAA PAPER 86-0952] p 19 A86-38845 Reduced modeling and analysis of large repetitive space structures via continuum/discrete concepts [AIAA PAPER 86-1022] p 24 A86-38879 A global-local approach to solving vibration of large truss structures	space structural control performances [SNIAS-861-440-104] p 65 N86-32516  STRUCTURAL DESIGN CRITERIA  Space frame optimization subject to frequency constraints [AIAA PAPER 86-0877] p 40 A86-38812  Key design parameters for a very low gravity in-orbit	computational issues for large space structure vibration suppression p 49 A86-42939 Estimation of frequencies of vibration using lattices p 49 A86-42960 Vibration of a large space beam under gravity effect p 52 A86-44884 Nonlinear response - A time domain approach with
[AIAA PAPER 86-0952] p 19 A86-38845 Reduced modeling and analysis of large repetitive space structures via continuum/discrete concepts [AIAA PAPER 86-1022] p 24 A86-38879 A global-local approach to solving vibration of large truss structures [AIAA PAPER 86-0872] p 41 A86-38907	space structural control performances [SNIAS-861-440-104] p 65 N86-32516  STRUCTURAL DESIGN CRITERIA Space frame optimization subject to frequency constraints [AIAA PAPER 86-0877] p 40 A86-38812	computational issues for large space structure vibration suppression p 49 A86-42939 Estimation of frequencies of vibration using lattices p 49 A86-42960 Vibration of a large space beam under gravity effect p 52 A86-44884
[AIAA PAPER 86-0952] p 19 A86-38845 Reduced modeling and analysis of large repetitive space structures via continuum/discrete concepts [AIAA PAPER 86-1022] p 24 A86-38879 A global-local approach to solving vibration of large truss structures [AIAA PAPER 86-0872] p 41 A86-38907 Mode localization phenomena in large space structures	space structural control performances [SNIAS-861-440-104] p 65 N86-32516  STRUCTURAL DESIGN CRITERIA  Space frame optimization subject to frequency constraints [AIAA PAPER 86-0877] p 40 A86-38812  Key design parameters for a very low gravity in-orbit facility orbital platforms [MATRA-EPT/DT/VTO68/098] p 58 N86-22631  Space Station Systems: A bibliography with indexes	computational issues for large space structure vibration suppression p 49 A86-42939 Estimation of frequencies of vibration using lattices p 49 A86-42960 Vibration of a large space beam under gravity effect p 52 A86-44884 Nonlinear response - A time domain approach with applications to acoustic fatigue, spacecraft and composite
[AIAA PAPER 86-0952] p 19 A86-38845 Reduced modeling and analysis of large repetitive space structures via continuum/discrete concepts [AIAA PAPER 86-1022] p 24 A86-38879 A global-local approach to solving vibration of large truss structures [AIAA PAPER 86-0872] p 41 A86-38907 Mode localization phenomena in large space structures [AIAA PAPER 86-0903] p 41 A86-38914	space structural control performances [SNIAS-861-440-104] p 65 N86-32516  STRUCTURAL DESIGN CRITERIA  Space frame optimization subject to frequency constraints [AIAA PAPER 86-0877] p 40 A86-38812  Key design parameters for a very low gravity in-orbit facility orbital platforms [MATRA-EPT/DT/VT068/098] p 58 N86-22631  Space Station Systems: A bibliography with indexes (supplement 1)	computational issues for large space structure vibration suppression p 49 A86-42939 Estimation of frequencies of vibration using lattices p 49 A86-42960 Vibration of a large space beam under gravity effect p 52 A86-44884 Nonlinear response - A time domain approach with applications to acoustic fatigue, spacecraft and composite materials [AIAA PAPER 86-1934] p 52 A86-45423 Verification of large space structures using scale
[AIAA PAPER 86-0952] p 19 A86-38845 Reduced modeling and analysis of large repetitive space structures via continuum/discrete concepts [AIAA PAPER 86-1022] p 24 A86-38879 A global-local approach to solving vibration of large truss structures [AIAA PAPER 86-0872] p 41 A86-38907 Mode localization phenomena in large space structures	space structural control performances [SNIAS-861-440-104] p 65 N86-32516  STRUCTURAL DESIGN CRITERIA  Space frame optimization subject to frequency constraints [AIAA PAPER 86-0877] p 40 A86-38812  Key design parameters for a very low gravity in-orbit facility orbital platforms [MATRA-EPT/DT/VTO68/098] p 58 N86-22631  Space Station Systems: A bibliography with indexes (supplement 1) [NASA-SP-7056(01)] p 101 N86-24711  Dynamics and control of flexible spacecraft during and	computational issues for large space structure vibration suppression p 49 A86-42939 Estimation of frequencies of vibration using lattices p 49 A86-42960 Vibration of a large space beam under gravity effect p 52 A86-44884 Nonlinear response - A time domain approach with applications to acoustic fatigue, spacecraft and composite materials [AIAA PAPER 86-1934] p 52 A86-45423 Verification of large space structures using scale modelling laws p 53 A86-47088
[AIAA PAPER 86-0952] p 19 A86-38845 Reduced modeling and analysis of large repetitive space structures via continuum/discrete concepts [AIAA PAPER 86-1022] p 24 A86-38879 A global-local approach to solving vibration of large truss structures [AIAA PAPER 86-0872] p 41 A86-38907 Mode localization phenomena in large space structures [AIAA PAPER 86-0903] p 41 A86-38914 Multiple Boundary Condition Tests (MBCT) for verification of large space structures [AIAA PAPER 86-0905] p 41 A86-38915	space structural control performances [SNIAS-861-440-104] p 65 N86-32516  STRUCTURAL DESIGN CRITERIA  Space frame optimization subject to frequency constraints [AIAA PAPER 86-0877] p 40 A86-38812  Key design parameters for a very low gravity in-orbit facility orbital platforms [MATRA-EPT/DT/VT068/098] p 58 N86-22631  Space Station Systems: A bibliography with indexes (supplement 1) [NASA-SP-7056(01)] p 101 N86-24711  Dynamics and control of flexible spacecraft during and after slewing maneuvers	computational issues for large space structure vibration suppression p 49 A86-42939 Estimation of frequencies of vibration using lattices p 49 A86-42960 Vibration of a large space beam under gravity effect p 52 A86-44884 Nonlinear response - A time domain approach with applications to acoustic fatigue, spacecraft and composite materials [AIAA PAPER 86-1934] p 52 A86-45423 Verification of large space structures using scale
[AIAA PAPER 86-0952] p 19 A86-38845 Reduced modeling and analysis of large repetitive space structures via continuum/discrete concepts [AIAA PAPER 86-1022] p 24 A86-38879 A global-local approach to solving vibration of large truss structures [AIAA PAPER 86-0872] p 41 A86-38907 Mode localization phenomena in large space structures [AIAA PAPER 86-0903] p 41 A86-38914 Multiple Boundary Condition Tests (MBCT) for verification of large space structures [AIAA PAPER 86-0905] p 41 A86-38915 Structural parameter identification using modal response	space structural control performances [SNIAS-861-440-104] p 65 N86-32516  STRUCTURAL DESIGN CRITERIA  Space frame optimization subject to frequency constraints [AIAA PAPER 86-0877] p 40 A86-38812  Key design parameters for a very low gravity in-orbit facility orbital platforms [MATRA-EPT/DT/VTO68/098] p 58 N86-22631  Space Station Systems: A bibliography with indexes (supplement 1) [NASA-SP-7056(01)] p 101 N86-24711  Dynamics and control of flexible spacecraft during and	computational issues for large space structure vibration suppression p 49 A86-42939 Estimation of frequencies of vibration using lattices p 49 A86-42960 Vibration of a large space beam under gravity effect p 52 A86-44884 Nonlinear response - A time domain approach with applications to acoustic fatigue, spacecraft and composite materials [AIAA PAPER 86-1934] p 52 A86-45423 Verification of large space structures using scale modelling laws p 53 A86-47088 Maneuver and vibration control of SCOLE [AIAA PAPER 86-1993] p 54 A86-47415 A square root method for the identification of large space
[AIAA PAPER 86-0952] p 19 A86-38845 Reduced modeling and analysis of large repetitive space structures via continuum/discrete concepts [AIAA PAPER 86-1022] p 24 A86-38879 A global-local approach to solving vibration of large truss structures [AIAA PAPER 86-0872] p 41 A86-38907 Mode localization phenomena in large space structures [AIAA PAPER 86-0903] p 41 A86-38914 Multiple Boundary Condition Tests (MBCT) for verification of large space structures [AIAA PAPER 86-0905] p 41 A86-38915 Structural parameter identification using modal response data	space structural control performances [SNIAS-861-440-104] p 65 N86-32516  STRUCTURAL DESIGN CRITERIA  Space frame optimization subject to frequency constraints [AIAA PAPER 86-0877] p 40 A86-38812  Key design parameters for a very low gravity in-orbit facility orbital platforms [MATRA-EPT/DT/VT068/098] p 58 N86-22631  Space Station Systems: A bibliography with indexes (supplement 1) [NASA-SP-7056(01)] p 101 N86-24711  Dynamics and control of flexible spacecraft during and after slewing maneuvers [NASA-CR-177027] p 62 N86-28983 Integrated thermal-structural-electromagnetic design optimization of large space antenna reflectors	computational issues for large space structure vibration suppression p 49 A86-42939 Estimation of frequencies of vibration using lattices p 49 A86-42960 Vibration of a large space beam under gravity effect p 52 A86-44884 Nonlinear response - A time domain approach with applications to acoustic fatigue, spacecraft and composite materials [AIAA PAPER 86-1934] p 52 A86-45423 Verification of large space structures using scale modelling laws p 53 A86-47088 Maneuver and vibration control of SCOLE [AIAA PAPER 86-1993] p 54 A86-47415 A square root method for the identification of large space structures
[AIAA PAPER 86-0952] p 19 A86-38845 Reduced modeling and analysis of large repetitive space structures via continuum/discrete concepts [AIAA PAPER 86-1022] p 24 A86-38879 A global-local approach to solving vibration of large truss structures [AIAA PAPER 86-0872] p 41 A86-38907 Mode localization phenomena in large space structures [AIAA PAPER 86-0903] p 41 A86-38914 Multiple Boundary Condition Tests (MBCT) for verification of large space structures [AIAA PAPER 86-0905] p 41 A86-38915 Structural parameter identification using modal response data p 43 A86-39479 Modeling, estimation and identification methods for static shape determination of flexible structures—for large	space structural control performances [SNIAS-861-440-104] p 65 N86-32516  STRUCTURAL DESIGN CRITERIA  Space frame optimization subject to frequency constraints [AIAA PAPER 86-0877] p 40 A86-38812 Key design parameters for a very low gravity in-orbit facility orbital platforms [MATRA-EPT/DT/VT068/098] p 58 N86-22631 Space Station Systems: A bibliography with indexes (supplement 1) [NASA-SP-7056(01)] p 101 N86-24711 Dynamics and control of flexible spacecraft during and after slewing maneuvers [NASA-CR-177027] p 62 N86-28983 Integrated thermal-structural-electromagnetic design optimization of large space antenna reflectors [NASA-TM-87713] p 35 N86-28984	computational issues for large space structure vibration suppression p 49 A86-42939 Estimation of frequencies of vibration using lattices p 49 A86-42960 Vibration of a large space beam under gravity effect p 52 A86-44884 Nonlinear response - A time domain approach with applications to acoustic fatigue, spacecraft and composite materials [AIAA PAPER 86-1934] p 52 A86-45423 Verification of large space structures using scale modelling laws p 53 A86-47088 Maneuver and vibration control of SCOLE [AIAA PAPER 86-1993] p 54 A86-47415 A square root method for the identification of large space
[AIAA PAPER 86-0952] p 19 A86-38845 Reduced modeling and analysis of large repetitive space structures via continuum/discrete concepts [AIAA PAPER 86-1022] p 24 A86-38879 A global-local approach to solving vibration of large truss structures [AIAA PAPER 86-0872] p 41 A86-38907 Mode localization phenomena in large space structures [AIAA PAPER 86-0903] p 41 A86-38914 Multiple Boundary Condition Tests (MBCT) for verification of large space structures [AIAA PAPER 86-0905] p 41 A86-38915 Structural parameter identification using modal response data p 43 A86-39479 Modeling, estimation and identification methods for static shape determination of flexible structures for large space structure design	space structural control performances [SNIAS-861-440-104] p 65 N86-32516  STRUCTURAL DESIGN CRITERIA  Space frame optimization subject to frequency constraints [AIAA PAPER 86-0877] p 40 A86-38812  Key design parameters for a very low gravity in-orbit facility orbital platforms [MATRA-EPT/DT/VT068/098] p 58 N86-22631  Space Station Systems: A bibliography with indexes (supplement 1) [NASA-SP-7056(01)] p 101 N86-24711  Dynamics and control of flexible spacecraft during and after slewing maneuvers [NASA-CR-177027] p 62 N86-28983 Integrated thermal-structural-electromagnetic design optimization of large space antenna reflectors	computational issues for large space structure vibration suppression p 49 A86-42939 Estimation of frequencies of vibration using lattices p 49 A86-42960 Vibration of a large space beam under gravity effect p 52 A86-44884 Nonlinear response - A time domain approach with applications to acoustic fatigue, spacecraft and composite materials [AIAA PAPER 86-1934] p 52 A86-45423 Verification of large space structures using scale modelling laws p 53 A86-47088 Maneuver and vibration control of SCOLE [AIAA PAPER 86-1993] p 54 A86-47415 A square root method for the identification of large space structures [AIAA PAPER 86-2049] p 54 A86-47432 Robust reduced-order control of flexible structures using the optimal projection/maximum entropy design
[AIAA PAPER 86-0952] p 19 A86-38845 Reduced modeling and analysis of large repetitive space structures via continuum/discrete concepts [AIAA PAPER 86-1022] p 24 A86-38879 A global-local approach to solving vibration of large truss structures [AIAA PAPER 86-0872] p 41 A86-38907 Mode localization phenomena in large space structures [AIAA PAPER 86-0903] p 41 A86-38914 Multiple Boundary Condition Tests (MBCT) for verification of large space structures [AIAA PAPER 86-0905] p 41 A86-38915 Structural parameter identification using modal response data p 43 A86-39479 Modeling, estimation and identification methods for static shape determination of flexible structures for large space structure design [AAS PAPER 85-424] p 20 A86-43223	space structural control performances [SNIAS-861-440-104] p 65 N86-32516  STRUCTURAL DESIGN CRITERIA  Space frame optimization subject to frequency constraints [AIAP APPER 86-0877] p 40 A86-38812  Key design parameters for a very low gravity in-orbit facility orbital piatforms [MATRA-EPT/DT/VT068/098] p 58 N86-2631  Space Station Systems: A bibliography with indexes (supplement 1) [NASA-SP-7056(01)] p 101 N86-24711  Dynamics and control of flexible spacecraft during and after slewing maneuvers [NASA-CR-177027] p 62 N86-28983 Integrated thermal-structural-electromagnetic design optimization of large space antenna reflectors [NASA-TM-87713] p 35 N86-28984  STRUCTURAL ENGINEERING  The effect of energy dissipation due to friction at the joint of a simple beam structure	computational issues for large space structure vibration suppression p 49 A86-42939 Estimation of frequencies of vibration using lattices p 49 A86-42960 Vibration of a large space beam under gravity effect p 52 A86-44884 Nonlinear response - A time domain approach with applications to acoustic fatigue, spacecraft and composite materials [AIAA PAPER 86-1934] p 52 A86-45423 Verification of large space structures using scale modelling laws p 53 A86-47088 Maneuver and vibration control of SCOLE [AIAA PAPER 86-1993] p 54 A86-47415 A square root method for the identification of large space structures [AIAA PAPER 86-2049] p 54 A86-47432 Robust reduced-order control of flexible structures using the optimal projection/maximum entropy design methodology
[AIAA PAPER 86-0952] p 19 A86-38845 Reduced modeling and analysis of large repetitive space structures via continuum/discrete concepts [AIAA PAPER 86-1022] p 24 A86-38879 A global-local approach to solving vibration of large truss structures [AIAA PAPER 86-0872] p 41 A86-38907 Mode localization phenomena in large space structures [AIAA PAPER 86-0903] p 41 A86-38914 Multiple Boundary Condition Tests (MBCT) for verification of large space structures [AIAA PAPER 86-0905] p 41 A86-38915 Structural parameter identification using modal response data p 43 A86-39479 Modeling, estimation and identification methods for static shape determination of flexible structures for large space structure design	Space structural control performances [SNIAS-861-440-104] p 65 N86-32516  STRUCTURAL DESIGN CRITERIA  Space frame optimization subject to frequency constraints [AIAA PAPER 86-0877] p 40 A86-38812 Key design parameters for a very low gravity in-orbit facility orbital platforms [MATRA-EPT/DT/VTO68/098] p 58 N86-22631 Space Station Systems: A bibliography with indexes (supplement 1) [NASA-SP-7056(01)] p 101 N86-24711 Dynamics and control of flexible spacecraft during and after slewing maneuvers [NASA-CR-177027] p 62 N86-28983 Integrated thermal-structural-electromagnetic design optimization of large space antenna reflectors [NASA-TM-87713] p 35 N86-28984  STRUCTURAL ENGINEERING  The effect of energy dissipation due to friction at the joint of a simple beam structure [AD-A163975] p 58 N86-24739	computational issues for large space structure vibration suppression p 49 A86-42939 Estimation of frequencies of vibration using lattices p 49 A86-42960 Vibration of a large space beam under gravity effect p 52 A86-44884 Nonlinear response - A time domain approach with applications to acoustic fatigue, spacecraft and composite materials [AIAA PAPER 86-1934] p 52 A86-45423 Verification of large space structures using scale modelling laws p 53 A86-47088 Maneuver and vibration control of SCOLE [AIAA PAPER 86-1993] p 54 A86-47415 A square root method for the identification of large space structures [AIAA PAPER 86-2049] p 54 A86-47432 Robust reduced-order control of flexible structures using the optimal projection/maximum entropy design
[AIAA PAPER 86-0952] p 19 A86-38845 Reduced modeling and analysis of large repetitive space structures via continuum/discrete concepts [AIAA PAPER 86-1022] p 24 A86-38879 A global-local approach to solving vibration of large truss structures [AIAA PAPER 86-0872] p 41 A86-38907 Mode localization phenomena in large space structures [AIAA PAPER 86-0903] p 41 A86-38914 Multiple Boundary Condition Tests (MBCT) for verification of large space structures [AIAA PAPER 86-0905] p 41 A86-38915 Structural parameter identification using modal response data p 43 A86-39479 Modeling, estimation and identification methods for static shape determination of flexible structures for large space structure design [AAS PAPER 85-424] p 20 A86-43223 Nonlinear deformation analysis of the Olympus Astromast p 21 A86-43756 Vibration of a large space beam under gravity effect	space structural control performances [SNIAS-861-440-104] p 65 N86-32516  STRUCTURAL DESIGN CRITERIA  Space frame optimization subject to frequency constraints [AIAA PAPER 86-0877] p 40 A86-38812 Key design parameters for a very low gravity in-orbit facility — orbital platforms [MATRA-EPT/DT/VT068/098] p 58 N86-22631 Space Station Systems: A bibliography with indexes (supplement 1) [NASA-SP-7056(01)] p 101 N86-24711 Dynamics and control of flexible spacecraft during and after slewing maneuvers [NASA-CR-177027] p 62 N86-28983 Integrated thermal-structural-electromagnetic design optimization of large space antenna reflectors [NASA-TM-87713] p 35 N86-28984  STRUCTURAL ENGINEERING The effect of energy dissipation due to friction at the joint of a simple beam structure [AD-A163975] p 58 N86-24739 Spacecraft structures design and verification p 28 N86-30685	computational issues for large space structure vibration suppression p 49 A86-42939 Estimation of frequencies of vibration using lattices p 49 A86-42960 Vibration of a large space beam under gravity effect p 52 A86-4884 Nonlinear response - A time domain approach with applications to acoustic fatigue, spacecraft and composite materials [AIAA PAPER 86-1934] p 52 A86-45423 Verification of large space structures using scale modelling laws p 53 A86-47088 Maneuver and vibration control of SCOLE [AIAA PAPER 86-1993] p 54 A86-4715 A square root method for the identification of large space structures [AIAA PAPER 86-2049] p 54 A86-47432 Robust reduced-order control of flexible structures using the optimal projection/maximum entropy design methodology [AIAA PAPER 86-2052] p 55 A86-47435 Key design parameters for a very low gravity in-orbit facility orbital platforms
[AIAA PAPER 86-0952] p 19 A86-38845 Reduced modeling and analysis of large repetitive space structures via continuum/discrete concepts [AIAA PAPER 86-1022] p 24 A86-38879 A global-local approach to solving vibration of large truss structures [AIAA PAPER 86-0872] p 41 A86-38907 Mode localization phenomena in large space structures [AIAA PAPER 86-0903] p 41 A86-38914 Multiple Boundary Condition Tests (MBCT) for verification of large space structures [AIAA PAPER 86-0905] p 41 A86-38915 Structural parameter identification using modal response data p 43 A86-39479 Modeling, estimation and identification methods for static shape determination of flexible structures for large space structure design [AAS PAPER 85-424] p 20 A86-43223 Nonlinear deformation analysis of the Olympus Astromast p 52 A86-44884	space structural control performances [SNIAS-861-440-104] p 65 N86-32516  STRUCTURAL DESIGN CRITERIA  Space frame optimization subject to frequency constraints [AIAA PAPER 86-0877] p 40 A86-38812  Key design parameters for a very low gravity in-orbit facility orbital platforms [MATTA-EPT/DT/VTO68/098] p 58 N86-2631  Space Station Systems: A bibliography with indexes (supplement 1) [NASA-SP-7056(01)] p 101 N86-24711  Dynamics and control of flexible spacecraft during and after slewing maneuvers [NASA-CR-177027] p 62 N86-28983 Integrated thermal-structural-electromagnetic design optimization of large space antenna reflectors [NASA-TM-87713] p 35 N86-28984  STRUCTURAL ENGINEERING  The effect of energy dissipation due to friction at the joint of a simple beam structure [AD-A163975] p 58 N86-24739  Spacecraft structures design and verification p 28 N86-30685	computational issues for large space structure vibration suppression p 49 A86-42939 Estimation of frequencies of vibration using lattices p 49 A86-42960 Vibration of a large space beam under gravity effect p 52 A86-44884 Nonlinear response - A time domain approach with applications to acoustic fatigue, spacecraft and composite materials [AIAA PAPER 86-1934] p 52 A86-45423 Verification of large space structures using scale modelling laws p 53 A86-47088 Maneuver and vibration control of SCOLE [AIAA PAPER 86-1993] p 54 A86-47415 A square root method for the identification of large space structures [AIAA PAPER 86-2049] p 54 A86-47432 Robust reduced-order control of flexible structures using the optimal projection/maximum entropy design methodology [AIAA PAPER 86-2052] p 55 A86-47435 Key design parameters for a very low gravity in-orbit facility orbital platforms [MATRA-EPT/DT/VT068/098] p 58 N86-22631
[AIAA PAPER 86-0952] p 19 A86-38845 Reduced modeling and analysis of large repetitive space structures via continuum/discrete concepts [AIAA PAPER 86-1022] p 24 A86-38879 A global-local approach to solving vibration of large truss structures [AIAA PAPER 86-0872] p 41 A86-38907 Mode localization phenomena in large space structures [AIAA PAPER 86-0903] p 41 A86-38914 Multiple Boundary Condition Tests (MBCT) for verification of large space structures [AIAA PAPER 86-0905] p 41 A86-38915 Structural parameter identification using modal response data p 43 A86-39479 Modeling, estimation and identification methods for static shape determination of flexible structures for large space structure design [AAS PAPER 85-424] p 20 A86-43223 Nonlinear deformation analysis of the Olympus Astromast p 21 A86-43756 Vibration of a large space beam under gravity effect	space structural control performances [SNIAS-861-440-104] p 65 N86-32516  STRUCTURAL DESIGN CRITERIA  Space frame optimization subject to frequency constraints [AIAA PAPER 86-0877] p 40 A86-38812 Key design parameters for a very low gravity in-orbit facility — orbital platforms [MATRA-EPT/DT/VT068/098] p 58 N86-22631 Space Station Systems: A bibliography with indexes (supplement 1) [NASA-SP-7056(01)] p 101 N86-24711 Dynamics and control of flexible spacecraft during and after slewing maneuvers [NASA-CR-177027] p 62 N86-28983 Integrated thermal-structural-electromagnetic design optimization of large space antenna reflectors [NASA-TM-87713] p 35 N86-28984  STRUCTURAL ENGINEERING The effect of energy dissipation due to friction at the joint of a simple beam structure [AD-A163975] p 58 N86-24739 Spacecraft structures design and verification p 28 N86-30685	computational issues for large space structure vibration suppression p 49 A86-42939 Estimation of frequencies of vibration using lattices p 49 A86-42960 Vibration of a large space beam under gravity effect p 52 A86-4884 Nonlinear response - A time domain approach with applications to acoustic fatigue, spacecraft and composite materials [AIAA PAPER 86-1934] p 52 A86-45423 Verification of large space structures using scale modelling laws p 53 A86-47088 Maneuver and vibration control of SCOLE [AIAA PAPER 86-1993] p 54 A86-4715 A square root method for the identification of large space structures [AIAA PAPER 86-2049] p 54 A86-47432 Robust reduced-order control of flexible structures using the optimal projection/maximum entropy design methodology [AIAA PAPER 86-2052] p 55 A86-47435 Key design parameters for a very low gravity in-orbit facility orbital platforms

SUBJECT INDEX TELECOMMUNICATION

TRUTS Structural performance of space station trusses with	Oxygen/hydrogen Space Station propulsion system concept definition for IOC	TECHNOLOGICAL FORECASTING  NASA space plans and scenarios to 2000 and beyond
missing members	[AIAA PAPER 86-1561] p 87 A86-42714	Book p 2 A86-34594
[NASA-TM-87715] p 34 N86-24731	Mathematical models of flexible spacecraft dynamics:	Enabling technologies for transition to utilization of
Strength of carbon fiber composite/titanium bonded	A survey of order reduction approaches aircraft tracking	space-based resources and operations p 93 A86-34992
joints as used for SPAS-type structures p 79 N86-30794	[NLR-MP-85004-U] p 60 N86-26367	Pioneering the space frontier p 4 A86-38100
UBSTRUCTURES	Communications platform payload definition study	Future directions in materials and structures for space
Verification of large beam-type space structures	[NASA-CR-174986] p 14 N86-27402 Development of composite tube protective coatings	applications
[AIAA PAPER 86-0860] p 24 A86-38809	(NASA-CR-178116) p 76 N86-29989	[AIAA PAPER 86-1185] p 25 A86-40611 The exploitation of space: Policy trends in the military
Orbital consumables resupply requirements impact on	SYSTEMS ENGINEERING	and commercial uses of outer space Book
the evolution of OSCRS	Failure detection and accommodation in structural dynamics systems using analytic redundancy in large	p 7 A86-43650
[AIAA PAPER 86-1603] p 96 A86-42743	space structures p 49 A86-42938	Space Station operations in the twenty-first century [AIAA PAPER 86-2328] p 10 A86-46951
SUPPORT SYSTEMS  CFRP support structure for high stability reflector	Accommodation study of the CRHESUS cryostat on the	[AIAA PAPER 86-2328] p 10 A86-46951 An economics perspective of the 21st century Space
antennas p 26 A86-49988	EURECA platform [SNIAS-1048ACA/LL/V] p 26 N86-22630	Station
Primer on operating and support (O and S) costs for	Mathematical correlation of modal parameter	[AIAA PAPER 86-2348] p 11 A86-46961
space systems [AD-A162381] p 12 N86-24588	identification methods via system realization theory [NASA-TM-87720] p 59 N86-25019	Projections of space systems opportunities and technologies for the 2000 to 2030 time period
SURFACE PROPERTIES	[NASA-TM-87720] p 59 N86-25019 Historical development of solar array drive mechanisms	p 11 A86-48451
The Shuttle glow as an indicator of material changes	by British Aerospace p 102 N86-27357	TECHNOLOGY ASSESSMENT
in space [AD-A167300] p 71 A86-30323	The Olympus antenna deployment subsystem design and testing spacecraft antennas p 27 N86-27392	Spacecraft attitude dynamics and control - A personal perspective on early developments p 35 A86-31651
SURFACE REACTIONS	A design study for the use of a multiple aperture	perspective on early developments p 35 A86-31651  The NASA Flight Demonstration Program
The Shuttle glow as an indicator of material changes	deployable antenna for soil moisture remote sensing	p 2 A86-32566
in space	satellite applications	Propulsion system concept assessment and technology
[AD-A167300] p 71 A86-30323	[NASA-CR-178154] p 16 N86-30933 SYSTEMS INTEGRATION	requirements for Space Station p 86 A86-34972
Analyses of spacecraft polymeric materials p 73 A86-41750	The Giotto assembly, integration and verification	Dynamic power - A Key to the promise of space p 86 A86-34994
SYNCHRONOUS PLATFORMS	programme p 5 A86-38273	Air and space travel - Tasks for the future
Geostationary communications platforms	Al applications for the Space Station program - Technology, design and integration challenges	p 3 A86-35518
p 2 A86-32547 Geostationary platform - An application of the Space	[AIAA PAPER 86-2315] p 21 A86-47048	The Giotto assembly, integration and verification
Station p 5 A86-40502	Integrated structure/control design - Present	programme p 5 A86-38273 Carbon fibres and their composites
Polar platform payload requirements in the 1990's	methodology and future opportunities p 58 A86-49094	p 72 A86-40487
[AAS PAPER 85-396] p 7 A86-43228	Electrical power system integration for the Space	Space Systems Technology Conference, San Diego, CA,
Communications platform payload definition study [NASA-CR-174986] p 14 N86-27402	Station [AIAA PAPER 86-2351] p 67 A86-49561	June 9-12, 1986, Technical Papers p 95 A86-40576
Communication Platform Payload Definition (CPPD)	[AIAA PAPER 86-2351] p 67 A86-49561 The system integration and verification testing of an	Spacecraft technology requirements for future NASA missions
study. Volume 1: Executive summary	orbital maneuvering vehicle for an air bearing floor	[AIAA PAPER 86-1160] p 6 A86-40609
[NASA-CR-174928] p 22 N86-27403	[NASA-CR-178350] p 100 N86-24217	State of the art in intelligent/brilliant robots p 82 A86-43884
Communication Platform Payload Definition (CPPD) study. Volume 2: Technical report	SYSTEMS SIMULATION  Aerospace simulation II; Proceedings of the Second	The role of Columbus in a future Space Station
[NASA-CR-174929] p 22 N86-27404	Conference, San Diego, CA, January 23-25, 1986	scenario p 12 A86-49565
Communication Platform Payload Definition (CPPD)	p 94 A86-37176 Modeling of a tethered two-body system in space	Alternative module configurations for advanced solar
study. Volume 3: Addendum		arrays on low orbit and extended lifetime missions (AMOC
[NASA.CR-174930] p.22 N86-27405	p 18 A86-37184	1)
[NASA-CR-174930] p 22 N86-27405 Communications platform payload definition study,	Space Station dynamic modeling, control and	[ESA-CR(P)-2129] p 89 N86-24025
Communications platform payload definition study, executive summary	Space Station dynamic modeling, control and simulation p 39 A86-37186	[ÉSA-CR(P)-2129] p 89 N86-24025 Growth capabilities of European retractable solar arrays
Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407	Space Station dynamic modeling, control and simulation p 39 A86-37186  Dynamics and control characteristics for the WISP 300	[ESA-CR(P)-2129] p 89 N86-24025 Growth capabilities of European retractable solar arrays space station power supplies
Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 SYNCHRONOUS SATELLITES  The use of electrostatic noise to control high-voltage	Space Station dynamic modeling, control and simulation p 39 A86-37186 Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220	[ESA-CR(P)-2129] p 89 N86-24025 Growth capabilities of European retractable solar arrays space station power supplies [ESA-CR(P)-2141] p 69 N86-26711 Communications platform payload definition study
Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 SYNCHRONOUS SATELLITES  The use of electrostatic noise to control high-voltage differential charging of spacecraft p 66 A86-41018	Space Station dynamic modeling, control and simulation p 39 A86-37186 Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220 Dynamic verification of very large space structures	[ESA-CR(P)-2129] p 89 N86-24025 Growth capabilities of European retractable solar arrays space station power supplies [ESA-CR(P)-2141] p 69 N86-26711 Communications platform payload definition study [NASA-CR-174986] p 14 N86-27402
Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 SYNCHRONOUS SATELLITES  The use of electrostatic noise to control high-voltage differential charging of spacecraft p 66 A86-41018 Communication Platform Payload Definition (CPPD)	Space Station dynamic modeling, control and simulation Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220 Dynamic verification of very large space structures p 63 N86-30683	[ESA-CR(P)-2129] p 89 N86-24025 Growth capabilities of European retractable solar arrays space station power supplies [ESA-CR(P)-2141] p 69 N86-26711 Communications platform payload definition study
Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 SYNCHRONOUS SATELLITES  The use of electrostatic noise to control high-voltage differential charging of spacecraft p 66 A86-41018	Space Station dynamic modeling, control and simulation p 39 A86-37186 Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220 Dynamic verification of very large space structures p 63 N86-30683  SYSTEMS STABILITY Payload isolation and precision pointing for the 1990's	[ESA-CR(P)-2129] p 89 N86-24025 Growth capabilities of European retractable solar arrays space station power supplies [ESA-CR(P)-2141] p 69 N86-26711 Communications platform payload definition study [NASA-CR-174986] p 14 N86-27402 Developments in the nondestructive evaluation (NDE) of composite materials p 79 N86-30785 Comparison of classical and cocuring manufacturing
Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 SYNCHRONOUS SATELLITES  The use of electrostatic noise to control high-voltage differential charging of spacecraft p 66 A86-41018 Communication Platform Payload Definition (CPPD) study. Volume 2: Technical report [NASA-CR-174929] p 22 N86-27404 Communication Platform Payload Definition (CPPD)	Space Station dynamic modeling, control and simulation p 39 A86-37186 Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220 Dynamic verification of very large space structures p 63 N86-30683  SYSTEMS STABILITY Payload isolation and precision pointing for the 1990's [AAS PAPER 85-010] p 36 A86-31781	[ESA-CR(P)-2129] p 89 N86-24025 Growth capabilities of European retractable solar arrays
Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 SYNCHRONOUS SATELLITES  The use of electrostatic noise to control high-voltage differential charging of spacecraft p 66 A86-41018 Communication Platform Payload Definition (CPPD) study. Volume 2: Technical report [NASA-CR-174929] p 22 N86-27404 Communication Platform Payload Definition (CPPD) study. Volume 3: Addendum	Space Station dynamic modeling, control and simulation p 39 A86-37186 Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration  [AAS PAPER 85-365] p 51 A86-43220 Dynamic verification of very large space structures p 63 N86-30683  SYSTEMS STABILITY Payload isolation and precision pointing for the 1990's [AAS PAPER 85-010] p 36 A86-31781 Finite dimensional stabilization of linear Distributed	[ESA-CR(P)-2129] p 89 N86-24025 Growth capabilities of European retractable solar arrays space station power supplies [ESA-CR(P)-2141] p 69 N86-26711 Communications platform payload definition study [NASA-CR-174986] p 14 N86-27402 Developments in the nondestructive evaluation (NDE) of composite materials p 79 N86-30785 Comparison of classical and cocuring manufacturing
Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 SYNCHRONOUS SATELLITES  The use of electrostatic noise to control high-voltage differential charging of spacecraft p 66 A86-41018 Communication Platform Payload Definition (CPPD) study. Volume 2: Technical report [NASA-CR-174929] p 22 N86-27404 Communication Platform Payload Definition (CPPD)	Space Station dynamic modeling, control and simulation p 39 A86-37186 Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220 Dynamic verification of very large space structures p 63 N86-30683  SYSTEMS STABILITY Payload isolation and precision pointing for the 1990's [AAS PAPER 85-010] p 36 A86-31781	[ESA-CR(P)-2129] p 89 N86-24025 Growth capabilities of European retractable solar arrays
Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 SYNCHRONOUS SATELLITES  The use of electrostatic noise to control high-voltage differential charging of spacecraft p 66 A86-41018 Communication Platform Payload Definition (CPPD) study, Volume 2: Technical report [NASA-CR-174929] p 22 N86-27404 Communication Platform Payload Definition (CPPD) study, Volume 3: Addendum [NASA-CR-174930] p 22 N86-27405 Communications platform payload definition study, executive summary	Space Station dynamic modeling, control and simulation p 39 A86-37186 Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220 Dynamic verification of very large space structures p 63 N86-30683  SYSTEMS STABILITY Payload isolation and precision pointing for the 1990's [AAS PAPER 85-010] p 36 A86-31781 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique	[ESA-CR(P)-2129] p 89 N86-24025 Growth capabilities of European retractable solar arrays
Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 SYNCHRONOUS SATELLITES  The use of electrostatic noise to control high-voltage differential charging of spacecraft p 66 A86-41018 Communication Platform Payload Definition (CPPD) study. Volume 2: Technical report [NASA-CR-174929] p 22 N86-27404 Communication Platform Payload Definition (CPPD) study. Volume 3: Addendum [NASA-CR-174930] p 22 N86-27405 Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407	Space Station dynamic modeling, control and simulation p 39 A86-37186 Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220 Dynamic verification of very large space structures p 63 N86-30683  SYSTEMS STABILITY Payload isolation and precision pointing for the 1990's [AAS PAPER 85-010] p 36 A86-31781 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique	[ESA-CR(P)-2129] p 89 N86-24025 Growth capabilities of European retractable solar arrays
Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 SYNCHRONOUS SATELLITES  The use of electrostatic noise to control high-voltage differential charging of spacecraft p 66 A86-41018 Communication Platform Payload Definition (CPPD) study, Volume 2: Technical report [NASA-CR-174929] p 22 N86-27404 Communication Platform Payload Definition (CPPD) study, Volume 3: Addendum [NASA-CR-174930] p 22 N86-27405 Communications platform payload definition study, executive summary	Space Station dynamic modeling, control and simulation p 39 A86-37186 Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220 Dynamic verification of very large space structures p 63 N86-30683  SYSTEMS STABILITY Payload isolation and precision pointing for the 1990's [AAS PAPER 85-010] p 36 A86-31781 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique	[ESA-CR(P)-2129] p 89 N86-24025 Growth capabilities of European retractable solar arrays
Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 SYNCHRONOUS SATELLITES  The use of electrostatic noise to control high-voltage differential charging of spacecraft p 66 A86-41018 Communication Platform Payload Definition (CPPD) study. Volume 2: Technical report [NASA-CR-174929] p 22 N86-27404 Communication Platform Payload Definition (CPPD) study. Volume 3: Addendum [NASA-CR-174930] p 22 N86-27405 Communications platform payload definition study. executive summary [NASA-CR-174985] p 14 N86-27407 Spacebus: Multimission communication satellites [SNIAS-861-422-119] p 16 N86-31637 SYNCOM 3 SATELLITE	Space Station dynamic modeling, control and simulation p 39 A86-37186 Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration  [AAS PAPER 85-365] p 51 A86-43220 Dynamic verification of very large space structures p 63 N86-30683  SYSTEMS STABILITY Payload isolation and precision pointing for the 1990's [AAS PAPER 85-010] p 36 A86-31781 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39492  T  TABLES (DATA)	[ESA-CR(P)-2129] p 89 N86-24025 Growth capabilities of European retractable solar arrays
Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 SYNCHRONOUS SATELLITES  The use of electrostatic noise to control high-voltage differential charging of spacecraft p 66 A86-41018 Communication Platform Payload Definition (CPPD) study. Volume 2: Technical report [NASA-CR-174929] p 22 N86-27404 Communication Platform Payload Definition (CPPD) study. Volume 3: Addendum [NASA-CR-174980] p 22 N86-27405 Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N96-27407 Spacebus: Multimission communication satellites [SNIAS-861-422-119] p 16 N86-31637 SYNCOM 3 SATELLITE  A thermal control design for the Leasat F-3 salvage	Space Station dynamic modeling, control and simulation p 39 A86-37186 Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration  [AAS PAPER 85-365] p 51 A86-43220 Dynamic verification of very large space structures p 63 N86-30683  SYSTEMS STABILITY Payload isolation and precision pointing for the 1990's [AAS PAPER 85-010] p 36 A86-31781 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39492  T  TABLES (DATA) Space environment simulation to test satellite thermal	[ESA-CR(P)-2129] p 89 N86-24025 Growth capabilities of European retractable solar arrays
Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 SYNCHRONOUS SATELLITES  The use of electrostatic noise to control high-voltage differential charging of spacecraft p 66 A86-41018 Communication Platform Payload Definition (CPPD) study. Volume 2: Technical report [NASA-CR-174929] p 22 N86-27404 Communication Platform Payload Definition (CPPD) study. Volume 3: Addendum [NASA-CR-174930] p 22 N86-27405 Communications platform payload definition study. executive summary [NASA-CR-174985] p 14 N86-27407 Spacebus: Multimission communication satellites [SNIAS-861-422-119] p 16 N86-31637 SYNCOM 3 SATELLITE	Space Station dynamic modeling, control and simulation p 39 A86-37186 Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration  [AAS PAPER 85-365] p 51 A86-43220 Dynamic verification of very large space structures p 63 N86-30683  SYSTEMS STABILITY Payload isolation and precision pointing for the 1990's [AAS PAPER 85-010] p 36 A86-31781 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39492  T  TABLES (DATA)	[ESA-CR(P)-2129] p 89 N86-24025 Growth capabilities of European retractable solar arrays
Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 SYNCHRONOUS SATELLITES  The use of electrostatic noise to control high-voltage differential charging of spacecraft p 66 A86-41018 Communication Platform Payload Definition (CPPD) study. Volume 2: Technical report [NASA-CR-174929] p 22 N86-27404 Communication Platform Payload Definition (CPPD) study. Volume 3: Addendum [NASA-CR-174980] p 22 N86-27405 Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 Spacebus: Multimission communication satellites [SNIAS-861-422-119] p 16 N86-31637 SYNCOM 3 SATELLITE  A thermal control design for the Leasat F-3 salvage mission [AIAA PAPER 86-1340] p 31 A86-39939 SYNTHETIC APERTURE RADAR	Space Station dynamic modeling, control and simulation p 39 A86-37186 Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration  [AAS PAPER 85-365] p 51 A86-43220 Dynamic verification of very large space structures p 63 N86-30683  SYSTEMS STABILITY Payload isolation and precision pointing for the 1990's [AAS PAPER 85-010] p 36 A86-31781 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39492  T  TABLES (DATA) Space environment simulation to test satellite thermal control coatings. Volume 2, appendix 1: Detailed results of optical measurements made after the various stages of the first test	[ESA-CR(P)-2129] p 89 N86-24025 Growth capabilities of European retractable solar arrays
Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 SYNCHRONOUS SATELLITES  The use of electrostatic noise to control high-voltage differential charging of spacecraft p 66 A86-41018 Communication Platform Payload Definition (CPPD) study. Volume 2: Technical report [NASA-CR-174929] p 22 N86-27404 Communication Platform Payload Definition (CPPD) study. Volume 3: Addendum [NASA-CR-174930] p 22 N86-27405 Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 Spacebus: Multimission communication satellites [SNIAS-861-422-119] p 16 N86-31637 SYNCOM 3 SATELLITE  A thermal control design for the Leasat F-3 salvage mission [AIAA PAPER 86-1340] p 31 A86-39939 SYNTHETIC APERTURE RADAR  NASA/American Society for Engineering Education	Space Station dynamic modeling, control and simulation p 39 A86-37186 Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220 Dynamic verification of very large space structures p 63 N86-30683  SYSTEMS STABILITY Payload isolation and precision pointing for the 1990's [AAS PAPER 85-010] p 36 A86-31781 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39492  T  TABLES (DATA) Space environment simulation to test satellite thermal control coatings. Volume 2, appendix 1: Detailed results of optical measurements made after the various stages of the first test [ESA-TT-891-VOL-2] p 33 N86-22628	[ESA-CR(P)-2129] p 89 N86-24025 Growth capabilities of European retractable solar arrays
Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 SYNCHRONOUS SATELLITES  The use of electrostatic noise to control high-voltage differential charging of spacecraft p 66 A86-41018 Communication Platform Payload Definition (CPPD) study. Volume 2: Technical report [NASA-CR-174929] p 22 N86-27404 Communication Platform Payload Definition (CPPD) study. Volume 3: Addendum [NASA-CR-174930] p 22 N86-27405 Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 Spacebus: Multimission communication satellites [SNIAS-861-422-119] p 16 N86-31637 SYNCOM 3 SATELLITE  A thermal control design for the Leasat F-3 salvage mission [AIAA PAPER 86-1340] p 31 A86-39939 SYNTHETIC APERTURE RADAR NASA/American Society for Engineering Education (ASEE) Summer Faculty Fellowship Program, 1985 Space Stations and Their Environments	Space Station dynamic modeling, control and simulation p 39 A86-37186 Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220 Dynamic verification of very large space structures p 63 N86-30683  SYSTEMS STABILITY Payload isolation and precision pointing for the 1990's [AAS PAPER 85-010] p 36 A86-31781 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39492  T  TABLES (DATA) Space environment simulation to test satellite thermal control coatings. Volume 2, appendix 1: Detailed results of optical measurements made after the various stages of the first test [ESA-TT-891-VOL-2] p 33 N86-22628 Space environment simulation to test satellite thermal	[ESA-CR(P)-2129] p 89 N86-24025 Growth capabilities of European retractable solar arrays
Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 SYNCHRONOUS SATELLITES  The use of electrostatic noise to control high-voltage differential charging of spacecraft p 66 A86-41018 Communication Platform Payload Definition (CPPD) study. Volume 2: Technical report [NASA-CR-174929] p 22 N86-27404 Communication Platform Payload Definition (CPPD) study. Volume 3: Addendum [NASA-CR-174930] p 22 N86-27405 Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 Spacebus: Multimission communication satellites [SNIAS-861-422-119] p 16 N86-31637 SYNCOM 3 SATELLITE A thermal control design for the Leasat F-3 salvage mission [AIAA PAPER 86-1340] p 31 A86-39939 SYNTHETIC APERTURE RADAR  NASA/American Society for Engineering Education (ASEE) Summer Faculty Fellowship Program, 1985 Space Stations and Their Environments [NASA-CR-171931] p 105 N86-31409	Space Station dynamic modeling, control and simulation p 39 A86-37186 Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220 Dynamic verification of very large space structures p 63 N86-30683  SYSTEMS STABILITY Payload isolation and precision pointing for the 1990's [AAS PAPER 85-010] p 36 A86-31781 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39492  T  TABLES (DATA) Space environment simulation to test satellite thermal control coatings. Volume 2, appendix 1: Detailed results of optical measurements made after the various stages of the first test [ESA-TT-891-VOL-2] p 33 N86-22628 Space environment simulation to test satellite thermal control coatings. Volume 2: Appendice 2, 3, and 4. Appendix 2: Detailed results of optical measurements	Growth capabilities of European retractable solar arrays
Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 SYNCHRONOUS SATELLITES  The use of electrostatic noise to control high-voltage differential charging of spacecraft p 66 A86-41018 Communication Platform Payload Definition (CPPD) study. Volume 2: Technical report [NASA-CR-174929] p 22 N86-27404 Communication Platform Payload Definition (CPPD) study. Volume 3: Addendum [NASA-CR-174930] p 22 N86-27405 Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 Spacebus: Multimission communication satellites [SNIAS-861-422-119] p 16 N86-31637 SYNCOM 3 SATELLITE  A thermal control design for the Leasat F-3 salvage mission [AIAA PAPER 86-1340] p 31 A86-39939 SYNTHETIC APERTURE RADAR NASA/American Society for Engineering Education (ASEE) Summer Faculty Fellowship Program, 1985 Space Stations and Their Environments [NASA-CR-171931] p 105 N86-31409 SYSTEM FAILURES	Space Station dynamic modeling, control and simulation p 39 A86-37186 Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration  [AAS PAPER 85-365] p 51 A86-43220 Dynamic verification of very large space structures p 63 N86-30683  SYSTEMS STABILITY Payload isolation and precision pointing for the 1990's [AAS PAPER 85-010] p 36 A86-31781 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39492  T  TABLES (DATA) Space environment simulation to test satellite thermal control coatings. Volume 2, appendix 1: Detailed results of optical measurements made after the various stages of the first test [ESA-TT-891-VOL-2] p 33 N86-22628 Space environment simulation to test satellite thermal control coatings. Volume 2: Appendices 2, 3, and 4, Appendix 2: Detailed results of optical measurements made after the various stages of the second test. Appendix	[ESA-CR(P)-2129] p 89 N86-24025 Growth capabilities of European retractable solar arrays
Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 SYNCHRONOUS SATELLITES  The use of electrostatic noise to control high-voltage differential charging of spacecraft p 66 A86-41018 Communication Platform Payload Definition (CPPD) study. Volume 2: Technical report [NASA-CR-174929] p 22 N86-27404 Communication Platform Payload Definition (CPPD) study. Volume 3: Addendum [NASA-CR-174930] p 22 N86-27405 Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 Spacebus: Multimission communication satellites [SNIAS-861-422-119] p 16 N86-31637 SYNCOM 3 SATELLITE  A thermal control design for the Leasat F-3 salvage mission [AIAA PAPER 86-1340] p 31 A86-39939 SYNTHETIC APERTURE RADAR  NASA/American Society for Engineering Education (ASEE) Summer Faculty Fellowship Program, 1985 Space Stations and Their Environments [NASA-CR-171931] p 105 N86-31409 SYSTEM FAILURES  Testing of a failure accommodation system on a highly flexible grid	Space Station dynamic modeling, control and simulation p 39 A86-37186 Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration  [AAS PAPER 85-365] p 51 A86-43220 Dynamic verification of very large space structures p 63 N86-30683  SYSTEMS STABILITY Payload isolation and precision pointing for the 1990's [AAS PAPER 85-010] p 36 A86-31781 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39492  T  TABLES (DATA) Space environment simulation to test satellite thermal control coatings. Volume 2, appendix 1: Detailed results of optical measurements made after the various stages of the first test [ESA-TT-891-VOL-2] p 33 N86-22628 Space environment simulation to test satellite thermal control coatings. Volume 2: Appendices 2, 3, and 4. Appendix 2: Detailed results of optical measurements made after the various stages of the second test. Appendix 3: Summary of optical results obtained during the first summary of optical results obtained during the first	[ESA-CR(P)-2129] p 89 N86-24025 Growth capabilities of European retractable solar arrays
Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 SYNCHRONOUS SATELLITES  The use of electrostatic noise to control high-voltage differential charging of spacecraft p 66 A86-41018 Communication Platform Payload Definition (CPPD) study. Volume 2: Technical report [NASA-CR-174929] p 22 N86-27404 Communication Platform Payload Definition (CPPD) study. Volume 3: Addendum [NASA-CR-174930] p 22 N86-27405 Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 Spacebus: Multimission communications satellites [SNIAS-861-422-119] p 16 N86-31637 SYNCOM 3 SATELLITE  A thermal control design for the Leasat F-3 salvage mission [AIAA PAPER 86-1340] p 31 A86-39939 SYNTHETIC APERTURE RADAR  NASA/American Society for Engineering Education (ASEE) Summer Faculty Fellowship Program, 1985 Space Stations and Their Environments [NASA-CR-171931] p 105 N86-31409 SYSTEM FAILURES  Testing of a failure accommodation system on a highly flexible grid p 38 A86-35390 SYSTEM IDENTIFICATION	Space Station dynamic modeling, control and simulation Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220 Dynamic verification of very large space structures p 63 N86-30683  SYSTEMS STABILITY Payload isolation and precision pointing for the 1990's [AAS PAPER 85-010] p 36 A86-31781 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39492  T  TABLES (DATA) Space environment simulation to test satellite thermal control coatings. Volume 2, appendix 1: Detailed results of optical measurements made after the various stages of the first test [ESA-TT-891-VOL-2] p 33 N86-22628 Space environment simulation to test satellite thermal control coatings. Volume 2: Appendices 2, 3, and 4. Appendix 2: Detailed results of optical measurements made after the various stages of the second test. Appendix 3: Summary of optical results obtained during the first test. Appendix 4: Summary of optical results obtained during the second test.	Growth capabilities of European retractable solar arrays
Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 SYNCHRONOUS SATELLITES  The use of electrostatic noise to control high-voltage differential charging of spacecraft p 66 A86-41018 Communication Platform Payload Definition (CPPD) study. Volume 2: Technical report [NASA-CR-174929] p 22 N86-27404 Communication Platform Payload Definition (CPPD) study. Volume 3: Addendum [NASA-CR-174980] p 22 N86-27405 Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N96-27407 Spacebus: Multimission communication satellites [SNIAS-861-422-119] p 16 N86-31637 SYNCOM 3 SATELLITE  A thermal control design for the Leasat F-3 salvage mission [AIAA PAPER 86-1340] p 31 A86-39939 SYNTHETIC APERTURE RADAR NASA/American Society for Engineering Education (ASEE) Summer Faculty Fellowship Program, 1985 Space Stations and Their Environments [NASA-CR-171931] SYSTEM FAILURES  Testing of a failure accommodation system on a highly flexible grid  SYSTEM IDENTIFICATION  Effects of noise on modal parameters identified by the	Space Station dynamic modeling, control and simulation p 39 A86-37186 Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration  [AAS PAPER 85-365] p 51 A86-43220 Dynamic verification of very large space structures p 63 N86-30683  SYSTEMS STABILITY Payload isolation and precision pointing for the 1990's [AAS PAPER 85-010] p 36 A86-31781 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39492  T  TABLES (DATA) Space environment simulation to test satellite thermal control coatings. Volume 2, appendix 1: Detailed results of optical measurements made after the various stages of the first test [ESA-TT-891-VOL-2] p 33 N86-22628 Space environment simulation to test satellite thermal control coatings. Volume 2: Appendices 2, 3, and 4. Appendix 2: Detailed results of optical measurements made after the various stages of the second test. Appendix 3: Summary of optical results obtained during the second test [ESA-TT-891-VOL-3] p 33 N86-22629	[ESA-CR(P)-2129] p 89 N86-24025 Growth capabilities of European retractable solar arrays
Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 SYNCHRONOUS SATELLITES  The use of electrostatic noise to control high-voltage differential charging of spacecraft p 66 A86-41018 Communication Platform Payload Definition (CPPD) study. Volume 2: Technical report [NASA-CR-174929] p 22 N86-27404 Communication Platform Payload Definition (CPPD) study. Volume 3: Addendum [NASA-CR-174930] p 22 N86-27405 Communications platform payload definition study. executive summary [NASA-CR-174985] p 14 N86-27407 Spacebus: Multimission communication satellites [SNIAS-861-422-119] p 16 N86-31637 SYNCOM 3 SATELLITE  A thermal control design for the Leasat F-3 salvage mission [AIAA PAPER 86-1340] p 31 A86-39939 SYNTHETIC APERTURE RADAR  NASA/American Society for Engineering Education (ASEE) Summer Faculty Fellowship Program, 1985 Space Stations and Their Environments [NASA-CR-171931] p 105 N86-31409 SYSTEM FAILURES  Testing of a failure accommodation system on a highly flexible grid p 38 A86-35390 SYSTEM IDENTIFICATION  Effects of noise on modal parameters identified by the Eigensystem Realization Algorithm p 42 A86-39036 Spiine-based distributed system identification with	Space Station dynamic modeling, control and simulation p 39 A86-37186 Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220 Dynamic verification of very large space structures p 63 N86-30683  SYSTEMS STABILITY Payload isolation and precision pointing for the 1990's [AAS PAPER 85-010] p 36 A86-31781 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39492  T  TABLES (DATA) Space environment simulation to test satellite thermal control coatings. Volume 2, appendix 1: Detailed results of optical measurements made after the various stages of the first test [ESA-TT-891-VOL-2] p 33 N86-22628 Space environment simulation to test satellite thermal control coatings. Volume 2: Appendices 2, 3, and 4. Appendix 2: Detailed results of optical measurements made after the various stages of the second test. Appendix 3: Summary of optical results obtained during the first test. Appendix 4: Summary of optical results obtained during the second test [ESA-TT-891-VOL-3] p 33 N86-22629  TANKERS	Growth capabilities of European retractable solar arrays
Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 SYNCHRONOUS SATELLITES  The use of electrostatic noise to control high-voltage differential charging of spacecraft p 66 A86-41018 Communication Platform Payload Definition (CPPD) study. Volume 2: Technical report [NASA-CR-174929] p 22 N86-27404 Communication Platform Payload Definition (CPPD) study. Volume 3: Addendum [NASA-CR-174980] p 22 N86-27405 Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 Spacebus: Multimission communication satellites [SNIAS-861-422-119] p 16 N86-31637 SYNCOM 3 SATELLITE  A thermal control design for the Leasat F-3 salvage mission [AIAA PAPER 86-1340] p 31 A86-39939 SYNTHETIC APERTURE RADAR NASA/American Society for Engineering Education (ASEE) Summer Faculty Fellowship Program, 1985 Space Stations and Their Environments [NASA-CR-171931] SYSTEM FAILURES  Testing of a failure accommodation system on a highly flexible grid p 38 A86-39039 SYSTEM IDENTIFICATION  Effects of noise on modal parameters identified by the Eigensystem Realization Algorithm p 42 A86-39036 Spline-based distributed system identification with application to large space antennas p 42 A86-39037	Space Station dynamic modeling, control and simulation p 39 A86-37186 Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration  [AAS PAPER 85-365] p 51 A86-43220 Dynamic verification of very large space structures p 63 N86-30683  SYSTEMS STABILITY Payload isolation and precision pointing for the 1990's [AAS PAPER 85-010] p 36 A86-31781 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39492  T  TABLES (DATA) Space environment simulation to test satellite thermal control coatings. Volume 2, appendix 1: Detailed results of optical measurements made after the various stages of the first test [ESA-TT-891-VOL-2] p 33 N86-22628 Space environment simulation to test satellite thermal control coatings. Volume 2: Appendices 2, 3, and 4. Appendix 2: Detailed results of optical measurements made after the various stages of the second test. Appendix 3: Summary of optical results obtained during the first test. Appendix 4: Summary of optical results obtained during the second test [ESA-TT-891-VOL-3] p 33 N86-22629  TANKERS Orbital consumables resupply requirements impact on the evolution of OSCRS	[ESA-CR(P)-2129] p 89 N86-24025 Growth capabilities of European retractable solar arrays
Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 SYNCHRONOUS SATELLITES  The use of electrostatic noise to control high-voltage differential charging of spacecraft p 66 A86-41018 Communication Platform Payload Definition (CPPD) study. Volume 2: Technical report [NASA-CR-174929] p 22 N86-27404 Communication Platform Payload Definition (CPPD) study. Volume 3: Addendum [NASA-CR-174930] p 22 N86-27405 Communications platform payload definition study. executive summary [NASA-CR-174985] p 14 N86-27407 Spacebus: Multimission communication satellites [SNIAS-861-422-119] p 16 N86-31637 SYNCOM 3 SATELLITE  A thermal control design for the Leasat F-3 salvage mission [AIAA PAPER 86-1340] p 31 A86-39939 SYNTHETIC APERTURE RADAR  NASA/American Society for Engineering Education (ASEE) Summer Faculty Fellowship Program, 1985 Space Stations and Their Environments [NASA-CR-171931] p 105 N86-31409 SYSTEM FAILURES  Testing of a failure accommodation system on a highly flexible grid p 38 A86-35390 SYSTEM IDENTIFICATION  Effects of noise on modal parameters identified by the Eigensystem Realization Algorithm p 42 A86-39036 Spiine-based distributed system identification with	Space Station dynamic modeling, control and simulation p 39 A66-37186 Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220 Dynamic verification of very large space structures p 63 N86-30683  SYSTEMS STABILITY Payload isolation and precision pointing for the 1990's [AAS PAPER 85-010] p 36 A86-31781 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39492  T  TABLES (DATA) Space environment simulation to test satellite thermal control coatings. Volume 2, appendix 1: Detailed results of optical measurements made after the various stages of the first test [ESA-TT-891-VOL-2] p 33 N86-22628 Space environment simulation to test satellite thermal control coatings. Volume 2: Appendices 2, 3, and 4. Appendix 2: Detailed results of optical measurements made after the various stages of the second test. Appendix 3: Summary of optical results obtained during the second test [ESA-TT-891-VOL-3] p 33 N86-22629  TANKERS Orbital consumables resupply requirements impact on the evolution of OSCRS [AIAA PAPER 86-1603] p 96 A86-42743	Growth capabilities of European retractable solar arrays
Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 SYNCHRONOUS SATELLITES  The use of electrostatic noise to control high-voltage differential charging of spacecraft p 66 A86-41018 Communication Platform Payload Definition (CPPD) study. Volume 2: Technical report [NASA-CR-174929] p 22 N86-27404 Communication Platform Payload Definition (CPPD) study. Volume 3: Addendum [NASA-CR-174929] p 22 N86-27405 Communication Platform Payload Definition (CPPD) study. Volume 3: Addendum [NASA-CR-174985] p 12 N86-27405 Communications platform payload definition study. executive summary [NASA-CR-174985] p 14 N96-27407 Spacebus: Multimission communication satellites [SNIAS-861-422-119] p 16 N86-31637 SYNCOM 3 SATELLITE  A thermal control design for the Leasat F-3 salvage mission [AIAA PAPER 86-1340] p 31 A86-39939 SYNTHETIC APERTURE RADAR  NASA/American Society for Engineering Education (ASEE) Summer Faculty Fellowship Program, 1985 Space Stations and Their Environments (NASA-CR-171931] SYSTEM FAILURES  Testing of a failure accommodation system on a highly flexible grid p 38 A86-35390 SYSTEM IDENTIFICATION  Effects of noise on modal parameters identified by the Eigensystem Realization Algorithm Spline-based distributed system Magnification with application to large space antennas A square root method for the identification of large space [AIAA PAPER 86-2049] p 54 A86-39037	Space Station dynamic modeling, control and simulation p 39 A86-37186 Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220 Dynamic verification of very large space structures p 63 N86-30683  SYSTEMS STABILITY Payload isolation and precision pointing for the 1990's [AAS PAPER 85-010] p 36 A86-31781 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39492  T  TABLES (DATA) Space environment simulation to test satellite thermal control coatings. Volume 2, appendix 1: Detailed results of optical measurements made after the various stages of the first test [ESA-TT-891-VOL-2] p 33 N86-22628 Space environment simulation to test satellite thermal control coatings. Volume 2: Appendices 2, 3, and 4. Appendix 2: Detailed results of optical measurements made after the various stages of the second test. Appendix 3: Summary of optical results obtained during the first test. Appendix 4: Summary of optical results obtained during the second test [ESA-TT-891-VOL-3] p 33 N86-22629  TANKERS Orbital consumables resupply requirements impact on the evolution of OSCRS [AIAA PAPER 86-1603] p 96 A86-42743	[ESA-CR(P)-2129] p 89 N86-24025 Growth capabilities of European retractable solar arrays
Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 SYNCHRONOUS SATELLITES  The use of electrostatic noise to control high-voltage differential charging of spacecraft p 66 A86-41018 Communication Platform Payload Definition (CPPD) study. Volume 2: Technical report [NASA-CR-174929] p 22 N86-27404 Communication Platform Payload Definition (CPPD) study. Volume 3: Addendum [NASA-CR-174930] p 22 N86-27405 Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 Spacebus: Multimission communication satellites [SNIAS-861-422-119] p 16 N86-31637 SYNCOM 3 SATELLITE  A thermal control design for the Leasat F-3 salvage mission [AIAA PAPER 86-1340] p 31 A86-39939 SYNTHETIC APERTURE RADAR  NASA/American Society for Engineering Education (ASEE) Summer Faculty Fellowship Program, 1985 Space Stations and Their Environments [NASA-CR-171931] p 105 N86-31409 SYSTEM FAILURES  Testing of a failure accommodation system on a highly flexible grid p 38 A86-35390 SYSTEM IDENTIFICATION  Effects of noise on modal parameters identified by the Eigensystem Realization Algorithm p 42 A86-39037 A square root method for the identification of large space structures [AIAA PAPER 86-2049] p 54 A86-47432 Dynamics of flexible spacecraft: An analysis of	Space Station dynamic modeling, control and simulation p 39 A86-37186 Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220 Dynamic verification of very large space structures p 63 N86-30683  SYSTEMS STABILITY Payload isolation and precision pointing for the 1990's [AAS PAPER 85-010] p 36 A86-31781 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39492  T  TABLES (DATA) Space environment simulation to test satellite thermal control coatings. Volume 2, appendix 1: Detailed results of optical measurements made after the various stages of the first test [ESA-TT-891-VOL-2] p 33 N86-22628 Space environment simulation to test satellite thermal control coatings. Volume 2: Appendice 2, 3, and 4. Appendix 2: Detailed results of optical measurements made after the various stages of the second test. Appendix 3: Summary of optical results of optical measurements made after the various stages of the second test. Appendix 3: Summary of optical results obtained during the first test. Appendix 4: Summary of optical results obtained during the second test [ESA-TT-891-VOL-3] p 33 N86-22629  TANKERS Orbital consumables resupply requirements impact on the evolution of OSCRS [AIAA PAPER 86-1603] p 96 A86-42743  TARGET RECOGNITION Machine vision and the OMV p 100 N86-24536	[ESA-CR(P)-2129] p 89 N86-24025 Growth capabilities of European retractable solar arrays
Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 SYNCHRONOUS SATELLITES  The use of electrostatic noise to control high-voltage differential charging of spacecraft p 66 A86-41018 Communication Platform Payload Definition (CPPD) study. Volume 2: Technical report [NASA-CR-174929] p 22 N86-27404 Communication Platform Payload Definition (CPPD) study. Volume 3: Addendum [NASA-CR-174929] p 22 N86-27405 Communication Platform Payload Definition (CPPD) study. Volume 3: Addendum [NASA-CR-174985] p 12 N86-27405 Communications platform payload definition study. executive summary [NASA-CR-174985] p 14 N96-27407 Spacebus: Multimission communication satellites [SNIAS-861-422-119] p 16 N86-31637 SYNCOM 3 SATELLITE  A thermal control design for the Leasat F-3 salvage mission [AIAA PAPER 86-1340] p 31 A86-39939 SYNTHETIC APERTURE RADAR  NASA/American Society for Engineering Education (ASEE) Summer Faculty Fellowship Program, 1985 Space Stations and Their Environments (NASA-CR-171931] SYSTEM FAILURES  Testing of a failure accommodation system on a highly flexible grid p 38 A86-35390 SYSTEM IDENTIFICATION  Effects of noise on modal parameters identified by the Eigensystem Realization Algorithm Spline-based distributed system Magnification with application to large space antennas A square root method for the identification of large space [AIAA PAPER 86-2049] p 54 A86-39037	Space Station dynamic modeling, control and simulation p 39 A86-37186 Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220 Dynamic verification of very large space structures p 63 N86-30683  SYSTEMS STABILITY Payload isolation and precision pointing for the 1990's [AAS PAPER 85-010] p 36 A86-31781 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39492  T  TABLES (DATA) Space environment simulation to test satellite thermal control coatings. Volume 2, appendix 1: Detailed results of optical measurements made after the various stages of the first test [ESA-TT-891-VOL-2] p 33 N86-22628 Space environment simulation to test satellite thermal control coatings. Volume 2: Appendices 2, 3, and 4. Appendix 2: Detailed results of optical measurements made after the various stages of the second test. Appendix 3: Summary of optical results obtained during the second test. Appendix 4: Summary of optical results obtained during the second test [ESA-TT-891-VOL-3] p 33 N86-22629  TANKERS Orbital consumables resupply requirements impact on the evolution of OSCRS [AIAA PAPER 86-1603] p 96 A86-42743  TARGET RECOGNITION Machine vision and the OMV p 100 N86-24536  TASKS Orbital transfer vehicle launch operations study.	[ESA-CR(P)-2129] p 89 N86-24025 Growth capabilities of European retractable solar arrays
Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 SYNCHRONOUS SATELLITES  The use of electrostatic noise to control high-voltage differential charging of spacecraft p 66 A86-41018 Communication Platform Payload Definition (CPPD) study. Volume 2: Technical report [NASA-CR-174929] p 22 N86-27404 Communication Platform Payload Definition (CPPD) study. Volume 3: Addendum [NASA-CR-174930] p 22 N86-27405 Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 Spacebus: Multimission communication satellites [SNIAS-861-422-119] p 16 N86-31637 SYNCOM 3 SATELLITE  A thermal control design for the Leasat F-3 salvage mission [AIAA PAPER 86-1340] p 31 A86-39939 SYNTHETIC APERTURE RADAR  NASA/American Society for Engineering Education (ASEE) Summer Faculty Fellowship Program, 1985 Space Stations and Their Environments [NASA-CR-171931] p 105 N86-31409 SYSTEM FAILURES  Testing of a failure accommodation system on a highly flexible grid p 38 A86-35390 SYSTEM FIGURES  Testing of a failure accommodation system on a highly flexible grid p 34 A86-39036 System Realization Algorithm p 42 A86-39036 System Indentification to large space antennas p 42 A86-39037 A square root method for the identification of large space structures [AIAA PAPER 86-2049] p 54 A86-47432 Dynamics of flexible spacecraft: An analysis of approaches towards mathematical model order reduct ion [NLR-TR-85068-U] p 65 N86-31643	Space Station dynamic modeling, control and simulation p 39 A86-37186 Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220 Dynamic verification of very large space structures p 63 N86-30683  SYSTEMS STABILITY Payload isolation and precision pointing for the 1990's [AAS PAPER 85-010] p 36 A86-31781 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39492  T  TABLES (DATA) Space environment simulation to test satellite thermal control coatings. Volume 2, appendix 1: Detailed results of optical measurements made after the various stages of the first test [ESA-TT-891-VOL-2] p 33 N86-22628 Space environment simulation to test satellite thermal control coatings. Volume 2: Appendices 2, 3, and 4. Appendix 2: Detailed results of optical measurements made after the various stages of the second test. Appendix 3: Summary of optical results of optical measurements made after the various stages of the second test. Appendix 3: Summary of optical results obtained during the first test. Appendix 4: Summary of optical results obtained during the second test [ESA-TT-891-VOL-3] p 33 N86-22629  TANKERS Orbital consumables resupply requirements impact on the evolution of OSCRS [AIAA PAPER 86-1603] p 96 A86-42743  TARGET RECOGNITION Machine vision and the OMV p 100 N86-24536  TASKS Orbital transfer vehicle launch operations study. Processing flows. Volume 3	[ESA-CR(P)-2129] p 89 N86-24025 Growth capabilities of European retractable solar arrays
Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 SYNCHRONOUS SATELLITES  The use of electrostatic noise to control high-voltage differential charging of spacecraft p 66 A86-41018 Communication Platform Payload Definition (CPPD) study. Volume 2: Technical report [NASA-CR-174929] p 22 N86-27404 Communication Platform Payload Definition (CPPD) study. Volume 3: Addendum [NASA-CR-174920] p 22 N86-27405 Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 Spacebus: Multimission communication satellites [SNIAS-861-422-119] p 16 N86-31637 SYNCOM 3 SATELLITE  A thermal control design for the Leasat F-3 salvage mission [AIAA PAPER 86-1340] p 31 A86-39939 SYNTHETIC APERTURE RADAR  NASA/American Society for Engineering Education (ASEE) Summer Faculty Fellowship Program, 1985 Space Stations and Their Environments [NASA-CR-171931] p 105 N86-31409 SYSTEM FAILURES  Testing of a failure accommodation system on a highly flexible grid p 38 A86-35390 SYSTEM IDENTIFICATION  Effects of noise on modal parameters identified by the Eigensystem Realization Algorithm p 42 A86-39036 SPIIne-based distributed system identification with application to large space antennas p 42 A86-39037 A square root method for the identification of large space structures [AIAA PAPER 86-2049] p 54 A86-47432 Dynamics of flexible spacecraft: An analysis of approaches towards mathematical model order reduct ion [NLR-TR-85068-U] p 65 N86-31643	Space Station dynamic modeling, control and simulation p 39 A86-37186 Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220 Dynamic verification of very large space structures p 63 N86-30683  SYSTEMS STABILITY Payload isolation and precision pointing for the 1990's [AAS PAPER 85-010] p 36 A86-31781 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39492  T  TABLES (DATA) Space environment simulation to test satellite thermal control coatings. Volume 2, appendix 1: Detailed results of optical measurements made after the various stages of the first test [ESA-TT-891-VOL-2] p 33 N86-22628 Space environment simulation to test satellite thermal control coatings. Volume 2: Appendices 2, 3, and 4. Appendix 2: Detailed results of optical measurements made after the various stages of the second test. Appendix 3: Summary of optical results obtained during the first test. Appendix 4: Summary of optical results obtained during the second test [ESA-TT-891-VOL-3] p 33 N86-22629  TANKERS Orbital consumables resupply requirements impact on the evolution of OSCRS [AIAA PAPER 86-1603] p 96 A86-42743  TARGET RECOGNITION Machine vision and the OMV p 100 N86-24536  TASKS Orbital transfer vehicle launch operations study. Processing flows. Volume 3 [NASA-CR-179766] p 17 N86-32505	[ESA-CR(P)-2129] p 89 N86-24025 Growth capabilities of European retractable solar arrays
Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 SYNCHRONOUS SATELLITES  The use of electrostatic noise to control high-voltage differential charging of spacecraft p 66 A86-41018 Communication Platform Payload Definition (CPPD) study. Volume 2: Technical report [NASA-CR-174929] p 22 N86-27404 Communication Platform Payload Definition (CPPD) study. Volume 3: Addendum [NASA-CR-174930] p 22 N86-27405 Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 Spacebus: Multimission communication satellites [SNIAS-861-422-119] p 16 N86-31637 SYNCOM 3 SATELLITE  A thermal control design for the Leasat F-3 salvage mission [AIAA PAPER 86-1340] p 31 A86-39939 SYNTHETIC APERTURE RADAR  NASA/American Society for Engineering Education (ASEE) Summer Faculty Fellowship Program, 1985 Space Stations and Their Environments [NASA-CR-171931] p 105 N86-31409 SYSTEM FAILURES  Testing of a failure accommodation system on a highly flexible grid p 38 A86-35390 SYSTEM FIGENTIFICATION  Effects of noise on modal parameters identified by the Eigensystem Realization Algorithm p 42 A86-39036 System Identification with application to large space antennas p 42 A86-39037 A square root method for the identification of large space structures [AIAA PAPER 86-2049] p 54 A86-47432 Dynamics of flexible spacecraft: An analysis of approaches towards mathematical model order reduct ion [NLR-TR-85068-U] p 65 N86-31643	Space Station dynamic modeling, control and simulation p 39 A86-37186 Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220 Dynamic verification of very large space structures p 63 N86-30683  SYSTEMS STABILITY Payload isolation and precision pointing for the 1990's [AAS PAPER 85-010] p 36 A86-31781 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39492  T  TABLES (DATA) Space environment simulation to test satellite thermal control coatings. Volume 2, appendix 1: Detailed results of optical measurements made after the various stages of the first test [ESA-TT-891-VOL-2] p 33 N86-22628 Space environment simulation to test satellite thermal control coatings. Volume 2: Appendices 2, 3, and 4. Appendix 2: Detailed results of optical measurements made after the various stages of the second test. Appendix 3: Summary of optical results of optical measurements made after the various stages of the second test. Appendix 3: Summary of optical results obtained during the first test. Appendix 4: Summary of optical results obtained during the second test [ESA-TT-891-VOL-3] p 33 N86-22629  TANKERS Orbital consumables resupply requirements impact on the evolution of OSCRS [AIAA PAPER 86-1603] p 96 A86-42743  TARGET RECOGNITION  Machine vision and the OMV p 100 N86-24536  TASKS Orbital transfer vehicle launch operations study. Processing flows. Volume 3 [NASA-CR-179766] p 17 N86-32505	[ESA-CR(P)-2129] p 89 N86-24025 Growth capabilities of European retractable solar arrays
Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 SYNCHRONOUS SATELLITES  The use of electrostatic noise to control high-voltage differential charging of spacecraft p 66 A86-41018 Communication Platform Payload Definition (CPPD) study. Volume 2: Technical report [NASA-CR-174929] p 22 N86-27404 Communication Platform Payload Definition (CPPD) study. Volume 3: Addendum [NASA-CR-174929] p 22 N86-27405 Communications platform payload definition study, executive summary [NASA-CR-174985] p 14 N86-27407 Spacebus: Multimission communication satellites [SNIAS-861-422-119] p 16 N86-31637 SYNCOM 3 SATELLITE  A thermal control design for the Leasat F-3 salvage mission [AIAA PAPER 86-1340] p 31 A86-39939 SYNTHETIC APERTURE RADAR  NASA/American Society for Engineering Education (ASEE) Summer Faculty Fellowship Program, 1985 Space Stations and Their Environments (NASA-CR-171931] SYSTEM FAILURES  Testing of a failure accommodation system on a highly flexible grid p 38 A86-35390 SYSTEM IDENTIFICATION  Effects of noise on modal parameters identified by the Eigensystem Realization Algorithm p 42 A86-39036 SYSTEM IDENTIFICATION  Effects of noise on modal parameters identification with application to large space antennas p 42 A86-39037 A square root method for the identification of large space structures [AIAA PAPER 86-2049] p 54 A86-47432 Dynamics of flexible spacecraft: An analysis of approaches towards mathematical model order reduct ion [IN.R-T.R-85068-U] SYSTEM Seassment of international payload requirements on	Space Station dynamic modeling, control and simulation p 39 A86-37186 Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220 Dynamic verification of very large space structures p 63 N86-30683  SYSTEMS STABILITY Payload isolation and precision pointing for the 1990's [AAS PAPER 85-010] p 36 A86-31781 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39492  T  TABLES (DATA) Space environment simulation to test satellite thermal control coatings. Volume 2, appendix 1: Detailed results of optical measurements made after the various stages of the first test [ESA-TT-891-VOL-2] p 33 N86-22628 Space environment simulation to test satellite thermal control coatings. Volume 2: Appendices 2, 3, and 4. Appendix 2: Detailed results of optical measurements made after the various stages of the second test. Appendix 3: Summary of optical results obtained during the second test [ESA-TT-891-VOL-3] p 33 N86-22629 TANKERS  Orbital consumables resupply requirements impact on the evolution of OSCRS [AIAA PAPER 86-1603] p 96 A86-42743  TARGET RECOGNITION Machine vision and the OMV p 100 N86-24536  TASKS Orbital transfer vehicle launch operations study. Processing flows. Volume 3 [NASA-CR-179766] p 17 N86-32505	[ESA-CR(P)-2129] p 89 N86-24025 Growth capabilities of European retractable solar arrays

Communication Platform Payload Definition (CPPD)	Proceedings of a Workshop on Applications of Tethers	Long-term performance of thermal control coatings at
study. Volume 2: Technical report [NASA-CR-174929] p 22 N86-27404	in Space: Executive Summary [NASA-CP-2422] p 101 N86-25794	geosynchronous altitude [AIAA PAPER 86-1356] p 71 A86-39951
Communication Platform Payload Definition (CPPD)	Cosmic dust collection with a sub-satellite tethered to	[AIAA PAPER 86-1356] p 71 A86-39951 Spacecraft materials test in a continuous, broad
study. Volume 3: Addendum	a space station p 14 N86-27146	energy-spectrum electron beam p 73 A86-47337
[NASA-CR-174930] p 22 N86-27405 TELEMETRY	Applications of Tethers in Space: Workshop	Measurement of the thermo-optical properties of varying paint thickness on carbon fiber composites in spacecraft
Exploring autonomy - The T(2)C(2) system Telemetry,	proceedings, volume 2 [NASA-CP-2422-VOL-2] p 103 N86-27644	structures p 74 N86-22620
Timing, Command and Control [AIAA PAPER 86-1184] p 5 A86-40592	Tethered constellations, their utilization as microgravity	New space paints p 74 N86-22621
TELEOPERATORS	platforms and relevant features p 103 N86-27645	Long term tests of contaminated Optical Solar Reflectors (OSRs) under combined environment spacecraft
Space telerobotics - A few more hurdles	Shuttle Tethered Aerothermodynamics Research Facilty (STARFAC) instrumentation requirements	reflectors p 74 N86-22622
p 81 A86-37047 Recent advances in teleoperation - Implications for the	p 34 N86-27652	The degradation and contamination experiment flown on the first European Communication Satellite ECS-1:
Space Station p 82 A86-40508	Shuttle Tethered Aerothermodynamics Research	Preliminary results on contamination p 74 N86-22623
Design for a goal-oriented telerobotic system	Facility (STARFAC) p 34 N86-27653  The development of optimal control laws for orbiting	Space environment simulation to test satellite thermal
[AIAA PAPER 86-2090] p 83 A86-47440 Automation and robotics for Space Station in the	tethered platform systems p 61 N86-27655	control coatings, volume 1 [ESA-TT-891-VOL-1] p 75 N86-22627
twenty-first century	Effects of damping on the control dynamics of the space	Space environment simulation to test satellite thermal
[AIAA PAPER 86-2300] p 84 A86-49552 Machine vision and the OMV p 100 N86-24536	shuttle based on tethered systems p 61 N86-27656 COMLINK proposal for future missions of tethered	control coatings. Volume 2, appendix 1: Detailed results of optical measurements made after the various stages
Index of aerospace mechanisms symposia proceedings	satellite p 69 N86-27658	of the first test
1-19 [NASA-TM-88205] p 102 N86-26650	Analytical investigation of the dynamics of tethered	[ESA-TT-891-VOL-2] p 33 N86-22628 Space environment simulation to test satellite thermal
Control loops with human operators in space operations.	constellations in Earth orbit, phase 2 [NASA-CR-178846] p 61 N86-28114	control coatings. Volume 2: Appendices 2, 3, and 4.
Part 1: Human engineering analysis, synthesis and	Applications of Tethers in Space: Workshop	Appendix 2: Detailed results of optical measurements
evaluation techniques [NLR-TR-84116-L-PT-1] p 16 N86-32107	proceedings, volume 1 [NASA-CP-2422-VOL-1] p 104 N86-28407	made after the various stages of the second test. Appendix 3: Summary of optical results obtained during the first
Control loops with human operators in space operations.	Tethered satellite design p 22 N86-28409	test. Appendix 4: Summary of optical results obtained
Part 2: Robotics operations and manual control experiment	Tether fundamentals p 104 N86-28410	during the second test [ESA-TT-891-VOL-3] p 33 N86-22629
[NLR-TR-84116-L-PT-2] p 85 N86-33024	A review of tether induced dynamical features p 61 N86-28411	[ESA-TT-891-VOL-3] p 33 N86-22629 THERMAL CYCLING TESTS
TELEVISION SYSTEMS	High resolution remote sensing missions of a tethered	A model for predicting thermomechanical response of
Communications and tracking - The keys to Space Station utilization p 66 A86-40529	satellite p 15 N86-28424	large space structures [AD-A162139] p 33 N86-23631
TEMPERATURE CONTROL	Spontaneous radiation emitted by moving tethered systems p 34 N86-28427	THERMAL ENVIRONMENTS
Power and thermal management concepts for free-flying	The use of tethered satellites for the collection of cosmic	Tethered constellations, their utilization as microgravity
platforms in the Space Station ERA p 86 A86-34990 Application of capillary pumped loop heat transport	dust and the sampling of man made orbital debris far from the space station p 15 N86-30589	platforms and relevant features p 103 N86-27645 THERMAL EXPANSION
systems to large spacecraft	The investigation of tethered satellite system	Damping characteristics of metal matrix composites
[AIAA PAPER 86-1295] p 31 A86-39903 A thermal control design for the Leasat F-3 salvage	dynamics	[AD-A163569] p 75 N86-24762 Theoretical and experimental behavior of carbon fiber
mission	[NASA-CR-178895] p 64 N86-31631 TETHERING	reinforced plastics under mechanical and thermal load
[AIAA PAPER 86-1340] p 31 A86-39939	Modeling of a tethered two-body system in space	p 78 N86-30767
Thermal analysis of the ACCESS space truss Assembly Concept for Construction of Erectable Space	p 18 A86-37184 A three-mass tethered system for micro-g/variable-g	New prediction methods for composites hygrothermal behavior p 78 N86-30771
Structure p 32 A86-40516	applications	THERMAL FATIGUE
TENSILE STRESS  Comparison of tension stabilized structures for large	[AIAA PAPER 86-1990] p 21 A86-47413	Theoretical and experimental behavior of carbon fiber reinforced plastics under mechanical and thermal load
space antenna reflectors	System engineering study of electrodynamic tether as a spaceborne generator and radiator of electromagnetic	p 78 N86-30767
[AIAA PAPER 86-0876] p 25 A86-38881 TEST FACILITIES	waves in the ULF/ELF frequency band	THERMAL INSTABILITY
Vibration qualification at the David Florida Laboratory	[NASA-CR-176749] p 68 N86-25689 Impacts of free-floating objects: Unique space station	Thermally-induced vibration and stability of booms with open cross section caused by unidirectional radiant
test facilities for space systems p 38 A86-33289	experiments p 14 N86-27162	heating p 35 A86-31024
Some recent experiences of mechanism performance and component assessment in thermal vacuum tests at	Analytical investigation of the dynamics of tethered constellations in Earth orbit, phase 2	THERMAL INSULATION  Thermal engineering of spacecraft composite
ESTL spacecraft structures p 85 N86-27390	[NASA-CR-178901] p 65 N86-32513	structures p 30 A86-37107
Thermal vacuum inclinometry: A test facility for antenna pointing mechanisms spacecraft antennas	TETHERLINES	Thermal analysis of the ACCESS space truss Assembly Concept for Construction of Erectable Space
p 102 N86-27391	Proceedings of a Workshop on Applications of Tethers in Space: Executive Summary	Structure p 32 A86-40516
Vibration qualification at the David Florida Laboratory spacecraft p 63 N86-30687	[NASA-CP-2422] p 101 N86-25794	THERMAL SHOCK
spacecraft p 63 N86-30687 TEST FIRING	Applications of Tethers in Space: Workshop proceedings, volume 2	The development of an environmental disturbance model for large space structures after the onset of thermal
A proven 25-lbF H2/O2 thruster for Space Station	[NASA-CP-2422-VOL-2] p 103 N86-27644	shock
auxiliary propulsion [AIAA PAPER 86-1560] p 87 A86-42713	Tethered elevator: A unique opportunity for space processing p 103 N86-27649	[AIAA PAPER 86-2123] p 32 A86-47924 THERMAL STABILITY
TETHERED BALLOONS	processing p 103 N86-27649  Dynamics of tethered constellations in Earth orbit	The thermal and mechanical stability of composite
Dynamics of tethered constellations in Earth orbit p 61 N86-27650	p 61 N86-27650	materials for space structures p 73 A86-40530
TETHERED SATELLITES	Applications of Tethers in Space: Workshop proceedings, volume 1	Thermal stability of sandwich reflectors spacecraft antennas p 35 N86-30774
Modeling of a tethered two-body system in space	[NASA-CP-2422-VOL-1] p 104 N86-28407	THERMAL STRESSES
p 18 A86-37184  A payload for utilization of space platform in the field	Electrodynamic interactions p 69 N86-28414 THEODOLITES	Some problems related to the thermally induced deformations of large space structures
of communication and earth observation	Optimizing accuracy in triangulation for geometrical	p 30 A86-36673
p 4 A86-37862 A three-dimensional dynamic analysis and libration study	verification of large space structures p 19 A86-38061	Thermal stresses in composite tubes
of a tethered satellites system	THERMAL ANALYSIS  Predicted temperature field in a thermomechanically	p 33 A86-50115 Thermal residual stresses in symmetric and unsymmetric
[AAS PAPER 85-340] p 50 A86-43208	heated viscoplastic space truss structure	carbon fiber reinforced plastics: Some tentative ways of
The development of optimal control laws for orbiting tethered platform systems	p 30 A86-32943 A Taylor-Galerkin finite element algorithm for transient	evaluation p 77 N86-30762 On correlation between thermal stresses, elastic strain
[AAS PAPER 85-360] p 51 A86-43217	nonlinear thermal-structural analysis	energy and debonding in thermally loaded fiber-reinforced
Quasi-analytical solutions for the dynamics of a class of tethered satellites with Danby's aerodynamical drag	[AIAA PAPER 86-0911] p 31 A86-38823	composite materials p 79 N86-30780 THERMAL VACUUM TESTS
p 52 A86-46383	Thermal analysis of the ACCESS space truss Assembly Concept for Construction of Erectable Space	Some recent experiences of mechanism performance
The Slinger - An in-orbit booster facility	Structure p 32 A86-40516	and component assessment in thermal vacuum tests at
[AIAA PAPER 86-2175] p 100 A86-47931 Frequencies of longitudinal oscillations of tethered	Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599	ESTL spacecraft structures p 85 N86-27390 Thermal vacuum inclinometry: A test facility for antenna
satellite systems	Multilayer printed circuit board characterization by	pointing mechanisms spacecraft antennas
[AIAA PAPER 86-2274] p 57 A86-47942 Analytical investigation of the dynamics of tethered	thermal analysis p 33 N86-22618 THERMAL CONDUCTIVITY	p 102 N86-27391 THERMODYNAMIC PROPERTIES
constellations in Earth orbit, phase 2	A model for predicting thermomechanical response of	Thermal and electromagnetic damping analysis and its
[NASA-CR-178754] p 58 N86-23629	large space structures	application p 34 N86-27677
System engineering study of electrodynamic tether as a spaceborne generator and radiator of electromagnetic	[AD-A162139] p 33 N86-23631 THERMAL CONTROL COATINGS	THERMODYNAMICS  A model for predicting thermomechanical response of
waves in the ULF/ELF frequency band	Thermal engineering of spacecraft composite	large space structures
[NASA-CR-176749] p 68 N86-25689	structures p 30 A86-37107	[AD-A162139] p 33 N86-23631

micrometeoroids on the space station. Report of the Workshop on Micrometeorite Capture Experiments [NASA-CR-177303] p 104 N86-30584

p 6 A86-40618

p 9 A86-45637

the dual keel space station - A systems analysis capabilities

[AIAA PAPER 86-1226]

Space Station utilization

THERMOELASTICITY	TRAJECTORY CONTROL	A global-local approach to solving vibration of large truss
A finite element model for the thermoelastic analysis of large composite space structures	Variable-structure control of spacecraft large-angle maneuvers p 36 A86-31666	structures [AIAA PAPER 86-0872] p 41 A86-38907
[AIAA PAPER 86-0875] p 31 A86-38811	Orbit transfer error analysis for multiple finite perigee	, , , , , , , , , , , , , , , , , , , ,
Thermal and electromagnetic damping analysis and its	burn, ascent trajectories	Demonstration of vibration control of a flexible truss structure p 44 A86-39488
application p 34 N86-27677	[AAS PAPER 85-302] p 97 A86-43204	Effect of degradation of material properties on the
On correlation between thermal stresses, elastic strain energy and debonding in thermally loaded fiber-reinforced	On-orbit manipulators - Sensory and control approaches	dynamic response of large space structures
composite materials p 79 N86-30780	[AIAA PAPER 86-2185] p 83 A86-47467	p 73 A86-41740
THERMOMECHANICAL TREATMENT	A laboratory robot for space application research	Reduced order compensator design for an experimental
Predicted temperature field in a thermomechanically	[AIAA PAPER 86-2186] p 83 A86-47468	large flexible structure p 50 A86-42995
heated viscoplastic space truss structure	An adaptive vision-based manipulator control scheme [AIAA PAPER 86-2187] p 83 A86-47469	Control-motivated dynamic tailoring of truss-work
p 30 A86-32943 THERMONUCLEAR POWER GENERATION	TRAJECTORY OPTIMIZATION	structures [AIAA PAPER 86-2190] p 56 A86-47471
Nuclear power for earth orbit and beyond	Single step optimization strategies for constrained	Analysis of a single-fold deployable truss beam
p 86 A86-38623	retargeting maneuvers of spacecraft	preloaded by extension of selected face diagonal
THERMOPLASTIC RESINS	p 47 A86-39510 Reduced risk two stage transfers to geosynchronous	members
Winding with thermoplastic polymers spacecraft	orbit by use of an optimized intermediate transfer orbit	[NASA-TM-87673] p 33 N86-23623
structures [SNIAS-861-430-106] p 80 N86-30804	[AIAA PAPER 86-2063] p 89 A86-47910	Shuttle-launch triangular space station
THICKNESS	TRANSFER FUNCTIONS Feedforward control of waves in lattice elements	[NASA-CASE-MSC-20676-1] p 26 N86-24729
Measurement of the thermo-optical properties of varying	[AD-A164009] p 59 N86-26222	Structural performance of space station trusses with missing members
paint thickness on carbon fiber composites in spacecraft	Control of flexible structures with respect to infinity	[NASA-TM-87715] p 34 N86-24731
structures p 74 N86-22620	flexible spacecraft p 60 N86-27359	Deployable geodesic truss structure A01
THIN FILMS Feasibility study of a discrete bearing/roller drive rotary	TRANSFER ORBITS	[NASA-CASE-LAR-13113-1] p 26 N86-24867
joint for the space station	The Giotto spacecraft's performance during the geostationary transfer orbit and near-earth mission	Synchronously deployable truss structure
[NASA-TM-88800] p 27 N86-30206	phases p 3 A86-36035	[NASA-CASE-LAR-13117-1] p 27 N86-25789
THIN WALLS	Orbit transfer error analysis for multiple finite perigee	A simple nonlinear joint model
Continuous forming of thin-walled CFRP pipes for	burn, ascent trajectories	[NASA-TM-87749] p 85 N86-30234
large-space structure p 72 A86-40371 THREE AXIS STABILIZATION	[AAS PAPER 85-302] p 97 A86-43204 Reduced risk two stage transfers to geosynchronous	Design and manufacturing aspects of space trusses
Damping synthesis for a spacecraft using substructure	orbit by use of an optimized intermediate transfer orbit	p 28 N86-30772
and component data p 37 A86-32940	[AIAA PAPER 86-2063] p 89 A86-47910	Preloaded space structural coupling joints [NASA-CASE-LAR-13489-1] p 29 N86-31630
THREE BODY PROBLEM	The Slinger - An in-orbit booster facility	Deployable M-braced truss structure
A three-dimensional dynamic analysis and libration study	[AIAA PAPER 86-2175] p 100 A86-47931 TRANSFORMATIONS (MATHEMATICS)	[NASA-CASE-LAR-13081-1] p 29 N86-32737
of a tethered satellites system [AAS PAPER 85-340] p 50 A86-43208	Modal assignment effects on decentralized control of	TUBES
THREE DIMENSIONAL MOTION	a large space structure	An evaluation of foldable elastic tubes for application
A three-dimensional dynamic analysis and libration study	[AD-A163977] p 59 N86-25402	in space structures p 24 A86-34634
of a tethered satellites system	TRANSIENT HEATING A Taylor-Galerkin finite element algorithm for transient	Thermal stresses in composite tubes
[AAS PAPER 85-340] p 50 A86-43208	nonlinear thermal-structural analysis	p 33 A86-50115
THRUST CHAMBERS A proven 25-lbF H2/O2 thruster for Space Station	[AIAA PAPER 86-0911] p 31 A86-38823	TUMBLING MOTION
auxiliary propulsion	TRANSIENT RESPONSE	Optimum detumbling of space platforms via a dynamic programming algorithm
[AIAA PAPER 86-1560] p 87 A86-42713	Transient dynamics during the extension of flexible members of space platforms p 46 A86-39499	[AIAA PAPER 86-2154] p 57 A86-47518
Proven, long-life hydrogen/oxygen thrust chambers for	TRANSMISSION LOSS	The detumbling of an axially symmetric satellite with
space station propulsion [NASA-TM-88822] p 90 N86-32522	Integrated thermal-structural-electromagnetic design	an orbital maneuvering vehicle by nonlinear feedback
[NASA-TM-88822] p 90 N86-32522 TIME OPTIMAL CONTROL	optimization of large space antenna reflectors	control
Singular perturbation methods for discrete time	[NASA-TM-87713] p 35 N86-28984 TRANSVERSE OSCILLATION	[AD-A163989] p 58 N86-24717
systems p 48 A86-42855	The investigation of tethered satellite system	TWO DIMENSIONAL FLOW  Thermal and electromagnetic damping analysis and its
Rapid torque-limited line-of-sight pointing of SCOLE	dynamics	application p 34 N86-27677
(Spacecraft Control Laboratory Experiment) configuration	[NASA-CR-178895] p 64 N86-31631 TRAPEZOIDS	
[AIAA PAPER 86-1991] p 54 A86-47414	Development of an Advanced Trapezoidal Axially	U
TIME TEMPERATURE PARAMETER	Grooved (ATAG) heat pipe for Space Station	U
The development of an environmental disturbance	[AIAA PAPER 86-1342] p 31 A86-39941	U.S.S.R. SPACE PROGRAM
model for large space structures after the onset of thermal shock	TRAVELING WAVES  Control of traveling waves in flexible structures	Real fantasy Russian book on cosmonautics and
[AIAA PAPER 86-2123] p 32 A86-47924	p 44 A86-39487	space exploration p 95 A86-39981
TITANIUM	TREES (MATHEMATICS)	Developing the final frontier: International cooperation
Strength of carbon fiber composite/titanium bonded	Robot spacecraft survivability using a decision tree for	in the peaceful uses of outer space Book
joints as used for SPAS-type structures p 79 N86-30794	data processing p 81 A86-32550 TRIANGULATION	p 96 A86-42236 ULTRAHIGH FREQUENCIES
TITANIUM ALLOYS	Optimizing accuracy in triangulation for geometrical	Proceedings of the 1985 Antenna Applications
Surface-treated titanium alloy gears for space	verification of large space structures p 19 A86-38061	Symposium, Volume 2
mechanisms space applications p 76 N86-27378	TRIBOLOGY	[AD-A165535] p 103 N86-27525
Damping characteristics of metal matrix composites [AD-A167792] p 80 N86-31668	Second European Space Mechanisms and Tribology Symposium	ULTRASONIC TESTS
TORQUE	[ESA-SP-231] p 102 N86-27353	Wave propagation measurements on two-dimensional lattice
Poold torque limited line of sinks actually of 0001 F		
Rapid torque-limited line-of-sight pointing of SCOLE	Definition and testing of gears for space robotics	[AD-A166207] p 62 N86-29891
(Spacecraft Control Laboratory Experiment)	Definition and testing of gears for space robotics space applications p 22 N86-27375	
(Spacecraft Control Laboratory Experiment) configuration	Definition and testing of gears for space robotics space applications p 22 N86-27375 The performance of unbonded MoS2 for space	[AD-A166207] p 62 N86-29891 <b>ULTRAVIOLET RADIATION</b> Ultraviolet radiometers p 75 N86-22626
(Spacecraft Control Laboratory Experiment) configuration [AIAA PAPER 86-1991] p 54 A86-47414  TORQUE MOTORS	Definition and testing of gears for space robotics space applications p 22 N86-27375  The performance of unbonded MoS2 for space applications space applications p 76 N86-27376	[AD-A166207] p 62 N86-29891  ULTRAVIOLET RADIATION     Ultraviolet radiometers p 75 N86-22626  ULYSSES MISSION
(Spacecraft Control Laboratory Experiment) configuration [AIAA PAPER 86-1991] p 54 A86-47414  TORQUE MOTORS  Development and testing of a dual-wound dc motor	Definition and testing of gears for space robotics space applications p 22 N86-27375 The performance of unbonded MoS2 for space	[AD-A166207] p 62 N86-29891  ULTRAVIOLET RADIATION  Ultraviolet radiometers p 75 N86-22626  ULYSSES MISSION  The Ulysses mechanisms former International Solar
(Spacecraft Control Laboratory Experiment) configuration [AIAA PAPER 86-1991] p 54 A86-47414  TORQUE MOTORS  Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382	Definition and testing of gears for space robotics space applications p 22 N86-27375  The performance of unbonded MoS2 for space applications space applications p 76 N86-27376  Some recent experiences of mechanism performance and component assessment in thermal vacuum tests at ESTL spacecraft structures p 85 N86-27390	[AD-A166207] p 62 N86-29891  ULTRAVIOLET RADIATION  Ultraviolet radiometers p 75 N86-22626  ULYSSES MISSION  The Ulysses mechanisms former International Solar
(Spacecraft Control Laboratory Experiment) configuration [AIAA PAPER 86-1991] p 54 A86-47414  TORQUE MOTORS  Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382  TOWERS	Definition and testing of gears for space robotics space applications p 22 N86-27375  The performance of unbonded MoS2 for space applications space applications p 76 N86-27376  Some recent experiences of mechanism performance and component assessment in thermal vacuum tests at ESTL spacecraft structures p 85 N86-27390  TROPOSPHERE	[AD-A166207] p 62 N86-29891  ULTRAVIOLET RADIATION Ultraviolet radiometers p 75 N86-22626  ULYSSES MISSION The Ulysses mechanisms former International Solar Polar Mission (ISPM) p 27 N86-27368  UNIONS (CONNECTORS) Preloaded space structural coupling joints
(Spacecraft Control Laboratory Experiment) configuration [AIAA PAPER 86-1991] p 54 A86-47414  TORQUE MOTORS  Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382  TOWERS  Dynamic characteristics of power-tower space stations with 15-foot truss bays	Definition and testing of gears for space robotics space applications p 22 N86-27375  The performance of unbonded MoS2 for space applications space applications p 76 N86-27376  Some recent experiences of mechanism performance and component assessment in thermal vacuum tests at ESTL spacecraft structures p 85 N86-27390  TROPOSPHERE Environmental criteria guidelines for space vehicle and	[AD-A166207] p 62 N86-29891  ULTRAVIOLET RADIATION  Ultraviolet radiometers p 75 N86-22626  ULYSSES MISSION  The Ulysses mechanisms former International Solar Polar Mission (ISPM) p 27 N86-27368  UNIONS (CONNECTORS)  Preloaded space structural coupling joints  [NASA-CASE-LAR-13489-1] p 29 N86-31630
(Spacecraft Control Laboratory Experiment) configuration [AIAA PAPER 86-1991] p 54 A86-47414  TORQUE MOTORS  Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382  TOWERS  Dynamic characteristics of power-tower space stations with 15-foot truss bays [NASA-TM-87684] p 60 N86-26357	Definition and testing of gears for space robotics—space applications p 22 N86-27375  The performance of unbonded MoS2 for space applications—space applications p 76 N86-27376  Some recent experiences of mechanism performance and component assessment in thermal vacuum tests at ESTL—spacecraft structures p 85 N86-27390  TROPOSPHERE  Environmental criteria guidelines for space vehicle and space design p 18 A86-32553	[AD-A166207] p 62 N86-29891  ULTRAVIOLET RADIATION    Ultraviolet radiometers p 75 N86-22626  ULYSSES MISSION    The Ulysses mechanisms former International Solar Polar Mission (ISPM) p 27 N86-27368  UNIONS (CONNECTORS)    Preloaded space structural coupling joints [NASA-CASE-LAR-13489-1] p 29 N86-31630  UNMANNED SPACECRAFT
(Spacecraft Control Laboratory Experiment) configuration [AIAA PAPER 86-1991] p 54 A86-47414  TORQUE MOTORS  Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382  TOWERS  Dynamic characteristics of power-tower space stations with 15-foot truss bays [NASA-TM-87684] p 60 N86-26357  TRACKING (POSITION)	Definition and testing of gears for space robotics space applications p 22 N86-27375  The performance of unbonded MoS2 for space applications space applications p 76 N86-27376  Some recent experiences of mechanism performance and component assessment in thermal vacuum tests at ESTL spacecraft structures p 85 N86-27390  TROPOSPHERE Environmental criteria guidelines for space vehicle and	[AD-A166207] p 62 N86-29891  ULTRAVIOLET RADIATION  Ultraviolet radiometers p 75 N86-22626  ULYSSES MISSION  The Ulysses mechanisms former International Solar Polar Mission (ISPM) p 27 N86-27368  UNIONS (CONNECTORS)  Preloaded space structural coupling joints  [NASA-CASE-LAR-13489-1] p 29 N86-31630
(Spacecraft Control Laboratory Experiment) configuration [AIAA PAPER 86-1991] p 54 A86-47414  TORQUE MOTORS  Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382  TOWERS  Dynamic characteristics of power-tower space stations with 15-foot truss bays [NASA-TM-87684] p 60 N86-26357  TRACKING (POSITION)  Communications and tracking - The keys to Space Station utilization p 66 A86-40529	Definition and testing of gears for space robotics space applications p22 N86-27375  The performance of unbonded MoS2 for space applications space applications p76 N86-27376  Some recent experiences of mechanism performance and component assessment in thermal vacuum tests at ESTL spacecraft structures p85 N86-27390  TROPOSPHERE  Environmental criteria guidelines for space vehicle and space design p18 A86-32553  TRUSSES  Predicted temperature field in a thermomechanically heated viscoplastic space truss structure	[AD-A166207] p 62 N86-29891  ULTRAVIOLET RADIATION Ultraviolet radiometers p 75 N86-22626  ULYSSES MISSION The Ulysses mechanisms former International Solar Polar Mission (ISPM) p 27 N86-27368  UNIONS (CONNECTORS) Preloaded space structural coupling joints [NASA-CASE-LAR-13489-1] p 29 N86-31630  UNMANNED SPACECRAFT Advanced propulsion for polar-orbiting and coorbiting
(Spacecraft Control Laboratory Experiment) configuration [AIAA PAPER 86-1991] p 54 A86-47414  TORQUE MOTORS  Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382  TOWERS  Dynamic characteristics of power-tower space stations with 15-foot truss bays [NASA-TM-87684] p 60 N86-26357  TRACKING (POSITION)  Communications and tracking - The keys to Space Station utilization p 66 A86-40529	Definition and testing of gears for space robotics space applications The performance of unbonded applications space applications p 76 N86-27376 Some recent experiences of mechanism performance and component assessment in thermal vacuum tests at ESTL spacecraft structures p 85 N86-27390  TROPOSPHERE Environmental criteria guidelines for space vehicle and space design p 18 A86-32553  TRUSSES Predicted temperature field in a thermomechanically heated viscoplastic space truss structure p 30 A86-32943	[AD-A166207] p 62 N86-29891  ULTRAVIOLET RADIATION Ultraviolet radiometers p 75 N86-22626  ULYSSES MISSION The Ulysses mechanisms former International Solar Polar Mission (ISPM) p 27 N86-27368  UNIONS (CONNECTORS) Preloaded space structural coupling joints [NASA-CASE-LAR-13489-1] p 29 N86-31630  UNMANNED SPACECRAFT Advanced propulsion for polar-orbiting and coorbiting free flyers [AIAA PAPER 86-1564] p 88 A86-42716  UPPER ATMOSPHERE
(Spacecraft Control Laboratory Experiment) configuration [AIAA PAPER 86-1991] p 54 A86-47414  TORQUE MOTORS  Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382  TOWERS  Dynamic characteristics of power-tower space stations with 15-foot truss bays [NASA-TM-87684] p 60 N86-26357  TRACKING (POSITION)  Communications and tracking - The keys to Space Station utilization p 66 A86-40529  TRACTION  Index of aerospace mechanisms symposia proceedings	Definition and testing of gears for space robotics space applications The performance of unbonded applications space applications Space applications Space applications Some recent experiences of mechanism performance and component assessment in thermal vacuum tests at ESTL Spacecraft structures p 85 N86-27390  TROPOSPHERE Environmental criteria guidelines for space vehicle and space design p 18 A86-32553  TRUSSES Predicted temperature field in a thermomechanically heated viscoplastic space truss structure p 30 A86-32943  Truss structure advanced development for Space	[AD-A166207] p 62 N86-29891  ULTRAVIOLET RADIATION Ultraviolet radiometers p 75 N86-22626  ULYSSES MISSION The Ulysses mechanisms former International Solar Polar Mission (ISPM) p 27 N86-27368  UNIONS (CONNECTORS) Preloaded space structural coupling joints [NASA-CASE-LAR-13489-1] p 29 N86-31630  UNMANNED SPACECRAFT Advanced propulsion for polar-orbiting and coorbiting free flyers [AIAA PAPER 86-1564] p 88 A86-42716  UPPER ATMOSPHERE Shuttle Tethered Aerothermodynamics Research
(Spacecraft Control Laboratory Experiment) configuration [AIAA PAPER 86-1991] p 54 A86-47414  TORQUE MOTORS  Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382  TOWERS  Dynamic characteristics of power-tower space stations with 15-foot truss bays [NASA-TM-87684] p 60 N86-26357  TRACKING (POSITION)  Communications and tracking - The keys to Space Station utilization p 66 A86-40529  TRACTION  Index of aerospace mechanisms symposia proceedings 1-19	Definition and testing of gears for space robotics space applications The performance of unbonded applications space applications p 76 N86-27376 Some recent experiences of mechanism performance and component assessment in thermal vacuum tests at ESTL spacecraft structures p 85 N86-27390  TROPOSPHERE Environmental criteria guidelines for space vehicle and space design p 18 A86-32553  TRUSSES Predicted temperature field in a thermomechanically heated viscoplastic space truss structure p 30 A86-32943	[AD-A166207] p 62 N86-29891  ULTRAVIOLET RADIATION  Ultraviolet radiometers p 75 N86-22626  ULYSSES MISSION  The Ulysses mechanisms former International Solar Polar Mission (ISPM) p 27 N86-27368  UNIONS (CONNECTORS)  Preloaded space structural coupling joints  [NASA-CASE-LAR-13489-1] p 29 N86-31630  UNMANNED SPACECRAFT  Advanced propulsion for polar-orbiting and coorbiting free flyers  [AIAA PAPER 86-1564] p 88 A86-42716  UPPER ATMOSPHERE  Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653
(Spacecraft Control Laboratory Experiment) configuration [AIAA PAPER 86-1991] p 54 A86-47414  TORQUE MOTORS  Development and testing of a dual-wound dc motor gearhead space applications p 102 N86-27382  TOWERS  Dynamic characteristics of power-tower space stations with 15-foot truss bays [NASA-TM-87684] p 60 N86-26357  TRACKING (POSITION)  Communications and tracking - The keys to Space Station utilization p 66 A86-40529  TRACTION  Index of aerospace mechanisms symposia proceedings 1-19	Definition and testing of gears for space robotics—space applications p 22 N86-27375  The performance of unbonded MoS2 for space applications—space applications p 76 N86-27376  Some recent experiences of mechanism performance and component assessment in thermal vacuum tests at ESTL—spacecraft structures p 85 N86-27390  TROPOSPHERE  Environmental criteria guidelines for space vehicle and space design p 18 A86-32553  TRUSSES  Predicted temperature field in a thermomechanically heated viscoplastic space truss structure p 30 A86-32943  Truss structure advanced development for Space Station p 24 A86-34987	[AD-A166207] p 62 N86-29891  ULTRAVIOLET RADIATION Ultraviolet radiometers p 75 N86-22626  ULYSSES MISSION The Ulysses mechanisms former International Solar Polar Mission (ISPM) p 27 N86-27368  UNIONS (CONNECTORS) Preloaded space structural coupling joints [NASA-CASE-LAR-13489-1] p 29 N86-31630  UNMANNED SPACECRAFT Advanced propulsion for polar-orbiting and coorbiting free flyers [AIAA PAPER 86-1564] p 88 A86-42716  UPPER ATMOSPHERE Shuttle Tethered Aerothermodynamics Research

p 25 A86-38883

Hybrid deployable/erectable solar dynamic box truss

system
[AIAA PAPER 86-0955]

VAPOR DEPOSIT	ON

Use of MoS2 applied by physical vapor deposition (PVD) on space mechanisms --- space applications

p 76 N86-27379

**VAPOR PHASES** 

Use of MoS2 applied by Physical Vapor Deposition (PVD) on space mechanisms p 80 N86-31639 ISNÍAS-861-440-1011

VARIABLE GEOMETRY STRUCTURES

Variable-structure control of spacecraft large-angle p 36 A86-31666 maneuvers Variable Structure Control System (VSCS) maneuvering of flexible spacecraft

[AIAA PAPER 86-0840] n 40 A86-38888 Variable structure control of spacecraft reorientation maneuvers

[AIAA PAPER 86-1987] p 53 A86-47412

VARIABLE MASS SYSTEMS

Single-step optimal control of the RPL experiment [AAS PAPER 85-045] p 37 A86-3 A86-31796

VELOCITY MEASUREMENT

A 3-component laser-Doppler velocimeter data acquisition and reduction system p 104 N86-30135 (NASA-CR-176929)

A new instrument to measure charged and neutral cometary dust particles at low and high impact velocities N86-30590

VIBRATION

Vibration and structureborne noise in space station p 64 INASA-CR-1771461 N86-31336

VIBRATION DAMPING

Uniform damping control of spacecraft

p 36 A86-31664 Flexibility control of solar battery arrays of spacecrafts p 85 A86-33203

Stiffness control of large space structures A86-33254 p 37

Minimum-fuel control of high-order systems p 86 A86-34174

Synthesis of discrete passive vibration dampers

[SAE PAPER 851935] p 39 A86-38548 Microprocessor controlled force actuator [AIAA PAPER 86-0916] A86-38827

p 40 A singular-solution approach for controlling the nonlinear response of a continuum model of a large space structure

[AIAA PAPER 86-0841] p 41 A86-38889 Identification of a damping matrix from model data p 43 A86-39478

Frequency domain solutions to multi-degree-of-freedom,

dry friction damped systems under periodic excitation p 44 A86-39485

Uniform damping control of spacecraft p 44 A86-39486

Control of traveling waves in flexible structures p 44 A86-39487

Homogenization and control of lattice structures p 45 A86-39495

Active vibration damping experiments at VPI & SU -Overview and recent results p 46 A86-39504 Vibration control of flexible beams using an active

p 46 A86-39505 Maneuvering of flexible spacecraft with application to SCOLE --- Spacecraft Control Laboratory Experiment

p 47 A86-39508 A slewing control experiment for flexible structures

p 47 A86-39509 Implementation problems associated with simultaneous

maneuver and vibration suppression of flexible spacecraft p 47 A86-39511 Material damping of simple structures in a simulated p 48 A86-41739 space environment

Integration of structures and controls - Some computational issues --- for large space structure vibration suppression p 49 A86-42939

Vibration control of flexible structures using member dampers p 49 A86-42941

Control of dynamic response of a continuum model of a large space structure p 52 A86-43772

Traveling wave control for large spacecraft structures p 53 A86-46463

Maneuver and vibration control of SCOLE [AIAA PAPER 86-1993] p 54 A86-47415

Robust reduced-order control of flexible structures using the optimal projection/maximum entropy design methodology

[AIAA PAPER 86-2052] p 55 A86-47435 Control-motivated dynamic tailoring of truss-work

p 56 A86-47471 [AIAA PAPER 86-2190] Dynamics and control of slew maneuver of large flexible spacecraft

[AIAA PAPER 86-2192] p 56 A86-47472 Issues of order reduction in active control system

[AIAA PAPER 86-2138] p 57 A86-47515

The effect of energy dissipation due to friction at the joint of a simple beam structure [AD-A163975] p 58 N86-24739

Effects of damping on the control dynamics of the space p 61 N86-27656 shuttle based on tethered systems

Thermal and electromagnetic damping analysis and its p 34 N86-27677 application ACOSS eleven (Active Control Of Space Structures) s p 62 N86-29890

[AD-A165864] Stiffness control of large space structures

p 63 N86-30652

Aspects of active isolation as applied to a satellite structure with shape precision payload p 63 N86-30653

Effects of model error on control of large flexible space antenna with comparisons of decoupled and linear quadratic regulator control procedures p 64 N86-30801 [NASA-TP-2604]

The investigation of tethered satellite system dynamics

[NASA-CR-178895] p 64 N86-31631

Analytical investigation of the dynamics of tethered constellations in Earth orbit, phase 2 p 65 N86-32513 [NASA-CR-178901]

**VIBRATION ISOLATORS** 

Aspects of active isolation as applied to a satellite structure with shape precision payload p 37 A86-33255

VIBRATION MEASUREMENT

Material damping of simple structures in a simulated p 48 A86-41739 space environment

VIBRATION MODE

Test and analysis correlation for structural dynamic p 37 A86-33284

Structural dynamic testing and analysis; Aerospace Technology Conference and Exposition, Long Beach, CA, October 14-17, 1985, Technical Papers

p 94 A86-38540 [SAE SP-635]

A global technique for estimation of modal parameters from measured data --- of spacecraft structures vibration [SAE PAPER 851926] p 39 A86-38542

Dynamic analysis and experiment methods for a generic space station model [AIAA PAPER 86-0838] p 40 A86-38886

Mode localization phenomena in large space [AIAA PAPER 86-0903] p 41 A86-38914

Spline-based Rayleigh-Ritz methods for approximation of the natural modes of vibration for flexible p 48 A86-40843 beams with tip bodies

Analytical investigation of the dynamics of tethered constellations in Earth orbit, phase 2 [NASA-CR-178901] p 65 N86-32513

VIBRATION TESTS

Test and analysis correlation for structural dynamic p 37 A86-33284

Vibration qualification at the David Florida Laboratory test facilities for space systems p 38 A86-33289 Dynamic analysis and experiment methods for a generic

space station model [AIAA PAPER 86-0838] p 40 A86-38886

Experimenal and analytical generic space staion dynamic models

p 58 N86-22997 [NASA-TM-87696] Low frequency design verification of large spacecraft p 28 N86-30686 structures

Vibration qualification at the David Florida Laboratory p 63 N86-30687 spacecraft

VISCOELASTIC DAMPING

Synthesis of discrete passive vibration dampers [SAE PAPER 851935] p 39 A86 p 39 A86-38548

VISCOPLASTICITY

Predicted temperature field in a thermomechanically heated viscoplastic space truss structure p 30 A86-32943

Machine vision and the OMV p 100 N86-24536 VOICE COMMUNICATION

Communications and tracking - The keys to Space Station utilization p 66 A86-40529

VOICE OF AMERICA

Satellite voice broadcast system study, volume 2 p 68 N86-24877 [NASA-CR-174905] Satellite voice broadcase system study. Volume 1: Executive summary [NASA-CR-174904]

p 68 N86-24878

WATER RECLAMATION

NASA/American Society for Engineering Education (ASEE) Summer Faculty Fellowship Program, 1985 ---Space Stations and Their Environments

[NASA-CR-171931] p 105 N86-31409

WAVE ATTENUATION

Feedforward control of waves in lattice elements [AD-A164009] p 59 N86-26222

WAVE EQUATIONS

Feedforward control of waves in lattice elements [AD-A164009] p 59 N86-26222

WAVE PROPAGATION

Characteristic wave approach in controlled large space [AIAA PAPER 86-0839]

p 40 A86-38887 Feedforward control of waves in lattice elements p 59 N86-26222 [AD-A164009] Wave propagation measurements on two-dimensional

p 62 N86-29891 [AD-A166207]

WAVEGUIDE ANTENNAS

Investigation of arrays of high-Q microstrip antennas p 66 A86-44733

WEAPON SYSTEMS

SDI orbital system timing constraints

p 92 A86-32552

**WEAR TESTS** Surface-treated titanium alloy for p 76 N86-27378 mechanisms --- space applications

WEIGHT ANALYSIS Synthesis of structures with multiple frequency constraints

[AIAA PAPER 86-0951] p 40 A86-38844

WEIGHT REDUCTION Mass property control of a spin stabilized spacecraft

with restrictive mission and weight constraints [SAWE PAPER 1668] p 38 A86-35212
Development of a generalized radiator weight optimization design code for high power spacecraft

applications IAIAA PAPER 86-12681 D 20 A86-39888 New aluminum alloys for satellite structures

SNIAS-861-440-111] p 80 N86-31641 WEIGHTLESSNESS

Tethered constellations, their utilization as microgravity p 103 N86-27645 platforms and relevant features

WEIGHTLESSNESS SIMULATION Zero-G simulation verifies EVA servicing of space station

modules [AIAA PAPER 86-2312] p 99 A86-46942 WELD TESTS

Scanning laser acoustic microscopy applied to the evaluation of material interconnections

p 75 N86-22624

WEST GERMANY The German programme on materials science in p 73 A86-45646 space

WIENER HOPF EQUATIONS

Reduced order compensator design for an experimental large flexible structure WIND TUNNEL TESTS

Theoretical and experimental investigations of sensor location for optimal aeroelastic system state estimation p 62 N86-29272 [NASA-CR-177115] WIRE CLOTH

Personnel occupied woven envelope robot p 14 N86-25401 [NASA-CR-176832] WIRING

Advanced Printed Wiring Board (PWB) materials for surface mounted devices in aerospace applications p 74 N86-22617

WORKING FLUIDS

Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634

X


X RAY IMAGERY

Robotic nondestructive inspection of aerospace p 95 A86-40509 structures

X RAY INSPECTION Nondestructive testing of fiber reinforced composites using X-ray fine structure procedures p 79 N86-30784 X RAY STRESS ANALYSIS

Thermal residual stresses in symmetric and unsymmetric carbon fiber reinforced plastics: Some tentative ways of evaluation p 77 N86-30762

#### Typical Personal Author Index Listing



Listings in this index are arranged alphabetically by personal author. The title of the document provides the user with a brief description of the subject matter. The report number helps to indicate the type of document listed (e.g., NASA report, . translation, NASA contractor report). The page and accession numbers are located beneath and to the right of the title. Under any one author's name the accession numbers are arranged in sequence with the AIAA accession numbers appearing first.

### AARON, J.

US status of Space Stations Phase B activities

p 9 A86-45630

#### ABARRATEGUI. F.

The Ulysses mechanisms p 27 N86-27368

A SENER latch design for docking mechanisms p 85 N86-27388

Electrostatic charging and arc discharges on satellite

dielectrics simulated by electron beam [AIAA PAPER 86-1191] p 66 A86-40597

ABELES, F. J.

Advanced EVA operation on-orbit tasks and services

[AIAA PAPER 86-1175] p 96 A86-40585 ABROUS, A.

Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599

ADAMO, R. C.

Status of critical issues in the area of spacecraft charging p 67 A86-47336

Orbit transfer error analysis for multiple finite perigee burn, ascent trajectories

[AAS PAPER 85-302]

p 97 A86-43204

ADELMAN, H. M.

Integrated thermal-structural-electromagnetic design optimization of large space antenna reflectors

[NASA-TM-87713] p 35 N86-28984 AGLER, R. D.

Structural control requirements for the 1990s [AAS PAPER 85-420] p 51 A86-43221

AGUIRRE-MARTINEZ, M. A.

ESA-sponsored developments in the field of deployable p 24 A86-36029 masts

#### AGUIRRE, M.

The Extendable and Retractable Mast (ERM)

p 27 N86-27364 The Collapsible Tube Mast (CTM) p 27 N86-27365

p 27 N86-27368 The Ulysses mechanisms Dynamic mechanical analysis as an aid to the characterization of composite materials

p 77 N86-30763

AHL, E. L., JR.

Latching mechanism for deployable/re-stowable columns useful in satellite construction p 101 N86-25791

[NASA-CASE-LAR-13169-1]

reduced-order controllers

AHMADIAN, M. Closed-loop stability of large space structures with

AKIN, D. L.

Construction and control of large space structures p 39 A86-37060

ALARIO, J. P.

The share flight experiment - An advanced heat pipe radiator for Space Station [AIAA PAPER 86-1297] p 5 A86-39905

ALBERTS, T. E.

Experiments in optimal control of a flexible arm with passive damping p 82 A86-39503

ALEXANDER, H.

Control of a free-flying robot manipulator system p 85 N86-33016

[NASA-CR-179717] ALLEN, C. L.

Assessment of international payload requirements on the dual keel space station - A systems analysis capabilities

[AIAA PAPER 86-1226]

p 6 A86-40618

p 45 A86-39493

ALLEN, D. H.

Predicted temperature field in a thermomechanically heated viscoplastic space truss structure

p 30 A86-32943 A finite element model for the thermoelastic analysis

of large composite space structures
[AIAA PAPER 86-0875] p 31 A86-38811 Effect of degradation of material properties on the

dynamic response of large space structures p 73 A86-41740 A model for predicting thermomechanical response of

large space structures [AD-A162139] p 33 N86-23631

ALLEN, P. B.

Sealing for long-term space application

p 92 A86-32909 ALLEN. W.

Electrical power system integration for the Space Station

[AIAA PAPER 86-2351] p 67 A86-49561

ALTMANN, G.

European space platform developments

[DGLR PAPER 85-123] A86-35173 Status of ESA's planning for the Space Station p 8 A86-44530

The Columbus Programme concept and its initial implementation steps p 9 A86-45628 AMIDIEU. M.

Design and test of a space deployable radiator [SNIAS-861-440-103]

AMIEUX, J. C.

p 23 N86-31640 Key design parameters for a very low gravity in-orbit

facility

[MATRA-EPT/DT/VT068/098] p 58 N86-22631 ANANTHAKRISHNAN, S.

Evaluation of performance characteristics for a space

antenna system subjected to stochastic disturbances p 43 A86-39482

### ANDERSEN, G. C.

Structural dynamic analysis of the Large Deployable

[AIAA PAPER 86-0004] p 42 A86-38951 Assessment of international payload requirements on

the dual keel space station - A systems analysis capabilities

[AIAA PAPER 86-1226] p 6 A86-40618 ANDERSON, J. C.

Development and testing of a dual-wound dc motor p 102 N86-27382 gearhead ANDERSON, J. W.

NASA finds the way toward building a Station fraught p 6 A86-41679 with legal hurdles

ANDERSON, L. L. Subsystem testing of Galileo's attitude and articulation control fault protection IAIAA PAPER 86-97831 p 91 A86-32117

ANDERSON, M. S.

Dynamic characteristics of statically determinate space-truss platforms p 48 A86-41741

ANDRIANOS, N.

Design study for a high stability large centrifuge test bed

[AIAA PAPER 86-2100]

p 11 A86-47445 ARDUINI, C. Numerical experiments on a controlled flexible structure

using DCAF [ESA-CR(P)-2159] p 61 N86-28116 ARDVINI, C.

Mass property control of a spin stabilized spacecraft ith restrictive mission and weight constraints

[SAWE PAPER 1668] p 38 A86-35212 ARGOUD, M. J.

Protective telescoping shield for solar concentrator

p 103 N86-27706 [NASA-CASE-NPO-16236-1] ARMSTRONG, E. S. Spline-based distributed system identification with

application to large space antennas p 42 A86-39037 Attitude control system synthesis for the Hoop/Column antenna using the LQG/LTR method

[AIAA PAPER 86-2139] p 55 A86-47452 Application of the LQG/LTR technique to robust controller synthesis for a large flexible space antenna [NASA-TP-2560] p 64 N86-30800

ARNOLD, D. A. Analytical investigation of the dynamics of tethered constellations in Earth orbit, phase 2

[NASA-CR-178754] p 58 N86-23629 Analytical investigation of the dynamics of tethered

constellations in Earth orbit, phase 2 [NASA-CR-178846] p 61 N86-28114

ARNOLD, G. S.

Reaction of high-velocity atomic oxygen with carbon p 71 A86-32977

ARONSSON, C. G.

Damage zone fracture analysis of fibrous composites

p 78 N86-30778 ASHLEY, H.

Some considerations on earthbound dynamic testing of large space structures TAIAA PAPER 86-09081 p 42 A86-38918

ATHANS, M.

Decentralized control of sequentially assembled large space structures p 82 A86-42997

ATKINSON, J. W. Hygrothermal characteristics of antenna materials p 77 N86-30760

ATLURI, S. N.

A singular-solution approach for controlling the nonlinear response of a continuum model of a large space

structure [AIAA PAPER 86-0841] p 41 A86-38889 Control of dynamic response of a continuum model of a large space structure p 52 A86-43772

В

BABCOCK, C. D.

Buckling and non-linear response of imperfect three-legged truss columns [AIAA PAPER 86-0974]

BACHMANN, H.

The Giotto assembly, integration and verification programme p 5 A86-38273

BACHTELL, E. E.

Comparison of tension stabilized structures for large space antenna reflectors

p 25 A86-38881 [AIAA PAPER 86-0876] Satellite voice broadcast. Volume 1: Executive

[NASA-CR-175016] p 13 N86-24875 Satellite voice broadcast. Volume 2: System study p 13 N86-24876

[NASA-CR-175017] BAECKLUND, J.

Damage zone fracture analysis of fibrous composites p 78 N86-30778

p 24 A86-38854

p 14 N86-27407

p 13 N86-24875

p 13 N86-24876

p 103 N86-27645

p 78 N86-30767

p 8 A86-45627

p 79 N86-30782

p 9 A86-45641

p 11 A86-47453

p 45 A86-39495

p 55 A86-47434

p 73 A86-47337

p 75 N86-24880

p 24 A86-34634

p 97 A86-43335

p 45 A86-39498

p 46 A86-39501

p 48 A86-42909

p 67 A86-46578

p 32 A86-40516

BAIER, H. Analysis of in-orbit performance of mechanisms within p 84 N86-27358 large structures BAIER, M. Key design parameters for a very low gravity in-orbit p 58 N86-22631 [MATRA-EPT/DT/VT068/098] RAINUM, P. M. Evaluation of performance characteristics for a space antenna system subjected to stochastic disturbances p 43 A86-39482 The development of optimal control laws for orbiting tethered platform systems p 51 A86-43217 [AAS PAPER 85-360] The development of an environmental disturbance model for large space structures after the onset of thermal shock [AIAA PAPER 86-2123] p 32 A86-47924 The development of optimal control laws for orbiting p 61 N86-27655 tethered platform systems BAKER, M. Space Station multidisciplinary analysis capability -[AIAA PAPER 86-0954] BALAKRISHNAN, A. V. A mathematical formulation of a large space structure p 50 A86-43005 control problem Stable direct adaptive control in Hilbert space p 43 A86-39483 Finite dimensional stabilization of linear Distributed Parameter Systems via Galerkin's technique p 45 A86-39492 BALMAIN, K. G. Charge accumulation and arc discharges on spacecraft materials and components p 70 N86-29893 [AD-A166216] BANERJEE, A. K. Modeling and simulation of spacecraft solar array deployment p 84 A86-47923 (AIAA PAPER 86-2122) BANKS, B. A. Oxidation protecting coatings for polymers p 75 N86-26434 (NASA-CASE-LEW-14072-3) Spline-based distributed system identification with application to large space antennas p 42 A86-39037 BANKS, W. M. Assessing the effects of delaminations on the postbuckling strength of CRFP panels p 79 N86-30781 BARACAT, W. A. Proceedings of a Workshop on Applications of Tethers in Space: Executive Summary p 101 N86-25794 INASA-CP-24221 Applications of Tethers in Space: proceedings, volume 2 p 103 N86-27644 [NASA-CP-2422-VOL-2] Applications of Tethers in Space: Workshop proceedings, volume 1 p 104 N86-28407 [NASA-CP-2422-VOL-1]

BARBA, P. M. Modeling and simulation of spacecraft solar array deployment p 84 A86-47923 [AIAA PAPER 86-2122] BARBERA, R. The Columbus preparatory programme supporting technology of the European Space Agency p 4 A86-37856

A three-dimensional dynamic analysis and libration study of a tethered satellites system p 50 A86-43208 [AAS PAPER 85-340] BARTHELEMY, J.-F. M. An improved multilevel optimization approach for the design of complex engineering systems p 19 A86-38953 [AIAA PAPER 86-0950] BARUH. H. Actuator failure detection in the control of distributed systems Implementation problems associated with simultaneous maneuver and vibration suppression of flexible p 47 A86-39511 spacecraft BASHFORD, D. P. The application of composites to space structures: Guidelines on important aspects for the designer p 77 N86-30759 BAUER, H. F. Motion trajectories of particles inside and outside an

Geostationary communications platforms

p 2 A86-32547

p 93 A86-34574

BAUMAN, E. J. BAXTER, M. J. BAYARD, D. S. BEAM, J. E.

February 2-6, 1985

Space Station

control of a flexible beam

[AIAA PAPER 86-2124]

Conceptual design of an 1 m long 'roll out fin' type expandable space radiator p 20 A86-39924 1 A I A A PAPER 86-13231 BECKER, H. W. Sealing for long-term space application p 92 A86-32909 BEHRENS, G. Growth capabilities of European retractable solar arravs p 69 N86-26711 [ESA-CR(P)-2141] BEKIR, E. C. Singular perturbation methods for discrete time p 48 A86-42855 systems A 3-component laser-Doppler velocimeter data acquisition and reduction system p 104 N86-30135 INASA-CR-1769291 BELVIN, W. K. Dynamic analysis and experiment methods for a generic snace station model [AIAA PAPER 86-0838] p 40 A86-38886 Experimenal and analytical generic space staion dynamic models p 58 N86-22997 [NASA-TM-87696] Orbital consumables resupply requirements impact on the evolution of OSCRS [AIAA PAPER 86-1603] p 96 A86-42743 BENAROYA. H. Neumann series approach to random vibrations BENDIKSEN, O. O. Mode localization phenomena in large space structures [AIAA PAPER 86-0903] BENDORF, C. V. Control of large flexible systems by spatial modal input-distribution control [AD-A166912] BENNETT, G. R. Space Station operations in the twenty-first century [AIAA PAPER 86-2328] BENNIGHOF, J. K. Control of traveling waves in flexible structures A Dornier latch design for a docking mechanism BERGAMASCHI, S. A review of tether induced dynamical features BERGMANN, H. W. Design preparations for large space structures Design and manufacturing aspects of space trusses

p 91

p 43 A86-39481 p 41 A86-38914 p 64 N86-30803 p 10 A86-46951 p 44 A86-39487 p 22 N86-27387 p 61 N86-28411 p 32 A86-40496 p 28 N86-30772 BERKA, R. B. Shuttle-launch triangular space station p 26 N86-24729 [NASA-CASE-MSC-20676-1] BÈRLIEN, J. Non-destructive measurement of residual stresses p 30 A86-32933 BERMAN, A. Error estimation and compensation in reduced dynamic

p 25 A86-38885

p 23 A86-33921

p 42 A86-39035

p 15 N86-27409

p 26 A86-49818

p 14 N86-27402

for mobile

models of large space structures [AIAA PAPER 86-0837]

Inflatable, space-rigidized reflectors

discrete-time modeling, estimation, and control

The optimal projection equations for reduced-order,

The suitability of various spacecraft for future space

Simplified lattice beam elements for geometrically

nonlinear static, dynamic, and postbuckling analysis

Communications platform payload definition study

BERNASCONI, M. C.

BERNSTEIN, D. S.

BERNSTEIN, R.

applications missions

[NASA-TM-88986]

[NASA-CR-174986]

Communications platform payload definition study, executive summary Guidance and control 1985; Proceedings of the Eighth [NASA-CR-174985] Annual Rocky Mountain Conference, Keystone, CO, A86-31776 BETTADAPUR, S. S. Satellite voice broadcast. Volume 1: Executive Some considerations of actuator dynamics in the attitude summary [NASA-CR-175016] p 57 A86-47955 Satellite voice broadcast. Volume 2: System study [NASA-CR-175017] On-orbit parameter and disturbance identification for BEVILACQUA. F. p 95 A86-39477 Tethered constellations, their utilization as microgravity platforms and relevant features BIELING, U. Theoretical and experimental behavior of carbon fiber reinforced plastics under mechanical and thermal load BIGNIER. M. The European Space Station programme On the defect sensitivity of spacecraft typical thin CFRP laminates BLACK, D. C. Point of view of the U.S. science community BLANCHARD, D. L. Flight results from the gravity-gradient-controlled RAE-1 satellite [AIAA PAPER 86-2140] BLANKENSHIP, G. L. Homogenization and control of lattice structures BLELLOCH, P. A. Modified LTR robust control for flexible structures [AIAA PAPER 86-2051] BLEZ. M. Spacecraft materials test in a continuous, broad energy-spectrum electron beam BLUME, H. J. C. Measurement apparation and procedure for the determination of surface emissivities [NASA-CASE-LAR-13455-1] BOATENG, C. An evaluation of foldable elastic tubes for application in space structures BOECKSTIEGEL, K.-H. Space stations: Legal aspects of scientific and commercial use in a framework of transatlantic cooperation; Proceedings of the International Colloquium, Hamburg, West Germany, October 3, 4, 1984 Linear regulator control of the hoop-column antenna Modelling of the hoop-column antenna and design of nonlinear control law in orbit Modelling and design of nonlinear feedback control law for a large space hoop-column antenna BOLOMEY, J.-C. A correction for continuous rotation in measurements of the near field BOLZ, J. A step towards an ESA composites design handbook for space structure applications BOOK, W. J.

p 79 N86-30799 Quasi-analytical solutions for the dynamics of a class of tethered satellites with Danby's aerodynamical drag p 52 A86-46383 Experiments in optimal control of a flexible arm with passive damping p 82 A86-39503 BORRIEN. A. Definition and testing of gears for space robotics p 22 N86-27375 BOSWELL, A. G. P. Some electrical properties of C.F.R.P. reflector p 65 A86-31923

BOUVARD, J. Winding with thermoplastic polymers [SNIAS-861-430-106] p 80 N86-30804 BOUVIER, C. Non-destructive measurement of residual stresses p 30 A86-32933 BOWEN, D. H. Dynamic mechanical analysis as an aid to the

characterization of composite materials p 77 N86-30763 BOWLES, D. E.

The thermal and mechanical stability of composite p 73 A86-40530 materials for space structures BRADLEY, O. H. Thermal analysis of the ACCESS space truss

orbiting Space Shuttle

BARBERIS, N. J.

BARISH, B. C.

BREINER, C. A.	CAMPBELL, H.	Test and analysis correlation for structural dynamic
Weights assessment for orbit-on-demand vehicles [SAWE PAPER 1674] p 3 A86-35217	Space Station propulsion test bed - A complete system	systems p 63 N86-30682 CHEN, JC.
BRENNAN, P. J.	[AIAA PAPER 86-1402] p 87 A86-42615	Stiffness control of large space structures
Development of an Advanced Trapezoidal Axially	Oxygen/hydrogen Space Station propulsion system	p 37 A86-33254
Grooved (ATAG) heat pipe	concept definition for IOC	Test and analysis correlation for structural dynamic
[AIAA PAPER 86-1342] p 31 A86-39941 BREWSTER, D. C.	[AIAA PAPER 86-1561] p 87 A86-42714 CANFIELD, R. A.	systems p 37 A86-33284  Verification of large space structures using scale
Some electrical properties of C.F.R.P. reflector	Optimum design of large structures with multiple	modelling laws p 53 A86-47088
antennas p 65 A86-31923	constraints	CHIGER, H. D.
BRILEY, G. L.	[AIAA PAPER 86-0952] p 19 A86-38845	Space Station multidisciplinary analysis capability -
Space Station propulsion test bed - A complete system	CANN, G. L. A 10,000 hour life multipropellant engine for Space	IDEAS2 [AIAA PAPER 86-0954] p 19 A86-38847
[AIAA PAPER 86-1402] p 87 A86-42615	Station applications	CHILTON, R. G.
Space station propulsion technology	[AIAA PAPER 86-1403] p 87 A86-42616	NASA/American Society for Engineering Education
[NASA-CR-178897] p 90 N86-31647	CANNON, R. H., JR.	(ASEE) Summer Faculty Fellowship Program, 1985
BROCKMAN, W. H.  An adaptive vision-based manipulator control scheme	Experiments on the end-point control of a two-link robot with elastic drives	[NASA-CR-171931] p 105 N86-31409 CHOUDHURY, A. K.
[AIAA PAPER 86-2187] p 83 A86-47469	[AIAA PAPER 86-1977] p 83 A86-47404	Linear regulator control of the hoop-column antenna
BROSDA, D.	Control of a free-flying robot manipulator system	p 45 A86-39498
On the development of a corrugated CFRP central cylinder for satellites p 28 N86-30791	[NASA-CR-179717] p 85 N86-33016	Modelling of the hoop-column antenna and design of nonlinear control law in orbit p 46 A86-39501
BROWN, J. V.	CARD, M. F. Construction and control of large space structures	nonlinear control law in orbit p 46 A86-39501 Modelling and design of nonlinear feedback control law
Geostationary communications platforms	p 39 A86-37060	for a large space hoop-column antenna
p 2 A86-32547	CARLISLE, R. F.	p 48 A86-42909
BRUNNER, O.  Nonlinear deformation analysis of the Olympus	Space Station Advanced Development Program	CHOW, I. C.
Astromast p 21 A86-43756	p 2 A86-32543 CARLOMAGNO, G. M.	Fluid recirculation, deployment and retraction of an expandable pulse power radiator
BRUNSCH, K.	Shuttle Tethered Aerothermodynamics Research Facility	[AIAA PAPER 86-1322] p 25 A86-39923
Autoclave, compression moulding p 72 A86-40495	(STARFAC) instrumentation requirements	CLARIN, P.
Experiences in FRG in aerospace application p 72 A86-40498	p 34 N86-27652	Damage zone fracture analysis of fibrous composites
BRYAN, S. R.	CARLSON, A. W.  Heat pipe radiator technology for space power	p 78 N86-30778
Capacitor-type micrometeoroid detectors	systems	Impact of automation on the design of carbon fiber
p 104 N86-30606	[AIAA PAPER 86-1300] p 31 A86-39907	omega ribs
BRYAN, T.	CARROLL, J. A.	[SNIAS-861-422-101] p 76 N86-28633
An Orbital Maneuvering Vehicle simulator p 5 A86-40515	Tether fundamentals p 104 N86-28410	CLARKE, M. M.  Recent advances in teleoperation - Implications for the
BUCHHOLZ, F. G.	CARROLL, K. A.  Balanced Augmented Controller Reduction	Space Station p 82 A86-40508
On correlation between thermal stresses, elastic strain	p 44 A86-39491	CLEAVE, M. L.
energy and debonding in thermally loaded fiber-reinforced	CARSWELL, W. S.	Results of the ACCESS space construction Shuttle flight
composite materials p 79 N86-30780 BUCK, V.	Fatigue and damage in fibre reinforced nylon	experiment
The performance of unbonded MoS2 for space	p 77 N86-30761 CEBALLOS, D. C.	[AIAA PAPER 86-1186] p 6 A86-40593 CLOPP, H. W.
applications p 76 N86-27376	Compensating structure and parameter optimization for	Communications platform payload definition study
BUEHLER, R. D.	attitude control of a flexible spacecraft	[NASA-CR-174986] p 14 N86-27402
Plasma thruster development: Magnetoplasmadynamic	p 36 A86-31668	
		Communications platform payload definition study,
propulsion, status and basic problems	CECCONI, J. L.	executive summary
propulsion, status and basic problems [AD-A165945] p 90 N86-28991 BUETTNER, H. M.	CECCONI, J. L.  New aluminum alloys for satellite structures	executive summary [NASA-CR-174985] p 14 N86-27407
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision	CECCONI, J. L.	executive summary [NASA-CR-174985] p 14 N86-27407 COFFEY, R. E.
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision  1	CECCONI, J. L.  New aluminum alloys for satellite structures [SNIAS-861-440-111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E. Reduced risk two stage transfers to geosynchronous
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision 1 [DE86-004180] p 68 N86-25680	CECCONI, J. L.  New aluminum alloys for satellite structures  [SNIAS-861-440-111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station	executive summary [NASA-CR-174985] p 14 N86-27407 COFFEY, R. E.
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision  1	CECCONI, J. L.  New aluminum alloys for satellite structures  [SNIAS-861-440-1111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station  [AIAA PAPER 86-2351] p 67 A86-49561	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision [DE86-004180] p 68 N86-25680  BULLOCH, C.  Space Station evolution - The uncertainty principle prevails p 11 A86-48373	CECCONI, J. L.  New aluminum alloys for satellite structures  [SNIAS-861-440-111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.  Subsystem testing of Galileo's attitude and articulation
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision 1 [DE86-004180] p 68 N86-25680  BULLOCH, C. Space Station evolution - The uncertainty principle prevails p 11 A86-48373  BUONO, G.	CECCONI, J. L.  New aluminum alloys for satellite structures  [SNIAS-861-440-111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station  [AIAA PAPER 86-2351] p 67 A86-49561  CENCICH, T.  Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.  Subsystem testing of Galileo's attitude and articulation control fault protection
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision 1 [DE86-004180] p 68 N86-25680  BULLOCH, C. Space Station evolution - The uncertainty principle prevails p 11 A86-48373  BUONO, G. Large space structural models by combination of finite	CECCONI, J. L.  New aluminum alloys for satellite structures  [SNIAS-861-440-111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station  [AIAA PAPER 86-2351] p 67 A86-49561  CENCICH, T.  Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for the JPL feed	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.  Subsystem testing of Galileo's attitude and articulation control fault protection [AIAA PAPER 86-9783] p 91 A86-32117
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision 1 [DE86-004180] p 68 N86-25680  BULLOCH, C. Space Station evolution - The uncertainty principle prevails p 11 A86-48373  BUONO, G.	CECCONI, J. L.  New aluminum alloys for satellite structures [SNIAS-861-440-111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station [AIAA PAPER 86-2351] p 67 A86-49561  CENCICH, T.  Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for the JPL feed [NASA-CR-178061] p 69 N86-28973	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.  Subsystem testing of Galileo's attitude and articulation control fault protection
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision 1 [DE86-004180] p 68 N86-25680  BULLOCH, C. Space Station evolution - The uncertainty principle prevails p 11 A86-48373  BUONO, G.  Large space structural models by combination of finite elements and transfer matrix methods  p 18 A86-37861  BUREO, A.	CECCONI, J. L.  New aluminum alloys for satellite structures  [SNIAS-861-440-111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station  [AIAA PAPER 86-2351] p 67 A86-49561  CENCICH, T.  Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for the JPL feed	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.  Subsystem testing of Galileo's attitude and articulation control fault protection [AIAA PAPER 86-9783] p 91 A86-32117  COLES, C. E.  Liquid droplet radiator program at the NASA Lewis Research Center
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision 1 [DE86-004180] p 68 N86-25680  BULLOCH, C.  Space Station evolution - The uncertainty principle prevails p 11 A86-48373  BUONO, G.  Large space structural models by combination of finite elements and transfer matrix methods  p 18 A86-37861  BUREO, A.  The Collapsible Tube Mast (CTM) p 27 N86-27365	CECCONI, J. L.  New aluminum alloys for satellite structures [SNIAS-861-440-111] p 80 N86-31641 CECKA, J.  Electrical power system integration for the Space Station [AIAA PAPER 86-2351] p 67 A86-49561 CENCICH, T.  Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for the JPL feed [NASA-CR-178061] p 69 N86-28973  Near-field testing of the 15-meter model of the hoop column antenna. [NASA-CR-178059] p 69 N86-29115	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.  Subsystem testing of Galileo's attitude and articulation control fault protection [AIAA PAPER 86-9783] p 91 A86-32117  COLES, C. E.  Liquid droplet radiator program at the NASA Lewis Research Center [ASME PAPER 86-HT-15] p 32 A86-49621
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision 1 [DE86-004180] p 68 N86-25680  BULLOCH, C. Space Station evolution - The uncertainty principle prevails  BUONO, G. Large space structural models by combination of finite elements and transfer matrix methods  BUREO, A. The Collapsible Tube Mast (CTM) p 27 N86-27365  BURKE, W. R.	CECCONI, J. L.  New aluminum alloys for satellite structures  [SNIAS-861-440-111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station  [AIAA PAPER 86-2351] p 67 A86-49561  CENCICH, T.  Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for the JPL feed  [NASA-CR-178061] p 69 N86-28973  Near-field testing of the 15-meter model of the hoop column antenna  [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.  Subsystem testing of Galileo's attitude and articulation control fault protection [AIAA PAPER 86-9783] p 91 A86-32117  COLES, C. E.  Liquid droplet radiator program at the NASA Lewis Research Center [ASME PAPER 86-HT-15] p 32 A86-49621  Effect of an oxygen plasma on the physical and chemical
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision 1 [DE86-004180] p 68 N86-25680  BULLOCH, C.  Space Station evolution - The uncertainty principle prevails p 11 A86-48373  BUONO, G.  Large space structural models by combination of finite elements and transfer matrix methods  p 18 A86-37861  BUREO, A.  The Collapsible Tube Mast (CTM) p 27 N86-27365	CECCONI, J. L.  New aluminum alloys for satellite structures  [SNIAS-861-440-111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station  [AIAA PAPER 86-2351] p 67 A86-49561  CENCICH, T.  Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for the JPL feed  [NASA-CR-178061] p 69 N86-28973  Near-field testing of the 15-meter model of the hoop column antenna  [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.  Subsystem testing of Galileo's attitude and articulation control fault protection [AIAA PAPER 86-9783] p 91 A86-32117  COLES, C. E.  Liquid droplet radiator program at the NASA Lewis Research Center [ASME PAPER 86-HT-15] p 32 A86-49621  Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision 1 [DE86-004180] p 68 N86-25680  BULLOCH, C. Space Station evolution - The uncertainty principle prevails p 11 A86-48373  BUONO, G. Large space structural models by combination of finite elements and transfer matrix methods  BUREO, A. The Collapsible Tube Mast (CTM) p 27 N86-27365  BURKE, W. R. Proceedings of a Workshop on Composites Design for Space Applications [ESA-SP-243] p 105 N86-30758	CECCONI, J. L.  New aluminum alloys for satellite structures  [SNIAS-861-440-111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station  [AIAA PAPER 86-2351] p 67 A86-49561  CENCICH, T.  Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for the JPL feed  [NASA-CR-178061] p 69 N86-28973  Near-field testing of the 15-meter model of the hoop column antenna  [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.  Subsystem testing of Galileo's attitude and articulation control fault protection [AIAA PAPER 86-9783] p 91 A86-32117  COLES, C. E.  Liquid droplet radiator program at the NASA Lewis Research Center [ASME PAPER 86-HT-15] p 32 A86-49621  Effect of an oxygen plasma on the physical and chemical
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision 1 [DE86-004180] p 68 N86-25680  BULLOCH, C. Space Station evolution - The uncertainty principle prevails provided by combination of finite elements and transfer matrix methods  BUONO, G.  Large space structural models by combination of finite elements and transfer matrix methods  p 18 A86-37861  BUREO, A. The Collapsible Tube Mast (CTM) p 27 N86-27365  BURKE, W. R. Proceedings of a Workshop on Composites Design for Space Applications [ESA-SP-243] p 105 N86-30758  BUSH, G.	CECCONI, J. L.  New aluminum alloys for satellite structures  [SNIAS-861-440-111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station  [AIAA PAPER 86-2351] p 67 A86-49561  CENCICH, T.  Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for the JPL feed  [NASA-CR-178061] p 69 N86-28973  Near-field testing of the 15-meter model of the hoop column antenna  [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna  [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds  [NASA-CR-178060] p 69 N86-29877  CERRO, J. A.	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.  Subsystem testing of Galileo's attitude and articulation control fault protection [AIAA PAPER 86-9783] p 91 A86-32117  COLES, C. E.  Liquid droplet radiator program at the NASA Lewis Research Center [ASME PAPER 86-HT-15] p 32 A86-49621  Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634  COLLINS, D. S.  Scanning laser acoustic microscopy applied to the
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision 1 [DE86-004180] p 68 N86-25680  BULLOCH, C. Space Station evolution - The uncertainty principle prevails p 11 A86-48373  BUONO, G.  Large space structural models by combination of finite elements and transfer matrix methods  p 18 A86-37861  BUREO, A. The Collapsible Tube Mast (CTM) p 27 N86-27365  BURKE, W. R. Proceedings of a Workshop on Composites Design for Space Applications [ESA-SP-243] p 105 N86-30758  BUSH, G. Design and test of a linear thermal actuator	CECCONI, J. L.  New aluminum alloys for satellite structures [SNIAS-861-440-1111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station [AIAA PAPER 86-2351] p 67 A86-49561  CENCICH, T.  Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for the JPL feed [NASA-CR-178061] p 69 N86-28973  Near-field testing of the 15-meter model of the hoop column antenna [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877  CERRO, J. A.  Weights assessment for orbit-on-demand vehicles	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.  Subsystem testing of Galileo's attitude and articulation control fault protection [AIAA PAPER 86-9783] p 91 A86-32117  COLES, C. E.  Liquid droplet radiator program at the NASA Lewis Research Center [ASME PAPER 86-HT-15] p 32 A86-49621  Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634  COLLINS, D. S.  Scanning laser acoustic microscopy applied to the evaluation of material interconnections
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision 1 [DE86-004180] p 68 N86-25680  BULLOCH, C. Space Station evolution - The uncertainty principle prevails provided by combination of finite elements and transfer matrix methods  BUONO, G.  Large space structural models by combination of finite elements and transfer matrix methods  p 18 A86-37861  BUREO, A. The Collapsible Tube Mast (CTM) p 27 N86-27365  BURKE, W. R. Proceedings of a Workshop on Composites Design for Space Applications [ESA-SP-243] p 105 N86-30758  BUSH, G.	CECCONI, J. L.  New aluminum alloys for satellite structures [SNIAS-861-440-111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station [AIAA PAPER 86-2351] p 67 A86-49561  CENCICH, T.  Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for the JPL feed [INASA-CR-178061] p 69 N86-28973  Near-field testing of the 15-meter model of the hoop column antenna [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877  CERRO, J. A.  Weights assessment for orbit-on-demand vehicles [SAWE PAPER 1674] p 3 A86-35217	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.  Subsystem testing of Galileo's attitude and articulation control fault protection [AIAA PAPER 86-9783] p 91 A86-32117  COLES, C. E.  Liquid droplet radiator program at the NASA Lewis Research Center [ASME PAPER 86-HT-15] p 32 A86-49621  Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634  COLLINS, D. S.  Scanning laser acoustic microscopy applied to the evaluation of material interconnections
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision 1 [DE86-004180] p 68 N86-25680  BULLOCH, C.  Space Station evolution - The uncertainty principle prevails p 11 A86-48373  BUONO, G.  Large space structural models by combination of finite elements and transfer matrix methods  p 18 A86-37861  BUREO, A.  The Collapsible Tube Mast (CTM) p 27 N86-27365  BURKE, W. R.  Proceedings of a Workshop on Composites Design for Space Applications [ESA-SP-243] p 105 N86-30758  BUSH, G.  Design and test of a linear thermal actuator p 34 N86-27380  BUSH, H. G.  Synchronously deployable truss structure	CECCONI, J. L.  New aluminum alloys for satellite structures [SNIAS-861-440-1111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station [AIAA PAPER 86-2351] p 67 A86-49561  CENCICH, T.  Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for the JPL feed [NASA-CR-178061] p 69 N86-28973  Near-field testing of the 15-meter model of the hoop column antenna [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877  CERRO, J. A.  Weights assessment for orbit-on-demand vehicles	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.  Subsystem testing of Galileo's attitude and articulation control fault protection [AIAA PAPER 86-9783] p 91 A86-32117  COLES, C. E.  Liquid droplet radiator program at the NASA Lewis Research Center [ASME PAPER 86-HT-15] p 32 A86-49621  Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634  COLLINS, D. S.  Scanning laser acoustic microscopy applied to the evaluation of material interconnections
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision 1 [DE86-004180] p 68 N86-25680  BULLOCH, C. Space Station evolution - The uncertainty principle prevails p 11 A86-48373  BUONO, G. Large space structural models by combination of finite elements and transfer matrix methods  BUREO, A. The Collapsible Tube Mast (CTM) p 27 N86-27365  BURKE, W. R. Proceedings of a Workshop on Composites Design for Space Applications [ESA-SP-243] p 105 N86-30758  BUSH, G. Design and test of a linear thermal actuator p 34 N86-27380  BUSH, H. G. Synchronously deployable truss structure [NASA-CASE-LAR-13117-1] p 27 N86-25789	CECCONI, J. L.  New aluminum alloys for satellite structures [SNIAS-861-440-111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station [AIAA PAPER 86-2351] p 67 A86-49561  CENCICH, T.  Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for the JPL feed [INASA-CR-178061] p 69 N86-28973  Near-field testing of the 15-meter model of the hoop column antenna [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877  CERRO, J. A.  Weights assessment for orbit-on-demand vehicles [SAWE PAPER 1674] p 3 A86-35217  CHAI, G. B.  Assessing the effects of delaminations on the postbuckling strength of CRFP panels	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.  Subsystem testing of Galileo's attitude and articulation control fault protection [AIAA PAPER 86-9783] p 91 A86-32117  COLES, C. E.  Liquid droplet radiator program at the NASA Lewis Research Center [ASME PAPER 86-HT-15] p 32 A86-49621  Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634  COLLINS, D. S.  Scanning laser acoustic microscopy applied to the evaluation of material interconnections  p 75 N86-22624  CONCEPCION, J. C.  Monopropellant hydrazine systems for space station applications
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision 1 [DE86-004180] p 68 N86-25680  BULLOCH, C. Space Station evolution - The uncertainty principle prevails BUONO, G. Large space structural models by combination of finite elements and transfer matrix methods  BUREO, A. The Collapsible Tube Mast (CTM) p 27 N86-27365  BURKE, W. R. Proceedings of a Workshop on Composites Design for Space Applications [ESA-SP-243] p 105 N86-30758  BUSH, G. Design and test of a linear thermal actuator p 34 N86-27380  BUSH, H. G. Synchronously deployable truss structure [NASA-CASE-LAR-13117-1] p 27 N86-25789  BUTLER, J. M., JR.	CECCONI, J. L.  New aluminum alloys for satellite structures  [SNIAS-861-440-111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station  [AIAA PAPER 86-2351] p 67 A86-49561  CENCICH, T.  Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for the JPL feed  [NASA-CR-178061] p 69 N86-28973  Near-field testing of the 15-meter model of the hoop column antenna  [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds  [NASA-CR-178060] p 69 N86-29877  CERRO, J. A.  Weights assessment for orbit-on-demand vehicles  [SAWE PAPER 1674] p 3 A86-35217  CHAI, G. B.  Assessing the effects of delaminations on the postbuckling strength of CRFP panels	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.  Subsystem testing of Galileo's attitude and articulation control fault protection [AIAA PAPER 86-9783] p 91 A86-32117  COLES, C. E.  Liquid droplet radiator program at the NASA Lewis Research Center [ASME PAPER 86-HT-15] p 32 A86-49621  Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634  COLLINS, D. S.  Scanning laser acoustic microscopy applied to the evaluation of material interconnections  p 75 N86-22624  CONCEPCION, J. C.  Monopropellant hydrazine systems for space station applications [AIAA PAPER 86-1562] p 88 A86-42715
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision 1 [DE86-004180] p 68 N86-25680  BULLOCH, C. Space Station evolution - The uncertainty principle prevails p 11 A86-48373  BUONO, G. Large space structural models by combination of finite elements and transfer matrix methods  BUREO, A. The Collapsible Tube Mast (CTM) p 27 N86-27365  BURKE, W. R. Proceedings of a Workshop on Composites Design for Space Applications [ESA-SP-243] p 105 N86-30758  BUSH, G. Design and test of a linear thermal actuator p 34 N86-27380  BUSH, H. G. Synchronously deployable truss structure [NASA-CASE-LAR-13117-1] p 27 N86-25789	CECCONI, J. L.  New aluminum alloys for satellite structures  [SNIAS-861-440-111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station  [AIAA PAPER 86-2351] p 67 A86-49561  CENCICH, T.  Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for the JPL feed  [NASA-CR-178061] p 69 N86-28973  Near-field testing of the 15-meter model of the hoop column antenna  [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna  [NASA-CR-178060] p 69 N86-2915  Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds  [NASA-CR-178060] p 69 N86-29877  CERRO, J. A.  Weights assessment for orbit-on-demand vehicles  [SAWE PAPER 1674] p 3 A86-35217  CHAI, G. B.  Assessing the effects of delaminations on the postbuckling strength of CRFP panels	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.  Subsystem testing of Galileo's attitude and articulation control fault protection [AIAA PAPER 86-9783] p 91 A86-32117  COLES, C. E.  Liquid droplet radiator program at the NASA Lewis Research Center [ASME PAPER 86-HT-15] p 32 A86-49621  Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634  COLLINS, D. S.  Scanning laser acoustic microscopy applied to the evaluation of material interconnections  p 75 N86-22624  CONCEPCION, J. C.  Monopropellant hydrazine systems for space station applications [AIAA PAPER 86-1562] p 88 A86-42715  CONNOR, M.
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision 1 [DE86-004180] p 68 N86-25680  BULLOCH, C. Space Station evolution - The uncertainty principle prevails  BUONO, G. Large space structural models by combination of finite elements and transfer matrix methods  BUREO, A. The Collapsible Tube Mast (CTM) p 27 N86-27365  BURKE, W. R. Proceedings of a Workshop on Composites Design for Space Applications [ESA-SP-243] p 105 N86-30758  BUSH, G. Design and test of a linear thermal actuator p 34 N86-27380  BUSH, H. G. Synchronously deployable truss structure [NASA-CASE-LAR-13117-1] p 27 N86-25789  BUTLER, J. M., JR. Mars missions and bases - A recent look p 2 A86-32548	CECCONI, J. L.  New aluminum alloys for satellite structures  [SNIAS-861-440-111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station  [AIAA PAPER 86-2351] p 67 A86-49561  CENCICH, T.  Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for the JPL feed  [NASA-CR-178061] p 69 N86-28973  Near-field testing of the 15-meter model of the hoop column antenna  [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds  [NASA-CR-178060] p 69 N86-29877  CERRO, J. A.  Weights assessment for orbit-on-demand vehicles  [SAWE PAPER 1674] p 3 A86-35217  CHAI, G. B.  Assessing the effects of delaminations on the postbuckling strength of CRFP panels	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.  Subsystem testing of Galileo's attitude and articulation control fault protection [AIAA PAPER 86-9783] p 91 A86-32117  COLES, C. E.  Liquid droplet radiator program at the NASA Lewis Research Center [ASME PAPER 86-HT-15] p 32 A86-49621  Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634  COLLINS, D. S.  Scanning laser acoustic microscopy applied to the evaluation of material interconnections  p 75 N86-22624  CONCEPCION, J. C.  Monopropellant hydrazine systems for space station applications [AIAA PAPER 86-1562] p 88 A86-42715  CONNOR, M.  A thermal control design for the Leasat F-3 salvage
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision 1 [DE86-004180] p 68 N86-25680  BULLOCH, C. Space Station evolution - The uncertainty principle prevails p 11 A86-48373  BUONO, G.  Large space structural models by combination of finite elements and transfer matrix methods  p 18 A86-37861  BUREO, A. The Collapsible Tube Mast (CTM) p 27 N86-27365  BURKE, W. R. Proceedings of a Workshop on Composites Design for Space Applications [ESA-SP-243] p 105 N86-30758  BUSH, G. Design and test of a linear thermal actuator p 34 N86-27380  BUSH, H. G. Synchronously deployable truss structure [NASA-CASE-LAR-13117-1] p 27 N86-25789  BUTLER, J. M., JR. Mars missions and bases - A recent look p 2 A86-32548  BUTLER, L. V. Protective telescoping shield for solar concentrator	CECCONI, J. L.  New aluminum alloys for satellite structures  [SNIAS-861-440-111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station  [AIAA PAPER 86-2351] p 67 A86-49561  CENCICH, T.  Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for the JPL feed  [NASA-CR-178061] p 69 N86-28973  Near-field testing of the 15-meter model of the hoop column antenna  [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna  [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds  [NASA-CR-178060] p 69 N86-29877  CERRO, J. A.  Weights assessment for orbit-on-demand vehicles  [SAWE PAPER 1674] p 3 A86-35217  CHAI, G. B.  Assessing the effects of delaminations on the postbuckling strength of CRFP panels  p 79 N86-30781  CHALMERS, D. R.  Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990  Application of capillary pumped loop heat transport	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.  Subsystem testing of Galileo's attitude and articulation control fault protection [AIAA PAPER 86-9783] p 91 A86-32117  COLES, C. E.  Liquid droplet radiator program at the NASA Lewis Research Center [ASME PAPER 86-HT-15] p 32 A86-49621  Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634  COLLINS, D. S.  Scanning laser acoustic microscopy applied to the evaluation of material interconnections  p 75 N86-22624  CONCEPCION, J. C.  Monopropellant hydrazine systems for space station applications [AIAA PAPER 86-1562] p 88 A86-42715  CONNOR, M.
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision 1 [DE86-004180] p 68 N86-25680  BULLOCH, C. Space Station evolution - The uncertainty principle prevails  BUONO, G. Large space structural models by combination of finite elements and transfer matrix methods  BUREO, A. The Collapsible Tube Mast (CTM) p 27 N86-27365  BURKE, W. R. Proceedings of a Workshop on Composites Design for Space Applications [ESA-SP-243] p 105 N86-30758  BUSH, G. Design and test of a linear thermal actuator p 34 N86-27380  BUSH, H. G. Synchronously deployable truss structure [NASA-CASE-LAR-13117-1] p 27 N86-25789  BUTLER, J. M., JR. Mars missions and bases - A recent look p 2 A86-32548	CECCONI, J. L.  New aluminum alloys for satellite structures [SNIAS-861-440-111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station [AIAA PAPER 86-2351] p 67 A86-49561  CENCICH, T.  Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for the JPL feed [INASA-CR-178061] p 69 N86-28973  Near-field testing of the 15-meter model of the hoop column antenna [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877  CERRO, J. A.  Weights assessment for orbit-on-demand vehicles [SAWE PAPER 1674] p 3 A86-35217  CHAI, G. B.  Assessing the effects of delaminations on the postbuckling strength of CRFP panels  p 79 N86-30781  CHALMERS, D. R.  Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990  Application of capillary pumped loop heat transport systems to large spacecraft	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.  Subsystem testing of Galileo's attitude and articulation control fault protection [AIAA PAPER 86-9783] p 91 A86-32117  COLES, C. E.  Liquid droplet radiator program at the NASA Lewis Research Center [ASME PAPER 86-HT-15] p 32 A86-49621  Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634  COLLINS, D. S.  Scanning laser acoustic microscopy applied to the evaluation of material interconnections  p 75 N86-22624  CONCEPCION, J. C.  Monopropellant hydrazine systems for space station applications [AIAA PAPER 86-1562] p 88 A86-42715  CONNOR, M.  A thermal control design for the Leasat F-3 salvage mission
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision 1 [DE86-004180] p 68 N86-25680  BULLOCH, C. Space Station evolution - The uncertainty principle prevails p 11 A86-48373  BUONO, G.  Large space structural models by combination of finite elements and transfer matrix methods  p 18 A86-37861  BUREO, A. The Collapsible Tube Mast (CTM) p 27 N86-27365  BURKE, W. R. Proceedings of a Workshop on Composites Design for Space Applications [ESA-SP-243] p 105 N86-30758  BUSH, G. Design and test of a linear thermal actuator p 34 N86-27380  BUSH, H. G. Synchronously deployable truss structure [NASA-CASE-LAR-13117-1] p 27 N86-25789  BUTLER, J. M., JR. Mars missions and bases - A recent look p 2 A86-32548  BUTLER, L. V. Protective telescoping shield for solar concentrator	CECCONI, J. L.  New aluminum alloys for satellite structures  [SNIAS-861-440-111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station  [AIAA PAPER 86-2351] p 67 A86-49561  CENCICH, T.  Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for the JPL feed  [NASA-CR-178061] p 69 N86-28973  Near-field testing of the 15-meter model of the hoop column antenna  [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna  [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds  [NASA-CR-178060] p 69 N86-29877  CERRO, J. A.  Weights assessment for orbit-on-demand vehicles  [SAWE PAPER 1674] p 3 A86-35217  CHAI, G. B.  Assessing the effects of delaminations on the postbuckling strength of CRFP panels  p 79 N86-30781  CHALMERS, D. R.  Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990  Application of capillary pumped loop heat transport	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.  Subsystem testing of Galileo's attitude and articulation control fault protection [AIAA PAPER 86-9783] p 91 A86-32117  COLES, C. E.  Liquid droplet radiator program at the NASA Lewis Research Center [ASME PAPER 86-HT-15] p 32 A86-49621  Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634  COLLINS, D. S.  Scanning laser acoustic microscopy applied to the evaluation of material interconnections  p 75 N86-22624  CONCEPCION, J. C.  Monopropellant hydrazine systems for space station applications [AIAA PAPER 86-1562] p 88 A86-42715  CONNOR, M.  A thermal control design for the Leasat F-3 salvage mission [AIAA PAPER 86-1340] p 31 A86-39939  COOK, T. M.  Al applications for the Space Station program
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision 1 [DE86-004180] p 68 N86-25680  BULLOCH, C. Space Station evolution - The uncertainty principle prevails p 11 A86-48373  BUONO, G.  Large space structural models by combination of finite elements and transfer matrix methods  p 18 A86-37861  BUREO, A. The Collapsible Tube Mast (CTM) p 27 N86-27365  BURKE, W. R. Proceedings of a Workshop on Composites Design for Space Applications [ESA-SP-243] p 105 N86-30758  BUSH, G. Design and test of a linear thermal actuator p 34 N86-27380  BUSH, H. G. Synchronously deployable truss structure [NASA-CASE-LAR-13117-1] p 27 N86-25789  BUTLER, J. M., JR. Mars missions and bases - A recent look p 2 A86-32548  BUTLER, L. V. Protective telescoping shield for solar concentrator	CECCONI, J. L.  New aluminum alloys for satellite structures  [SNIAS-861-440-111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station  [AIAA PAPER 86-2351] p 67 A86-49561  CENCICH, T.  Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for the JPL feed  [INASA-CR-178061] p 69 N86-28973  Near-field testing of the 15-meter model of the hoop column antenna  [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna  [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds  [NASA-CR-178060] p 69 N86-29877  CERRO, J. A.  Weights assessment for orbit-on-demand vehicles  [SAWE PAPER 1674] p 3 A86-35217  CHAI, G. B.  Assessing the effects of delaminations on the postbuckling strength of CRFP panels  p 79 N86-30781  CHALMERS, D. R.  Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990  Application of capillary pumped loop heat transport systems to large spacecraft  [AIAA PAPER 86-1295] p 31 A86-39903  CHANDE, A. M.  Robot spacecraft survivability using a decision tree for	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.  Subsystem testing of Galileo's attitude and articulation control fault protection [AIAA PAPER 86-9783] p 91 A86-32117  COLES, C. E.  Liquid droplet radiator program at the NASA Lewis Research Center [ASME PAPER 86-HT-15] p 32 A86-49621  Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator INASA-TM-88839] p 80 N86-31634  COLLINS, D. S.  Scanning laser acoustic microscopy applied to the evaluation of material interconnections  p 75 N86-22624  CONCEPCION, J. C.  Monopropellant hydrazine systems for space station applications [AIAA PAPER 86-1562] p 88 A86-42715  CONNOR, M.  A thermal control design for the Leasat F-3 salvage mission [AIAA PAPER 86-1340] p 31 A86-39939  COOK, T. M.  Al applications for the Space Station program - Technology, design and integration challenges
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision 1 [DE86-004180] p 68 N86-25680  BULLOCH, C. Space Station evolution - The uncertainty principle prevails p 11 A86-48373  BUONO, G.  Large space structural models by combination of finite elements and transfer matrix methods  p 18 A86-37861  BUREO, A. The Collapsible Tube Mast (CTM) p 27 N86-27365  BURKE, W. R. Proceedings of a Workshop on Composites Design for Space Applications [ESA-SP-243] p 105 N86-30758  BUSH, G. Design and test of a linear thermal actuator p 34 N86-27380  BUSH, H. G. Synchronously deployable truss structure [NASA-CASE-LAR-13117-1] p 27 N86-25789  BUTLER, J. M., JR. Mars missions and bases - A recent look p 2 A86-32548  BUTLER, L. V. Protective telescoping shield for solar concentrator	CECCONI, J. L.  New aluminum alloys for satellite structures  [SNIAS-861-440-111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station  [AIAA PAPER 86-2351] p 67 A86-49561  CENCICH, T.  Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for the JPL feed  [NASA-CR-178061] p 69 N86-28973  Near-field testing of the 15-meter model of the hoop column antenna  [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna  [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds  [NASA-CR-178060] p 69 N86-29877  CERRO, J. A.  Weights assessment for orbit-on-demand vehicles  [SAWE PAPER 1674] p 3 A86-35217  CHAI, G. B.  Assessing the effects of delaminations on the postbuckling strength of CRFP panels  P 79 N86-30781  CHALMERS, D. R.  Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990  Application of capillary pumped loop heat transport systems to large spacecraft  [AIAA PAPER 86-1295] p 31 A86-39903  CHANDE, A. M.  Robot spacecraft survivability using a decision tree for data processing p 81 A86-32550	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.  Subsystem testing of Galileo's attitude and articulation control fault protection [AIAA PAPER 86-9783] p 91 A86-32117  COLES, C. E.  Liquid droplet radiator program at the NASA Lewis Research Center [ASME PAPER 86-HT-15] p 32 A86-49621  Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634  COLLINS, D. S.  Scanning laser acoustic microscopy applied to the evaluation of material interconnections  p 75 N86-22624  CONCEPCION, J. C.  Monopropellant hydrazine systems for space station applications [AIAA PAPER 86-1562] p 88 A86-42715  CONNOR, M.  A thermal control design for the Leasat F-3 salvage mission  [AIAA PAPER 86-1340] p 31 A86-39939  COOK, T. M.  Al applications for the Space Station program - Technology, design and integration challenges [AIAA PAPER 86-2315] p 21 A86-47048
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision 1 [DE86-004180] p 68 N86-25680  BULLOCH, C. Space Station evolution - The uncertainty principle prevails p 11 A86-48373  BUONO, G. Large space structural models by combination of finite elements and transfer matrix methods  BUREO, A. The Collapsible Tube Mast (CTM) p 27 N86-27365  BURKE, W. R. Proceedings of a Workshop on Composites Design for Space Applications [ESA-SP-243] p 105 N86-30758  BUSH, G. Design and test of a linear thermal actuator p 34 N86-27380  BUSH, H. G. Synchronously deployable truss structure [NASA-CASE-LAR-13117-1] p 27 N86-25789  BUTLER, J. M., JR. Mars missions and bases - A recent look p 2 A86-32548  BUTLER, L. V. Protective telescoping shield for solar concentrator [NASA-CASE-NPO-16236-1] p 103 N86-27706  C  CABLE, N. Experiment manipulators for automatic sample	CECCONI, J. L.  New aluminum alloys for satellite structures  [SNIAS-861-440-111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station  [AIAA PAPER 86-2351] p 67 A86-49561  CENCICH, T.  Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for the JPL feed  [NASA-CR-178061] p 69 N86-28973  Near-field testing of the 15-meter model of the hoop column antenna  [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds  [NASA-CR-178060] p 69 N86-29877  CERRO, J. A.  Weights assessment for orbit-on-demand vehicles  [SAWE PAPER 1674] p 3 A86-35217  CHAI, G. B.  Assessing the effects of delaminations on the postbuckling strength of CRFP panels  p 79 N86-30781  CHALMERS, D. R.  Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990  Application of capillary pumped loop heat transport systems to large spacecraft  [AIAA PAPER 86-1295] p 31 A86-39903  CHANDE, A. M.  Robot spacecraft survivability using a decision tree for data processing p 81 A86-32550  CHARON, W.	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.  Subsystem testing of Galileo's attitude and articulation control fault protection [AIAA PAPER 86-9783] p 91 A86-32117  COLES, C. E.  Liquid droplet radiator program at the NASA Lewis Research Center [ASME PAPER 86-HT-15] p 32 A86-49621  Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634  COLLINS, D. S.  Scanning laser acoustic microscopy applied to the evaluation of material interconnections  p 75 N86-22624  CONCEPCION, J. C.  Monopropellant hydrazine systems for space station applications [AIAA PAPER 86-1562] p 88 A86-42715  CONNOR, M.  A thermal control design for the Leasat F-3 salvage mission [AIAA PAPER 86-1340] p 31 A86-39939  COCK, T. M.  Al applications for the Space Station program - Technology, design and integration challenges [AIAA PAPER 86-2315] p 21 A86-47048  COOPER, P. A.  Multidisciplinary capability for analysis of the dynamics
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision 1 [DE86-004180] p 68 N86-25680  BULLOCH, C. Space Station evolution - The uncertainty principle prevails  BUONO, G. Large space structural models by combination of finite elements and transfer matrix methods  BUREO, A. The Collapsible Tube Mast (CTM) p 27 N86-27365  BURKE, W. R. Proceedings of a Workshop on Composites Design for Space Applications [ESA-SP-243] p 105 N86-30758  BUSH, G. Design and test of a linear thermal actuator p 34 N86-27380  BUSH, H. G. Synchronously deployable truss structure [NASA-CASE-LAR-13117-1] p 27 N86-25789  BUTLER, J. M., JR. Mars missions and bases - A recent look p 2 A86-32548  BUTLER, L. V. Protective telescoping shield for solar concentrator [NASA-CASE-NPO-16236-1] p 103 N86-27706  C  CABLE, N. Experiment manipulators for automatic sample handling p 84 N86-27386	CECCONI, J. L.  New aluminum alloys for satellite structures  [SNIAS-861-440-111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station  [AIAA PAPER 86-2351] p 67 A86-49561  CENCICH, T.  Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for the JPL feed  [NASA-CR-178061] p 69 N86-28973  Near-field testing of the 15-meter model of the hoop column antenna  [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna  [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds  [NASA-CR-178060] p 69 N86-29877  CERRO, J. A.  Weights assessment for orbit-on-dermand vehicles  [SAWE PAPER 1674] p 3 A86-35217  CHAI, G. B.  Assessing the effects of delaminations on the postbuckling strength of CRFP panels  p 79 N86-30781  CHALMERS, D. R.  Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990  Application of capillary pumped loop heat transport systems to large spacecraft  [AIAA PAPER 86-1295] p 31 A86-39903  CHANDE, A. M.  Robot spacecraft survivability using a decision tree for data processing p 81 A86-32550  CHARON, W.  Aspects of active isolation as applied to a satellite	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.  Subsystem testing of Galileo's attitude and articulation control fault protection [AIAA PAPER 86-9783] p 91 A86-32117  COLES, C. E.  Liquid droplet radiator program at the NASA Lewis Research Center [ASME PAPER 86-HT-15] p 32 A86-49621  Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634  COLLINS, D. S.  Scanning laser acoustic microscopy applied to the evaluation of material interconnections  p 75 N86-22624  CONCEPCION, J. C.  Monopropellant hydrazine systems for space station applications [AIAA PAPER 86-1562] p 88 A86-42715  CONNOR, M.  A thermal control design for the Leasat F-3 salvage mission  [AIAA PAPER 86-1340] p 31 A86-39939  COOK, T. M.  Al applications for the Space Station program - Technology, design and integration challenges [AIAA PAPER 86-2315] p 21 A86-47048  COOPER, P. A.  Multidisciplinary capability for analysis of the dynamics and control of flexible space structures
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision 1 [DE86-004180] p 68 N86-25680  BULLOCH, C.  Space Station evolution - The uncertainty principle prevails p 11 A86-48373  BUONO, G.  Large space structural models by combination of finite elements and transfer matrix methods  BUREO, A.  The Collapsible Tube Mast (CTM) p 27 N86-27365  BURKE, W. R.  Proceedings of a Workshop on Composites Design for Space Applications [ESA-SP-243] p 105 N86-30758  BUSH, G.  Design and test of a linear thermal actuator p 34 N86-27380  BUSH, H. G. Synchronously deployable truss structure [NASA-CASE-LAR-13117-1] p 27 N86-25789  BUTLER, L. V.  Protective telescoping shield for solar concentrator [NASA-CASE-NPO-16236-1] p 103 N86-27706  C  CABLE, N. Experiment manipulators for automatic sample handling p 84 N86-27386 A Dornier latch design for a docking mechanism	CECCONI, J. L.  New aluminum alloys for satellite structures  [SNIAS-861-440-111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station  [AIAA PAPER 86-2351] p 67 A86-49561  CENCICH, T.  Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for the JPL feed  [NASA-CR-178061] p 69 N86-28973  Near-field testing of the 15-meter model of the hoop column antenna  [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds  [NASA-CR-178060] p 69 N86-29877  CERRO, J. A.  Weights assessment for orbit-on-demand vehicles  [SAWE PAPER 1674] p 3 A86-35217  CHAI, G. B.  Assessing the effects of delaminations on the postbuckling strength of CRFP panels  p 79 N86-30781  CHALMERS, D. R.  Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990  Application of capillary pumped loop heat transport systems to large spacecraft  [AIAA PAPER 86-1295] p 31 A86-39903  CHANDE, A. M.  Robot spacecraft survivability using a decision tree for data processing  CHARON, W.  Aspects of active isolation as applied to a satellite structure with shape precision payload	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.  Subsystem testing of Galileo's attitude and articulation control fault protection [AIAA PAPER 86-9783] p 91 A86-32117  COLES, C. E.  Liquid droplet radiator program at the NASA Lewis Research Center [ASME PAPER 86-HT-15] p 32 A86-49621  Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634  COLLINS, D. S.  Scanning laser acoustic microscopy applied to the evaluation of material interconnections  p 75 N86-22624  CONCEPCION, J. C.  Monopropellant hydrazine systems for space station applications [AIAA PAPER 86-1562] p 88 A86-42715  CONNOR, M.  A thermal control design for the Leasat F-3 salvage mission  [AIAA PAPER 86-1340] p 31 A86-39939  COOK, T. M.  Al applications for the Space Station program - Technology, design and integration challenges [AIAA PAPER 86-2315] p 21 A86-47048  COOPER, P. A.  Multidisciplinary capability for analysis of the dynamics and control of flexible space structures [AIAA PAPER 86-0961] p 42 A86-38933
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision 1 [DE86-004180] p 68 N86-25680  BULLOCH, C. Space Station evolution - The uncertainty principle prevails p 11 A86-48373  BUONO, G. Large space structural models by combination of finite elements and transfer matrix methods  BUREO, A. The Collapsible Tube Mast (CTM) p 27 N86-27365  BURKE, W. R. Proceedings of a Workshop on Composites Design for Space Applications [ESA-SP-243] p 105 N86-30758  BUSH, G. Design and test of a linear thermal actuator p 34 N86-27380  BUSH, H. G. Synchronously deployable truss structure [NASA-CASE-LAR-13117-1] p 27 N86-25789  BUTLER, J. M., JR. Mars missions and bases - A recent look p 2 A86-32548  BUTLER, L. V. Protective telescoping shield for solar concentrator [NASA-CASE-NPO-16236-1] p 103 N86-27706  C  CABLE, N. Experiment manipulators for automatic sample handling p 84 N86-27386 A Dornier latch design for a docking mechanism p 22 N86-27387	CECCONI, J. L.  New aluminum alloys for satellite structures [SNIAS-861-440-111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station [AIAA PAPER 86-2351] p 67 A86-49561  CENCICH, T.  Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for the JPL feed [NASA-CR-178061] p 69 N86-28973  Near-field testing of the 15-meter model of the hoop column antenna [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877  CERRO, J. A.  Weights assessment for orbit-on-dermand vehicles [SAWE PAPER 1674] p 3 A86-35217  CHAI, G. B.  Assessing the effects of delaminations on the postbuckling strength of CRFP panels  p 79 N86-30781  CHALMERS, D. R.  Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990  Application of capillary pumped loop heat transport systems to large spacecraft [AIAA PAPER 86-1295] p 31 A86-39903  CHANDE, A. M.  Robot spacecraft survivability using a decision tree for data processing p 81 A86-32550  CHARON, W.  Aspects of active isolation as applied to a satellite structure with shape precision payload  p 37 A86-33255  Aspects of active isolation as applied to a satellite	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.  Subsystem testing of Galileo's attitude and articulation control fault protection [AIAA PAPER 86-9783] p 91 A86-32117  COLES, C. E.  Liquid droplet radiator program at the NASA Lewis Research Center [ASME PAPER 86-HT-15] p 32 A86-49621  Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634  COLLINS, D. S.  Scanning laser acoustic microscopy applied to the evaluation of material interconnections  p 75 N86-22624  CONCEPCION, J. C.  Monopropellant hydrazine systems for space station applications [AIAA PAPER 86-1562] p 88 A86-42715  CONNOR, M.  A thermal control design for the Leasat F-3 salvage mission [AIAA PAPER 86-1340] p 31 A86-39939  COOK, T. M.  Al applications for the Space Station program Technology, design and integration challenges [AIAA PAPER 86-2315] p 21 A86-47048  COOPER, P. A.  Multidisciplinary capability for analysis of the dynamics and control of flexible space structures [AIAA PAPER 86-3961] p 42 A86-38933  Control/structures interaction study of two 300 KW
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision 1 [DE86-004180] p 68 N86-25680  BULLOCH, C.  Space Station evolution - The uncertainty principle prevails p 11 A86-48373  BUONO, G.  Large space structural models by combination of finite elements and transfer matrix methods  BUREO, A.  The Collapsible Tube Mast (CTM) p 27 N86-27365  BURKE, W. R.  Proceedings of a Workshop on Composites Design for Space Applications [ESA-SP-243] p 105 N86-30758  BUSH, G.  Design and test of a linear thermal actuator p 34 N86-27380  BUSH, H. G. Synchronously deployable truss structure [NASA-CASE-LAR-13117-1] p 27 N86-25789  BUTLER, L. V.  Protective telescoping shield for solar concentrator [NASA-CASE-NPO-16236-1] p 103 N86-27706  C  CABLE, N. Experiment manipulators for automatic sample handling p 84 N86-27386 A Dornier latch design for a docking mechanism	CECCONI, J. L.  New aluminum alloys for satellite structures [SNIAS-861-440-111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station [AIAA PAPER 86-2351] p 67 A86-49561  CENCICH, T.  Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for the JPL feed [NASA-CR-178061] p 69 N86-28973  Near-field testing of the 15-meter model of the hoop column antenna [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877  CERRO, J. A.  Weights assessment for orbit-on-demand vehicles [SAWE PAPER 1674] p 3 A86-35217  CHAI, G. B.  Assessing the effects of delaminations on the postbuckling strength of CRFP panels  P 79 N86-30781  CHALMERS, D. R.  Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990  Application of capillary pumped loop heat transport systems to large spacecraft [AIAA PAPER 86-1295] p 31 A86-39903  CHANDE, A. M.  Robot spacecraft survivability using a decision tree for data processing p 81 A86-32550  CHARON, W.  Aspects of active isolation as applied to a satellite structure with shape precision payload  p 37 A86-33255  Aspects of active isolation as applied to a satellite structure with shape precision payload	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.  Subsystem testing of Galileo's attitude and articulation control fault protection [AIAA PAPER 86-9783] p 91 A86-32117  COLES, C. E.  Liquid droplet radiator program at the NASA Lewis Research Center [ASME PAPER 86-HT-15] p 32 A86-49621  Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634  COLLINS, D. S.  Scanning laser acoustic microscopy applied to the evaluation of material interconnections  p 75 N86-22624  CONCEPCION, J. C.  Monopropellant hydrazine systems for space station applications [AIAA PAPER 86-1562] p 88 A86-42715  CONNOR, M.  A thermal control design for the Leasat F-3 salvage mission  [AIAA PAPER 86-1340] p 31 A86-39939  COOK, T. M.  Al applications for the Space Station program - Technology, design and integration challenges [AIAA PAPER 86-2315] p 21 A86-47048  COOPER, P. A.  Multidisciplinary capability for analysis of the dynamics and control of flexible space structures [AIAA PAPER 86-0961] p 42 A86-38933
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision 1 [DE86-004180] p 68 N86-25680  BULLOCH, C. Space Station evolution - The uncertainty principle prevails p 11 A86-48373  BUONO, G. Large space structural models by combination of finite elements and transfer matrix methods  BUREO, A. The Collapsible Tube Mast (CTM) p 27 N86-27365  BURKE, W. R. Proceedings of a Workshop on Composites Design for Space Applications [ESA-SP-243] p 105 N86-30758  BUSH, G. Design and test of a linear thermal actuator Design and test of a linear thermal actuator [NASA-CASE-LAR-13117-1] p 27 N86-25789  BUTLER, L. V. Protective telescoping shield for solar concentrator [NASA-CASE-NPO-16236-1] p 103 N86-27706  C  CABLE, N. Experiment manipulators for automatic sample handling A Dornier latch design for a docking mechanism p 22 N86-27387  CALICO, R. A. The effects of structural perturbations on modal suppression p 45 A86-39497	CECCONI, J. L.  New aluminum alloys for satellite structures [SNIAS-861-440-111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station [AIAA PAPER 86-2351] p 67 A86-49561  CENCICH, T.  Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for the JPL feed [NASA-CR-178061] p 69 N86-28973  Near-field testing of the 15-meter model of the hoop column antenna [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877  CERRO, J. A.  Weights assessment for orbit-on-dermand vehicles [SAWE PAPER 1674] p 3 A86-35217  CHAI, G. B.  Assessing the effects of delaminations on the postbuckling strength of CRFP panels  p 79 N86-30781  CHALMERS, D. R.  Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990  Application of capillary pumped loop heat transport systems to large spacecraft [AIAA PAPER 86-1295] p 31 A86-39903  CHANDE, A. M.  Robot spacecraft survivability using a decision tree for data processing p 81 A86-32550  CHARON, W.  Aspects of active isolation as applied to a satellite structure with shape precision payload  p 37 A86-33255  Aspects of active isolation as applied to a satellite	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.  Subsystem testing of Galileo's attitude and articulation control fault protection [AIAA PAPER 86-9783] p 91 A86-32117  COLES, C. E.  Liquid droplet radiator program at the NASA Lewis Research Center [ASME PAPER 86-HT-15] p 32 A86-49621  Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634  COLLINS, D. S.  Scanning laser acoustic microscopy applied to the evaluation of material interconnections p 75 N86-22624  CONCEPCION, J. C.  Monopropellant hydrazine systems for space station applications [AIAA PAPER 86-1562] p 88 A86-42715  CONNOR, M.  A thermal control design for the Leasat F-3 salvage mission [AIAA PAPER 86-1340] p 31 A86-39939  COCK, T. M.  Al applications for the Space Station program Technology, design and integration challenges [AIAA PAPER 86-2315] p 21 A86-47048  COOPER, P. A.  Multidisciplinary capability for analysis of the dynamics and control of flexible space structures [AIAA PAPER 86-0961] p 42 A86-38933  Control/structures interaction study of two 300 KW dual-keel space station concepts
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision 1 [DE86-004180] p 68 N86-25680  BULLOCH, C. Space Station evolution - The uncertainty principle prevails p 11 A86-48373  BUONO, G. Large space structural models by combination of finite elements and transfer matrix methods  BUREO, A. The Collapsible Tube Mast (CTM) p 27 N86-27365  BURKE, W. R. Proceedings of a Workshop on Composites Design for Space Applications [ESA-SP-243] p 105 N86-30758  BUSH, G. Design and test of a linear thermal actuator p 34 N86-27380  BUSH, H. G. Synchronously deployable truss structure [NASA-CASE-LAR-13117-1] p 27 N86-25789  BUTLER, J. M., JR. Mars missions and bases - A recent look p 2 A86-32548  BUTLER, L. V. Protective telescoping shield for solar concentrator [NASA-CASE-NPO-16236-1] p 103 N86-27706  C  CABLE, N. Experiment manipulators for automatic sample handling p 84 N86-27386 A Dornier latch design for a docking mechanism p 22 N86-27387  CALICO, R. A. The effects of structural perturbations on modal suppression p 45 A86-39497 Astrodynamics 1985; Proceedings of the Conference,	CECCONI, J. L.  New aluminum alloys for satellite structures [SNIAS-861-440-111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station [AIAA PAPER 86-2351] p 67 A86-49561  CENCICH, T.  Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for the JPL feed [NASA-CR-178061] p 69 N86-28973  Near-field testing of the 15-meter model of the hoop column antenna [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877  CERRO, J. A.  Weights assessment for orbit-on-demand vehicles [SAWE PAPER 1674] p 3 A86-35217  CHAI, G. B.  Assessing the effects of delaminations on the postbuckling strength of CRFP panels  P 79 N86-30781  CHALMERS, D. R.  Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990  Application of capillary pumped loop heat transport systems to large spacecraft [AIAA PAPER 86-1295] p 31 A86-39903  CHANDE, A. M.  Robot spacecraft survivability using a decision tree for data processing p 81 A86-32550  CHARON, W.  Aspects of active isolation as applied to a satellite structure with shape precision payload  p 37 A86-33255  Aspects of active isolation as applied to a satellite structure with shape precision payload  p 63 N86-30653  CHEN, J. C.  Verification of large beam-type space structures	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.  Subsystem testing of Galileo's attitude and articulation control fault protection [AIAA PAPER 86-9783] p 91 A86-32117  COLES, C. E.  Liquid droplet radiator program at the NASA Lewis Research Center [ASME PAPER 86-HT-15] p 32 A86-49621  Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634  COLLINS, D. S.  Scanning laser acoustic microscopy applied to the evaluation of material interconnections  p 75 N86-22624  CONCEPCION, J. C.  Monopropellant hydrazine systems for space station applications [AIAA PAPER 86-1562] p 88 A86-42715  CONNOR, M.  A thermal control design for the Leasat F-3 salvage mission [AIAA PAPER 86-1340] p 31 A86-39939  COCK, T. M.  Al applications for the Space Station program - Technology, design and integration challenges [AIAA PAPER 86-2315] p 21 A86-47048  COOPER, P. A.  Multidisciplinary capability for analysis of the dynamics and control of flexible space structures [AIAA PAPER 86-0961] p 42 A86-38933  Control/structures interaction study of two 300 KW dual-keel space station concepts [NASA-TM-87679] p 61 N86-28113  COPPOLINO, R. N.  A global technique for estimation of modal parameters
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision 1 [DE86-004180] p 68 N86-25680  BULLOCH, C. Space Station evolution - The uncertainty principle prevails  BUONO, G. Large space structural models by combination of finite elements and transfer matrix methods  BUREO, A. The Collapsible Tube Mast (CTM) p 27 N86-27365  BURKE, W. R. Proceedings of a Workshop on Composites Design for Space Applications [ESA-SP-243] p 105 N86-30758  BUSH, G. Design and test of a linear thermal actuator p 34 N86-27380  BUSH, H. G. Synchronously deployable truss structure [NASA-CASE-LAR-13117-1] p 27 N86-25789  BUTLER, J. M., JR. Mars missions and bases - A recent look p 2 A86-32548  BUTLER, L. V. Protective telescoping shield for solar concentrator [NASA-CASE-NPO-16236-1] p 103 N86-27706  C  CABLE, N. Experiment manipulators for automatic sample handling A Dornier latch design for a docking mechanism p 22 N86-27387  CALICO, R. A. The effects of structural perturbations on modal suppression p 45 A86-39497 Astrodynamics 1985; Proceedings of the Conference, Vail, CO, August 12-15, 1985. Parts 1 & 2	CECCONI, J. L.  New aluminum alloys for satellite structures  [SNIAS-861-440-111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station  [AIAA PAPER 86-2351] p 67 A86-49561  CENCICH, T.  Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for the JPL feed  [NASA-CR-178061] p 69 N86-28973  Near-field testing of the 15-meter model of the hoop column antenna  [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds  [NASA-CR-178060] p 69 N86-29877  CERRO, J. A.  Weights assessment for orbit-on-demand vehicles  [SAWE PAPER 1674] p 3 A86-35217  CHAI, G. B.  Assessing the effects of delaminations on the postbuckling strength of CRFP panels  p 79 N86-30781  CHALMERS, D. R.  Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990  Application of capillary pumped loop heat transport systems to large spacecraft  [AIAA PAPER 86-1295] p 31 A86-39903  CHANDE, A. M.  Robot spacecraft survivability using a decision tree for data processing p 81 A86-32550  CHARON, W.  Aspects of active isolation as applied to a satellite structure with shape precision payload  p 37 A86-33255  Aspects of active isolation as applied to a satellite structure with shape precision payload  p 63 N86-30653  CHEN, J. C.  Verification of large beam-type space structures  [AIAA PAPER 86-0860] p 24 A86-38809	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.  Subsystem testing of Galileo's attitude and articulation control fault protection [AIAA PAPER 86-9783] p 91 A86-32117  COLES, C. E.  Liquid droplet radiator program at the NASA Lewis Research Center [ASME PAPER 86-HT-15] p 32 A86-49621  Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634  COLLINS, D. S.  Scanning laser acoustic microscopy applied to the evaluation of material interconnections  p 75 N86-22624  CONCEPCION, J. C.  Monopropellant hydrazine systems for space station applications [AIAA PAPER 86-1562] p 88 A86-42715  CONNOR, M.  A thermal control design for the Leasat F-3 salvage mission  [AIAA PAPER 86-1340] p 31 A86-39939  COK, T. M.  Al applications for the Space Station program - Technology, design and integration challenges [AIAA PAPER 86-2315] p 21 A86-47048  COOPER, P. A.  Multidisciplinary capability for analysis of the dynamics and control of flexible space structures [AIAA PAPER 86-0961] p 42 A86-38933  Control/structures interaction study of two 300 KW dual-keel space station concepts [NASA-TM-87679] p 61 N86-28113  COPPOLINO, R. N.  A global technique for estimation of modal parameters from measured data
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision 1 [DE86-004180] p 68 N86-25680  BULLOCH, C.  Space Station evolution - The uncertainty principle prevails p 11 A86-48373  BUONO, G.  Large space structural models by combination of finite elements and transfer matrix methods  BUREO, A.  The Collapsible Tube Mast (CTM) p 27 N86-27365  BURKE, W. R.  Proceedings of a Workshop on Composites Design for Space Applications [ESA-SP-243] p 105 N86-30758  BUSH, G.  Design and test of a linear thermal actuator p 34 N86-27380  BUSH, H. G.  Synchronously deployable truss structure [NASA-CASE-LAR-13117-1] p 27 N86-25789  BUTLER, L. V.  Protective telescoping shield for solar concentrator [NASA-CASE-NPO-16236-1] p 103 N86-27706  C  CABLE, N.  Experiment manipulators for automatic sample handling p 84 N86-27387  CALICO, R. A.  The effects of structural perturbations on modal suppression A Dornier latch design for a docking mechanism p 22 N86-39497 Astrodynamics 1985; Proceedings of the Conference, Vail, CO, August 12-15, 1985. Parts 1 & 2 p 97 A86-43201	CECCONI, J. L.  New aluminum alloys for satellite structures [SNIAS-861-440-111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station [AIAA PAPER 86-2351] p 67 A86-49561  CENCICH, T.  Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for the JPL feed [NASA-CR-178061] p 69 N86-28973  Near-field testing of the 15-meter model of the hoop column antenna [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] p 69 N86-29877  CERRO, J. A.  Weights assessment for orbit-on-dermand vehicles [SAWE PAPER 1674] p 3 A86-35217  CHAI, G. B.  Assessing the effects of delaminations on the postbuckling strength of CRFP panels  p 79 N86-30781  CHALMERS, D. R.  Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990  Application of capillary pumped loop heat transport systems to large spacecraft [AIAA PAPER 86-1295] p 31 A86-39903  CHANDE, A. M.  Robot spacecraft survivability using a decision tree for data processing p 81 A86-32550  CHARON, W.  Aspects of active isolation as applied to a satellite structure with shape precision payload  p 37 A86-33255  Aspects of active isolation as applied to a satellite structure with shape precision payload  p 63 N86-30653  CHEN, J. C.  Verification of large beam-type space structures [AIAA PAPER 86-0860] p 24 A86-38809  Vibration of a large space beam under gravity effect	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.  Subsystem testing of Galileo's attitude and articulation control fault protection [AIAA PAPER 86-9783] p 91 A86-32117  COLES, C. E.  Liquid droplet radiator program at the NASA Lewis Research Center [ASME PAPER 86-HT-15] p 32 A86-49621  Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634  COLLINS, D. S.  Scanning laser acoustic microscopy applied to the evaluation of material interconnections  p 75 N86-22624  CONCEPCION, J. C.  Monopropellant hydrazine systems for space station applications [AIAA PAPER 86-1562] p 88 A86-42715  CONNOR, M.  A thermal control design for the Leasat F-3 salvage mission [AIAA PAPER 86-1340] p 31 A86-39939  COOK, T. M.  Al applications for the Space Station program - Technology, design and integration challenges [AIAA PAPER 86-2315] p 21 A86-47048  COOPER, P. A.  Multidisciplinary capability for analysis of the dynamics and control of flexible space structures [AIAA PAPER 86-0961] p 42 A86-38933  Control/structures interaction study of two 300 KW dual-keel space station concepts [NASA-TM-87679] p 61 N86-28113  COPPOLINO, R. N.  A global technique for estimation of modal parameters from measured data [SAE PAPER 851926] p 39 A86-38542
propulsion, status and basic problems [AD-A165945] p 90 N86-28991  BUETTNER, H. M.  Behavior of very large short pulse antennas. Revision 1 [DE86-004180] p 68 N86-25680  BULLOCH, C. Space Station evolution - The uncertainty principle prevails  BUONO, G. Large space structural models by combination of finite elements and transfer matrix methods  BUREO, A. The Collapsible Tube Mast (CTM) p 27 N86-27365  BURKE, W. R. Proceedings of a Workshop on Composites Design for Space Applications [ESA-SP-243] p 105 N86-30758  BUSH, G. Design and test of a linear thermal actuator p 34 N86-27380  BUSH, H. G. Synchronously deployable truss structure [NASA-CASE-LAR-13117-1] p 27 N86-25789  BUTLER, J. M., JR. Mars missions and bases - A recent look p 2 A86-32548  BUTLER, L. V. Protective telescoping shield for solar concentrator [NASA-CASE-NPO-16236-1] p 103 N86-27706  C  CABLE, N. Experiment manipulators for automatic sample handling A Dornier latch design for a docking mechanism p 22 N86-27387  CALICO, R. A. The effects of structural perturbations on modal suppression p 45 A86-39497 Astrodynamics 1985; Proceedings of the Conference, Vail, CO, August 12-15, 1985. Parts 1 & 2	CECCONI, J. L.  New aluminum alloys for satellite structures  [SNIAS-861-440-111] p 80 N86-31641  CECKA, J.  Electrical power system integration for the Space Station  [AIAA PAPER 86-2351] p 67 A86-49561  CENCICH, T.  Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for the JPL feed  [NASA-CR-178061] p 69 N86-28973  Near-field testing of the 15-meter model of the hoop column antenna  [NASA-CR-178059] p 69 N86-29115  Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds  [NASA-CR-178060] p 69 N86-29877  CERRO, J. A.  Weights assessment for orbit-on-demand vehicles  [SAWE PAPER 1674] p 3 A86-35217  CHAI, G. B.  Assessing the effects of delaminations on the postbuckling strength of CRFP panels  p 79 N86-30781  CHALMERS, D. R.  Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990  Application of capillary pumped loop heat transport systems to large spacecraft  [AIAA PAPER 86-1295] p 31 A86-39903  CHANDE, A. M.  Robot spacecraft survivability using a decision tree for data processing p 81 A86-32550  CHARON, W.  Aspects of active isolation as applied to a satellite structure with shape precision payload  p 37 A86-33255  Aspects of active isolation as applied to a satellite structure with shape precision payload  p 63 N86-30653  CHEN, J. C.  Verification of large beam-type space structures  [AIAA PAPER 86-0860] p 24 A86-38809	executive summary [NASA-CR-174985] p 14 N86-27407  COFFEY, R. E.  Reduced risk two stage transfers to geosynchronous orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910  COHEN, D. M.  Subsystem testing of Galileo's attitude and articulation control fault protection [AIAA PAPER 86-9783] p 91 A86-32117  COLES, C. E.  Liquid droplet radiator program at the NASA Lewis Research Center [ASME PAPER 86-HT-15] p 32 A86-49621  Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator [NASA-TM-88839] p 80 N86-31634  COLLINS, D. S.  Scanning laser acoustic microscopy applied to the evaluation of material interconnections  p 75 N86-22624  CONCEPCION, J. C.  Monopropellant hydrazine systems for space station applications [AIAA PAPER 86-1562] p 88 A86-42715  CONNOR, M.  A thermal control design for the Leasat F-3 salvage mission  [AIAA PAPER 86-1340] p 31 A86-39939  COK, T. M.  Al applications for the Space Station program - Technology, design and integration challenges [AIAA PAPER 86-2315] p 21 A86-47048  COOPER, P. A.  Multidisciplinary capability for analysis of the dynamics and control of flexible space structures [AIAA PAPER 86-0961] p 42 A86-38933  Control/structures interaction study of two 300 KW dual-keel space station concepts [NASA-TM-87679] p 61 N86-28113  COPPOLINO, R. N.  A global technique for estimation of modal parameters from measured data

The use of tethered satellites for the collection of cosmic	DECHAUMPHAI, P.	DURSCH, H.
dust and the sampling of man made orbital debris far from	A Taylor-Galerkin finite element algorithm for transient	Development of composite tube protective coating
the space station p 15 N86-30589	nonlinear thermal-structural analysis [AIAA PAPER 86-0911] p 31 A86-38823	[NASA-CR-178116] p 76 N86-29989 <b>DUTAT, M.</b>
COYNER, J. V.  Satellite voice broadcast. Volume 1: Executive	DELEUTERIO, G. M. T.	Space environment simulation to test satellite therma
summary	Dynamics of gyroelastic vehicles p 45 A86-39494	control coatings, volume 1
[NASA-CR-175016] p 13 N86-24875	DELLAMICO, S.	[ESA-TT-891-VOL-1] p 75 N86-2262
Satellite voice broadcast. Volume 2: System study	High-stability telescope structures p 28 N86-30773 DEMORE, L.	DUTILLOY, J. R.
[NASA-CR-175017] p 13 N86-24876	Design study for a high stability large centrifuge test	Generalized parity relations for large space structure
COYNER, J. V., JR.  Hybrid deployable/erectable solar dynamic box truss	bed	with uncertain parameters [NASA-CR-176762] p 34 N86-24739
system	[AIAA PAPER 86-2100] p 11 A86-47445	DUVALL, J. A.
[AIAA PAPER 86-0955] p 25 A86-38883	DEMSETZ, L. A.  Verification of large space structures using scale	Some recent experiences of mechanism performance
CRAWLEY, E. F.	modelling laws p 53 A86-47088	and component assessment in thermal vacuum tests a
Experimental verification of distributed piezoelectric	DEROUVRAY, A.	ESTL p 85 N86-27390
actuators for use in precision space structures [AIAA PAPER 86-0878] p 19 A86-38813	Industrial calculation of damage tolerance and stress	DWYER, T. A. W., III  Single step optimization strategies for constrained
CREAMER, N. G.	allowables in components made of composite materials using the PAM-FISS/biphase material model	retargeting maneuvers p 47 A86-39510
Structural parameter identification using modal response	p 78 N86-30779	Variable structure control of spacecraft reorientation
data p 43 A86-39479	DERYDER, L. J.	maneuvers
CREDLAND, J.	Space Station multidisciplinary analysis capability -	(AIAA PAPER 86-1987) p 53 A86-47412
The Giotto assembly, integration and verification programme p 5 A86-38273	IDEAS2	<u>_</u>
CROCKER, R. L.	[AIAA PAPER 86-0954] p 19 A86-38847 DHARAN, C. K. H.	E
Developments in the nondestructive evaluation (NDE)	Delamination fracture toughness of composite	
of composite materials p 79 N86-30785	spacecraft structures p 78 N86-30777	EBERT, S. J.
CROOM, D. L.	DICKERSON, S. L.	Oxygen/hydrogen Space Station propulsion system
Viewing the earth from Space - Towards the Space	Experiments in optimal control of a flexible arm with passive damping p 82 A86-39503	concept definition for IOC [AIAA PAPER 86-1561] p 87 A86-42714
Station polar platform p 9 A86-45642 CSONKA, P. L.	DICKINSON, R. M.	ECKHARDT, K.
Space reflector supported by radiation pressure	Large space reflector technology on the Space	Low frequency design verification of large spacecraft
p 30 A86-33942	Station	structures p 38 A86-33286
CUDNEY, H. H., JR.	[AIAA PAPER 86-2302] p 11 A86-49554 DIEM-KIRSOP, P. S.	Low frequency design verification of large spacecraf
Vibration control of flexible beams using an active	Liquid droplet radiator program at the NASA Lewis	structures p 28 N86-30680
hinge p 46 A86-39505	Research Center	A new instrument to measure charged and neutra
CULBERTSON, P. E. The U.S. Space Station program p 3 A86-37853	[ASME PAPER 86-HT-15] p 32 A86-49621	cometary dust particles at low and high impact velocities
CULLIAN, C. A.	DOBROWOLNY, M.	p 70 N86-30590
Guidance and control 1985; Proceedings of the Eighth	Electrodynamic interactions p 69 N86-28414 Spontaneous radiation emitted by moving tethered	EDBERG, D. L.  Material damping of simple structures in a simulated
Annual Rocky Mountain Conference, Keystone, CO,	systems p 34 N86-28427	space environment p 48 A86-4173
February 2-6, 1985 p 91 A86-31776	DODDS, S. J.	EDIGHOFFER, H. H.
CULP, R. D.	Simultaneous plant parameter and state estimation by	Dynamic analysis and experiment methods for a generic
Guidance and control 1985; Proceedings of the Eighth Annual Rocky Mountain Conference, Keystone, CO,	a successive states method p 48 A86-40769	space station model
February 2-6, 1985 p 91 A86-31776	DOETSCH, K. H.	[AIAA PAPER 86-0838] p 40 A86-38886 Experimenal and analytical generic space stator
CURTAIN, R. F.	Space Station - The Canadian contribution p 12 A86-49563	dynamic models
Reduced order models for distributed systems based	DONNELLY, R. P., JR.	(NASA-TM-87696) p 58 N86-2299
on Hankel-norm approximations p 19 A86-39490	The effect of energy dissipation due to friction at the	EGAN, G. R.
CURTIS, H. O.  Power and thermal management concepts for free-flying	joint of a simple beam structure	Maintainability planning for the Space Station [AIAA PAPER 86-9754] p 91 A86-3209
platforms in the Space Station ERA p 86 A86-34990	[AD-A163975] p 58 N86-24739	EGGEMAN, G. W.
CYRIL, X.	DONOHOE, M. Polar platform payload requirements in the 1990's	Improved flexibility of an EVA glove
On modeling the dynamics of large space	[AAS PAPER 85-396] p 7 A86-43228	p 21 A86-4871:
manipulators [AAS PAPER 85-393] p 51 A86-43215	DORROUGH, D. C.	EHRICKE, K. A.  Lunar industralization and settlement - Birth of polygloba
(AA3 FAFER 63-393) p 51 A66-43215	Evolutionary paths for artificial intelligence technologies	civilization p 1 A86-3018
ъ	in operator interactions with space station robots p 81 A86-34971	EIDEN, M.
D	DORSEY, J. T.	Nonlinear deformation analysis of the Olympu
D.O. I.T. A.	Structural performance of space station trusses with	Astromast p 21 A86-43750 <b>ELFER. N.</b>
DAGUET, A.  Spacebus: Multimission communication satellites	missing members	Design for space debris protection p 18 A86-32910
[SNIAS-861-422-119] p 16 N86-31637	[NASA-TM-87715] p 34 N86-24731	ELYADA, D.
DALLEST, F.	Dynamic characteristics of power-tower space stations	Buckling and non-linear response of imperfect
Design of spacecraft	with 15-foot truss bays [NASA-TM-87684] p 60 N86-26357	three-legged truss columns [AIAA PAPER 86-0974] p 24 A86-3885
[ISBN-2-225-80732-9] p 23 N86-31629	DOW, J. M.	EMANUEL, E. M.
DANESHVAR, K.  Analyses of spacecraft polymeric materials	Orbit manoeuvre and determination strategy for the	An IBM PC-based math model for space station sola
p 73 A86-41750	EURECA Mission	array simulation p 23 N86-3141
DAVIDSON, R.	[AAS PAPER 85-408] p 7 A86-43259	EMERY, A. F.  Specular and direct radiative loads on space structure
Dynamic mechanical analysis as an aid to the	DOWELL, E. H. Frequency domain solutions to multi-degree-of-freedom,	[AIAA PAPER 86-1355] p 32 A86-4959
characterization of composite materials	dry friction damped systems under periodic excitation	ERBEN, E.
p 77 N86-30763	p 44 A86-39485	Low frequency design verification of large spacecra
DAVIS, L. D.  The optimal projection equations for reduced-order,	DRAKE, F. D.	structures p 38 A86-3328  Low frequency design verification of large spacecra
discrete-time modeling, estimation, and control	A comparative analysis of space colonization	structures p 28 N86-3068
p 42 A86-39035	enterprises p 5 A86-38168 DRIGGERS, T.	ERCEGOVIC, B. A.
DAVIS, R. A.	Communication Platform Payload Definition (CPPD)	Heat pipe radiator technology for space power
Technology base for the future of space	study. Volume 2: Technical report	systems [AIAA PAPER 86-1300] p 31 A86-3990
p 10 A86-45709 DAVISON, E. J.	[NASA-CR-174929] p 22 N86-27404	[AIAA PAPER 86-1300] p 31 A86-3990 ERCOLI FINZI, A.
Robust attitude and shape control of third generation	Communication Platform Payload Definition (CPPD)	Active structural control with decentralized an
spacecraft	study. Volume 3: Addendum [NASA-CR-174930] p 22 N86-27405	colocated control units p 46 A86-3950
[AAS PAPER 85-425] p 52 A86-43224	[NASA-CR-174930] p 22 N86-27405 <b>DUBEL, J. F.</b>	ERICKSON, C.
DE LUIS, J.  Experimental verification of distributed piezoelectric	Truss structure advanced development for Space	Orbit Transfer Rocket Engine Technology Program Advanced engine study, task D.1/D.3
actuators for use in precision space structures	Station p 24 A86-34987	[NASA-CR-175084] p 90 N86-2636
[AIAA PAPER 86-0878] p 19 A86-38813	DUKE, M. B.	ERICKSON, J. D.
DEATH, M. D.	Strategies for a permanent lunar base	Artificial intelligence - NASA p 17 A86-3253
The Olympus antenna deployment subsystem design and testing p 27 N86-27392	p 1 A86-30117 DUNN, B. D.	ESTES, R. D.  System engineering study of electrodynamic tether a
DEBEER, D. L.	Scanning laser acoustic microscopy applied to the	a spaceborne generator and radiator of electromagnet
The strength of bolted joints in Kevlar RP	evaluation of material interconnections	waves in the ULF/ELF frequency band
p 28 N86-30765	p 75 N86-22624	[NASA-CR-176749] p 68 N86-2568

ETERNO, J. S.  Decentralized control of sequentially assembled large	FOLDES, P.  A design study for the use of a multiple aperture	GASS, M.  Concepts on Columbus flight operations
space structures p 82 A86-42997	deployable antenna for soil moisture remote sensing	p 12 A86-50337
EVANS, S. A.	satellite applications	GAULT, D. E.
Oxygen/hydrogen Space Station propulsion system	[NASA-CR-178154] p 16 N86-30933	Impacts of free-floating objects: Unique space station
concept definition for IOC	FONTANA, A.	experiments p 14 N86-27162
[AIAA PAPER 86-1561] p 87 A86-42714	Control of Flexible Structures (COFS) Flight Experiment	GEBLER, B.
	Program p 5 A86-39502	Modeling and control of a lightweight robot p 84 N86-27363
F	FOSS, R. A.	GESING, W.
	Thermal analysis of the ACCESS space truss p 32 A86-40516	Robust attitude and shape control of third generation
FADALI, M. S.	FOTE, A. A.	spacecraft
Single step optimization strategies for constrained	Long-term performance of thermal control coatings at	[AAS PAPER 85-425] p 52 A86-43224
retargeting maneuvers p 47 A86-39510	geosynchronous altitude	GIBSON, J. S.
FALANGAS, E. T.	[AIAA PAPER 86-1356] p 71 A86-39951	Computer aided modelling/compensator design for a
Momentum management concepts for a Space Station	FOURNIER, C.	flexible space antenna p 96 A86-42993 GIESY, D. P.
[AIAA PAPER 86-2047] p 54 A86-47430	Key design parameters for a very low gravity in-orbit	Control/structures interaction study of two 300 KW
Preliminary evaluation of a reaction control system for	facility	dual-keel space station concepts
a Space Station	[MATRA-EPT/DT/VT068/098] p 58 N86-22631	[NASA-TM-87679] p 61 N86-28113
[AIAA PAPER 86-2152] p 89 A86-47460	FRANZ, J.  Strength of carbon fiber composite/titanium bonded	GILBERT, M. G.
FALCO, P. M.	joints as used for SPAS-type structures	Integrated structure/control design - Present
The AFML/Lockheed test method for characterizing	p 79 N86-30794	methodology and future opportunities p 58 A86-49094
material outgassing and deposition kinetics	FRAZIER, D.	GILLAM, I. T., IV
[AIAA PAPER 86-1279] p 74 A86-49595	Mobile gantry robots for large structures	Business in orbit - The commercial use of space
FANSON, J. L. Stiffness control of large space structures	p 81 A86-32929	p 96 A86-41978
p 37 A86-33254	FREELAND, R. E.	GILLE, J. P.
Stiffness control of large space structures	Large space reflector technology on the Space	Analysis and modeling of fluid transfer in orbit
p 63 N86-30652	Station	[AIAA PAPER 86-1718] p 32 A86-42809
FARRELL, C. E.	[AIAA PAPER 86-2302] p 11 A86-49554	GILLIS, J. T.  Estimation of frequencies of vibration using lattices
Satellite voice broadcast. Volume 1: Executive	FREY, H. U.  Deformation measurements on antennas under	p 49 A86-42960
summary	simulated outer space conditions using holographic	GIOMMI, M.
[NASA-CR-175016] p 13 N86-24875	interferometry	Measurement of the thermo-optical properties of varying
Satellite voice broadcast. Volume 2: System study	[DGLR PAPER 85-150] p 30 A86-35186	paint thickness on carbon fiber composites in spacecraft
[NASA-CR-175017] p 13 N86-24876	Holographic interferometry for distortion measurements	structures p 74 N86-22620
FAVRE, J. P.	of antennas p 23 N86-30776	GLASER, H.  Reconstruction of forcing functions based on measured
Thermal residual stresses in symmetric and unsymmetric carbon fiber reinforced plastics: Some tentative ways of	FREZET, M.	structural responses p 63 N86-30684
evaluation p 77 N86-30762	ESABASE extension to spacecraft charging	GLASER, R. J.
FELICI, F.	[MATRA-CMT-TS101/RT/16.85] p 71 N86-32517	Multiple boundary condition test (MBCT) approach to
The Giotto spacecraft's performance during the	FROMHOLD, A. T.  Analyses of spacecraft polymeric materials	update mathematical models of large flexible structures
geostationary transfer orbit and near-earth mission	p 73 A86-41750	[SAE PAPER 851933] p 39 A86-38546
phases p 3 A86-36035	FROST, W.	Multiple Boundary Condition Tests (MBCT) for
FEREBEE, M. J., JR.	Environmental criteria guidelines for space vehicle and	verification of large space structures [AIAA PAPER 86-0905] p 41 A86-38915
Optimization of mass placement in Space Station	space design p 18 A86-32553	[AIAA PAPER 86-0905] p 41 A86-38915 GLASER, R.J.
applications	FROUD, R.	Extension for ground-based testing for large space
[SAWE PAPER 1672] p 24 A86-35215	Ultraviolet radiometers p 75 N86-22626	structures p 37 A86-32944
FERRI, A. A.  Frequency domain solutions to multi-degree-of-freedom,	FUENTES, M.  The Collapsible Tube Mast (CTM) p 27 N86-27365	GLASS, J. F.
dry friction damped systems under periodic excitation	The Ulysses mechanisms p 27 N86-27368	Oxygen/hydrogen Space Station propulsion system
p 44 A86-39485	A SENER latch design for docking mechanisms	concept definition for IOC
FICHTER, W. B.	p 85 N86-27388	[AIAA PAPER 86-1561] p 87 A86-42714 GLASSFORD, A. P. M.
A simple nonlinear joint model	FUH, JS.	The AFML/Lockheed test method for characterizing
[NASA-TM-87749] p 85 N86-30234	Error estimation and compensation in reduced dynamic	material outgassing and deposition kinetics
FILIOS, P. G.	models of large space structures [AIAA PAPER 86-0837] p 25 A86-38885	[AIAA PAPER 86-1279] p 74 A86-49595
Moving-bank multiple model adaptive algorithms applied	FUJII, H.	GLOVER, K.
to flexible spacecraft control [AD-A164016] p 59 N86-24740	Electrostatic charging and arc discharges on satellite	Reduced order models for distributed systems based
FINLEY, J. A.	dielectrics simulated by electron beam	on Hankel-norm approximations p 19 A86-39490 GOGLIA, G. L.
Preliminary evaluation of a reaction control system for	[AIAA PAPER 86-1191] p 66 A86-40597	Adaptive control of large space structures using
a Space Station	FUKUDA, T.	recursive lattice filters
[AIAA PAPER 86-2152] p 89 A86-47460	Flexibility control of solar battery arrays of spacecrafts	[NASA-CR-177270] p 60 N86-27401
FINNELL, W., III	p 85 A86-33203 FURUMOTO, N.	GOO, S. D.
Orbital maneuvering vehicle guidance, navigation and	Modeling and simulation of spacecraft solar array	A steerable radiator for spacecraft application
control	deployment	[AIAA PAPER 86-1298] p 100 A86-49597
[AAS PAPER 85-043] p 36 A86-31794 FISHER, H. L.	[AIAA PAPER 86-2122] p 84 A86-47923	GOROVE, S.
		Expectations in space law - A peek into the future p 96 A86-41982
Optimum detumbling of space platforms via a dynamic programming algorithm	G	GOURMELON, G.
[AIAA PAPER 86-2154] p 57 A86-47518	<b>-</b>	The degradation and contamination experiment flown
FITZER, E.	GABRYNOWICZ, J. I.	on the first European Communication Satellite ECS-1:
Carbon fibres and their composites	The Space Settlement Papers p 10 A86-45767	Preliminary results on contamination p 74 N86-22623
p 72 A86-40487	GALIPIENSO, G.	Ultraviolet radiometers p 75 N86-22626
FLAMENT, P.	High-stability telescope structures p 28 N86-30773	GRAHAM, O. L.
Solar array deployment simulation using ADAMS	GAMPE, F.  A Dornier latch design for a docking mechanism	Communications and tracking - The keys to Space
software p 60 N86-27360	p 22 N86-27387	Station utilization p 66 A86-40529
FLASHNER, H.	GARBA, J.	GRAHAM, W. B.
An orthogonal decomposition approach to modal synthesis p 39 A86-36216	Vibration of a large space beam under gravity effect	Dynamics and control characteristics for the WISP 300
A laboratory robot for space application research	p 52 A86-44884	m dipole antenna/Shuttle configuration [AAS PAPER 85-365] p 51 A86-43220
{AIAA PAPER 86-2186} p 83 A86-47468	GARBA, J. A.	GRANDHI, R. V.
FLEMING, K. R.	Verification of large beam-type space structures	Optimum design of large structures with multiple
The detumbling of an axially symmetric satellite with	[AIAA PAPER 86-0860] p 24 A86-38809 Verification of large space structures using scale	constraints
an orbital maneuvering vehicle by nonlinear feedback	modelling laws p 53 A86-47088	[AIAA PAPER 86-0952] p 19 A86-38845
control	GARIPAY, R. R.	GRAZIANI, F.
[AD-A163989] p 58 N86-24717	A thermal control design for the Leasat F-3 salvage	Numerical experiments on a controlled flexible structure
FLORINI, A.	mission	using DCAF
Developing the final frontier: International cooperation in the peaceful uses of outer space. In 96, A86,42236	[AIAA PAPER 86-1340] p 31 A86-39939	[ESA-CR(P)-2159] p 61 N86-28116
in the peaceful uses of outer space p 96 A86-42236 FLOYD, M. A.	GARRETT, J. W.  The AFML/Lockheed test method for characterizing	GREEN, B. D.  The Shuttle glow as an indicator of material changes
Single-step optimal control of the RPL experiment	material outgassing and deposition kinetics	in space
[AAS PAPER 85-045] p 37 A86-31796	[AIAA PAPER 86-1279] p 74 A86-49595	[AD-A167300] p 71 A86-30323
		•

GREGER, G.

European experience and perspectives

p 97 A86-43336

GREGORY, D.N.

Olympus, the spacecraft of the future

p 8 A86-43705

GRIFFIN, B. N.

Zero-G simulation verifies EVA servicing of space station

[AIAA PAPER 86-2312]

p 99 A86-46942

GRIFFIS, D. P.

Capacitor-type micrometeoroid detectors

p 104 N86-30606

GRILIKHES, V. A.

Solar energy conversion systems for power plants in space - A comparative analysis and prospects for p 66 A86-36671 development

GRINGEL, D.

Alternative module configurations for advanced solar arrays on low orbit and extended lifetime missions (AMOC

(ÉSA-CR(P)-21291

p 89 N86-24025

GROMOV, S. K.

Some problems related to the thermally induced deformations of large space structures

p 30 A86-36673

GROSSI, M. D.

Analytical investigation of the dynamics of tethered constellations in Earth orbit, phase 2 p 58 N86-23629

[NASA-CR-178754]

System engineering study of electrodynamic tether as a spaceborne generator and radiator of electromagnetic

waves in the ULF/ELF frequency band [NASA-CR-176749] p 68 N86-25689

Analytical investigation of the dynamics of tethered constellations in Earth orbit, phase 2

p 61 N86-28114 INASA-CR-1788461 GROTH, H.

Thermal stability of sandwich reflectors

p 35 N86-30774

GRUZEN, A.

Robust reduced-order control of flexible structures using the optimal projection/maximum entropy design methodology

[AIAA PAPER 86-2052] p 55 A86-47435

Design of dynamic output feedback controllers with parameter variation insensitivity AIAA PAPER 86-2050] p 54 A86-47433

GUILLAUMON, J. C.

New space paints

p 74 N86-22621 GULINO, D. A.

Effect of an oxygen plasma on the physical and chemical properties of several fluids for the liquid droplet radiator NASA-TM-888391 GULLAHORN, G. E.

Analytical investigation of the dynamics of tethered

constellations in Earth orbit, phase 2 p 58 N86-23629 INASA-CR-1787541

Analytical investigation of the dynamics of tethered constellations in Earth orbit, phase 2 p 61 N86-28114

[NASA-CR-178846]

GUMASTAS, A. R.

Linear regulator control of the hoop-column antenna p 45 A86-39498

GUO. Y. A laboratory robot for space application research

[AIAA PAPER 86-2186] p 83 A86-47468 GUSTAFSON, E.

Heat pipe radiator technology for space power systems

[AIAA PAPER 86-1300] p 31 A86-39907

GUSTAVSON, B.

Error estimation and compensation in reduced dynamic models of large space structures

[AIAA PAPER 86-0837] p 25 A86-38885

GUYENNE, T. D.

Second European Space Mechanisms and Tribology

[ESA-SP-231]

p 102 N86-27353

Н

HABERMEYER, J. A.

Space Station multidisciplinary analysis capability -IDFAS2

[AIAA PAPER 86-0954] HABLANI, H. B.

p 19 A86-38847

Dynamics of a deformable pointing spacecraft by Kane's method, and telescope's image-stability evaluation p 56 A86-47474 [AIAA PAPER 86-2194]

HADAEGH, F. Y.

On-orbit parameter and disturbance identification for p 95 A86-39477 Space Station

HAISLER, W. E.

Predicted temperature field in a thermomechanically heated viscoplastic space truss structure

p 30 A86-32943 A finite element model for the thermoelastic analysis

of large composite space structures [AIAA PAPER 86-0875] p 31 A86-38811

Effect of degradation of material properties on the dynamic response of large space structures p 73 A86-41740

A model for predicting thermomechanical response of

large space structures p 33 N86-23631 [AD-A162139]

Dynamic power - A Key to the promise of space p 86 A86-34994

HALL, D. F.

Long-term performance of thermal control coatings at geosynchronous altitude AIAA PAPER 86-1356] p 71 A86-39951

HALLAUER, W. L., JR.

Active vibration damping experiments at VPI & SU Overview and recent results p 46 A86-39504

HALSELL, J. D., JR.

A proposed design for an interim space rescue ferry [AD-A164039] p 101 N86-24741

HAMER, H. A.

Effects of model error on control of large flexible space antenna with comparisons of decoupled and linear quadratic regulator control procedures NASA-TP-2604] p 64 N86-30801

HAMMOND, R. A.

Evolutionary paths for artificial intelligence technologies in operator interactions with space station robots p 81 A86-34971

The development of an environmental disturbance model for large space structures after the onset of thermal shock

[AIAA PAPER 86-2123]

p 32 A86-47924

HANKS, B. R.

Dynamic verification of very large space structures p 37 A86-33285

Control of Flexible Structures (COFS) Flight Experiment p 5 A86-39502 Program Dynamic verification of very large space structures

p 63 N86-30683

HANSON, R.

An adaptive vision-based manipulator control scheme [AIAA PAPER 86-2187] p 83 A86-47469 HARSHMAN, M.

Design study for a high stability large centrifuge test hed [AIAA PAPER 86-2100] p 11 A86-47445

HASHIMOTO, Y.

Thermally-induced vibration and stability of booms with open cross section caused by unidirectional radiant p 35 A86-31024

HASLAM, J. W., JR.

The system integration and verification testing of an orbital maneuvering vehicle for an air bearing floo [NASA-CR-178350] p 100 N86-24217

HASTINGS, D. E.

The use of electrostatic noise to control high-voltage p 66 A86-41018 differential charging of spacecraft HASTINGS, G. G.

Experiments in optimal control of a flexible arm with passive damping p 82 A86-39503

HATIS, P. D.

Predictive momentum management for the Space Station p 52 A86-46462

HAUG. E.

Industrial calculation of damage tolerance and stress allowables in components made of composite materials using the PAM-FISS/biphase material model p 78 N86-30779

HAVLISCEK, H.

Design study for a high stability large centrifuge test hed p 11 A86-47445

[AIAA PAPER 86-2100] HAWKES, T. A.

Communications platform payload definition study p 14 N86-27402 [NASA-CR-174986] Communications platform payload definition study,

executive summary [NASA-CR-174985]

p 14 N86-27407 HAYDUK, R. J.

Future directions in materials and structures for space

[AIAA PAPER 86-1185] p 25 A86-40611

HEARD, W. L., JR.

ACCESS (Assembly Concept for Construction of Erectable Space Structure) - A Shuttle flight experiment p 1 A86-32540 Construction and control of large space structures

p 39 A86-37060 Results of the ACCESS space construction Shuttle flight

[AIAA PAPER 86-1186] p 6 A86-40593

HEATH, G. W. Space safety and rescue 1984-1985

p 98 A86-44326

p 87 A86-42616

HECKERT, B. A 10,000 hour life multipropellant engine for Space Station applications

HEDGLEY, D. R., JR.

[AIAA PAPER 86-1403]

Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599

HÈGEMANS, G. J.

High Power Solar Array (HPSA) study [FOK-TR-R-85-068] p 71 N86-31998

HEGG. D. R.

ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890

HEIZER, B. L.

A steerable radiator for spacecraft application

p 100 A86-49597 [AIAA PAPER 86-1298] HELD. J. J.

Improved flexibility of an EVA glove

p 21 A86-48713

p 43 A86-39478

HENDERSON, D. E.

The system integration and verification testing of an orbital maneuvering vehicle for an air bearing floo p 100 N86-24217 [NASA-CR-178350]

HENDERSON, I. D.

Historical development of solar array drive mechanisms by British Aerospace p 102 N86-27357

HENDRICKS, C.

Development of composite tube protective coatings [NASA-CR-178116] p 76 N86-29989 HENDRICKS, S. L.

Structural parameter identification using modal response

p 43 A86-39479 HENDRICKSON, W. L. Identification of a damping matrix from model data

data

Propulsion system concept assessment and technology requirements for Space Station p 86 A86-34972 HENSCHEL

Nondestructive testing of fiber reinforced composites using X-ray fine structure procedures p 79 N86-30784 HENSON, B. W.

Development and testing of a dual-wound dc motor p 102 N86-27382

HERBERT, J. J. Comparison of tension stabilized structures for large

pace antenna reflectors [AIAA PAPER 86-0876] p 25 A86-38881 HERBIG. H.

Development of an antenna structure for a deployable offset antenna p 29 N86-30797 HESS, J. W.

A parametric examination of the stability robustness characteristics of two decoupled controllers designed for large space structure control

[AIAA PAPER 86-2053] p 55 A86-47436 HIFL C.C. New prediction methods for composites hygrothermal

p 78 N86-30771 behavior HILL M.

Fluid management and its role in the future of Space Station [AIAA PAPER 86-2301] p 89 A86-49553

HILLBRATH, H. S. Monopropellant hydrazine systems for space station

applications [AIAA PAPER 86-1562] p 88 A86-42715 HILLS, R. S.

Design, fabricate and test Spacecraft Automatic Active Discharge System (SAADS) [AD-A166559] p 70 N86-30802

HINES, B. Orbit Transfer Rocket Engine Technology Program:

Advanced engine study, task D.1/D.3 [NASA-CR-175084] p 90 N86-26369 HINNRICHS, R.

Electrical power system integration for the Space Station p 67 A86-49561

[AIAA PAPER 86-2351] HINTERMANN, H. E.

Coatings against fretting p 76 N86-27377 Use of MoS2 applied by physical vapor deposition (PVD) p 76 N86-27379 on space mechanisms Use of MoS2 applied by Physical Vapor Deposition (PVD)

on space mechanisms [SNIAS-861-440-101]

p 80 N86-31639

Flexibility control of solar battery arrays of spacecrafts

Features of the solar array drive mechanism for the

HOSTEMKAMP, R. G.

Space Telescope

p 85 A86-33203

p 102 N86-27356

IAIAA PAPER 86-09551

ASCOT (Advanced Structural Control Techniques)

IRWIN, R. D.

[AD-A165917]

HIPOL, P. J. HOUSNER, J. M. Space Station multidisciplinary analysis capability -Nonlinear dynamic analysis of deploying flexible space IDFAS2 booms [AIAA PAPER 86-0954] p 19 A86-38847 p 61 N86-28981 HOBAN, F. T. HOWELL, K. C. JOHNSON, C. L. NASA's space station planning - An update Some considerations of actuator dynamics in the attitude p 8 A86-44529 control of a flexible beam HODGKINSON, J. M. [AIAA PAPER 86-2124] IDEAS2 p 57 A86-47955 The strength of bolted joints in Kevlar RP HOWSMAN, T. G. p 28 N86-30765 JOHNSON, K. G. ASCOT (Advanced Structural Control Techniques) [AD-A165917] p 62 N86-28985 Trajectory determinations and collection HSIEH, J. G. micrometeoroids on the space station. Report of the Finite dimensional stabilization of linear Distributed Workshop on Micrometeorite Capture Experiments Parameter Systems via Galerkin's technique p 104 N86-30584 [NASA-CR-177303] p 45 A86-39492 HOFFMAN, J. Shuttle Tethered Aerothermodynamics Research Facilty Orbital maneuvering vehicle guidance, navigation and (STARFAC) instrumentation requirements control p 34 N86-27652 [AAS PAPER 85-043] p 36 A86-31794 HOFFMANN, H. E. W. HUDSON, W. R. Columbus - The European participation in international Spacecraft technology requirements for future NASA p 3 A86-37854 missions [AIAA PAPER 86-1160] p 6 A86-40609 Experiments on the end-point control of a two-link robot HUGHES, P. C. with elastic drives Balanced Augmented Controller Reduction [AIAA PAPER 86-1977] p 83 A86-47404 p 44 A86-39491 HOLLMANN, K. HUGHES, R. O. Damage zone fracture analysis of fibrous composites Conceptual design of pointing control systems for Space p 78 N86-30778 Station gimballed payloads JONES, I. W. HOLLOWAY, P. F. [AIAA PAPER 86-1986] p 53 A86-47411 Future space transportation options - Overview HUNT. J. p 6 A86-40616 [AIAA PAPER 86-1210] JONES, L. Second European Space Mechanisms and Tribology HOLMES, A. M. C. Symposium Optimizing accuracy in triangulation for geometrical [ÉSÁ-SP-231] system p 102 N86-27353 verification of large space structures p 19 A86-38061 HUNTER, D. G. HOLMES, P. J. JÖNES, L. W. Dynamics and control characteristics for the WISP 300 Nonlinear dynamics and chaotic motions in feedback m dipole antenna/Shuttle configuration controlled elastic systems p 51 A86-43220 [AAS PAPER 85-365] [AD-A162385] n 84 N86-24294 HUNTER, E. M. HOLZACH, H. Communication Platform Payload Definition (CPPD) Integrated sensor and actuator system for flexible space study. Volume 1: Executive summary p 102 N86-27385 structure experiments [NASA-CR-174928] p 22 N86-27403 HOLZDEPPE, D. Communication Platform Payload Definition (CPPD) study. Volume 2: Technical report Reconstruction of forcing functions based on measured structural responses p 63 N86-30684 [NASA-CR-174929] p 22 N86-27404 Communication Platform Payload Definition (CPPD) State of the art in intelligent/brilliant robots study. Volume 3: Addendum p 82 A86-43884 [NASA-CR-174930] p 22 N86-27405 HYER, M. W. Astrodynamics 1985; Proceedings of the Conference, Thermal stresses in composite tubes Vail, CO, August 12-15, 1985. Parts 1 & 2 p 33 A86-50115 JOSHI, S. M. p 97 A86-43201 HYLAND, D. C. HOOVER, J. The optimal projection equations for reduced-order. Near-field testing of the 15-meter model of the hoop discrete-time modeling, estimation, and control p 42 A86-39035 column antenna. Volume 3: Near- and far-field plots for the JPL feed [NASA-CR-178061] p 69 N86-28973 Near-field testing of the 15-meter model of the hoop column antenna IANCULESCU, G. D. [NASA-CR-178059] p 69 N86-29115 Galileo inflight friction identification for the scan platform Near-field testing of the 15-meter model of the hoop control loop column antenna. Volume 2: Near- and far-field plots for [AAS PAPER 85-383] p 97 A86-43274 the LaRC feeds IBRAHIM, A. M. [NASA-CR-178060] p 69 N86-29877 Transient dynamics during the extension of flexible HORDINSKY, J. p 46 A86-39499 JUANG. J.-N. members EVA suit glove design p 20 A86-40521 On the dynamics of beam type structural members during HORNER, G. C. deployment Microprocessor controlled force actuator [AAS PAPER 85-392] p 50 A86-43214 p 40 A86-38827 [AIAA PAPER 86-0916] On-orbit parameter and disturbance identification for Vibration control of flexible beams using an active hinge p 95 A86-39477 p 46 A86-39505 Space Station HORSSELENBERG, R. W. H. Design and development of the Advanced Rigid Array An investigation of adaptive control techniques for space p 70 N86-30796 stations p 38 A86-35333 (ARA) solar panel Space Station dynamic modeling, control and HORSTEIN, M. p 39 A86-37186 Satellite voice broadcast system study, volume 2 simulation [NASA-CR-174905] p 68 N86-24877 INMAN, D. J. JÚNKINS, J. L. Microprocessor controlled force actuator Satellite voice broadcase system study. Volume 1: p 40 A86-38827 [AIAA PAPER 86-0916] Executive summary Identification of a damping matrix from model data [NASA-CR-174904] p 68 N86-24878 p 43 A86-39478 HORTA, L. G. Closed-loop stability of large space structures with A slewing control experiment for flexible structures p 45 A86-39493 reduced-order controllers p 47 A86-39509 Vibration control of flexible beams using an active HOSMER, G. J. p 46 A86-39505 Space Station - An integrated approach to operational Control of symmetrizable distributed parameter logistics support p 49 A86-42921 [AIAA PAPER 86-2321] p 10 A86-46947 IRVINE, T. B. HOSOGAI, H. Hybrid deployable/erectable solar dynamic box truss

### JARA-ALMONTE, C. C.

Finite element analysis of subregions using a specified p 18 A86-36866 boundary stiffness method

Space Station multidisciplinary analysis capability -

[AIAA PAPER 86-0954]

p 19 A86-38847

Effects of model error on control of large flexible space antenna with comparisons of decoupled and linear quadratic regulator control procedures p 64 N86-30801 [NASA-TP-2604]

JOHNSON, K. R.

Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990

The degradation and contamination experiment flown on the first European Communication Satellite ECS-1: Preliminary results on contamination p 74 N86-22623 JONCKHEERE, E. A.

Reduced order compensator design for an experimental p 50 A86-42995 large flexible structure JONES, E. M.

The Space Settlement Papers p 10 A86-45767 JONES, G. J.

Design considerations for large photovoltaic systems [DE86-002125] p 68 N86-23053

An evaluation of foldable elastic tubes for application p 24 A86-34634 in space structures

Space Station propulsion test bed - A complete

p 87 A86-42615 [AIAA PAPER 86-1402]

Oxygen/hydrogen Space Station propulsion system concept definition for IOC

(AIAA PAPER 86-1561) p 87 A86-42714 JONES, W. V.

Workshop on Cosmic Ray and High Energy Gamma Ray Experiments for the Space Station Era, Louisiana State University, Baton Rouge, October 17-20, 1984. Proceedings

JORASCH, Ř. Communication Platform Payload Definition (CPPD) study. Volume 2: Technical report

[NASA-CR-174929] p 22 N86-27404 Communication Platform Payload Definition (CPPD) study. Volume 3: Addendum

[NASA-CR-174930] p 22 N86-27405

Stability of multiloop LQ regulators with nonlinearities. I - Regions of attraction. II - Regions of ultimate boundedness p 38 A86-36074 Attitude control system synthesis for the Hoop/Column

antenna using the LQG/LTR method [AIAA PAPER 86-2139] p 55 A86-47452 Application of the LQG/LTR technique to robust

controller synthesis for a large flexible space antenna INASA-TP-25601 p 64 N86-30800

parameter Mathematical correlation of modal identification methods via system realization theory p 59 N86-25019 NASA-TM-87720]

Effects of noise on modal parameters identified by the Eigensystem Realization Algorithm p 42 A86-39036 A slewing control experiment for flexible structures

p 47 A86-39509 The development of optimal control laws for orbiting

tethered platform systems

[AAS PAPER 85-360] p 51 A86-43217 Effects of noise on ERA-identified modal parameters [AAS PAPER 85-422] p 52 A86-43222 An Eigensystem Realization Algorithm in Frequency

Domain for modal parameter identification p 54 A86-47431 [AIAA PAPER 86-2048]

In search of the optimal quadratic regulator

p 43 A86-39484

An asymptotic perturbation method for nonlinear optimal IAAS PAPER 85-3641 p 51 A86-43219

Multi-criterion approaches to optimization of linear regulators [AIAA PAPER 86-2198] p 56 A86-47478

K

KAIDY, J. T.

p 25 A86-38883

p 62 N86-28985

A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607

KAKAD, Y. P. KAKAD, Y. P. Dynamics and control of slew maneuver of large flexible spacecraft IAIAA PAPER 86-21921 Dynamics and control of flexible spacecraft during and after slewing maneuvers [NASA-CR-177027] KALYANASUNDARAM, S. Effect of degradation of material properties on the dynamic response of large space structures KAMPEN, S. Control loops with human operators in space operations. Part 2: Robotics operations and manual control experiment [NLR-TR-84116-L-PT-2] KAN, H. K. A. Space environment effects on spacecraft surface materials KAO, T. Communications platform payload definition study [NASA-CR-174986] Communications platform payload definition study, executive summary [NASA-CR-174985] KAPPEL, F. Distributed parameter systems; Proceedings of the Second International Conference on Control Theory for Distributed Parameter Systems and Applications, Vorau, Austria, July 9-14, 1984 KARAM, R. D. Thermal engineering of spacecraft composite structures Electrostatic charging and arc discharges on satellite dielectrics simulated by electron beam [AIAA PAPER 86-1191] KAUFMAN. B. Astrodynamics 1985; Proceedings of the Conference, Vail, CO, August 12-15, 1985. Parts 1 & 2 KAVANAUGH, C. Shuttle-launch triangular space station
[NASA-CASE-MSC-20676-1] p KEFAUVER, N. Near-field testing of the 15-meter model of the hoop column antenna. Volume 3: Near- and far-field plots for the JPL feed [NASA-CR-178061] Near-field testing of the 15-meter model of the hoop column antenna [NASA-CR-178059] Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds [NASA-CR-178060] KÈSSLER. K. M. Transfer of alignment and calibration of multiple sensors in flexible systems KEY, T. S. Design considerations for large photovoltaic systems [DE86-002125] KIDA, T. A matrix approach to dynamics formulation of complex space structures Capacitor-type micrometeoroid detectors KISSEL, G. J. ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] KNIGHT, C. E.

KOLKAILAH, F.

Investigation of arrays of high-Q microstrip antennas p 66 A86-44733

Finite element analysis of subregions using a specified p 18 A86-36866 boundary stiffness method Alternative module configurations for advanced solar

arrays on low orbit and extended lifetime missions (AMOC [ESA-CR(P)-2129] p 89 N86-24025

A survey of handling qualities criteria and their applications to high performance aircraft [NASA-CR-179654] p 77 N86-30738 KOVACEVIC, G. Design for space debris protection p 18 A86-32910 KOVITZ, J. A distributed array antenna system p 68 A86-50286

KRISHNA, R. The development of an environmental disturbance model for large space structures after the onset of thermal shock [AIAA PAPER 86-2123] p 32 A86-47924 KROLICZEK. E. J.

p 56 A86-47472

p 62 N86-28983

p 73 A86-41740

p.85 N86-33024

p 71 A86-32406

p 14 N86-27402

p 14 N86-27407

p 98 A86-46808

p 30 A86-37107

p 66 A86-40597

p 97 A86-43201

p 26 N86-24729

p 69 N86-28973

p 69 N86-29115

p 69 N86-29877

p 50 A86-43003

p 68 N86-23053

p 45 A86-39496

p 104 N86-30606

p 62 N86-29890

Application of capillary pumped loop heat transport systems to large spacecraft [AIAA PAPER 86-1295] p 31 A86-39903

KRUELLE, G. Alternative space power systems p 65 A86-35194 KUMMER. H.

Concepts on Columbus flight operations

p 12 A86-50337

Distributed parameter systems; Proceedings of the Second International Conference on Control Theory for Distributed Parameter Systems and Applications, Vorau, Austria, July 9-14, 1984 p 98 A86-46808

KUO, C. P. Extension for ground-based testing for large space structures p 37 A86-32944 Multiple Boundary Condition Tests (MBCT) for

verification of large space structures p 41 A86-38915 [AIAA PAPER 86-0905] KUO, C.-P.

Multiple boundary condition test (MBCT) approach to update mathematical models of large flexible structures [SAE PAPER 851933] p 39 A86-38546 KURIBAYASHI, Y.

Flexibility control of solar battery arrays of spacecrafts p 85 A86-33203

LABRUYERE, C.

Deployable antenna reflector

[SNIAS-861-422-117] p 81 N86-32537 LAKE, M. S. Multidisciplinary capability for analysis of the dynamics and control of flexible space structures

p 42 A86-38933 [AIAA PAPER 86-0961] Analysis of a single-fold deployable truss beam preloaded by extension of selected face diagonal

members [NASA-TM-87673] p 33 N86-23623

LALLMAN, F. J. Control/structures interaction study of two 300 KW dual-keel space station concepts

[NASA-TM-87679] p 61 N86-28113

Reduced order models for distributed systems based on Hankel-norm approximations p 19 A86-39490 LAMBERSON, S. E.

Integrated design of space structures using lattice plate finite elements p 21 A86-46465 LAMM. P. K.

Spline-based distributed system identification with application to large space antennas p 42 A86-39037 LAMONTAGNE, R. H.

Primer on operating and support (O and S) costs for space systems AD-A162381] p 12 N86-24588

LANG. W. E. Mass property control of a spin stabilized spacecraft with restrictive mission and weight constraints

[SAWE PAPER 1668] p 38 A86-35212 LANGE, T.

Integrated sensor and actuator system for flexible space p 102 N86-27385 structure experiments LANZ, M.

Active structural control with decentralized and colocated control units p 46 A86-39506 LASKIN, R. A.

Payload isolation and precision pointing for the 1990's [AAS PAPER 85-010] p 36 A86-31781 Future payload isolation and pointing system technology p 53 A86-46464

Strength of carbon fiber composite/titanium bonded joints as used for SPAS-type structures

p 79 N86-30794 LAZAR, S.

Millimeter-wave range for the quick evaluation of large reflector antennas with complex feeds p 65 A86-30714

LAZARUS, T. L. Control effectiveness characterization for state estimation and control on a highly flexible grid p 55 A86-47454 [AIAA PAPER 86-2142]

Modeling of a tethered two-body system in space p 18 A86-37184

LEBLANC, J. M. Speed regulators for space appendages deployment p 84 N86-27369

Large space structural models by combination of finite elements and transfer matrix methods p 18 A86-37861

LECKENBY, J. N.

Multilayer printed circuit board characterization by thermal analysis p 33 N86-22618

Dynamic mechanical analysis as an aid to the characterization of composite materials p 77 N86-30763

LEE, S. S.

Feedforward control of waves in lattice elements [AD-A164009]

p 59 N86-26222 Wave propagation measurements on two-dimensional lattice

[AD-A1662071 p 62 N86-29891 Failure propagation in continuum models of LSS (Large Space Structures), part 1

[AD-A166208] p 63 N86-29892 LEGER, L. J.

Protecting spacecraft from atomic oxygen

p 67 A86-45706 Effects of the low Earth orbital environment on spacecraft materials p 77 N86-30595

LEITNER, R.

Structural analysis, manufacturing and test evaluation of a polarization sensitive reflector p 35 N86-30798 LEONDES, C. T.

An investigation of adaptive control techniques for space p 38 A86-35333 stations

LEVIN. G. M.

The NASA Flight Demonstration Program

p 2 A86-32566

LEVINS. D. The Giotto spacecraft's performance during the geostationary transfer orbit and near-earth mission

A new understanding of breakdowns in the day sections of geosynchronous orbit p 67 A86-47335

LICHTENBERG, B. United States scientific community views of the Space

Station p 4 A86-37869 LIEBBE, S. W.

A global-local approach to solving vibration of large truss structures

[AIAA PAPER 86-0872] p 41 A86-38907

LIEBERT, B. E.

Materials considerations in the design of a metal-hydride heat pump for an advanced extravehicular mobility unit p 80 N86-31427

LIKINS, P. Spacecraft attitude dynamics and control - A personal perspective on early developments p 35 A86-31651

Rapid torque-limited line-of-sight pointing of SCOLE Control (Spacecraft Laboratory Experiment) configuration

p 54 A86-47414 [AIAA PAPER 86-1991] LIN, Y.-H.

Space Station dynamic modeling, control and simulation p 39 A86-37186 LIPS, K. W.

Damping synthesis for a spacecraft using substructure p 37 A86-32940 and component data Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration

p 51 A86-43220 [AAS PAPER 85-365] LITTLE, S. A.

Analyses of spacecraft polymeric materials

p 73 A86-41750 LITTY, J. D.

Enabling technologies for transition to utilization of space-based resources and operations

p 93 A86-34992

Theoretical and experimental investigations of sensor location for optimal aeroelastic system state estimation [NASA-CR-177115] p 62 N86-29272

LIU, J. J. F. Astrodynamics 1985; Proceedings of the Conference, Vail, CO, August 12-15, 1985. Parts 1 & 2

p 97 A86-43201

LLEWELLYN-JONES, D. T. Viewing the earth from Space - Towards the Space

Station polar platform p 9 A86-45642 LO. R. E.

An overview of European space transportation systems [NASA-TM-77683]

p 13 N86-25398 LOCKER, J. R.

SDI orbital system timing constraints

p 92 A86-32552 LOEWENTHAL, S. H. Feasibility study of a discrete bearing/roller drive rotary joint for the space station p 27 N86-30206 [NASA-TM-88800]

LONGDON, N. MAIGRET, J. P. MATHEWS, C. W. Preparing for the future: The ESA technological research Design of bonded structural joints for spacecraft [SNIAS-861-430-105] p 22 N86-The suitability of various spacecraft for future space and development program 1986-1988 p 22 N86-28118 applications missions p 80 N86-32347 MAILLAT, M. NASA-TM-889861 p 15 N86-27409 LONGMAN, R. W. MATSUMOTO, K. Coatings against fretting Design of dynamic output feedback controllers with Use of MoS2 applied by physical vapor deposition (PVD) A matrix approach to dynamics formulation of complex parameter variation insensitivity space structures p 45 A86-39496 on space mechanisms p 76 N86-27379 p 54 A86-47433 AIAA PAPER 86-20501 Use of MoS2 applied by Physical Vapor Deposition (PVD) MATTHEWS, F. L. LOOZE, D. P. The strength of bolted joints in Kevlar RP on space mechanisms. Decentralized control of sequentially assembled large [SNIAS-861-440-101] p 28 N86-30765 p 80 N86-31639 space structures p 82 A86-42997 MAJOR, C. S. MAUCERI, J. G. LORENZINI, E. Shuttle Remote Manipulator collision-avoidance Demonstration of vibration control of a flexible truss Analytical investigation of the dynamics of tethered p 82 A86-43885 structure p 44 A86-39488 constellations in Earth orbit, phase 2 [NASA-CR-178754] MALONEY, J. W. MCANULTY, M. A. p 58 N86-23629 Maintaining and servicing a space-based Orbital Transfer vehicle (OTV) at the Space Station Machine vision and the OMV p 100 N86-24536 Dynamics of tethered constellations in Earth orbit MCCLAMROCH, N. H. p 61 N86-27650 Vibration control of flexible structures using member AIAA PAPER 86-2332] p 10 A86-46955 LORENZINI, E. C. MAMEN, R. dampers p 49 A86-42941 A three-mass tethered system for micro-g/variable-g Vibration qualification at the David Florida Laboratory ACOSS eleven (Active Control Of Space Structures) s p 62 N86-29890 applications [AD-A1658641 p 38 A86-33289 [AIAA PAPER 86-1990] p 21 A86-47413 MCDONALD, M. W. Vibration qualification at the David Florida Laboratory System engineering study of electrodynamic tether as p 63 N86-30687 A study of 35-ghz radar-assisted orbital maneuvering MAMODE, A. vehicle/space telescope docking p 101 N86-24537 a spaceborne generator and radiator of electromagnetic waves in the ULF/ELF frequency band MCDOWELL, R. S. Magnesium matrix composite materials processing and p 68 N86-25689 [NASA-CR-176749] applications p 72 A86-40384 Optical Fabrication and Testing Workshop: Large Analytical investigation of the dynamics of tethered Telescope Optics, Albuquerque, NM, March 4-8, 1985, constellations in Earth orbit, phase 2 The Galileo scan platform pointing control system - A Proceedings p 61 N86-28114 [NASA-CR-178846] modern control theoretic viewpoint p 92 A86-32407 The investigation of tethered satellite system p 36 A86-31795 [AAS PAPER 85-044] MCELROY, J. H. dynamics Galileo inflight friction identification for the scan platform Plan for space station polar-orbiting platform [AD-A164405] [NASA-CR-178895] p 64 N86-31631 p 14 N86-25403 control loop Analytical investigation of the dynamics of tethered constellations in Earth orbit, phase 2 AAS PAPER 85-3831 MCGOWAN, P. E. p 97 A86-43274 Nonlinear dynamic analysis of deploying flexible space MANABE, S. p 65 N86-32513 [NASA-CR-178901] Controller design of flexible spacecraft attitude control [NASA-TM-87617] p 61 N86-28981 LUNDQUIST, C. A. p 37 A86-33204 Commerical use of space - Status and prospects MCLAREN, M. D. MANARINI, G. p 6 A86-41154 Robust multivariable control of large space structures Tethered satellite design p 22 N86-28409 LUTZ, J. D. using positivity
[AIAA PAPER 86-2125] MANCUSO, T. G. A finite element model for the thermoelastic analysis p 57 A86-47925 Initiation of the next step - The acquisition of a Space of large composite space structures MCLAUGHLIN, J. Station Program p 2 A86-34962 MANGANO, M. J. [AIAA PAPER 86-0875] p 31 A86-38811 On-orbit manipulators - Sensory and control Effect of degradation of material properties on the approaches Platform options for the Space Station program dynamic response of large space structures p 7 A86-43231 [AIAA PAPER 86-2185] [AAS PAPER 85-399] p 83 A86-47467 p 73 A86-41740 MÀNKINS, J. C. MEHRA, R. K. LYALL, H. Fault-tolerant control of large space structures using the Large space reflector technology on the Space p 75 N86-22626 stable factorization approach Ultraviolet radiometers Station LYNN, N. p 58 N86-23343 [AIAA PAPER 86-2302] p 11 A86-49554 INASA-CR-39641 Selections from Flug Revue und Flugwelt International.

A. On the border of Time-hypersonic flight. B. NASA MEHTA, R. D. MANNARA, G. 3-component laser-Doppler velocimeter data Mission requirements for coorbiting and polar platforms acquisition and reduction system programs pave the way for the hypersonic aircraft. C. A critical survey p 4 A86-37872 [NASA-CR-176929] Shuttle flight 61-B; construction in space. D. Faster than p 104 N86-30135 MANTEGAZZA, P. a bullet; hypersonic military aircraft MEINEL, A. B. Active structural control with decentralized and [NASA-TM-88418] p 26 N86-24652 An overview of optical telescope technology colocated control units p 46 A86-39506 p 1 A86-32413 MARCHETTI, M. Measurement of the thermo-optical properties of varying MEINEL, C. P. M Strategies to minimize Delta V costs of extraterrestrial paint thickness on carbon fiber composites in spacecraft p 1 A86-32536 resources p 74 N86-22620 structures MACALA, G. A. MEINEL, M. P. MARCO, J. The Galileo scan platform pointing control system - A An overview of optical telescope technology Long term tests of contaminated Optical Solar Reflectors modern control theoretic viewpoint p 1 A86-32413 (OSRs) under combined environment [AAS PAPER 85-044] p 36 A86-31795 MEIROVITCH, L. p 74 N86-22622 MACAULEY, M. K. Minimum-fuel control of high-order systems Space environment simulation to test satellite thermal p 86 A86-34174 An economics perspective of the 21st century Space control coatings, volume 1 Equations for the vibration of a slewing flexible Station [ESA-TT-891-VOL-1] p 75 N86-22627 [AIAA PAPER 86-2348] p 11 A86-46961 MARTIN, J. spacecraft MACCONOCHIE, I. O. [AIAA PAPER 86-0906] Development of a simulation code for a latent heat Dynamics and control of large structures; Proceedings Weights assessment for orbit-on-demand vehicles thermal energy storage system in a space station p 70 N86-31113 of the Fifth Symposium, Blacksburg, VA, June 12-14, ISAWE PAPER 16741 p 3 A86-35217 [DE86-010070] p 95 A86-39476 MACHETO P MARTIN, J. A. Control of traveling waves in flexible structures Weights assessment for orbit-on-demand vehicles The production and properties of composite materials p 44 A86-39487 [SAWE PAPER 1674] p 3 A86-35217 with light alloy matrices reinforced with continuous fibers Maneuvering of flexible spacecraft with application to Two-stage earth-to-orbit vehicles with series and parallel p 72 A86-40378 (C. SiČ) SCOLE COLE p 47 A86-39508 Maneuver and vibration control of SCOLE burn MACLELLAN, D. C. The suitability of various spacecraft for future space [AIAA PAPER 86-1413] p 87 A86-42623 p 54 A86-47415 AIAA PAPER 86-1993] MARTIN, M. applications missions MÉISL. C. J. Design of bonded structural joints for spacecraft p 15 N86-27409 [NASA-TM-88986] p 22 N86-28118 Life Cycle Cost methodology for space station propulsion SNIAS-861-430-105] MADDOX, L. W. Parametric design and preliminary mission analysis of MARTIN, M. F. [ÁIAA PAPER 86-1405] p 87 A86-42618 The system integration and verification testing of an a proposed Hybrid OTV with TOS/AMS (TM) solid-fuel Oxygen/hydrogen Space Station propulsion system orbital maneuvering vehicle for an air bearing floor [NASA-CR-178350] p 100 N86-24217 boosters, and ring-cusp ion return engines concept definition for IOC p 88 A86-43206 [AAS PAPER 85-304] p 87 A86-42714 MARTINEZ, A. [AIAA PAPER 86-1561] MAGGARD, W. P. MEKARU, M. M. Orbit Transfer Rocket Engine Technology Program: ASCOT (Advanced Structural Control Techniques) Nuclear powered ion engine orbit transfer vehicle design Advanced engine study, task D.1/D.3 [AD-A165917] p 62 N86-28985 p 90 N86-26369 and operational effectiveness [NASA-CR-175084] MAHEFKEY, E. T. [AIAA PAPER 86-1391] p 86 A86-42608 MARTY, D. Fluid recirculation, deployment and retraction of an MÈLTON, R. G. Design of spacecraft [ISBN-2-225-80732-9] expandable pulse power radiator p 23 N86-31629 Orbit transfer error analysis for multiple finite perigee [AIAA PAPER 86-1322] p 25 A86-39923 burn, ascent trajectories MARULO, F. Conceptual design of an 1 m long 'roll out fin' type [AAS PAPER 85-302] p 97 A86-43204 Large space structural models by combination of finite expandable space radiator Optimum detumbling of space platforms via a dynamic elements and transfer matrix methods

[AIAA PAPER 86-1323]

[AIAA PAPER 86-1391]

and operational effectiveness

Nuclear powered ion engine orbit transfer vehicle design

MAHONEY, S. P.

p 20 A86-39924

p 86 A86-42608

MARZWELL, N. I.

[AIAA PAPER 86-2302]

Station

p 57 A86-47518

p 91 A86-30113

programming algorithm

MENDELL, W. W.

[AIAA PAPER 86-2154]

Lunar bases and space activities of the 21st century

p 18 A86-37861

p 11 A86-49554

Large space reflector technology on the Space

Strategies for a permanent lunar base	MOCCIA, A. High resolution remote sensing missions of a tethered	MULLER, R. M. The Slinger - An in-orbit booster facility
MENOZZI, G.	satellite p 15 N86-28424	[AIAA PAPER 86-2175] p 100 A86-47931
Advanced Printed Wiring Board (PWB) materials for surface mounted devices in aerospace applications	MODI, V. J.  Transient dynamics during the extension of flexible	MULLIN, J. P.  Dynamic power - A Key to the promise of space
p 74 N86-22617 MERLET, J.	members p 46 A86-39499 On the dynamics of beam type structural members during	p 86 A86-34994 MURAD, E.
Key design parameters for a very low gravity in-orbit	deployment [AAS PAPER 85-392] p 50 A86-43214	The Shuttle glow as an indicator of material changes
facility [MATRA-EPT/DT/VT068/098] p 58 N86-22631	Frequencies of longitudinal oscillations of tethered	in space [AD-A167300] p 71 A86-30323
MERTESDORF, S. J.	satellite systems [AIAA PAPER 86-2274] p 57 A86-47942	MURAY, J. J.
Development of a generalized radiator weight optimization design code for high power spacecraft	Effects of damping on the control dynamics of the space	Space reflector supported by radiation pressure p 30 A86-33942
applications	shuttle based on tethered systems p 61 N86-27656 MONACO, S.	MURAYAMA, K.
[AIAA PAPER 86-1268] p 20 A86-39888 MEYER. D. P.	A nonlinear attitude control law for a satellite with flexible	Continuous forming of thin-walled CFRP pipes for large-space structure p 72 A86-40371
Evolutionary paths for artificial intelligence technologies	appendages p 49 A86-42989 MONITOR, D. S.	MUROZONO, M.
in operator interactions with space station robots p 81 A86-34971	Alternative docking concepts for application to the Space Station p 92 A86-32912	Thermally-induced vibration and stability of booms with open cross section caused by unidirectional radiant
MEYER, R. X.	MONTGOMERY, R. C.	heating p 35 A86-31024
Electronic compensation for structural deformations of large space antennas	Testing of a failure accommodation system on a highly flexible grid p 38 A86-35390	AB
[AAS PAPER 85-395] p 20 A86-43216	Failure detection and accommodation in structural	N
MICHNO, M. J., JR. High modulus composite properties	dynamics systems using analytic redundancy p 49 A86-42938	NAGY, K.
[AIAA PAPER 86-1187] p 73 A86-40594	Control effectiveness characterization for state	Shuttle-launch triangular space station [NASA-CASE-MSC-20676-1] p 26 N86-24729
MIKULAS, M. M., JR.  Deployable geodesic truss structure A01	estimation and control on a highly flexible grid [AIAA PAPER 86-2142] p 55 A86-47454	NANEVICZ, J. E.
[NASA-CASE-LAR-13113-1] p 26 N86-24867	MONTI, R.  Mission requirements for coorbiting and polar platforms	Status of critical issues in the area of spacecraft charging p 67 A86-47336
Deployable M-braced truss structure [NASA-CASE-LAR-13081-1] p 29 N86-32737	- A critical survey p 4 A86-37872	Spacecraft materials test in a continuous, broad
MIKULAS, M., JR.	Tethered elevator: A unique opportunity for space processing p 103 N86-27649	energy-spectrum electron beam p 73 A86-47337
Synchronously deployable truss structure [NASA-CASE-LAR-13117-1] p 27 N86-25789	MOON, F. C.	NAPOLITANO, L. G.  Mission requirements for coorbiting and polar platforms
MILGRAM, P.	Nonlinear dynamics and chaotic motions in feedback controlled elastic systems	- A critical survey p 4 A86-37872
Control theoretic analysis of human operator mediated rendezvous and docking	[AD-A162385] p 84 N86-24294	Tethered constellations, their utilization as microgravity platforms and relevant features p 103 N86-27645
[NLR-MP-85020-U] p 16 N86-32106	MOORE, S.  The effects of structural perturbations on modal	NAYLER, G. H. F.
Control loops with human operators in space operations.  Part 1: Human engineering analysis, synthesis and	suppression p 45 A86-39497	Design and development testing of the bonded joint between a typical launch vehicle attachment ring and CFRP
evaluation techniques	MORGAN, H. D.  Momentum management concepts for a Space	thrust cone p 28 N86-30790
[NLR-TR-84116-L-PT-1] p 16 N86-32107 Control loops with human operators in space operations.	Station [AIAA PAPER 86-2047] p 54 A86-47430	NELLESSEN, W. European space platform developments
Part 3: Rendezvous and docking operations and model	MORRIS, J. F.	[DGLR PAPER 85-123] p 3 A86-35173
analysis of performance with human-in-the-loop [NLR-TR-84116-L-PT-3] p 17 N86-32108	Decreased creep for increased space power p 66 A86-44906	NELSON, H. F.  Thermal design of aeroassisted orbital transfer
Control loops with human operators in space operations.	MORRIS, M. D.	vehicles p 30 A86-37041
Part 4: Research requirements for human-in-the-loop space teleoperator development	Development of a simulation code for a latent heat thermal energy storage system in a space station	NELSON, P. E.  Control effectiveness characterization for state
[NLR-TR-84116-L-PT-4] p 17 N86-32109	[DE86-010070] p 70 N86-31113	estimation and control on a highly flexible grid [AIAA PAPER 86-2142] p 55 A86-47454
Control loops with human operators in space operations.  Part 5: Executive summary	MORTENSEN, A.  Space manufacturing utilizing the directional	[AIAA PAPER 86-2142] p 55 A86-47454 NEWCOMB, R. W.
[NLR-TR-84116-L-PT-5] p 17 N86-32110 MILLER, D. B.	electrostatic accretion process p 102 N86-27300 MORY, R. L.	Robot spacecraft survivability using a decision tree for data processing p 81 A86-32550
Plan for space station polar-orbiting platform	EURECA concept and its potential evolution within the	NEWSOM, J. R.
[AD-A164405] p 14 N86-25403 MILLER, D. F.	Space Station era [AAS PAPER 85-398] p 97 A86-43230	Integrated structure/control design - Present methodology and future opportunities
Integration of structures and controls - Some	MOSCHETTI, B.	p 58 A86-49094
computational issues p 49 A86-42939 MILLER, P. A.	Design and test of a space deployable radiator [SNIAS-861-440-103] p 23 N86-31640	NIMMO, N. A.  Dynamic characteristics of statically determinate
Space Station polar orbiting platform - Mission analysis	MOSTAFA, O.	space-truss platforms p 48 A86-41741
and planning [AIAA PAPER 86-2178] p 11 A86-47960	Variable Structure Control System (VSCS) maneuvering of flexible spacecraft	NISHIMOTO, H.  Electrostatic charging and arc discharges on satellite
MINGORI, D. L.  Computer aided modelling/compensator design for a	[AIAA PAPER 86-0840] p 40 A86-38888	dielectrics simulated by electron beam
flexible space antenna p 96 A86-42993	Maneuvering of flexible spacecraft [AIAA PAPER 86-2193] p 56 A86-47473	[AIAA PAPER 86-1191] p 66 A86-40597 NOLLEY, B.
Modified LTR robust control for flexible structures [AIAA PAPER 86-2051] p 55 A86-47434	MOSTAFAVI, M.  A correction for continuous rotation in measurements	Nuclear power for earth orbit and beyond p 86 A86-38623
Nutational stability of a spinning spacecraft with internal	of the near field p 67 A86-46578	NORMAN, A. M.
mass motion and axial thrust [AIAA PAPER 86-2271] p 57 A86-47940	MOY, C. B. Application of capillary pumped loop heat transport	Space Station propulsion test bed - A complete system
MIRTICH, M. J. Oxidation protecting coatings for polymers	systems to large spacecraft	[AIAA PAPER 86-1402] p 87 A86-42615
[NASA-CASE-LEW-14072-3] p 75 N86-26434	[AIAA PAPER 86-1295] p 31 A86-39903 MUELLER, K.	NORRIS, G. A.  Feedforward control of waves in lattice elements
MISRA, A. K.  On modeling the dynamics of large space	Selections from Flug Revue und Flugwelt International.	[AD-A164009] p 59 N86-26222 NORRIS, M. A.
manipulators	A. On the border of Time-hypersonic flight. B. NASA programs pave the way for the hypersonic aircraft. C.	Maneuvering of flexible spacecraft with application to
[AAS PAPER 85-393] p 51 A86-43215 Frequencies of longitudinal oscillations of tethered	Shuttle flight 61-B; construction in space. D. Faster than	SCOLE p 47 A86-39508 NORRIS, P.
satellite systems [AIAA PAPER 86-2274] p 57 A86-47942	a bullet; hypersonic military aircraft [NASA-TM-88418] p 26 N86-24652	Robotics in space p 82 A86-44550
MISRA, M. S.	MUGELLESI, R.	0
Damping characteristics of metal matrix composites [AD-A163569] p 75 N86-24762	Orbit manoeuvre and determination strategy for the EURECA Mission	<b>J</b>
MITCHELL, P.	[AAS PAPER 85-408] p.7 A86-43259	ODONOGHUE, P. E.
External tank/aft cargo carrier on orbit applications p 99 A86-46855	RIT-10 low-thrust control of Eureca's orbital decay p 88 A86-44447	A singular-solution approach for controlling the nonlinear response of a continuum model of a large space
MIURA, K.  Method of packaging and deployment of large	MULLER, H. Selections from Flux Poyus and Fluxwelt International	structure [AIAA PAPER 86-0841] p 41 A86-38889
membranes in space	Selections from Flug Revue und Flugwelt International.  A. On the border of Time-hypersonic flight. B. NASA	Control of dynamic response of a continuum model of
[ISAS-618] p 26 N86-23624 <b>MOBLEY, T.</b>	programs pave the way for the hypersonic aircraft. C. Shuttle flight 61-B; construction in space. D. Faster than	a large space structure p 52 A86-43772 OERY, H.
External tank/aft cargo carrier on orbit applications	a bullet; hypersonic military aircraft	Reconstruction of forcing functions based on measured
p 99 A86-46855	[NASA-TM-88418] p 26 N86-24652	structural responses p 63 N86-30684

PADULA, S. L.		
[AIAA PAPER 86-2193]	р 56	A86-47473
Maneuvering of flexible spacecraft	•	
Flexibility formulation in Structural (	Control	A86-39489
of flexible spacecraft [AIAA PAPER 86-0840]	p 40	A86-38888
Variable Structure Control System (	(VSCS)	maneuvering
oż, H.	•	
radiator for Space Station [AIAA PAPER 86-1297]		A86-39905
The share flight experiment - An	advance	ed heat pipe
[NASA-CR-178059] OTTERSTEDT, P. J.	p 69	N86-29115
column antenna		
SMANSKI, J.  Near-field testing of the 15-meter	model	of the hoop
SCHANCKI I	p 34	N86-27380
Design and test of a linear thermal		
SBORNE, D.		
[NASA-CR-178060]	p 69	N86-29877
the LaRC feeds	110 101-11	ola piota ioi
column antenna. Volume 2: Near- ar	nd far-fi	eld plots for
[NASA-CR-178059] Near-field testing of the 15-meter		
column antenna	0.60	N86-29115
Near-field testing of the 15-meter	model	of the hoop
[NASA-CR-178061]		N86-28973
the JPL feed		
column antenna. Volume 3: Near- ar		
Near-field testing of the 15-meter	model	of the hoop
INASA-CH-177191]	p 70	1400-20133
Radiation effects on high performate [NASA-CR-177191]		mers N86-28195
RWOLL, R. A.	nee neb	more
large flexible structure	p 50	A86-42995
Reduced order compensator design	for an e	experimental
PDENACKER, C. PH.	•	
[DE86-010070]	p 70	N86-31113
thermal energy storage system in a s	pace sta	ation
Development of a simulation cod	le for a	latent heat
space structures PLSZEWSKI, M.	p 45	A00-33430
A matrix approach to dynamics form	nulation	A86-39496
KAMOTO, O.		of complex
space structures	p 45	A86-39496
A matrix approach to dynamics form	nulation	of complex
HKAMI, Y.		

Integrated thermal-structural-electromagnetic design optimization of large space antenna reflectors [NASA-TM-87713] p 35 N86-28984

[NASA-TM-87713] p 35 N86-2898 PAGANA, E.

Inflatable, space-rigidized reflectors for mobile missions p 23 A86-33921

PAILLER. R.

Magnesium matrix composite materials processing and

applications p 72 A86-40384

PAILLOUS, A.

Long term tests of contaminated Optical Solar Reflectors

(OSRs) under combined environment
p 74 N86-22622
Space environment simulation to test satellite thermal

control coatings, volume 1 [ESA-TT-891-VOL-1] p 75 N86-22627 PALASZEWSKI, B. A.

Advanced propulsion for polar-orbiting and coorbiting free flyers

free flyers
[AIAA PAPER 86-1564] p 88 A86-42716

PANCHENKO, B. A.
Investigation of arrays of high-Q microstrip antennas

p 66 A86-44733

PAPPA, R. S.

Effects of poins on model parameters identified by the

Effects of noise on modal parameters identified by the Eigensystem Realization Algorithm p 42 A86-39036 Effects of noise on ERA-identified modal parameters [AAS PAPER 85-422] p 52 A86-43222 PARISH, R. C.

PARISH, R. C.
A steerable radiator for spacecraft application

[AIAA PAPER 86-1298] p 100 A86-49597

Shuttle-launch triangular space station

[NASA-CASE-MSC-20676-1] p 26 N86-24729

PARKER, I.

More space in space p 3 A86-35319

PARKER, K.

Some recent experiences of mechanism performance and component assessment in thermal vacuum tests at ESTL p 85 N86-27390

PARKS, K.
Strategies to minimize Delta V costs of extraterrestrial resources p 1 A86-32536

PARRY, C. O. Issues of order reduction in active control system

design [AIAA PAPER 86-2138] p 57 A86-47515 PARSONS, E. K.

Emulating structural motion by array processors
[AIAA PAPER 86-1988] p 56 A86-47510

PASSERON, L.

Influence of structural parameter uncertainties on flexible space structural control performances

[SNIAS-861-440-104] p 65 N86-32516

PATIL, S. A.

Reliability models applicable to space telescope solar array assembly system p 21 N86-24541

Use of MoS2 applied by physical vapor deposition (PVD) on space mechanisms p 76 N86-27379

Use of MoS2 applied by Physical Vapor Deposition (PVD) on space mechanisms

[SNIAS-861-440-101] p 80 N86-31639

New aluminum alloys for satellite structures

[SNIAS-861-440-111] p 80 N86-31641

PAULUKAITIS, K. R.

The system integration and verification testing of an orbital maneuvering vehicle for an air bearing floor

orbital maneuvering vehicle for an air bearing floor [NASA-CR-178350] p 100 N86-24217

Spacecraft technology requirements for future NASA missions
[AIAA PAPER 86-1160] p 6 A86-40609

PEACOCK, B.

EVA suit glove design p 20 A86-40521

PEAHL, D. L.

A survey of handling qualities criteria and their applications to high performance aircraft [NASA-CR-179654] p 77 N86-30738

PEDERSEN, K. S.

American experiences and perspectives - International cooperation on a permanently manned Space Station p 7 A86-43337

The changing face of international space cooperation

One view of NASA p 8 A86-44405

Joining forces in space - NASA's view

p 8 A86-44528 PELENC, L.

High power rigid solar array [SNIAS-861-440-110] p 70 N86-31997

PENA, L. R.

Maintaining and servicing a space-based Orbital

Transfer vehicle (OTV) at the Space Station

Transfer vehicle (OTV) at the Space Station
[AIAA PAPER 86-2332] p 10 A86-46955
PENNER. H.

Selections from Flug Revue und Flugwelt International.
A. On the border of Time-hypersonic flight. B. NASA programs pave the way for the hypersonic aircraft. C. Shuttle flight 61-B; construction in space. D. Faster than a bullet; hypersonic military aircraft

[NASA-TM-88418] p 26 N86-24652
PENNINGTON, J. E.
Space telerobotics - A few more hurdles

p 81 A86-37047
PEPLINKSI, D. R.

Reaction of high-velocity atomic oxygen with carbon p 71 A86-32977

French views on Columbus - Preparation of its utilization relations with other programs p 10 A86-45647
PEREZ

Impact of automation on the design of carbon fiber omega ribs
[SNIAS-861-422-101] p 76 N86-28633
PERRY. D. L.

Orbital consumables resupply requirements impact on the evolution of OSCRS
[AIAA PAPER 86-1603] p 96 A86-42743

PETERSON, T.
Fluid management and its role in the future of Space Station
[AIAA PAPER 86-2301] p 89 A86-49553

[AIAA PAPER 86-2301] p 89 A86-49553

PETITJEAN, L.

Definition and testing of gears for space robotics
p 22 N86-27375

Mechanisms developed in the French space industry p 103 N86-27394

Comparison of classical and cocuring manufacturing techniques for a CFRP honeycomb central tube p 29 N86-30792

Structural analysis, manufacturing and test evaluation of a polarization sensitive reflector p 35 N86-30798 PHILLIPS. R.

Electrical power system integration for the Space Station
[AIAA PAPER 86-2351] p 67 A86-49561

PIERCE, P. R.

Power and thermal management concepts for free-flying platforms in the Space Station ERA p 86 A86-34990 PIVIROTTO. D. L.

Automation and robotics for Space Station in the twenty-first century

[AIAA PAPER 86-2300] p 84 A86-49552

PLAGNE
Impact of automation on the design of carbon fiber

omega ribs [SNIAS-861-422-101] p 76 N86-28633 PONNAPPAN, R.

Conceptual design of an 1 m long 'roll out fin' type expandable space radiator
[AIAA PAPER 86-1323] p 20 A86-39924

[AIAA PAPER 86-1323] p 20 A86-39924 PONTANO, B. A.

Communications platform payload definition study
[NASA-CR-174986] p 14 N86-27402
Communications platform payload definition study,
executive summary
[NASA-CR-174985] p 14 N86-27407

POST, H. N.

Design considerations for large photovoltaic systems

[DE86-002125] p. 68 N86-23053

Design considerations for large photovoltaic systems
[DE86-002125] p 68 N86-23053

PRESLER, A. F.

Liquid droplet radiator program at the NASA Lewis

Research Center
[ASME PAPER 86-HT-15] p 32 A86-49621
PRICE. H. G.

PRICE, H. G.
Proven, long-life hydrogen/oxygen thrust chambers for space station propulsion

space station propulsion
[NASA-TM-88822] p 90 N86-32522

PRIESETT, K.

A Dornier latch design for a docking mechanism

p 22 N86-27387

PUGMIRE, T. K.

A 10,000 hour life multipropellant engine for Space

A 10,000 nour life multipropellant engine for Space Station applications [AIAA PAPER 86-1403] p 87 A86-42616 PUSTAY, J. J.

Application of capillary pumped loop heat transport systems to large spacecraft
[AIAA PAPER 86-1295] p 31 A86-39903

### Q

QUIGG, P. W.
The Space Settlement Papers p 10 A86-45767
QUINN, R. D.
Equations for the vibration of a slewing flexible spacecraft
[AIAA PAPER 86-0906] p 41 A86-38916
Maneuvering of flexible spacecraft with application to SCOLE
Maneuver and vibration control of SCOLE
[AIAA PAPER 86-1993] p 54 A86-47415

#### R

RAND, R. H.

Nonlinear dynamics and chaotic motions in feedback controlled elastic systems
[AD-A162385] p 84 N86-24294
RANEY, W.

Space Station utilization p 9 A86-45637
RANEY, W. P.

Space Station utilization p 4 A86-37868
RANKIN, J. G.

RANKIN, J. G.

Development of an Advanced Trapezoidal Axially
Grooved (ATAG) heat pipe
[AIAA PAPER 86-1342] p 31 A86-39941

[AIAA PAPER 86-1342] p 31 A86-39941

RAZAVI, H. C.
Fault-tolerant control of large space structures using the

stable factorization approach
[NASA-CR-3964] p 58 N86-23343
RECTOR, W. F., III

Propulsion system concept assessment and technology requirements for Space Station p 86 A86-34972 REDDY, A. S. S. R.

REDDY, A. S. S. R.

Evaluation of performance characteristics for a space antenna system subjected to stochastic disturbances

p 43 A86-39482 Interactive computer graphics and its role in control system design of large space structures

n design of large space structures p 21 A86-47115

REHAK, M.

Neumann series approach to random vibrations p 43 A86-39481

REIBALDI, G.
Inflatable, space-rigidized reflectors for mobile missions p 23 A86-33921

REIBALDI, G. G.
Inflatable technology in orbit demonstration within the European Space Agency programs p 4 A86-37863

Dimensional stability of CFRP tubes for space ROE, F. SAWYER, R. S. p 35 N86-30775 An Orbital Maneuvering Vehicle simulator Communications and tracking - The keys to Space p 5 A86-40515 Station utilization p 66 A86-40529 Adequate fiber reinforced structural elements in load ROMEO, G. SCHAECHTER, D. B. introduction area of fiber reinforced shells Analytical and experimental results of advanced Estimation of distributed parameter systems - Some p 78 N86-30770 composite stiffened panels under combined loads closed-form solutions p 52 A86-46455 REMONDIERE, O. p 78 N86-30768 SCHAEFER, R. H. ROS. J. A Magnesium matrix composite materials processing and Advanced EVA operation on-orbit tasks and services A SENER latch design for docking mechanisms [AIAA PAPER 86-1175] p 72 A86-40384 p 96 A86-40585 RESHATOFF P J p 85 N86-27388 SCHAPPACHER, W. Emulating structural motion by array processors Distributed parameter systems; Proceedings of the [AIAA PAPER 86-1988] p 56 A86-47510 Geostationary platform - An application of the Space Second International Conference on Control Theory for Station p 5 A86-40502 REW. D. W. Distributed Parameter Systems and Applications, Vorau, In search of the optimal quadratic regulator Austria, July 9-14, 1984 D 98 A86-46808 p 43 A86-39484 Spline-based Rayleigh-Ritz methods for SCHEID, R. É., JR. approximation of the natural modes of vibration for flexible Multi-criterion approaches to optimization of linear Kalman-like estimation for static distributed systems regulators beams with tip bodies p 48 A86-40843 Antenna shape from radiation measurements [AIAA PAPER 86-2198] ACOSS eleven (Active Control Of Space Structures) s p 56 A86-47478 p 66 A86-39480 [AD-A165864] RÉYNOLDS, G. J. p 62 N86-29890 Modeling, estimation and identification methods for A thermal control design for the Leasat F-3 salvage ROSENTHAL, S. E. static shape determination of flexible structures mission A proven 25-lbF H2/O2 thruster for Space Station [AAS PAPER 85-424] p 20 A86-43223 [AIAA PAPER 86-1340] p 31 A86-39939 auxiliary propulsion SCHLIESING, J. A. REYNOLDS, J. [AIAA PAPER 86-1560] p 87 A86-42713 Shuttle-launch triangular space station Design and development testing of the bonded joint ROSS, J. L. [NASA-CASE-MSC-20676-1] p 26 N86-24729 Results of the ACCESS space construction Shuttle flight between a typical launch vehicle attachment ring and CFRP thrust cone p 28 N86-30790 SCHMID, M. experiment The Extendable and Retractable Mast (ERM) [AIAA PAPER 86-1186] RHODES, G. D. p 6 A86-40593 p 27 N86-27364 ROUTH, D. A steerable radiator for spacecraft application SCHMIDT, O. L. [AIAA PAPER 86-1298] p 100 A86-49597 The NASA Flight Demonstration Program Communications and tracking - The keys to Space RHODES J A86-32566 p 2 Station utilization p 66 A86-40529 ROUX. C. Assessing the effects of delaminations on the postbuckling strength of CRFP panels Solar array deployment simulation using ADAMS Key design parameters for a very low gravity in-orbit p 79 N86-30781 software p 60 N86-27360 facility RHODES, M. D. ROWE, W. J. [MATRA-EPT/DT/VT068/098] p 58 N86-22631 Deployable geodesic truss structure A01 Prospects for intelligent aerospace structures SCHMITZ, W. [NASA-CASE-LAR-13113-1] p 26 N86-24867 [AIAA PAPER 86-1139] p 25 A86-43328 Alternative module configurations for advanced solar Preloaded space structural coupling joints RÒWELL, L. F. arrays on low orbit and extended lifetime missions (AMOC Integrated analysis tools for trade studies of spacecraft [NASA-CASE-LAR-13489-1] p 29 N86-31630 controller and sensor locations Deployable M-braced truss structure [ESA-CR(P)-2129] p 89 N86-24025 [NASA-CASE-LAR-13081-1] [AIAA PAPER 86-1192] p 29 N86-32737 p 20 A86-40613 SCHNEIDER, S. R. RICHTER, G. P. ROWLEY, R. W. Plan for space station polar-orbiting platform A long-life 50 lbf H2/O2 thruster for Space Station Platform options for the Space Station program [AD-A164405] p 14 N86-25403 auxiliary propulsion [AAS PAPER 85-399] A86-43231 SCHNEIDER, W. C. [AIAA PAPER 86-1404] p 87 A86-42617 Shuttle-launch triangular space station ROWNTREE, R. A. Proven, long-life hydrogen/oxygen thrust chambers for Surface-treated titanium alloy gears for space [NASA-CASE-MSC-20676-1] p 26 N86-24729 space station propulsion mechanisms p 76 N86-27378 SCHULLER, F. T. [NASA-TM-88822] p 90 N86-32522 ROY, PH. Feasibility study of a discrete bearing/roller drive rotary RICHTER, R. F. G. ioint for the space station Magnesium matrix composite materials processing and Development of an Advanced Trapezoidal Axially NASA-TM-888001 p 27 N86-30206 applications p 72 A86-40384 Grooved (ATAG) heat pipe SCHULTZ, P. H. RUBENSTEIN, D. S. [AIAA PAPER 86-1342] p 31 A86-39941 Impacts of free-floating objects: Unique space station Optimum detumbling of space platforms via a dynamic RIDER, S. B. programming algorithm p 14 N86-27162 Application of solids modeling technology to space SCHWARZ, M. [AIAA PAPER 86-2154] p 57 A86-47518 station conceptual design and on-orbit assembly The exploitation of space: Policy trends in the military RUGE, P p 81 A86-34970 and commercial uses of outer space p 7 A86-43650 Control of flexible structures with respect to infinity RILEY, B. R. SCIALINO, G. L. p 60 N86-27359 Theoretical study on the effect of the design of small CFRP support structure for high stability reflector (milli-Newton) thruster jets on molecular contamination for antennas p 26 A86-49988 the space station S SCIARRINO, F. [NASA-CR-177263] p 90 N86-26358 A payload for utilization of space platform in the field RILEY, M. F. of communication and earth observation An improved multilevel optimization approach for the SACHDEV. S. S. p 4 A86-37862 design of complex engineering systems Canadarm - A review of its flights p 83 A86-47053 COMLINK proposal for future missions of tethered AIAA PAPER 86-0950] SADIN. S. R. p 19 A86-38953 p 69 N86-27658 Enabling technologies for transition to utilization of RINAL DO. A SCOTT, A. D. Index of aerospace mechanisms symposia proceedings space-based resources and operations Structural dynamic analysis of the Large Deployable 1-19 p 93 A86-34992 [NASA-TM-88205] p 102 N86-26650 SAFONOV. M. G. [AIAA PAPER 86-0004] p 42 A86-38951 RIVACOBA, J. Reduced order compensator design for an experimental SCOTT, G. The Collapsible Tube Mast (CTM) p 27 N86-27365 large flexible structure Non-destructive measurement of residual stresses A SENER latch design for docking mechanisms SALOME R p 30 A86-32933 p 85 N86-27388 SEARBY, N. E. Mechanisms developed in the French space industry ROBERTS, B. B. p 103 N86-27394 A design for fluid management in space Strategies for a permanent lunar base p 89 A86-47969 p 1 A86-30117 Measurement of the thermo-optical properties of varying SELTZER, S. M. ROBERTS, E. W. ASCOT (Advanced Structural Control Techniques) paint thickness on carbon fiber composites in spacecraft Thermal vacuum inclinometry: A test facility for antenna IAD-A1659171 p 62 N86-28985 p 74 N86-22620 pointing mechanisms p 102 N86-27391 SEMENOV, N. N. ROBERTSHAW, H. H. SALZMAN, J. Conversion of solar energy p 86 A86-36668 Fluid management and its role in the future of Space A slewing control experiment for flexible structures SENNEFF. J. M. Station p 47 A86-39509 A long-life 50 lbf H2/O2 thruster for Space Station [AIAA PAPER 86-2301] p 89 A86-49553 ROBINSON, P. J. auxiliary propulsion [AIAA PAPER 86-1404] A proven 25-lbF H2/O2 thruster for Space Station SALZWEDEL, H. C. p 87 A86-42617 Transfer of alignment and calibration of multiple sensors auxiliary propulsion SEVASTON, G. E. in flexible systems p 50 A86-43003 [AIAA PAPER 86-1560] p 87 A86-42713 The Galileo scan platform pointing control system - A RODMAN, L. C. SANDLIN, D. R. modern control theoretic viewpoint A survey of handling qualities criteria and their 3-component laser-Doppler velocimeter data [AAS PAPER 85-044] p 36 A86-31795 acquisition and reduction system applications to high performance aircraft SHAIN, E. B. [NASA-CR-176929] [NASA-CR-179654] p 77 N86-30738 p 104 N86-30135 Demonstration of vibration control of a flexible truss RODRIGUEZ, G. SAVAGE, T. R. structure p 44 A86-39488 Kalman-like estimation for static distributed systems Space Station communication networks SHAMBAUGH. R. Antenna shape from radiation measurements [AIAA PAPER 86-2307] p 67 A86-46939 p 20 A86-40521 EVA suit glove design p 66 A86-39480 SAW, K. C. SHARKEY, J. T. Modeling, estimation and identification methods for Reduced modeling and analysis of large repetitive space Design and development testing of the bonded joint static shape determination of flexible structures structures via continuum/discrete concepts between a typical launch vehicle attachment ring and CFRP thrust cone p 28 N86-30790 [AAS PAPER 85-424] [AIAA PAPER 86-1022] p 20 A86-43223 p 24 A86-38879

PERSONAL AUTHOR INDEX THOMPSON, D. R.

SKOWRONSKI, J. M. STUART, J. R. SHAW, R. A distributed array antenna system p 68 A86-50286 Reduced risk two stage transfers to geosynchronous Model reference adaptive control under uncertainty of orbit by use of an optimized intermediate transfer orbit [AIAA PAPER 86-2063] p 89 A86-47910 SHENHAR, J. nonlinear flexible manipulators Minimum-fuel control of high-order systems [AIAA PAPER 86-1976] p 53 A86-47403 p 86 A86-34174 SÙGANO, T. SLABY, J. Continuous forming of thin-walled CFRP pipes for SHERMAN, J. W., III Evaluation of solar array flight experiment response during flight for extension/retraction phase Plan for space station polar-orbiting platform large-space structure p 72 A86-40371 p 14 N86-25403 [AD-A164405] [NASA-TM-86551] p 29 N86-31606 Thermally-induced vibration and stability of booms with open cross section caused by unidirectional radiant Space Station services provided to communications Robust multivariable control of large space structures satellites using positivity p 10 A86-46956 SUMNER J B AIAA PAPER 86-2333] [AIAA PAPER 86-2125] p 57 A86-47925 Modal assignment effects on decentralized control of SHIBUYA, Y. SLIWA, N. O. Electrostatic charging and arc discharges on satellite a large space structure Design for a goal-oriented telerobotic system p 59 N86-25402 dielectrics simulated by electron beam [AIAA PAPER 86-2090] p 83 A86-47440 (AD-A1639771 SUN, C. T. p 66 A86-40597 [AlAA PAPER 86-1191] SMITH, P. D. A global-local approach to solving vibration of large truss SHIEH. R. C. Shuttle-launch triangular space station Preload modeling, analysis, and optimal design [NASA-CASE-MSC-20676-1] p 26 N86-24729 structures [AIAA PAPER 86-0872] p 41 A86-38907 techniques for beam/rod/cable element structures SNODDY, W. C. p 25 A86-41742 SUNDARARAJAN, N. Commerical use of space - Status and prospects Attitude control system synthesis for the Hoop/Column antenna using the LQG/LTR method SHIELDS, N. An Orbital Maneuvering Vehicle simulator SOLOMON, A. D. [AIAA PAPER 86-2139] p 55 A86-47452 Adaptive control of large space structures using p 5 A86-40515 Development of a simulation code for a latent heat SHIELDS, N. L., JR. thermal energy storage system in a space station recursive lattice filters The system integration and verification testing of an [DE86-010070] p 70 N86-31113 [NASA-CR-177270] orbital maneuvering vehicle for an air bearing floor p 60 N86-27401 SOVEY, J. S. p 100 N86-24217 Application of the LQG/LTR technique to robust A 10,000 hour life multipropellant engine for Space [NASA-CR-178350] controller synthesis for a large flexible space antenna SHIFLETT G. Station applications [NASA-TP-2560] A laboratory robot for space application research [AIAA PAPER 86-1403] p 64 N86-30800 p 87 A86-42616 p 83 A86-47468 AIAA PAPER 86-2186] Oxidation protecting coatings for polymers SUTSCH. A. p 75 N86-26434 Operation and control of space-based solar energy SHIH, C.-F. [NASA-CASE-LEW-14072-3] power plants with CCGT using helium as a working Verification of large beam-type space structures SPECTOR, V. p 24 A86-38809 [AIAA PAPER 86-0860] A laboratory robot for space application research medium [ASME PAPER 86-GT-152] n 89 A86-48206 Vibration of a large space beam under gravity effect [AIAA PAPER 86-2186] p 83 A86-47468 [AIAA PAPER 86-0907] p 41 A86-38917 SUTTER, T. R. SPERO, A. J. Vibration of a large space beam under gravity effect Behavior of very large short pulse antennas. Revision Multidisciplinary capability for analysis of the dynamics and control of flexible space structures p 52 A86-44884 [AIAA PAPER 86-0961] p 42 A86-38933 SHILOV, A. E. [DE86-004180] p 68 N86-25680 p 86 A86-36668 SUZUKI. H. Conversion of solar energy SPRING, S. C. An Eigensystem Realization Algorithm in Frequency SHOJI, J. M. Results of the ACCESS space construction Shuttle flight Domain for modal parameter identification Oxygen/hydrogen Space Station propulsion system experiment p 54 A86-47431 concept definition for IOC [AIAA PAPER 86-1186] [AIAA PAPER 86-2048] p 6 A86-40593 [AIAA PAPER 86-1561] p 87 A86-42714 SYKES, G. F. SRIDHAR, B. SIÈMERS, P. The thermal and mechanical stability of composite Identification of Space Station dynamics p 15 N86-28420 Technology and test p 73 A86-40530 p 49 A86-42965 materials for space structures SIEMERS, P. M. STARES, P. Shuttle Tethered Aerothermodynamics Research Facilty The exploitation of space: Policy trends in the military (STARFAC) instrumentation requirements and commercial uses of outer space p 7 A86-43650 p 34 N86-27652 STAUNTON, B. Shuttle Tethered Aerothermodynamics Research On-orbit manipulators - Sensory and control TAFF L G Facility (STARFAC) approaches Satellite debris - Recent measurements [AIAA PAPER 86-2185] p 7 A86-41747 p 83 A86-47467 SIGUR. W. A. STAVRINIDIS, C. Application and potential future of advanced composites TAMMA, K. K. Spacecraft structures design and verification in space p 71 A86-32917 Reduced modeling and analysis of large repetitive space p 23 A86-33287 SILVERBERG, L. structures via continuum/discrete concepts Nonlinear deformation analysis of the Olympus [AIAA PAPER 86-1022] p 24 A86-38879 Uniform damping control of spacecraft p 21 A86-43756 p 36 A86-31664 TANG, C. C. H. Spacecraft structures design and verification SILVERBERG, L. M. A three-dimensional dynamic analysis and libration study p 28 N86-30685 of a tethered satellites system Uniform damping control of spacecraft p 44 A86-39486 [AAS PAPER 85-340] p 50 A86-43208 Shuttle-launch triangular space station [NASA-CASE-MSC-20676-1] p TANG, L. Implementation problems associated with simultaneous p 26 N86-24729 sion of flexible p 47 A86-39511 On-off attitude control of flexible satellites maneuver and vibration suppression STEINBORN, W. p 53 A86-46470 spacecraft The German programme on materials science in SIMON, M. C. esign and test of a space deployable radiator Space Station design-to-cost - A massive engineering STEVENS, J. W. p 23 N86-31640 [SNIAS-861-440-103] Design considerations for large photovoltaic systems ISAWE PAPER 16731 p 18 A86-35216 [DE86-002125] p 68 N86-23053 TAUBER, W. Development of an antenna structure for a deployable SIMONIAN, S. S. Synthesis of discrete passive vibration dampers offset antenna Robust beam-pointing and attitude control of a flexible [SAE PAPER 851935] p 39 A86-38548 p 36 A86-31665 spacecraft SIMONTON, J. W. Enhancements in the routine evaluation of composite Deployable geodesic truss structure A01 [NASA-CASE-LAR-13113-1] p 26 aerospace components using a microprocessor based The Columbus preparatory programme supporting p 26 N86-24867 p 73 A86-47605 technology of the European Space Agency p 4 A86-37856 SIMPSON, J. A. Columbus technology - Status and plans The impact of space debris on manned space A new instrument to measure charged and neutral p 12 A86-50338 cometary dust particles at low and high impact velocities operations p 70 N86-30590 STONE, J. R. [AIAA PAPER 86-1178] p 96 A86-40588 NASA electrothermal auxiliary propulsion technology SIRA-RAMIREZ, H. [AIAA PAPER 86-1703] Variable structure control of spacecraft reorientation Robotic nondestructive inspection of aerospace p 95 A86-40509 structures maneuvers A nonlinear attitude control law for a satellite with flexible [AIAA PAPER 86-1987] p 53 A86-47412 An Orbital Maneuvering Vehicle simulator p 49 A86-42989 appendages SIRLIN, S. W. STRAUSS, F. J. Payload isolation and precision pointing for the 1990's Air and space travel - Tasks for the future [AAS PAPER 85-010] p 36 A86-31781 Measurement of the thermo-optical properties of varying p 3 A86-35518 Future payload isolation and pointing system paint thickness on carbon fiber composites in spacecraft STRITTMATTER, R. p 53 A86-46464 technology Key design parameters for a very low gravity in-orbit SKAAR, S. B. facility Spacecraft materials test in a continuous, broad On-off attitude control of flexible satellites MATRA-EPT/DT/VT068/0981 p 58 N86-22631 p 73 A86-47337 p 53 A86-46470 energy-spectrum electron beam STRITZ, F. THOMAS. R. An adaptive vision-based manipulator control scheme

EVA suit glove design

from measured data

[SAE PAPER 851926]

A global technique for estimation of modal parameters

STROUD, R. Č.

p 83 A86-47469

p 46 A86-39504

[AIAA PAPER 86-2187]

Overview and recent results

Active vibration damping experiments at VPI & SU -

SKIDMORE, G. R.

p 20 A86-40521

p 39 A86-38542

(FOC)

THOMPSON, D. R.

Space station

p 74 N86-22619

p 16 N86-30602

High voltage potting for the Faint Object Camera

THOMPSON, R. C. An asymptotic perturbation method for nonlinear optimal control problems IAAS PAPER 85-3641 p 51 A86-43219 THORESON, D. W. A steerable radiator for spacecraft application [AIAA PAPER 86-1298] p 100 A86-49597 THORNTON, E. A. A Taylor-Galerkin finite element algorithm for transient

nonlinear thermal-structural analysis [AIAA PAPER 86-0911] p.31 A86-38823 TISCHLER, V. A.

Integration of structures and controls Some computational issues p 49 A86-42939 TISNE. J. L.

Winding with thermoplastic polymers [SNIAS-861-430-106] p 80 N86-30804

TOLLISON, D. K. ASCOT (Advanced Structural Control Techniques) (AD-A1659171 p 62 N86-28985 TOMPKINS, S. S.

The thermal and mechanical stability of composite materials for space structures p 73 A86-40530 TONG, M.

A multibody dynamics equation formulation by momentum principle p 50 A86-43213 [AAS PAPER 85-391] TRACY, J. L.

The Giotto spacecraft's performance during the geostationary transfer orbit and near-earth mission phases p 3 A86-36035 TRELLA, M.

Technology challenges for the Columbus Programme p 9 A86-45629

TRUMP, C. G. The Canadarm - On earth as it is in space p 93 A86-34123

TSUCHIYA, K. Controller design of flexible spacecraft attitude control p 37 A86-33204

Oxygen/hydrogen Space Station propulsion system concept definition for IOC

[AIAA PAPER 86-1561] p 87 A86-42714 TURIN, G. Giotto despin mechanism subsystem: General loop design and pointing aspects p 60 N86-27361

TURNER, R. E. Environmental criteria guidelines for space vehicle and

space design p 18 A86-32553 TURNER, T.

Exploring autonomy - The T(2)C(2) system [AIAA PAPER 86-1184] p 5 A86-40592 TUZZOLINO, A. J.

A new instrument to measure charged and neutral cometary dust particles at low and high impact velocities p 70 N86-30590

UGALDEA, S. The Ulysses mechanisms p 27 N86-27368 UMANSKII. S. P. Real fantasy p 95 A86-39981 Aerospace simulation II; Proceedings of the Second Conference, San Diego, CA, January 23-25, 1986 p 94 A86-37176 USIK. L.

Thermal and electromagnetic damping analysis and its application p 34 N86-27677

USSHER, T. H.

Space Station - The Canadian contribution p 12 A86-49563

VADALI, S. R.

Variable-structure control of spacecraft large-angle p 36 A86-31666 VAICAITIS, R.

Nonlinear response - A time domain approach [AIAA PAPER 86-1934] p 52 A86-45423

Vibration and structureborne noise in space station [NASA-CR-177146] p 64 N86-31336 VALLERANI, E.

Columbus - The European participation in international space stations p 3 A86-37854 p 8 A86-44402 Space Station - The new frontier VAN DER HA, J. C.

RIT-10 low-thrust control of Eureca's orbital decay p 88 A86-44447 VANDEGRAAFF, R. C.

Control loops with human operators in space operations. Part 1: Human engineering analysis, synthesis and evaluation techniques [NLR-TR-84116-L-PT-1] p 16 N86-32107

VANDENBUSSCHE, F. C.

The Giotto spacecraft's performance during the geostationary transfer orbit and near-earth mission p 3 A86-36035

VANDENKERCKHOVE, J. A. Space platform design options - A comparison, for cost-effectiveness, of expendable, reusable

serviceable spacecraft p 8 A86-44531 VANDER VELDE, W. E. Robust reduced-order control of flexible structures using

the optimal projection/maximum entropy design methodology [AIAA PAPER 86-2052]

p 55 A86-47435 VÄNDERVELDE, W. E.

Reliability issues in active control of large flexible space structures

[NASA-CR-179758] p 65 N86-32512 VANE. D. Polar platform payload requirements in the 1990's

AAS PAPER 85-396] p 7 A86-43228 VANSWIETEN, C. M.

Control loops with human operators in space operations. Part 2: Robotics operations and manual control experiment [NLR-TR-84116-L-PT-2] p 85 N86-33024

VANWOERKOM, P. T. L. M.

Mathematical models of flexible spacecraft dynamics: A survey of order reduction approaches

[NLR-MP-85004-U] NLR-MP-85004-U] p 60 N86-26367 Dynamics of flexible spacecraft: An analysis of approaches towards mathematical model order reduct (NLR-TR-85068-111

p 65 N86-31643 Control loops with human operators in space operations Part 3: Rendezvous and docking operations and model analysis of performance with human-in-the-loop [NLR-TR-84116-L-PT-3] p 17 N86-32108

VANZELST. R. F. P.

Hand calculation method for buckling of composite shell structures p 28 N86-30769 VARHOLA, D.

Model reduction and modal assignment in decoupled control

AIAA PAPER 86-2137] p 55 A86-47451 VARIN, R. R.

Continuous fiber composite hoops p 72 A86-40503 VENKAYYA, V. B.

Optimum design of large structures with multiple constraints [AIAA PAPER 86-0952] p 19 A86-38845 Integration of structures and controls Some

computational issues p 49 A86-42939 Issues of order reduction in active control system design [AIAA PAPER 86-2138] p 57 A86-47515

VENNERI, S. L. Future directions in materials and structures for space

applications [AIAA PAPER 86-1185] p 25 A86-40611 VERNON, R.

Fluid management and its role in the future of Space

[AIAA PAPER 86-2301] p 89 A86-49553 VETRELLA, S.

High resolution remote sensing missions of a tethered satellite p 15 N86-28424

VIDYASAGAR, M. Fault-tolerant control of large space structures using the stable factorization approach

[NASA-CR-3964] p 58 N86-23343

VIGNERON, F. R. Damping synthesis for a spacecraft using substructure p 37 A86-32940 and component data

Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration [AAS PAPER 85-365]

p 51 A86-43220 VILLALBA, M. J.

ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 VISENTINE, J. T.

Protecting spacecraft from atomic oxygen

p 67 A86-45706 VON FLOTOW, A. H. Traveling wave control for large spacecraft structures

p 53 A86-46463 Control-motivated dynamic tailoring of truss-work structures

[AIAA PAPER 86-2190] p.56 A86-47471 VORBRUGG, H.

Development of an antenna structure for a deployable offset antenna p 29 N86-30797

W

WADA, B. K.

Extension for ground-based testing for large space structures p 37 A86-32944

Test and analysis correlation for structural dynamic systems p 37 A86-33284

Multiple boundary condition test (MBCT) approach to update mathematical models of large flexible structures [SAE PAPER 851933] p 39 A86-38546 Multiple Boundary Condition Tests (MBCT) for

verification of large space structures [AIAA PAPER 86-0905] p 41 A86-38915 Test and analysis correlation for structural dynamic

p 63 N86-30682 WALKER, W. L.

Protective telescoping shield for solar concentrator [NASA-CASE-NPO-16236-1] p 103 N86-27706 WALLS, J.

An Orbital Maneuvering Vehicle simulator

p 5 A86-40515 WALLSOM, E.

Synchronously deployable truss structure [NASA-CASE-LAR-13117-1] p 27 p 27 N86-25789 WALTER, J.

Nondestructive testing of fiber reinforced composites using X-ray fine structure procedures p 79 N86-30784

WANG, B. P. Synthesis of structures with multiple frequency constraints

[AIAA PAPER 86-0951] p 40 A86-38844

WANG, P. K. C.

A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500 WANG, S. J.

An investigation of adaptive control techniques for space stations p 38 A86-35333 Space Station dynamic modeling, control and

p 39 A86-37186 WANGE, G.

Selections from Flug Revue und Flugwelt International. A. On the border of Time-hypersonic flight. B. NASA programs pave the way for the hypersonic aircraft. C. Shuttle flight 61-B; construction in space. D. Faster than a bullet; hypersonic military aircraft [NASA-TM-88418] p 26 N86-24652

WARD, L. On-orbit manipulators - Sensory and control approaches

[AIAA PAPER 86-2185] p 83 A86-47467

WATANABE, T.

Continuous forming of thin-walled CFRP pipes for large-space structure p 72 A86-40371

WATSON, J. J. Results of the ACCESS space construction Shuttle flight

[AIAA PAPER 86-1186] p 6 A86-40593

WEFEL, J. P. Workshop on Cosmic Ray and High Energy Gamma Ray Experiments for the Space Station Era, Louisiana State

University, Baton Rouge, October 17-20 Proceedings p 99 A86-46851 WEHRLE, V. A.

Design and test of a linear thermal actuator p 34 N86-27380

WEISHAUPT, U. Cosmic dust detection with large Surface p 16 N86-30604 piezoceramics

WEISS, W. Structural analysis, manufacturing and test evaluation

of a polarization sensitive reflector p 35 N86-30798 WEISSHAAR, T. A. structure/control

design - Present methodology and future opportunities p 58 A86-49094

WEN. J. Stable direct adaptive control in Hilbert space

p 43 A86-39483 WERNER, M. W.

SIRTF and the Space Station [AIAA PAPER 86-2353] p 12 A86-50266 WESSELSKI, C. J.

Shuttle-launch triangular space station [NASA-CASE-MSC-20676-1] p 26 N86-24729

WESSLING, F. C. Personnel occupied woven envelope robot

[NASA-CR-176832] p 14 N86-25401 WESTPAL, W.

p 65 A86-35194 Alternative space power systems WEWERINKE, P. H.

Control theoretic analysis of human operator mediated rendezvous and docking [NLR-MP-85020-U] p 16 N86-32106

PERSONAL AUTHOR INDEX ZWARTBOL, T.

Control loops with human operators in space operations. Part 1: Human engineering analysis, synthesis and evaluation techniques [NLR-TR-84116-L-PT-1] p 16 N86-32107 Control loops with human operators in space operations.

Part 3: Rendezvous and docking operations and model analysis of performance with human-in-the-loop

[NLR-TR-84116-L-PT-3] p 17 N86-32108 WHITAKER, A. F.

Analyses of spacecraft polymeric materials

p 73 A86-41750

WHITE, K. A., III Liquid droplet radiator program at the NASA Lewis Research Center

[ASME PAPER 86-HT-15] p 32 A86-49621 WHITSETT, J.

Electrical power system integration for the Space Station

[AIAA PAPER 86-2351] p 67 A86-49561 WIBERG, D. M.

Estimation of frequencies of vibration using lattices p 49 A86-42960 WIF 8

Modeling and simulation of spacecraft solar array deployment

[AIAA PAPER 86-2122] p 84 A86-47923 WIENSS, W.

The role of Columbus in a future Space Station scenario p 12 A86-49565

WILL, R. W. Design for a goal-oriented telerobotic system

p 83 A86-47440 [AIAA PAPER 86-2090] WILLIAMS, C. D.

An evaluation of foldable elastic tubes for application in space structures p 24 A86-34634 WILLIAMS, C. E. NASA/American Society for Engineering Education

(ASEE) Summer Faculty Fellowship Program, 1985 [NASA-CR-171931] p 105 N86-31409

WILLIAMS, J. H., JR.

Feedforward control of waves in lattice elements [AD-A164009] p 59 N86-26222 Wave propagation measurements on two-dimensional lattice

[AD-A166207] p 62 N86-29891 Failure propagation in continuum models of LSS (Large Space Structures), part 1

[AD-A166208] p 63 N86-29892 WILLIAMS, J. P

Testing of a failure accommodation system on a highly flexible grid p 38 A86-35390 Failure detection and accommodation in structural dynamics systems using analytic redundancy

p 49 A86-42938 Control effectiveness characterization for state estimation and control on a highly flexible grid

[AIAA PAPER 86-2142] p 55 A86-47454 WILLIAMS, T.

A square root method for the identification of large space structures

[AIAA PAPER 86-2049] p 54 A86-47432 WILLSHIRE, K. F.

Automation and robotics for Space Station in the twenty-first century [AIAA PAPER 86-2300] p 84 A86-49552

WILLWAY, T. A. Damping of composites p 78 N86-30764 WILSON, J.

Index of aerospace mechanisms symposia proceedings 1-10

[NASA-TM-88205] p 102 N86-26650 WILTSEE, C. B.

SIRTF and the Space Station

[AIAA PAPER 86-2353] p 12 A86-50266 WOLF, H.

Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653 WOLFF, F.

Contracts of and with private enterprises concerning the development, the construction, and the assembly of space vehicles p 82 A86-43341

WOO, H. H. Momentum management concepts for a Space Station

[AIAA PAPER 86-2047] p 54 A86-47430 Preliminary evaluation of a reaction control system for a Space Station

[AIAA PAPER 86-2152] p 89 A86-47460 WOO, T. H.

Space frame optimization subject to frequency [AIAA PAPER 86-0877]

p 40 A86-38812 WOOD, G. M.

Shuttle Tethered Aerothermodynamics Research Facilty (STARFAC) instrumentation requirements

p 34 N86-27652

Shuttle Tethered Aerothermodynamics Research Facility (STARFAC) p 34 N86-27653

WOODARD, S. The development of optimal control laws for orbiting tethered platform systems

[AAS PAPER 85-360] p 51 A86-43217 WOOLHEATER, C.

Design study for a high stability large centrifuge test

bed [AIAA PAPER 86-2100] p 11 A86-47445

WORKMAN, G. L.

Robotic nondestructive inspection of aerospace p 95 A86-40509 structures WORLEY, S. D. Analyses of spacecraft polymeric materials

p 73 A86-41750

WORTMAN, J. J.

Capacitor-type micrometeoroid detectors

p 104 N86-30606 WOSTENHOLM, G. H.

Hygrothermal characteristics of antenna materials p 77 N86-30760

Analysis of a single-fold deployable truss beam preloaded by extension of selected face diagonal members

[NASA-TM-87673] p 33 N86-23623 WYN-ROBERTS, D.

Space mechanisms development in the ESA technological research program p 103 N86-27397



YAJIMA, N.

Flexibility control of solar battery arrays of spacecrafts p 85 A86-33203

YALDA-MOOSHABAD, I.

On-off attitude control of flexible satellites p 53 A86-46470

YAM, Y.

Nutational stability of a spinning spacecraft with internal

mass motion and axial thrust [AIAA PAPER 86-2271] p 57 A86-47940

YAMAGUCHI, I. A matrix approach to dynamics formulation of complex space structures p 45 A86-39496

YANG, T. Y. Integrated design of space structures using lattice plate finite elements p 21 A86-46465

Simplified lattice beam elements for geometrically nonlinear static, dynamic, and postbuckling analysis p 26 A86-49818

Hygrothermal characteristics of antenna materials p 77 N86-30760

YEDAVALLI, R. K. Tine domain design of robust controllers for LQG (Linear Quadratic Gaussian); application to large space structures

[AD-A163635] p 59 N86-26074 YORK, R. R.

Application of solids modeling technology to space station conceptual design and on-orbit assembl p 81 A86-34970

YOUNG, J. W.

Multidisciplinary capability for analysis of the dynamics and control of flexible space structures

[AIAA PAPER 86-0961] p 42 A86-38933 Control/structures interaction study of two 300 KW dual-keel space station concepts

NASA-TM-87679] p 61 N86-28113 YUAN. J. S.-C.

Robust beam-pointing and attitude control of a flexible pacecraft p 36 A86-31665 Robust control of a flexible non-symmetrical spacecraft p 47 A86-39569

Z

ZAK, M.

Characteristic wave approach in controlled large space structures

[AIAA PAPER 86-0839] ZAVATTARO CHIADO PIAT. M. G.

Quasi-analytical solutions for the dynamics of a class of tethered satellites with Danby's aerodynamical drag p 52 A86-46383

ZEFELD, V. V.

Spacecraft architecture [NASA-TM-77908]

p 101 N86-24736 ZEILER, T. A.

Integrated structure/control design - Present methodology and future opportunities

p 58 A86-49094

ZERSEN, W. F. H.

Future space transportation options - Overview [AIAA PAPER 86-1210] p 6 A86-40616 ZHANG, J. J.

Wave propagation measurements on two-dimensional

(AD-A166207) p 62 N86-29891 ZILIANI, M. A.

High power rigid solar array [SNIAS-861-440-110]

ZIMMERMAN, D. C. Microprocessor controlled force actuator

[AIAA PAPER 86-0916] p 40 A86-38827 ZWANENBURG, R.

A deployable and retractable strongback structure p 27 N86-27389


ZWARTBOL, T.

Attitude control of spacecraft: An overview of recent developments and research (NLR-MP-85055-U1

p 64 N86-31636

p 70 N86-31997

#### **Typical Corporate Source Index Listing**



Listings in this index are arranged alphabetically by corporate source. The title of the document is used to provide a brief description of the subject matter. The page number and the accession number are included in each entry to assist the user in locating the abstract in the abstract section. If applicable, a report number is also included as an aid in identifying the document.

## Advanced Technology and Research, Inc.,

Burtonsville, Md.

control

The development of an environmental disturbance model for large space structures after the onset of thermal shock

[AIAA PAPER 86-2123] p 32 A86-47924 AÈG-Telefunken, Wedel (West Germany).

Alternative module configurations for advanced solar

arrays on low orbit and extended lifetime missions (AMOC

[ESA-CR(P)-2129] p 89 N86-24025 Growth capabilities of European retractable solar arravs

[ESA-CR(P)-2141] p 69 N86-26711

Air Force Inst. of Tech., Wright-Patterson AFB, Ohio. The detumbling of an axially symmetric satellite with an orbital maneuvering vehicle by nonlinear feedback

[AD-A163989] p 58 N86-24717

The effect of energy dissipation due to friction at the joint of a simple beam structure

[AD-A163975] p 58 N86-24739 Moving-bank multiple model adaptive algorithms applied

to flexible spacecraft control [AD-A164016] p 59 N86-24740 A proposed design for an interim space rescue ferry

vehicle [AD-A164039] p 101 N86-24741

Modal assignment effects on decentralized control of a large space structure

[AD-A163977] p 59 N86-25402 Control of large flexible systems by spatial modal input-distribution control

[AD-A166912] p 64 N86-30803

Air Force Rocket Propulsion Lab., Edwards AFB, Calif. Plasma thruster development: Magnetoplasmadynamic opulsion, status and basic problems AD-A1659451 p 90 N86-28991

Air Force Space Div., Los Angeles, Calif.

Future space transportation options - Overview [AIAA PAPER 86-1210] p 6 A86-40616

Alabama Univ., Birmingham Machine vision and the OMV p 100 N86-24536

Alabama Univ., Huntsville. An Orbital Maneuvering Vehicle simulator

p 5 A86-40515

Commerical use of space - Status and prospects p 6 A86-41154

Alabama Univ., University.

Personnel occupied woven envelope robot

[NASA-CR-176832] p 14 N86-25401

Arizona Univ., Tucson.

An overview of optical telescope technology

p 1 A86-32413

Atomic Energy Research Establishment, Harwell (England).

Dynamic mechanical analysis as an aid to the characterization of composite materials

p 77 N86-30763

Auburn Univ., Ala.

Analyses of spacecraft polymeric materials

p 73 A86-41750

#### Berry Coll., Mount Berry, Ga.

A study of 35-ghz radar-assisted orbital maneuvering vehicle/space telescope docking p 101 N86-24537 Boeing Aerospace Co., Kennedy Space Center, Fla.

Orbital transfer vehicle launch operations study: Manpower summary and facility requirements, volume 5 [NASA-CR-179705] p 17 N86-32504 Orbital transfer vehicle launch operations study. Processing flows. Volume 3

[NASA-CR-179766] p 17 N86-32505

Boeing Aerospace Co., Seattle, Wash.

A steerable radiator for spacecraft application

[AIAA PAPER 86-1298] p 100 A86-49597 Development of composite tube protective coatings [NASA-CR-178116] p 76 N86-29989

p 76 N86-29989 Boeing Co., Cocoa Beach, Fla. Space Station - An integrated approach to operational

logistics support

[AIAA PAPER 86-2321] p 10 A86-46947

British Aerospace Dynamics Group, Bristol (England).

Design and development testing of the bonded joint between a typical launch vehicle attachment ring and CFRP thrust cone p 28 N86-30790

British Aerospace Dynamics Group, Stevenage

Historical development of solar array drive mechanisms by British Aerospace p 102 N86-27357 The Olympus antenna deployment subsystem design

and testing
British Columbia Univ., Vancouver. N86-27392 p 27

Effects of damping on the control dynamics of the space shuttle based on tethered systems Brown Univ., Providence, R. I. p 61 N86-27656

Spline-based distributed system identification with application to large space antennas p 42 A86-39037 Impacts of free-floating objects: Unique space station

p 14 N86-27162

Brussels Univ. (Belgium).

New prediction methods for composites hygrothermal p 78 N86-30771

#### California Inst. of Tech. Pasadena.

Stiffness control of large space structures

A86-33254 A three-dimensional dynamic analysis and libration study of a tethered satellites system

[AAS PAPER 85-340] p 50 A86-43208 California Polytechnic State Univ., San Luis Obispo. A survey of handling qualities criteria and their

applications to high performance aircraft p 77 N86-30738 [NASA-CR-1796541

California Univ., Berkeley.

Delamination fracture toughness of composite spacecraft structures p 78 N86-30777

California Univ., Los Angeles,

An investigation of adaptive control techniques for space ations p 38 A86-35333 stations

A robust nonlinear attitude control law for space stations with flexible structural components p 46 A86-39500

Computer aided modelling/compensator design for a flexible space antenna p 96 A86-42993 Modified LTR robust control for flexible structures

[AIAA PAPER 86-2051] p 55 A86-47434 Nutational stability of a spinning spacecraft with internal

mass motion and axial thrust [AIAA PAPER 86-2271] p 57 A86-47940

Centre d'Etudes et de Recherches, Toulouse (France). Long term tests of contaminated Optical Solar Reflectors (OSRs) under combined environment

p 74 N86-22622 Centre National d'Etudes Spatiales, Toulouse (France). New space paints p 74 N86-22621

Definition and testing of gears for space robotics p 22 N86-27375

Mechanisms developed in the French space industry p 103 N86-27394

Design of spacecraft

[ISBN-2-225-80732-9] p 23 N86-31629 Centre Suisse de Documentation dans le Domaine de

la Microtechnique, Neuchatel. Coatings against fretting p 76 N86-27377

Chicago Univ., III. A new instrument to measure charged and neutral cometary dust particles at low and high impact velocitie

p 70 N86-30590 College of William and Mary, Williamsburg, Va.

Radiation effects on high performance polymers [NASA-CR-177191] p.76 N86 p 76 N86-28195

Columbia Univ., New York.

Nonlinear response - A time domain approach [AIAA PAPER 86-1934] p 52 A86-45423

Vibration and structureborne noise in space station [NASA-CR-177146] p 64 N86-31336

Consiglio Nazionale delle Ricerche, Frascati (Italy). Electrodynamic interactions

p 69 N86-28414 Spontaneous radiation emitted by moving tethered p 34 N86-28427

Consiglio Nazionale delle Ricerche, Rome (Italy). Tethered satellite design

p 22 N86-28409 Construcciones Aeronauticas S.A., Madrid (Spain). High-stability telescope structures p 28 N86-30773

Consulenze Generali Roma (Italy).

Numerical experiments on a controlled flexible structure using DCAF [ESA-CR(P)-2159] p 61 N86-28116

Contraves Italiana, Rome.

COMLINK proposal for future missions of tethered satellite p 69 N86-27658 Control Dynamics Co., Huntsville, Ala.

ASCOT (Advanced Structural Control Techniques)

[AD-A165917] p 62 N86-28985 Control Research Corp., Lexington, Mass.

Rapid torque-limited line-of-sight pointing of SCOLE

(Spacecraft Laboratory Control Experiment) configuration

[AIAA PAPER 86-1991] p 54 A86-47414

Cornell Univ., Ithaca, N.Y.

Nonlinear dynamics and chaotic motions in feedback controlled elastic systems [AD-A162385] p 84 N86-24294

#### D

Department of Communications, Ottawa (Ontario) Vibration qualification at the David Florida Laboratory

p 63 N86-30687 Deutsche Forschungs- und Versuchsanstalt fuer Luftund Raumfahrt, Brunswick (West Germany).

Design and manufacturing aspects of space trusses p 28 N86-30772 Deutsche Forschungs- und Versuchsanstalt fuer Luftund Raumfahrt, Oberpfaffenhofen (West Germany). Integrated sensor and actuator system for flexible space p 102 N86-27385 structure experiments Deutsche Forschungs- und Versuchsanstalt fuer Luftund Raumfahrt, Stuttgart (West Germany). The performance of unbonded MoS2 for p 76 N86-27376 applications Deutsche Gesellschaft fuer Luft- und Raumfahrt, Bonn (West Germany). The Second International Symposium on Aeroelasticity and Structural Dynamics p 104 N86-30627 IDGI R-85-021 Dornier-Werke G.m.b.H., Friedrichshafen (West Germany). Features of the solar array drive mechanism for the p 102 N86-27356 Space Telescope Analysis of in-orbit performance of mechanisms within p 84 N86-27358 large structures The Extendable and Retractable Mast (ERM) p 27 N86-27364 A Dornier latch design for a docking mechanism p 22 N86-27387 Aspects of active isolation as applied to a satellite structure with shape precision payload n 63 N86-30653 Draper (Charles Stark) Lab., Inc., Cambridge, Mass. Predictive momentum management for the Space p 52 A86-46462 Station ACOSS eleven (Active Control Of Space Structures) s [AD-A165864] p 62 N86-29890 Du Pont (UK) Ltd., Stevenage (England). Multilayer printed circuit board characterization by p 33 N86-22618 thermal analysis Duke Univ., Durham, N. C. Frequency domain solutions to multi-degree-of-freedom, dry friction damped systems under periodic excitation p 44 A86-39485 Edighoffer, Inc., Newport News, Va. Dynamic analysis and experiment methods for a generic snace station model p 40 A86-38886 [AIAA PAPER 86-0838] Energy Science Labs., Inc., San Diego, Calif. o 104 N86-28410 Tether fundamentals Engineering System International, Rungis (France). Industrial calculation of damage tolerance and stress allowables in components made of composite materials using the PAM-FISS/biphase material model p 78 N86-30779 Essex Corp., Huntsville, Ala. An Orbital Maneuvering Vehicle simulator p 5 A86-40515 The system integration and verification testing of an orbital maneuvering vehicle for an air bearing floor [NASA-CR-178350] p 100 N86 p 100 N86-24217 European Space Agency, Paris (France). Space environment simulation to test satellite thermal control coatings, volume 1 [ESA-TT-891-VOL-1] n 75 N86-22627 Space environment simulation to test satellite thermal control coatings. Volume 2, appendix 1: Detailed results of optical measurements made after the various stages of the first test p 33 N86-22628 [ESA-TT-891-VOL-2] Space environment simulation to test satellite thermal control coatings. Volume 2: Appendices 2, 3, and 4. Appendix 2: Detailed results of optical measurements made after the various stages of the second test. Appendix Summary of optical results obtained during the first test. Appendix 4: Summary of optical results obtained during the second test [ESA-TT-891-VOL-3] p 33 N86-22629 Second European Space Mechanisms and Tribology Symposium p 102 N86-27353 IÉSA-SP-2311 Proceedings of a Workshop on Composites Design for Space Applications p 105 N86-30758 Dimensional stability of CFRP tubes for space tructures p 35 N86-30775 structures Preparing for the future: The ESA technological research and development program 1986-1988 p 80 N86-32347 [FSA-SP-1079] European Space Agency. European Space Research

Scanning laser acoustic microscopy applied to the evaluation of material interconnections p 75 N86-22624 p 75 Ultraviolet radiometers N86-22626 The Collapsible Tube Mast (CTM) p 27 N86-27365 Development and testing of a dual-wound dc moto p 102 N86-27382 gearhead Experiment manipulators for automatic sample p 84 N86-27386 handling mechanisms development in the ESA Space p 103 N86-27397 technological research program Spacecraft structures design and verification p 28 N86-30685 Data for selection of space materials p 81 N86-32584 [ESA-PSS-01-701-ISSUE-1] European Space Tribology Lab., Risley (England). Surface-treated titanium alloy gears for p 76 N86-27378 mechanisms Some recent experiences of mechanism performance and component assessment in thermal vacuum tests at р 85 N86-27390 ESTI Thermal vacuum inclinometry: A test facility for antenna p 102 N86-27391 nointing mechanisms Evansville Univ., Ind. Theoretical study on the effect of the design of small (milli-Newton) thruster jets on molecular contamination for the space station INASA-CR-1772631 p 90 N86-26358 Fyxon Corp., Houston, Tex. An evaluation of foldable elastic tubes for application p 24 A86-34634 in space structures Foldes, Inc., Wayne, Pa. A design study for the use of a multiple aperture deployable antenna for soil moisture remote sensing satellite applications [NASA-CR-178154] p 16 N86-30933 Ford Aerospace and Communications Corp., College Park. Md. Flight results from the gravity-gradient-controlled RAE-1 satellite p 11 A86-47453 [AIAA PAPER 86-2140] Ford Aerospace and Communications Corp., Palo Alto, Calif. Communication Platform Payload Definition (CPPD) study. Volume 1: Executive summary INASA-CR-1749281 n 22 N86-27403 Communication Platform Payload Definition (CPPD) study. Volume 2: Technical report n 22 N86-27404 [NASA-CR-174929] p 22 N86-27404 Communication Platform Payload Definition (CPPD) study. Volume 3: Addendum p 22 N86-27405 [NASA-CR-174930]

Fulmer Research Inst. Ltd., Stoke Poges (England). The application of composites to space structures:

Guidelines on important aspects for the designer p 77 N86-30759 Developments in the nondestructive evaluation (NDE)

p 79 N86-30785 of composite materials

### G

General Research Corp., McLean, Va.

Enabling technologies for transition to utilization of space-based resources and operations

p 93 A86-34992

Georgetown Univ., Washington, D.C.

The changing face of international space cooperation
One view of NASA p 8 A86-44405

Grumman Aerospace Corp., Bethpage, N.Y. The share flight experiment - An advanced heat pipe radiator for Space Station

[AIAA PAPER 86-1297] p 5 A86-39905 Heat pipe radiator technology for space power systems p 31 A86-39907

[ÁIAA PAPER 86-1300]

Harvard-Smithsonian Center for Astrophysics, Cambridge, Mass.

A three-mass tethered system for micro-g/variable-g applications p 21 A86-47413

[AIAA PAPER 86-1990] Hawaii Univ., Honolulu.

Materials considerations in the design of a metal-hydride heat pump for an advanced extravehicular mobility unit p 80 N86-31427

Houston Univ., Clear Lake, Tex. A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607 Howard Univ., Washington, D. C.

An evaluation of foldable elastic tubes for application p 24 A86-34634 in space structures Evaluation of performance characteristics for a space antenna system subjected to stochastic disturbances p 43 A86-39482

The development of optimal control laws for orbiting tethered platform systems

p 51 A86-43217 IAAS PAPER 85-3601 Interactive computer graphics and its role in control system design of large space structures p 21 A86-47115

The development of an environmental disturbance model for large space structures after the onset of thermal

shock p 32 A86-47924 [AIAA PAPER 86-2123] The development of optimal control laws for orbiting tethered platform systems p 61 N86-27655

Illinois Univ., Urbana. Single step optimization strategies for constrained p 47 A86-39510 retargeting maneuvers Variable structure control of spacecraft reorientation maneuvers [AIAA PAPER 86-1987] p 53 A86-47412

Proceedings of the 1985 Antenna Applications Symposium, Volume 2 [AD-A165535]

p 103 N86-27525

Imperial Coll. of Science and Technology, London (England).

The strength of bolted joints in Kevlar RP p 28 N86-30765

Indiana Univ. Northwest, Garv.

Cosmic dust collection with a sub-satellite tethered to a space station p 14 N86-27146

Industrieanlagen-Betriebsgesellschaft m.b.H., Ottobrunn (West Germany).

Holographic interferometry for distortion measurements p 23 N86-30776 of antennas

Jet Propulsion Lab., California Inst. of Tech., Pasadena.

Payload isolation and precision pointing for the 1990's p 36 A86-31781 [AAS PAPER 85-010]

The Galileo scan platform pointing control system - A modern control theoretic viewpoint p 36 A86-31795 [AAS PAPER 85-044]

Subsystem testing of Galileo's attitude and articulation control fault protection

p 91 A86-32117 [AIAA PAPER 86-9783] An overview of optical telescope technology

D 1 A86-32413 Extension for ground-based testing for large space

p 37 A86-32944 structures Stiffness control of large space structures p 37 A86-33254

Test and analysis correlation for structural dynamic p 37 A86-33284 An investigation of adaptive control techniques for space

p 38 A86-35333 stations Space Station dynamic modeling, control and p 39 A86-37186 simulation

Multiple boundary condition test (MBCT) approach to update mathematical models of large flexible structures p 39 A86-38546 ISAE PAPER 8519331 Verification of large beam-type space structures

p 24 A86-38809 I AIAA PAPER 86-0860 I Characteristic wave approach in controlled large space structures

p 40 A86-38887 [AIAA PAPER 86-0839] Multiple Boundary Condition Tests (MBCT) for verification of large space structures

p 41 A86-38915 [AIAA PAPER 86-0905] Vibration of a large space beam under gravity effect p 41 A86-38917

[AIAA PAPER 86-0907] On-orbit parameter and disturbance identification for p 95 A86-39477 Space Station

Kalman-like estimation for static distributed systems Antenna shape from radiation measurements p 66 A86-39480

Spacecraft technology requirements for future NASA

missions p 6 A86-40609 [AIAA PAPER 86-1160] Material damping of simple structures in a simulated p 48 A86-41739 space environment

Advanced propulsion for polar-orbiting and coorbiting free flyers
[AIAA PAPER 86-1564] p 88 A86-42716

(FOC)

(Netherlands).

and Technology Center, ESTEC, Noordwijk

High voltage potting for the Faint Object Camera

The degradation and contamination experiment flown

on the first European Communication Satellite ECS-1:

Preliminary results on contamination p 74 N86-22623

p 74 N86-22619

A three-dimensional dynamic analysis and libration study	Martin Marietta Corp., Denver, Colo.	Business in orbit - The commercial use of space
of a tethered satellites system	Near-field testing of the 15-meter model of the hoop	p 96 A86-41978
[AAS PAPER 85-340] p 50 A86-43208	column antenna. Volume 3: Near- and far-field plots for	American experiences and perspectives - International
Modeling, estimation and identification methods for static shape determination of flexible structures	the JPL feed [NASA-CR-178061] p 69 N86-28973	cooperation on a permanently manned Space Station p 7 A86-43337
[AAS PAPER 85-424] p 20 A86-43223	Near-field testing of the 15-meter model of the hoop	The changing face of international space cooperation
Polar platform payload requirements in the 1990's	column antenna	One view of NASA p 8 A86-44405
[AAS PAPER 85-396] p 7 A86-43228	[NASA-CR-178059] p 69 N86-29115	Joining forces in space - NASA's view p 8 A86-44528
Platform options for the Space Station program [AAS PAPER 85-399] p 7 A86-43231	Maryland Univ., College Park.	NASA's space station planning - An update
Galileo inflight friction identification for the scan platform	Thermal stresses in composite tubes p 33 A86-50115	p 8 A86-44529
control loop	Massachusetts Inst. of Tech., Cambridge.	Space Station utilization p 9 A86-45637
[AAS PAPER 85-383] p 97 A86-43274 Vibration of a large space beam under gravity effect	Construction and control of large space structures	Point of view of the U.S. science community p 9 A86-45641
p 52 A86-44884	p 39 A86-37060 Experimental verification of distributed piezoelectric	Selections from Flug Revue und Flugwelt International.
Future payload isolation and pointing system	actuators for use in precision space structures	A. On the border of Time-hypersonic flight, B. NASA
technology p 53 A86-46464	[AIAA PAPER 86-0878] p 19 A86-38813	programs pave the way for the hypersonic aircraft. C. Shuttle flight 61-B; construction in space. D. Faster than
Verification of large space structures using scale modelling laws p 53 A86-47088	Generalized parity relations for large space structures	a bullet; hypersonic military aircraft
Nutational stability of a spinning spacecraft with internal	with uncertain parameters [NASA-CR-176762] p 34 N86-24730	[NASA-TM-88418] p 26 N86-24652
mass motion and axial thrust	Feedforward control of waves in lattice elements	Space Station Systems: A bibliography with indexes
[AIAA PAPER 86-2271] p 57 A86-47940 Automation and robotics for Space Station in the	[AD-A164009] p 59 N86-26222	(supplement 1) [NASA-SP-7056(01)] p 101 N86-24711
twenty-first century	Wave propagation measurements on two-dimensional lattice	Spacecraft architecture
[AIAA PAPER 86-2300] p 84 A86-49552	[AD-A166207] p 62 N86-29891	[NASA-TM-77908] p 101 N86-24736
Large space reflector technology on the Space	Failure propagation in continuum models of LSS (Large	An overview of European space transportation systems
Station [AIAA PAPER 86-2302] p 11 A86-49554	Space Structures), part 1	[NASA-TM-77683] p 13 N86-25398
Protective telescoping shield for solar concentrator	[AD-A166208] p 63 N86-29892 Reliability issues in active control of large flexible space	Proceedings of a Workshop on Applications of Tethers
[NASA-CASE-NPO-16236-1] p 103 N86-27706	structures	in Space: Executive Summary
Stiffness control of large space structures p 63 N86-30652	[NASA-CR-179758] p 65 N86-32512	[NASA-CP-2422] p 101 N86-25794 The suitability of various spacecraft for future space
Test and analysis correlation for structural dynamic	Massachusetts Inst. of Tech., Lexington.	applications missions
systems p 63 N86-30682	Satellite debris - Recent measurements p 7 A86-41747	[NASA-TM-88986] p 15 N86-27409
·	MATRA Espace, Paris-Velizy (France).	Applications of Tethers in Space: Workshop
K	Key design parameters for a very low gravity in-orbit	proceedings, volume 2 [NASA-CP-2422-VOL-2] p 103 N86-27644
	facility [MATRA-EPT/DT/VT068/098] p 58 N86-22631	Space station systems: A bibliography with indexes
Kansas State Univ., Manhattan.	MATRA Espace, Toulouse (France).	(supplement 2)
Improved flexibility of an EVA glove	ESABASE extension to spacecraft charging	[NASA-SP-7056(02)] p 103 N86-28105 Applications of Tethers in Space: Workshop
p 21 A86-48713	[MATRA-CMT-TS101/RT/16.85] p 71 N86-32517	proceedings, volume 1
Kentron International, Inc., Hampton, Va. Weights assessment for orbit-on-demand vehicles	Messerschmitt-Boelkow-Blohm G.m.b.H., Bremen (West Germany).	[NASA-CP-2422-VOL-1] p 104 N86-28407
[SAWE PAPER 1674] p 3 A86-35217	Low frequency design verification of large spacecraft	Planetary exploration through year 2000: An augmented program. Part two of a report by the Solar System
	structures p 28 N86-30686	Exploration Committee of the NASA Advisory Council
L	On the defect sensitivity of spacecraft typical thin CFRP laminates p 79 N86-30782	[NASA-TM-89235] p 15 N86-28970
-	Nondestructive testing of fiber reinforced composites	National Aeronautics and Space Administration. Ames
Lawrence Livermore National Lab., Calif.	using X-ray fine structure procedures p 79 N86-30784	Research Center, Moffett Field, Calif. SIRTF and the Space Station
Behavior of very large short pulse antennas. Revision	On the development of a corrugated CFRP central	[AIAA PAPER 86-2353] p 12 A86-50266
[DE86-00/190] D 68 N86-25680	cylinder for satellites p 28 N86-30791  A step towards an ESA composites design handbook	Index of aerospace mechanisms symposia proceedings
[DE86-004180] p 68 N86-25680	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799	Index of aerospace mechanisms symposia proceedings 1-19
[DE86-004180] p 68 N86-25680  Lockheed Engineering and Management Services Co., Inc., Houston, Tex.	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799 Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (West	Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650
Lockheed Engineering and Management Services Co., Inc., Houston, Tex.  A distributed array antenna system p 68 A86-50286	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799 Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (West Germany).	Index of aerospace mechanisms symposia proceedings 1-19
Lockheed Engineering and Management Services Co., Inc., Houston, Tex.  A distributed array antenna system p 68 A86-50286 Lockheed Missiles and Space Co., Sunnyvale, Calif.	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799 Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (West	Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650 National Aeronautics and Space Administration. Flight Research Center, Edwards, Calif. Specular and direct radiative loads on space structure
Lockheed Engineering and Management Services Co., Inc., Houston, Tex.  A distributed array antenna system p 68 A86-50286	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799 Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (West Germany).  Development of an antenna structure for a deployable offset antenna p 29 N86-30797 Structural analysis, manufacturing and test evaluation	Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650 National Aeronautics and Space Administration. Flight Research Center, Edwards, Calif. Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599
Lockheed Engineering and Management Services Co., Inc., Houston, Tex. A distributed array antenna system p 68 A86-50286 Lockheed Missiles and Space Co., Sunnyvale, Calif. Index of aerospace mechanisms symposia proceedings	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799 Messerschmilt-Boelkow-Blohm G.m.b.H., Munich (West Germany).  Development of an antenna structure for a deployable offset antenna p 29 N86-30797 Structural analysis, manufacturing and test evaluation of a polarization sensitive reflector p 35 N86-30798	Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650 National Aeronautics and Space Administration. Flight Research Center, Edwards, Calif. Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599 National Aeronautics and Space Administration.
Lockheed Engineering and Management Services Co., Inc., Houston, Tex. A distributed array antenna system p 68 A86-50286 Lockheed Missiles and Space Co., Sunnyvale, Calif. Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650 Louisiana State Univ., Baton Rouge.	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799 Messerschmilt-Boelkow-Blohm G.m.b.H., Munich (West Germany).  Development of an antenna structure for a deployable offset antenna p 29 N86-30797 Structural analysis, manufacturing and test evaluation of a polarization sensitive reflector p 35 N86-30798 Messerschmilt-Boelkow-Blohm G.m.b.H., Ottobrunn	Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650 National Aeronautics and Space Administration. Flight Research Center, Edwards, Calif. Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599
Lockheed Engineering and Management Services Co., Inc., Houston, Tex. A distributed array antenna system p 68 A86-50286 Lockheed Missiles and Space Co., Sunnyvale, Calif. Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650 Louislana State Univ., Baton Rouge. Workshop on Cosmic Ray and High Energy Gamma Ray	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799 Messerschmilt-Boelkow-Blohm G.m.b.H., Munich (West Germany).  Development of an antenna structure for a deployable offset antenna p 29 N86-30797 Structural analysis, manufacturing and test evaluation of a polarization sensitive reflector p 35 N86-30798 Messerschmilt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany).  Strength of carbon fiber composite/titanium bonded	Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650 National Aeronautics and Space Administration. Flight Research Center, Edwards, Calif. Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599 National Aeronautics and Space Administration. Goddard Space Flight Center, Greenbelt, Md. Mass property control of a spin stabilized spacecraft with restrictive mission and weight constraints
Lockheed Engineering and Management Services Co., Inc., Houston, Tex.  A distributed array antenna system p 68 A86-50286  Lockheed Missiles and Space Co., Sunnyvale, Calif. Index of aerospace mechanisms symposia proceedings 1-19  [NASA-TM-88205] p 102 N86-26650  Louisiana State Univ., Baton Rouge.  Workshop on Cosmic Ray and High Energy Gamma Ray Experiments for the Space Station Era, Louisiana State	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799 Messerschmilt-Boelkow-Blohm G.m.b.H., Munich (West Germany).  Development of an antenna structure for a deployable offset antenna p 29 N86-30797 Structural analysis, manufacturing and test evaluation of a polarization sensitive reflector p 35 N86-30798 Messerschmitt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany).  Strength of carbon fiber composite/titanium bonded joints as used for SPAS-type structures	Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650 National Aeronautics and Space Administration. Flight Research Center, Edwards, Calif. Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599 National Aeronautics and Space Administration. Goddard Space Flight Center, Greenbelt, Md. Mass property control of a spin stabilized spacecraft with restrictive mission and weight constraints [SAWE PAPER 1668] p 38 A86-35212
Lockheed Engineering and Management Services Co., Inc., Houston, Tex. A distributed array antenna system p 68 A86-50286 Lockheed Missiles and Space Co., Sunnyvale, Calif. Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650 Louislana State Univ., Baton Rouge. Workshop on Cosmic Ray and High Energy Gamma Ray	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799 Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (West Germany).  Development of an antenna structure for a deployable offset antenna p 29 N86-30797 Structural analysis, manufacturing and test evaluation of a polarization sensitive reflector p 35 N86-30798 Messerschmitt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany).  Strength of carbon fiber composite/titanium bonded joints as used for SPAS-type structures p 79 N86-30794	Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650 National Aeronautics and Space Administration. Filight Research Center, Edwards, Calif. Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599 National Aeronautics and Space Administration. Goddard Space Flight Center, Greenbelt, Md. Mass property control of a spin stabilized spacecraft with restrictive mission and weight constraints [SAWE PAPER 1668] p 38 A86-35212 Polar platform payload requirements in the 1990's
Lockheed Engineering and Management Services Co., Inc., Houston, Tex.  A distributed array antenna system p 68 A86-50286  Lockheed Missiles and Space Co., Sunnyvale, Calif. Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  Louislana State Univ., Baton Rouge.  Workshop on Cosmic Ray and High Energy Gamma Ray Experiments for the Space Station Era, Louisiana State University, Baton Rouge, October 17-20, 1984, Proceedings p 99 A86-46851  Loyola Univ., Chicago, III.	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799 Messerschmilt-Boelkow-Blohm G.m.b.H., Munich (West Germany).  Development of an antenna structure for a deployable offset antenna p 29 N86-30797 Structural analysis, manufacturing and test evaluation of a polarization sensitive reflector p 35 N86-30798 Messerschmitt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany).  Strength of carbon fiber composite/titanium bonded joints as used for SPAS-type structures	Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  National Aeronautics and Space Administration. Flight Research Center, Edwards, Calif. Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599  National Aeronautics and Space Administration. Goddard Space Flight Center, Greenbelt, Md. Mass property control of a spin stabilized spacecraft with restrictive mission and weight constraints [SAWE PAPER 1668] p 38 A86-35212 Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228
Lockheed Engineering and Management Services Co., Inc., Houston, Tex.  A distributed array antenna system p 68 A86-50286  Lockheed Missiles and Space Co., Sunnyvale, Calif. Index of aerospace mechanisms symposia proceedings 1-19  [NASA-TM-88205] p 102 N86-26650  Louisiana State Univ., Baton Rouge.  Workshop on Cosmic Ray and High Energy Gamma Ray Experiments for the Space Station Era, Louisiana State University, Baton Rouge, October 17-20, 1984, Proceedings p 99 A86-46851  Loyola Univ., Chicago, III.  The use of tethered satellites for the collection of cosmic	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799 Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (West Germany).  Development of an antenna structure for a deployable offset antenna p 29 N86-30797 Structural analysis, manufacturing and test evaluation of a polarization sensitive reflector p 35 N86-30798 Messerschmitt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany).  Strength of carbon fiber composite/titanium bonded joints as used for SPAS-type structures p 79 N86-30794 Offset unfurlable antenna, phase 1 [MBB-RX11] p 29 N86-32622	Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  National Aeronautics and Space Administration. Flight Research Center, Edwards, Calif.  Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599  National Aeronautics and Space Administration.  Goddard Space Flight Center, Greenbelt, Md.  Mass property control of a spin stabilized spacecraft with restrictive mission and weight constraints  [SAWE PAPER 1668] p 38 A86-35212  Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228  Flight results from the gravity-gradient-controlled RAE-1 satellite
Lockheed Engineering and Management Services Co., Inc., Houston, Tex.  A distributed array antenna system p 68 A86-50286  Lockheed Missiles and Space Co., Sunnyvale, Calif. Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  Louisiana State Univ., Baton Rouge.  Workshop on Cosmic Ray and High Energy Gamma Ray Experiments for the Space Station Era, Louisiana State University, Baton Rouge, October 17-20, 1984, Proceedings p 99 A86-46851  Loyola Univ., Chicago, III.  The use of tethered satellites for the collection of cosmic dust and the sampling of man made orbital debris far from	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799 Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (West Germany).  Development of an antenna structure for a deployable offset antenna p 29 N86-30797 Structural analysis, manufacturing and test evaluation of a polarization sensitive reflector p 35 N86-30798 Messerschmitt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany).  Strength of carbon fiber composite/titanium bonded joints as used for SPAS-type structures p 79 N86-30794 Offset unfurlable antenna, phase 1	Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  National Aeronautics and Space Administration. Flight Research Center, Edwards, Calif. Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599  National Aeronautics and Space Administration. Goddard Space Flight Center, Greenbelt, Md. Mass property control of a spin stabilized spacecraft with restrictive mission and weight constraints [SAWE PAPER 1668] p 38 A86-35212 Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228 Flight results from the gravity-gradient-controlled RAE-1 satellite [AIAA PAPER 86-2140] p 11 A86-47453
Lockheed Engineering and Management Services Co., Inc., Houston, Tex.  A distributed array antenna system p 68 A86-50286  Lockheed Missiles and Space Co., Sunnyvale, Calif. Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  Louisiana State Univ., Baton Rouge.  Workshop on Cosmic Ray and High Energy Gamma Ray Experiments for the Space Station Era, Louisiana State University, Baton Rouge, October 17-20, 1984, Proceedings p 99 A86-46851  Loyola Univ., Chicago, III.  The use of tethered satellites for the collection of cosmic dust and the sampling of man made orbital debris far from	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799 Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (West Germany).  Development of an antenna structure for a deployable p 29 N86-30797 Structural analysis, manufacturing and test evaluation of a polarization sensitive reflector p 35 N86-30798 Messerschmitt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany).  Strength of carbon fiber composite/titanium bonded joints as used for SPAS-type structures p 79 N86-30794  Offset unfurlable antenna, phase 1 [MBB-RX11] p 29 N86-32622	Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  National Aeronautics and Space Administration. Flight Research Center, Edwards, Calif.  Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599  National Aeronautics and Space Administration.  Goddard Space Flight Center, Greenbelt, Md.  Mass property control of a spin stabilized spacecraft with restrictive mission and weight constraints [SAWE PAPER 1668] p 38 A86-35212 Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228 Flight results from the gravity-gradient-controlled RAE-1 satellite [AIAA PAPER 86-2140] p 11 A86-47453 The Slinger - An in-orbit booster facility
Lockheed Engineering and Management Services Co., Inc., Houston, Tex.  A distributed array antenna system p 68 A86-50286  Lockheed Missiles and Space Co., Sunnyvale, Calif. Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  Louisiana State Univ., Baton Rouge.  Workshop on Cosmic Ray and High Energy Gamma Ray Experiments for the Space Station Era, Louisiana State University, Baton Rouge, October 17-20, 1984, Proceedings p 99 A86-46851  Loyola Univ., Chicago, III.  The use of tethered satellites for the collection of cosmic dust and the sampling of man made orbital debris far from the space station p 15 N86-30589  Lunar and Planetary Inst., Houston, Tex.  Trajectory determinations and collection of	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799 Messerschmiltt-Boelkow-Blohm G.m.b.H., Munich (West Germany).  Development of an antenna structure for a deployable offset antenna p 29 N86-30797 Structural analysis, manufacturing and test evaluation of a polarization sensitive reflector p 35 N86-30798 Messerschmiltt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany).  Strength of carbon fiber composite/titanium bonded joints as used for SPAS-type structures p 79 N86-30794  Offset unfurlable antenna, phase 1  [MBB-RX11] p 29 N86-32622	Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  National Aeronautics and Space Administration. Flight Research Center, Edwards, Calif.  Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599  National Aeronautics and Space Administration.  Goddard Space Flight Center, Greenbelt, Md.  Mass property control of a spin stabilized spacecraft with restrictive mission and weight constraints  [SAWE PAPER 1668] p 38 A86-35212  Polar platform payload requirements in the 1990's  [AAS PAPER 85-396] p 7 A86-43228  Flight results from the gravity-gradient-controlled RAE-1 satellite  [AIAA PAPER 86-2140] p 11 A86-47453  The Slinger - An in-orbit booster facility  [AIAA PAPER 86-2175] p 100 A86-47931
Lockheed Engineering and Management Services Co., Inc., Houston, Tex.  A distributed array antenna system p 68 A86-50286  Lockheed Missiles and Space Co., Sunnyvale, Calif. Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  Louisiana State Univ., Baton Rouge.  Workshop on Cosmic Ray and High Energy Gamma Ray Experiments for the Space Station Era, Louisiana State University, Baton Rouge, October 17-20, 1984, Proceedings p 99 A86-46851  Loyola Univ., Chicago, III.  The use of tethered satellites for the collection of cosmic dust and the sampling of man made orbital debris far from the space station p 15 N86-30589  Lunar and Planetary Inst., Houston, Tex.  Trajectory determinations and collection of micrometeoroids on the space station. Report of the	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799 Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (West Germany).  Development of an antenna structure for a deployable offset antenna p 29 N86-30797 Structural analysis, manufacturing and test evaluation of a polarization sensitive reflector p 35 N86-30798 Messerschmitt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany).  Strength of carbon fiber composite/titanium bonded joints as used for SPAS-type structures p 79 N86-30794 Offset unfurlable antenna, phase 1 [MBB-RX11] p 29 N86-32622  N Naples Univ. (Italy). Tethered constellations, their utilization as microgravity	Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  National Aeronautics and Space Administration. Flight Research Center, Edwards, Calif.  Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599  National Aeronautics and Space Administration.  Goddard Space Flight Center, Greenbelt, Md.  Mass property control of a spin stabilized spacecraft with restrictive mission and weight constraints [SAWE PAPER 1668] p 38 A86-35212  Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228  Flight results from the gravity-gradient-controlled RAE-1 satellite [AIAA PAPER 86-2140] p 11 A86-47453  The Slinger - An in-orbit booster facility
Lockheed Engineering and Management Services Co., Inc., Houston, Tex.  A distributed array antenna system p 68 A86-50286  Lockheed Missiles and Space Co., Sunnyvale, Calif. Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  Louisiana State Univ., Baton Rouge.  Workshop on Cosmic Ray and High Energy Gamma Ray Experiments for the Space Station Era, Louisiana State University, Baton Rouge, October 17-20, 1984, Proceedings p 99 A86-46851  Loyola Univ., Chicago, III.  The use of tethered satellites for the collection of cosmic dust and the sampling of man made orbital debris far from the space station p 15 N86-30589  Lunar and Planetary Inst., Houston, Tex.  Trajectory determinations and collection of	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799 Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (West Germany).  Development of an antenna structure for a deployable offset antenna p 29 N86-30797 Structural analysis, manufacturing and test evaluation of a polarization sensitive reflector p 35 N86-30798 Messerschmitt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany).  Strength of carbon fiber composite/titanium bonded joints as used for SPAS-type structures p 79 N86-30794  Offset unfurlable antenna, phase 1  [MBB-RX11] p 29 N86-32622  N  Naples Univ. (Italy).  Tethered constellations, their utilization as microgravity platforms and relevant features p 103 N86-27645  Tethered elevator: A unique opportunity for space	Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  National Aeronautics and Space Administration. Flight Research Center, Edwards, Calif.  Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599  National Aeronautics and Space Administration.  Goddard Space Flight Center, Greenbelt, Md.  Mass property control of a spin stabilized spacecraft with restrictive mission and weight constraints [SAWE PAPER 1668] p 38 A86-35212  Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228  Flight results from the gravity-gradient-controlled RAE-1 satellite [AIAA PAPER 86-2140] p 11 A86-47453  The Slinger - An in-orbit booster facility [AIAA PAPER 86-2175] p 100 A86-47931  National Aeronautics and Space Administration. John F. Kennedy Space Center, Cocoa Beach, Fla.  Space Station - An integrated approach to operational
Lockheed Engineering and Management Services Co., Inc., Houston, Tex. A distributed array antenna system p 68 A86-50286 Lockheed Missiles and Space Co., Sunnyvale, Calif. Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650 Louisiana State Univ., Baton Rouge. Workshop on Cosmic Ray and High Energy Gamma Ray Experiments for the Space Station Era, Louisiana State University, Baton Rouge, October 17-20, 1984, Proceedings p 99 A86-46851 Loyola Univ., Chicago, III. The use of tethered satellites for the collection of cosmic dust and the sampling of man made orbital debris far from the space station p 15 N86-30589 Lunar and Planetary Inst., Houston, Tex. Trajectory determinations and collection of micrometeoroids on the space station. Report of the Workshop on Micrometeorite Capture Experiments	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799 Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (West Germany).  Development of an antenna structure for a deployable offset antenna p 29 N86-30797  Structural analysis, manufacturing and test evaluation of a polarization sensitive reflector p 35 N86-30798 Messerschmitt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany).  Strength of carbon fiber composite/titanium bonded joints as used for SPAS-type structures p 79 N86-30794  Offset unfurlable antenna, phase 1 [MBB-RX11] p 29 N86-32622  N  Naples Univ. (Italy).  Tethered constellations, their utilization as microgravity platforms and relevant features p 103 N86-27645  Tethered elevator: A unique opportunity for space processing p 103 N86-27649	Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  National Aeronautics and Space Administration. Flight Research Center, Edwards, Calif.  Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599  National Aeronautics and Space Administration.  Goddard Space Flight Center, Greenbelt, Md.  Mass property control of a spin stabilized spacecraft with restrictive mission and weight constraints  [SAWE PAPER 1668] p 38 A86-35212  Polar platform payload requirements in the 1990's  [AAS PAPER 85-396] p 7 A86-43228  Flight results from the gravity-gradient-controlled RAE-1 satellite  [AIAA PAPER 86-2140] p 11 A86-47453  The Slinger - An in-orbit booster facility  [AIAA PAPER 86-2175] p 100 A86-47931  National Aeronautics and Space Administration. John F. Kennedy Space Center, Cocoa Beach, Fia.  Space Station - An integrated approach to operational logistics support
Lockheed Engineering and Management Services Co., Inc., Houston, Tex.  A distributed array antenna system p 68 A86-50286  Lockheed Missiles and Space Co., Sunnyvale, Calif. Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  Louisiana State Univ., Baton Rouge.  Workshop on Cosmic Ray and High Energy Gamma Ray Experiments for the Space Station Era, Louisiana State University, Baton Rouge, October 17-20, 1984, Proceedings p 99 A86-46851  Loyola Univ., Chicago, III.  The use of tethered satellites for the collection of cosmic dust and the sampling of man made orbital debris far from the space station p 15 N86-30589  Lunar and Planetary Inst., Houston, Tex.  Trajectory determinations and collection of micrometeoroids on the space station. Report of the Workshop on Micrometeorite Capture Experiments [NASA-CR-177303] p 104 N86-30584	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799 Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (West Germany).  Development of an antenna structure for a deployable offset antenna p 29 N86-30797 Structural analysis, manufacturing and test evaluation of a polarization sensitive reflector p 35 N86-30798 Messerschmitt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany).  Strength of carbon fiber composite/titanium bonded joints as used for SPAS-type structures p 79 N86-30794 Offset unfurlable antenna, phase 1 [MBB-RX11] p 29 N86-32622  N Naples Univ. (Italy).  Tethered constellations, their utilization as microgravity platforms and relevant features p 103 N86-27645 Tethered elevator: A unique opportunity for space processing p 103 N86-27649 High resolution remote sensing missions of a tethered	Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  National Aeronautics and Space Administration. Flight Research Center, Edwards, Calif. Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599  National Aeronautics and Space Administration. Goddard Space Flight Center, Greenbelt, Md. Mass property control of a spin stabilized spacecraft with restrictive mission and weight constraints [SAWE PAPER 1668] p 38 A86-35212 Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228 Flight results from the gravity-gradient-controlled RAE-1 satellite [AIAA PAPER 86-2140] p 11 A86-47453 The Slinger - An in-orbit booster facility [AIAA PAPER 86-2175] p 100 A86-47931  National Aeronautics and Space Administration. John F. Kennedy Space Center, Cocoa Beach, Fla. Space Station - An integrated approach to operational logistics support [AIAA PAPER 86-2321] p 10 A86-46947
Lockheed Engineering and Management Services Co., Inc., Houston, Tex. A distributed array antenna system p 68 A86-50286 Lockheed Missiles and Space Co., Sunnyvale, Calif. Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650 Louisiana State Univ., Baton Rouge. Workshop on Cosmic Ray and High Energy Gamma Ray Experiments for the Space Station Era, Louisiana State University, Baton Rouge, October 17-20, 1984, Proceedings p 99 A86-46851 Loyola Univ., Chicago, III. The use of tethered satellites for the collection of cosmic dust and the sampling of man made orbital debris far from the space station p 15 N86-30589 Lunar and Planetary Inst., Houston, Tex. Trajectory determinations and collection of micrometeoroids on the space station. Report of the Workshop on Micrometeorite Capture Experiments	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799 Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (West Germany).  Development of an antenna structure for a deployable offset antenna p 29 N86-30797  Structural analysis, manufacturing and test evaluation of a polarization sensitive reflector p 35 N86-30798 Messerschmitt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany).  Strength of carbon fiber composite/titanium bonded joints as used for SPAS-type structures p 79 N86-30794  Offset unfurlable antenna, phase 1 [MBB-RX11] p 29 N86-32622  N  Naples Univ. (Italy).  Tethered constellations, their utilization as microgravity platforms and relevant features p 103 N86-27645  Tethered elevator: A unique opportunity for space processing p 103 N86-27649	Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  National Aeronautics and Space Administration. Flight Research Center, Edwards, Calif.  Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599  National Aeronautics and Space Administration.  Goddard Space Flight Center, Greenbelt, Md.  Mass property control of a spin stabilized spacecraft with restrictive mission and weight constraints  [SAWE PAPER 1668] p 38 A86-35212  Polar platform payload requirements in the 1990's  [AAS PAPER 85-396] p 7 A86-43228  Flight results from the gravity-gradient-controlled RAE-1 satellite  [AIAA PAPER 86-2140] p 11 A86-47453  The Slinger - An in-orbit booster facility  [AIAA PAPER 86-2175] p 100 A86-47931  National Aeronautics and Space Administration. John F. Kennedy Space Center, Cocoa Beach, Fla.  Space Station - An integrated approach to operational logistics support  [AIAA PAPER 86-2321] p 10 A86-46947  Proceedings of the 2nd Annual Conference on NASA/University Advanced Space Design Program
Lockheed Engineering and Management Services Co., Inc., Houston, Tex.  A distributed array antenna system p 68 A86-50286  Lockheed Missiles and Space Co., Sunnyvale, Calif. Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  Louisiana State Univ., Baton Rouge.  Workshop on Cosmic Ray and High Energy Gamma Ray Experiments for the Space Station Era, Louisiana State University, Baton Rouge, October 17-20, 1984, Proceedings p 99 A86-46851  Loyola Univ., Chicago, III.  The use of tethered satellites for the collection of cosmic dust and the sampling of man made orbital debris far from the space station p 15 N86-30589  Lunar and Planetary Inst., Houston, Tex.  Trajectory determinations and collection of micrometeoroids on the space station. Report of the Workshop on Micrometeorite Capture Experiments [NASA-CR-177303] p 104 N86-30584	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799 Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (West Germany).  Development of an antenna structure for a deployable offset antenna p 29 N86-30797 Structural analysis, manufacturing and test evaluation of a polarization sensitive reflector p 35 N86-30798 Messerschmitt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany).  Strength of carbon fiber composite/titanium bonded joints as used for SPAS-type structures p 79 N86-30794 Offset unfurlable antenna, phase 1 [MBB-RX11] p 29 N86-32622  N Naples Univ. (Italy).  Tethered constellations, their utilization as microgravity platforms and relevant features p 103 N86-27645 Tethered elevator: A unique opportunity for space processing High resolution remote sensing missions of a tethered satellite p 15 N86-28424 National Aeronautics and Space Administration, Washington, D.C.	Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  National Aeronautics and Space Administration. Flight Research Center, Edwards, Calif.  Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599  National Aeronautics and Space Administration.  Goddard Space Flight Center, Greenbelt, Md.  Mass property control of a spin stabilized spacecraft with restrictive mission and weight constraints [SAWE PAPER 1668] p 38 A86-35212  Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228  Flight results from the gravity-gradient-controlled RAE-1 satellite [AIAA PAPER 86-2140] p 11 A86-47453  The Slinger - An in-orbit booster facility [AIAA PAPER 86-2175] p 100 A86-47931  National Aeronautics and Space Administration. John F. Kennedy Space Center, Cocoa Beach, Fla.  Space Station - An integrated approach to operational logistics support [AIAA PAPER 86-2321] p 10 A86-46947  Proceedings of the 2nd Annual Conference on NASA/University Advanced Space Design Program [NASA-TM-89399] p 104 N86-29888
Lockheed Engineering and Management Services Co., Inc., Houston, Tex.  A distributed array antenna system p 68 A86-50286  Lockheed Missiles and Space Co., Sunnyvale, Calif. Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  Louisiana State Univ., Baton Rouge.  Workshop on Cosmic Ray and High Energy Gamma Ray Experiments for the Space Station Era, Louisiana State University, Baton Rouge, October 17-20, 1984, Proceedings p 99 A86-46851  Loyola Univ., Chicago, III.  The use of tethered satellites for the collection of cosmic dust and the sampling of man made orbital debris far from the space station. P 15 N86-30589  Lunar and Planetary Inst., Houston, Tex.  Trajectory determinations and collection of micrometeoroids on the space station. Report of the Workshop on Micrometeorite Capture Experiments [NASA-CR-177303] p 104 N86-30584	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799 Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (West Germany).  Development of an antenna structure for a deployable offset antenna p 29 N86-30797 Structural analysis, manufacturing and test evaluation of a polarization sensitive reflector p 35 N86-30798 Messerschmitt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany).  Strength of carbon fiber composite/titanium bonded joints as used for SPAS-type structures p 79 N86-30794 Offset unfurlable antenna, phase 1 [MBB-RX11] p 29 N86-32622  N  Naples Univ. (Italy).  Tethered constellations, their utilization as microgravity platforms and relevant features p 103 N86-27645 Tethered elevator: A unique opportunity for space processing p 103 N86-27649 High resolution remote sensing missions of a tethered satellite p 15 N86-28424 National Aeronautics and Space Administration, Washington, D.C.  Space Station Advanced Development Program	Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  National Aeronautics and Space Administration. Flight Research Center, Edwards, Calif. Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599  National Aeronautics and Space Administration. Goddard Space Flight Center, Greenbelt, Md. Mass property control of a spin stabilized spacecraft with restrictive mission and weight constraints [SAWE PAPER 1668] p 38 A86-35212 Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228 Flight results from the gravity-gradient-controlled RAE-1 satellitie [AIAA PAPER 86-2140] p 11 A86-47453 The Slinger - An in-orbit booster facility [AIAA PAPER 86-2175] p 100 A86-47931  National Aeronautics and Space Administration. John F. Kennedy Space Center, Cocoa Beach, Fla. Space Station - An integrated approach to operational logistics support [AIAA PAPER 86-2321] p 10 A86-46947 Proceedings of the 2nd Annual Conference on NASA/University Advanced Space Design Program [NASA-TM-89399] p 104 N86-2988  National Aeronautics and Space Administration.
Lockheed Engineering and Management Services Co., Inc., Houston, Tex.  A distributed array antenna system p 68 A86-50286  Lockheed Missiles and Space Co., Sunnyvale, Calif. Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  Louisiana State Univ., Baton Rouge.  Workshop on Cosmic Ray and High Energy Gamma Ray Experiments for the Space Station Era, Louisiana State University, Baton Rouge, October 17-20, 1984, Proceedings p 99 A86-46851  Loyola Univ., Chicago, III.  The use of tethered satellites for the collection of cosmic dust and the sampling of man made orbital debris far from the space station p 15 N86-30589  Lunar and Planetary Inst., Houston, Tex.  Trajectory determinations and collection of micrometeoroids on the space station. Report of the Workshop on Micrometeorite Capture Experiments [NASA-CR-177303] p 104 N86-30584	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799 Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (West Germany).  Development of an antenna structure for a deployable offset antenna p 29 N86-30797 Structural analysis, manufacturing and test evaluation of a polarization sensitive reflector p 35 N86-30798 Messerschmitt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany).  Strength of carbon fiber composite/titanium bonded joints as used for SPAS-type structures p 79 N86-30794 Offset unfurlable antenna, phase 1 [MBB-RX11] p 29 N86-32622  N  Naples Univ. (Italy).  Tethered constellations, their utilization as microgravity platforms and relevant features p 103 N86-27645 Tethered elevator: A unique opportunity for space processing p 103 N86-27649 High resolution remote sensing missions of a tethered satellite p 15 N86-28424 National Aeronautics and Space Administration, Washington, D.C.  Space Station Advanced Development Program p 2 A86-32543 The NASA Flight Demonstration Program	Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  National Aeronautics and Space Administration. Flight Research Center, Edwards, Calif. Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599  National Aeronautics and Space Administration. Goddard Space Flight Center, Greenbelt, Md. Mass property control of a spin stabilized spacecraft with restrictive mission and weight constraints [SAWE PAPER 1668] p 38 A86-35212 Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228 Flight results from the gravity-gradient-controlled RAE-1 satellite [AIAA PAPER 86-2140] p 11 A86-47453 The Slinger - An in-orbit booster facility [AIAA PAPER 86-2175] p 100 A86-47931 National Aeronautics and Space Administration. John F. Kennedy Space Center, Cocoa Beach, Fla. Space Station - An integrated approach to operational logistics support [AIAA PAPER 86-2321] p 10 A86-46947 Proceedings of the 2nd Annual Conference on NASA/University Advanced Space Design Program [NASA-TM-89399] p 104 N86-29888 National Aeronautics and Space Administration. Lyndon B. Johnson Space Center, Houston, Tex. Lunar bases and space activities of the 21st century
Lockheed Engineering and Management Services Co., Inc., Houston, Tex.  A distributed array antenna system p 68 A86-50286  Lockheed Missiles and Space Co., Sunnyvale, Calif. Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  Louisiana State Univ., Baton Rouge.  Workshop on Cosmic Ray and High Energy Gamma Ray Experiments for the Space Station Era, Louisiana State University, Baton Rouge, October 17-20, 1984, Proceedings p 99 A86-46851  Loyola Univ., Chicago, III.  The use of tethered satellites for the collection of cosmic dust and the sampling of man made orbital debris far from the space station p 15 N86-30589  Lunar and Planetary Inst., Houston, Tex.  Trajectory determinations and collection of micrometeoroids on the space station. Report of the Workshop on Micrometeorite Capture Experiments [NASA-CR-177303] p 104 N86-30584  Martin Marietta Aerospace, Denver, Colo.  Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] p 25 A86-38883	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799 Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (West Germany).  Development of an antenna structure for a deployable offset antenna p 29 N86-30797 Structural analysis, manufacturing and test evaluation of a polarization sensitive reflector p 35 N86-30798 Messerschmitt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany).  Strength of carbon fiber composite/titanium bonded joints as used for SPAS-type structures p 79 N86-30794 Offset unfurlable antenna, phase 1 [MBB-RX11] p 29 N86-32622  N  Naples Univ. (Italy).  Tethered constellations, their utilization as microgravity platforms and relevant features p 103 N86-27645  Tethered constellations, their utilization as microgravity platforms and relevant features p 103 N86-27645  Tethered elevator: A unique opportunity for space processing p 103 N86-27649  High resolution remote sensing missions of a tethered satellite p 15 N86-28424  National Aeronautics and Space Administration, Washington, D.C.  Space Station Advanced Development Program p 2 A86-32543  The NASA Flight Demonstration Program p 2 A86-32566	Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  National Aeronautics and Space Administration. Flight Research Center, Edwards, Calif. Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599  National Aeronautics and Space Administration. Goddard Space Flight Center, Greenbelt, Md. Mass property control of a spin stabilized spacecraft with restrictive mission and weight constraints [SAWE PAPER 1668] p 38 A86-35212 Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228 Flight results from the gravity-gradient-controlled RAE-1 satellite [AIAA PAPER 86-2140] p 11 A86-47453 The Slinger - An in-orbit booster facility [AIAA PAPER 86-2175] p 100 A86-47931 National Aeronautics and Space Administration. John F. Kennedy Space Center, Cocoa Beach, Fla. Space Station - An integrated approach to operational logistics support [AIAA PAPER 86-2321] p 10 A86-46947 Proceedings of the 2nd Annual Conference on NASA/University Advanced Space Design Program [NASA-TM-89399] p 104 N86-29888 National Aeronautics and Space Administration. Lyndon B. Johnson Space Center, Houston, Tex. Lunar bases and space activities of the 21st century
Lockheed Engineering and Management Services Co., Inc., Houston, Tex.  A distributed array antenna system p 68 A86-50286  Lockheed Missiles and Space Co., Sunnyvale, Calif. Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  Louisiana State Univ., Baton Rouge.  Workshop on Cosmic Ray and High Energy Gamma Ray Experiments for the Space Station Era, Louisiana State University, Baton Rouge, October 17-20, 1984, Proceedings p 99 A86-46851  Loyola Univ., Chicago, III.  The use of tethered satellites for the collection of cosmic dust and the sampling of man made orbital debris far from the space station p 15 N86-30589  Lunar and Planetary Inst., Houston, Tex.  Trajectory determinations and collection of micrometeoroids on the space station. Report of the Workshop on Micrometeorite Capture Experiments [NASA-CR-177303] p 104 N86-30584	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799 Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (West Germany).  Development of an antenna structure for a deployable offset antenna p 29 N86-30797 Structural analysis, manufacturing and test evaluation of a polarization sensitive reflector p 35 N86-30798 Messerschmitt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany).  Strength of carbon fiber composite/titanium bonded joints as used for SPAS-type structures p 79 N86-30794 Offset unfurlable antenna, phase 1 [MBB-RX11] p 29 N86-32622  N  Naples Univ. (Italy).  Tethered constellations, their utilization as microgravity platforms and relevant features p 103 N86-27645 Tethered elevator: A unique opportunity for space processing p 103 N86-27649 High resolution remote sensing missions of a tethered satellite p 15 N86-28424 National Aeronautics and Space Administration, Washington, D.C.  Space Station Advanced Development Program p 2 A86-32543 The NASA Flight Demonstration Program p 2 A86-32566 NASA space plans and scenarios to 2000 and beyond	Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  National Aeronautics and Space Administration. Flight Research Center, Edwards, Calif.  Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599  National Aeronautics and Space Administration.  Goddard Space Flight Center, Greenbelt, Md.  Mass property control of a spin stabilized spacecraft with restrictive mission and weight constraints [SAWE PAPER 1668] p 38 A86-35212  Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228  Flight results from the gravity-gradient-controlled RAE-1 satellite [AIAA PAPER 86-2140] p 11 A86-47453  The Slinger - An in-orbit booster facility [AIAA PAPER 86-2175] p 100 A86-47931  National Aeronautics and Space Administration. John F. Kennedy Space Center, Cocoa Beach, Fla.  Space Station - An integrated approach to operational logistics support [AIAA PAPER 86-2321] p 10 A86-46947  Proceedings of the 2nd Annual Conference on NASA/University Advanced Space Design Program [NASA-TM-89399] p 10 N 86-29888  National Aeronautics and Space Administration.  Lyndon B. Johnson Space Center, Houston, Tex.  Lunar bases and space activities of the 2st century p 21 A86-30113  Strategies for a permanent lunar base
Lockheed Engineering and Management Services Co., Inc., Houston, Tex.  A distributed array antenna system p 68 A86-50286  Lockheed Missiles and Space Co., Sunnyvale, Calif. Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  Louisiana State Univ., Baton Rouge.  Workshop on Cosmic Ray and High Energy Gamma Ray Experiments for the Space Station Era, Louisiana State University, Baton Rouge, October 17-20, 1984, Proceedings p 99 A86-46851  Loyola Univ., Chicago, III.  The use of tethered satellites for the collection of cosmic dust and the sampling of man made orbital debris far from the space station p 15 N86-30589  Lunar and Planetary Inst., Houston, Tex.  Trajectory determinations and collection of micrometeoroids on the space station. Report of the Workshop on Micrometeorite Capture Experiments [NASA-CR-177303] p 104 N86-30584  M  Martin Marietta Aerospace, Denver, Colo.  Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] p 25 A86-38883  Damping characteristics of metal matrix composites (AD-A163569) p 75 N86-24762  Satellite voice broadcast. Volume 1: Executive	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799 Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (West Germany).  Development of an antenna structure for a deployable offset antenna p 29 N86-30797 Structural analysis, manufacturing and test evaluation of a polarization sensitive reflector p 35 N86-30798 Messerschmitt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany).  Strength of carbon fiber composite/titanium bonded joints as used for SPAS-type structures p 79 N86-30794 Offset unfurlable antenna, phase 1 [MBB-RX11] p 29 N86-32622  N  Naples Univ. (Italy).  Tethered constellations, their utilization as microgravity platforms and relevant features p 103 N86-27645 Tethered elevator: A unique opportunity for space processing p 103 N86-27649 High resolution remote sensing missions of a tethered satellite p 15 N86-28424 National Aeronautics and Space Administration, Washington, D.C.  Space Station Advanced Development Program p 2 A86-32566 NASA space plans and scenarios to 2000 and beyond p 2 A86-34594	Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  National Aeronautics and Space Administration. Flight Research Center, Edwards, Calif.  Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599  National Aeronautics and Space Administration.  Goddard Space Flight Center, Greenbelt, Md.  Mass property control of a spin stabilized spacecraft with restrictive mission and weight constraints [SAWE PAPER 1668] p 38 A86-35212  Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228  Flight results from the gravity-gradient-controlled RAE-1 satellite [AIAA PAPER 86-2140] p 11 A86-47453  The Slinger - An in-orbit booster facility [AIAA PAPER 86-2175] p 100 A86-47931  National Aeronautics and Space Administration. John F. Kennedy Space Center, Cocoa Beach, Fla.  Space Station - An integrated approach to operational logistics support [AIAA PAPER 86-2321] p 10 A86-46947  Proceedings of the 2nd Annual Conference on NASA/University Advanced Space Design Program [NASA-TM-89399] p 104 N86-29888  National Aeronautics and Space Administration.  Lyndon B. Johnson Space Center, Houston, Tex.  Lunar bases and space activities of the 21st century p 91 A86-30113  Strategies for a permanent lunar base
Lockheed Engineering and Management Services Co., Inc., Houston, Tex. A distributed array antenna system p 68 A86-50286 Lockheed Missiles and Space Co., Sunnyvale, Calif. Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650 Louisiana State Univ., Baton Rouge. Workshop on Cosmic Ray and High Energy Gamma Ray Experiments for the Space Station Era, Louisiana State University, Baton Rouge, October 17-20, 1984, Proceedings p 99 A86-46851 Loyola Univ., Chicago, III. The use of tethered satellites for the collection of cosmic dust and the sampling of man made orbital debris far from the space station p 15 N86-30589 Lunar and Planetary Inst., Houston, Tex. Trajectory determinations and collection of micrometeoroids on the space station. Report of the Workshop on Micrometeorite Capture Experiments [NASA-CR-177303] p 104 N86-30584  Martin Marietta Aerospace, Denver, Colo. Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] p 25 A86-38883 Damping characteristics of metal matrix composites [AD-A163569] p 75 N86-24762 Satellite voice broadcast. Volume 1: Executive summary	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799 Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (West Germany).  Development of an antenna structure for a deployable offset antenna p 29 N86-30797 Structural analysis, manufacturing and test evaluation of a polarization sensitive reflector p 35 N86-30798 Messerschmitt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany).  Strength of carbon fiber composite/titanium bonded joints as used for SPAS-type structures p 79 N86-30794 Offset unfurlable antenna, phase 1 [MBB-RX11] p 29 N86-32622  N  Naples Univ. (Italy).  Tethered constellations, their utilization as microgravity platforms and relevant features p 103 N86-27645 Tethered elevator: A unique opportunity for space processing p 103 N86-27649 High resolution remote sensing missions of a tethered satellite hat little stational Aeronautics and Space Administration, Washington, D.C.  Space Station Advanced Development Program p 2 A86-32543 The NASA Flight Demonstration Program p 2 A86-32543 The NASA Flight Demonstration Program p 2 A86-32566 NASA space plans and scenarios to 2000 and beyond p 2 A86-34594 Enabling technologies for transition to utilization of space-based resources and operations	Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  National Aeronautics and Space Administration. Flight Research Center, Edwards, Calif.  Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599  National Aeronautics and Space Administration.  Goddard Space Flight Center, Greenbelt, Md.  Mass property control of a spin stabilized spacecraft with restrictive mission and weight constraints [SAWE PAPER 1668] p 38 A86-35212  Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228  Flight results from the gravity-gradient-controlled RAE-1 satellite [AIAA PAPER 86-2140] p 11 A86-47453  The Slinger - An in-orbit booster facility [AIAA PAPER 86-2175] p 100 A86-47931  National Aeronautics and Space Administration. John F. Kennedy Space Center, Cocoa Beach, Fla.  Space Station - An integrated approach to operational logistics support [AIAA PAPER 86-2321] p 10 A86-46947  Proceedings of the 2nd Annual Conference on NASA/University Advanced Space Design Program [NASA-TM-89399] p 10 N 86-29888  National Aeronautics and Space Administration.  Lyndon B. Johnson Space Center, Houston, Tex.  Lunar bases and space activities of the 2st century p 21 A86-30113  Strategies for a permanent lunar base
Lockheed Engineering and Management Services Co., Inc., Houston, Tex.  A distributed array antenna system p 68 A86-50286  Lockheed Missiles and Space Co., Sunnyvale, Calif. Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  Louisiana State Univ., Baton Rouge.  Workshop on Cosmic Ray and High Energy Gamma Ray Experiments for the Space Station Era, Louisiana State University, Baton Rouge, October 17-20, 1984, Proceedings p 99 A86-46851  Loyola Univ., Chicago, III.  The use of tethered satellites for the collection of cosmic dust and the sampling of man made orbital debris far from the space station. P 15 N86-30589  Lunar and Planetary Inst., Houston, Tex.  Trajectory determinations and collection of micrometeoroids on the space station. Report of the Workshop on Micrometeorite Capture Experiments [NASA-CR-177303] p 104 N86-30584  Martin Marietta Aerospace, Denver, Colo.  Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] p 25 A86-38883  Damping characteristics of metal matrix composites [AD-A163569] p 75 N86-24762  Satellite voice broadcast. Volume 1: Executive summary [NASA-CR-175016] p 13 N86-24875	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799 Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (West Germany).  Development of an antenna structure for a deployable offset antenna p 29 N86-30797 Structural analysis, manufacturing and test evaluation of a polarization sensitive reflector p 35 N86-30798 Messerschmitt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany).  Strength of carbon fiber composite/titanium bonded joints as used for SPAS-type structures p 79 N86-30794 Offset unfurlable antenna, phase 1 [MBB-RX11] p 29 N86-32622  N  Naples Univ. (Italy).  Tethered constellations, their utilization as microgravity platforms and relevant features p 103 N86-27645 Tethered elevator: A unique opportunity for space processing p 103 N86-27649 High resolution remote sensing missions of a tethered satellite p 15 N86-28424 National Aeronautics and Space Administration, Washington, D.C.  Space Station Advanced Development Program p 2 A86-32543 The NASA Flight Demonstration Program p 2 A86-32566 NASA space plans and scenarios to 2000 and beyond p 2 A86-34594 Enabling technologies for transition to utilization of space-based resources and operations	Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  National Aeronautics and Space Administration. Flight Research Center, Edwards, Calif. Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599  National Aeronautics and Space Administration. Goddard Space Flight Center, Greenbelt, Md. Mass property control of a spin stabilized spacecraft with restrictive mission and weight constraints [SAWE PAPER 1668] p 38 A86-35212 Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228 Flight results from the gravity-gradient-controlled RAE-1 satellite [AIAA PAPER 86-2140] p 11 A86-47453 The Slinger - An in-orbit booster facility [AIAA PAPER 86-2175] p 100 A86-47931 National Aeronautics and Space Administration. John F. Kennedy Space Center, Cocoa Beach, Fla. Space Station - An integrated approach to operational logistics support [AIAA PAPER 86-2321] p 10 A86-46947 Proceedings of the 2nd Annual Conference on NASA/University Advanced Space Design Program [NASA-TM-89399] p 104 N86-29888 National Aeronautics and Space Administration. Lyndon B. Johnson Space Center, Houston, Tex. Lunar bases and space activities of the 21st century p 91 A86-30113 Strategies for a permanent lunar base
Lockheed Engineering and Management Services Co., Inc., Houston, Tex. A distributed array antenna system p 68 A86-50286 Lockheed Missiles and Space Co., Sunnyvale, Calif. Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650 Louisiana State Univ., Baton Rouge. Workshop on Cosmic Ray and High Energy Gamma Ray Experiments for the Space Station Era, Louisiana State University, Baton Rouge, October 17-20, 1984, Proceedings p 99 A86-46851 Loyola Univ., Chicago, III. The use of tethered satellites for the collection of cosmic dust and the sampling of man made orbital debris far from the space station p 15 N86-30589 Lunar and Planetary Inst., Houston, Tex. Trajectory determinations and collection of micrometeoroids on the space station. Report of the Workshop on Micrometeorite Capture Experiments [NASA-CR-177303] p 104 N86-30584  Martin Marietta Aerospace, Denver, Colo. Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] p 25 A86-38883 Damping characteristics of metal matrix composites [AD-A163569] p 75 N86-24762 Satellite voice broadcast. Volume 1: Executive summary	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799 Messerschmilt-Boelkow-Blohm G.m.b.H., Munich (West Germany).  Development of an antenna structure for a deployable offset antenna p 29 N86-30797 Structural analysis, manufacturing and test evaluation of a polarization sensitive reflector p 35 N86-30798 Messerschmilt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany).  Strength of carbon fiber composite/titanium bonded joints as used for SPAS-type structures p 79 N86-30794 Offset unfurlable antenna, phase 1 [MBB-RX11] p 29 N86-32622  N  N Naples Univ. (Italy).  Tethered constellations, their utilization as microgravity platforms and relevant features p 103 N86-27645 Tethered elevator: A unique opportunity for space processing p 103 N86-27649 High resolution remote sensing missions of a tethered satellite p 15 N86-28424 National Aeronautics and Space Administration, Washington, D.C.  Space Station Advanced Development Program p 2 A86-32543 The NASA Flight Demonstration Program p 2 A86-32566 NASA space plans and scenarios to 2000 and beyond p 2 A86-34594 Enabling technologies for transition to utilization of space-based resources and operations	Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  National Aeronautics and Space Administration. Flight Research Center, Edwards, Calif. Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599  National Aeronautics and Space Administration. Goddard Space Flight Center, Greenbelt, Md. Mass property control of a spin stabilized spacecraft with restrictive mission and weight constraints [SAWE PAPER 1668] p 38 A86-35212 Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228 Flight results from the gravity-gradient-controlled RAE-1 satellite [AIAA PAPER 86-2140] p 11 A86-47453 The Slinger - An in-rotht booster facility [AIAA PAPER 86-2175] p 100 A86-47931  National Aeronautics and Space Administration. John F. Kennedy Space Center, Cocoa Beach, Fla. Space Station - An integrated approach to operational logistics support [AIAA PAPER 86-2321] p 10 A86-46947 Proceedings of the 2nd Annual Conference on NASA/University Advanced Space Design Program [NASA-TM-89399] p 104 N86-29888  National Aeronautics and Space Administration. Lyndon B. Johnson Space Center, Houston, Tex. Lunar bases and space activities of the 21st century p 91 A86-30113  Strategies for a permanent lunar base p 1 A86-30117 Maintainability planning for the Space Station [AIAA PAPER 86-9754] p 91 A86-32095 Artificial intelligence - NASA p 17 A86-32538 Initiation of the next step - The acquisition of a Space
Lockheed Engineering and Management Services Co., Inc., Houston, Tex.  A distributed array antenna system p 68 A86-50286  Lockheed Missiles and Space Co., Sunnyvale, Calif. Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  Louisiana State Univ., Baton Rouge.  Workshop on Cosmic Ray and High Energy Gamma Ray Experiments for the Space Station Era, Louisiana State University, Baton Rouge, October 17-20, 1984, Proceedings p 99 A86-46851  Loyola Univ., Chicago, III.  The use of tethered satellites for the collection of cosmic dust and the sampling of man made orbital debris far from the space station p 15 N86-30589  Lunar and Planetary Inst., Houston, Tex.  Trajectory determinations and collection of micrometeoroids on the space station. Report of the Workshop on Micrometeorite Capture Experiments [NASA-CR-177303] p 104 N86-30584  Martin Marietta Aerospace, Denver, Colo.  Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] p 25 A86-38883  Damping characteristics of metal matrix composites [AD-A163569] p 75 N86-24762  Satellite voice broadcast. Volume 1: Executive summary [NASA-CR-175016] p 13 N86-24875  Satellite voice broadcast. Volume 2: System study [NASA-CR-175017] p 13 N86-24876  Near-field testing of the 15-meter model of the hoop	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799 Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (West Germany).  Development of an antenna structure for a deployable offset antenna p 29 N86-30797 Structural analysis, manufacturing and test evaluation of a polarization sensitive reflector p 35 N86-30798 Messerschmitt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany).  Strength of carbon fiber composite/titanium bonded joints as used for SPAS-type structures p 79 N86-30794 Offset unfurlable antenna, phase 1 [MBB-RX11] p 29 N86-32622  N  Naples Univ. (Italy).  Tethered constellations, their utilization as microgravity platforms and relevant features p 103 N86-27645  Tethered elevator: A unique opportunity for space processing p 103 N86-27649  High resolution remote sensing missions of a tethered satellite p 15 N86-28424  National Aeronautics and Space Administration,  Washington, D.C.  Space Station Advanced Development Program p 2 A86-32543  The NASA Flight Demonstration Program p 2 A86-32566  NASA space plans and scenarios to 2000 and beyond p 2 A86-34594  Enabling technologies for transition to utilization of space-based resources and operations  p 3 A86-37853	Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  National Aeronautics and Space Administration. Flight Research Center, Edwards, Calif. Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599  National Aeronautics and Space Administration. Goddard Space Flight Center, Greenbelt, Md. Mass property control of a spin stabilized spacecraft with restrictive mission and weight constraints [SAWE PAPER 1668] p 38 A86-35212 Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228 Flight results from the gravity-gradient-controlled RAE-1 satellite [AIAA PAPER 86-2140] p 11 A86-47453 The Slinger - An in-orbit booster facility [AIAA PAPER 86-2175] p 100 A86-47931 National Aeronautics and Space Administration. John F. Kennedy Space Center, Cocoa Beach, Fla. Space Station - An integrated approach to operational logistics support [AIAA PAPER 86-2321] p 10 A86-46947 Proceedings of the 2nd Annual Conference on NASA/University Advanced Space Design Program [NASA-TM-89399] p 104 N86-29888 National Aeronautics and Space Administration. Lyndon B. Johnson Space Center, Houston, Tex. Lunar bases and space activities of the 21st century p 91 A86-30113 Strategies for a permanent lunar base p 1 A86-30117 Maintainability planning for the Space Station [AIAA PAPER 86-9754] p 91 A86-32538 Initiation of the next step - The acquisition of a Space Station Program
Lockheed Engineering and Management Services Co., Inc., Houston, Tex.  A distributed array antenna system p 68 A86-50286  Lockheed Missiles and Space Co., Sunnyvale, Calif. Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  Louisiana State Univ., Baton Rouge.  Workshop on Cosmic Ray and High Energy Gamma Ray Experiments for the Space Station Era, Louisiana State University, Baton Rouge, October 17-20, 1984, Proceedings p 99 A86-46851  Loyola Univ., Chicago, III.  The use of tethered satellites for the collection of cosmic dust and the sampling of man made orbital debris far from the space station p 15 N86-30589  Lunar and Planetary Inst., Houston, Tex.  Trajectory determinations and collection of micrometeoroids on the space station. Report of the Workshop on Micrometeorite Capture Experiments [NASA-CR-177303] p 104 N86-30584  M  Martin Marietta Aerospace, Denver, Colo.  Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] p 25 A86-38883  Damping characteristics of metal matrix composites [AD-A163569] p 75 N86-24762  Satellite voice broadcast. Volume 1: Executive summary [NASA-CR-175016] p 13 N86-24875  Satellite voice broadcast. Volume 2: System study [NASA-CR-175017] p 13 N86-24876  Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799 Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (West Germany).  Development of an antenna structure for a deployable offset antenna p 29 N86-30797 Structural analysis, manufacturing and test evaluation of a polarization sensitive reflector p 35 N86-30798 Messerschmitt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany).  Strength of carbon fiber composite/titanium bonded joints as used for SPAS-type structures p 79 N86-30794 Offset unfurlable antenna, phase 1 [MBB-RX11] p 29 N86-32622  N  Naples Univ. (Italy).  Tethered constellations, their utilization as microgravity platforms and relevant features p 103 N86-27645 Tethered elevator: A unique opportunity for space processing High resolution remote sensing missions of a tethered satellite p 15 N86-28424 National Aeronautics and Space Administration, Washington, D.C.  Space Station Advanced Development Program p 2 A86-32543 The NASA Flight Demonstration Program p 2 A86-32543 The NASA space plans and scenarios to 2000 and beyond p 2 A86-34594 Enabling technologies for transition to utilization of space-based resources and operations  P 3 A86-34694 Enabling technology requirements for future NASA missions	Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  National Aeronautics and Space Administration. Flight Research Center, Edwards, Calif. Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599  National Aeronautics and Space Administration. Goddard Space Flight Center, Greenbelt, Md. Mass property control of a spin stabilized spacecraft with restrictive mission and weight constraints [SAWE PAPER 1668] p 38 A86-35212 Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228 Flight results from the gravity-gradient-controlled RAE-1 satellite [AIAA PAPER 86-2140] p 11 A86-47453 The Slinger - An in-orbit booster facility [AIAA PAPER 86-2175] p 100 A86-47931  National Aeronautics and Space Administration. John F. Kennedy Space Center, Cocoa Beach, Fla. Space Station - An integrated approach to operational logistics support [AIAA PAPER 86-2321] p 10 A86-46947 Proceedings of the 2nd Annual Conference on NASA/University Advanced Space Design Program [NASA-TM-89399] p 104 N86-29886  National Aeronautics and Space Administration. Lyndon B. Johnson Space Center, Houston, Tex. Lunar bases and space activities of the 21st century p 91 A86-30113  Strategies for a permanent lunar base p 1 A86-30117  Maintainability planning for the Space Station [AIAA PAPER 86-9754] p 91 A86-32953 Initiation of the next step - The acquisition of a Space Station Program p 2 A86-34962  Development of an Advanced Trapezoidal Axially
Lockheed Engineering and Management Services Co., Inc., Houston, Tex.  A distributed array antenna system p 68 A86-50286  Lockheed Missiles and Space Co., Sunnyvale, Calif. Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  Louisiana State Univ., Baton Rouge.  Workshop on Cosmic Ray and High Energy Gamma Ray Experiments for the Space Station Era, Louisiana State University, Baton Rouge, October 17-20, 1984, Proceedings p 99 A86-46851  Loyola Univ., Chicago, III.  The use of tethered satellities for the collection of cosmic dust and the sampling of man made orbital debris far from the space station p 15 N86-30589  Lunar and Planetary Inst., Houston, Tex.  Trajectory determinations and collection of micrometeoroids on the space station. Report of the Workshop on Micrometeorite Capture Experiments [NASA-CR-177303] p 104 N86-30584  W  Martin Marietta Aerospace, Denver, Colo.  Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] p 25 A86-38883  Damping characteristics of metal matrix composites (AD-A163569) p 75 N86-24762  Satellite voice broadcast. Volume 1: Executive summary [NASA-CR-175016] p 13 N86-24875  Satellite voice broadcast. Volume 2: System study [NASA-CR-175017] p 13 N86-24876  Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799 Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (West Germany).  Development of an antenna structure for a deployable offset antenna p 29 N86-30797 Structural analysis, manufacturing and test evaluation of a polarization sensitive reflector p 35 N86-30798 Messerschmitt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany).  Strength of carbon fiber composite/titanium bonded joints as used for SPAS-type structures p 79 N86-30794 Offset unfurlable antenna, phase 1 [MBB-RX11] p 29 N86-32622  N  N  Naples Univ. (Italy).  Tethered constellations, their utilization as microgravity platforms and relevant features p 103 N86-27645 Tethered elevator: A unique opportunity for space processing p 103 N86-27649 High resolution remote sensing missions of a tethered satellite y 15 N86-28424 National Aeronautics and Space Administration, Washington, D.C.  Space Station Advanced Development Program p 2 A86-32543 The NASA Flight Demonstration Program p 2 A86-32543 The NASA Flight Demonstration Program p 2 A86-32544 Enabling technologies for transition to utilization of space-based resources and operations  P 3 A86-34594 Enabling technologies for transition to utilization of space-based resources and operations  P 3 A86-34594 The U.S. Space Station program p 3 A86-34598 Space Station utilization p 4 A86-37688 Spacecraft technology requirements for future NASA missions  [AIAA PAPER 86-1160] p 6 A86-40609	Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  National Aeronautics and Space Administration. Flight Research Center, Edwards, Calif. Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599  National Aeronautics and Space Administration. Goddard Space Flight Center, Greenbelt, Md. Mass property control of a spin stabilized spacecraft with restrictive mission and weight constraints [SAWE PAPER 1668] p 38 A86-35212 Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228 Flight results from the gravity-gradient-controlled RAE-1 satellite [AIAA PAPER 86-2140] p 11 A86-47453 The Slinger - An in-orbit booster facility [AIAA PAPER 86-2175] p 100 A86-47931 National Aeronautics and Space Administration. John F. Kennedy Space Center, Cocoa Beach, Fla. Space Station - An integrated approach to operational logistics support [AIAA PAPER 86-2321] p 10 A86-46947 Proceedings of the 2nd Annual Conference on NASA/University Advanced Space Design Program [NASA-TM-89399] p 104 N86-29888 National Aeronautics and Space Administration. Lyndon B. Johnson Space Center, Houston, Tex. Lunar bases and space activities of the 21st century p 91 A86-30113 Strategies for a permanent lunar base p 1 A86-30117 Maintainability planning for the Space Station [AIAA PAPER 86-9754] p 91 A86-32538 Initiation of the next step - The acquisition of a Space Station Program
Lockheed Engineering and Management Services Co., Inc., Houston, Tex.  A distributed array antenna system p 68 A86-50286  Lockheed Missiles and Space Co., Sunnyvale, Calif. Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  Louisiana State Univ., Baton Rouge.  Workshop on Cosmic Ray and High Energy Gamma Ray Experiments for the Space Station Era, Louisiana State University, Baton Rouge, October 17-20, 1984, Proceedings p 99 A86-46851  Loyola Univ., Chicago, III.  The use of tethered satellities for the collection of cosmic dust and the sampling of man made orbital debris far from the space station p 15 N86-30589  Lunar and Planetary Inst., Houston, Tex.  Trajectory determinations and collection of micrometeoroids on the space station. Report of the Workshop on Micrometeorite Capture Experiments [NASA-CR-177303] p 104 N86-30584  W  Martin Marietta Aerospace, Denver, Colo.  Hybrid deployable/erectable solar dynamic box truss system [AIAA PAPER 86-0955] p 25 A86-38883  Damping characteristics of metal matrix composites (AD-A163569) p 75 N86-24762  Satellite voice broadcast. Volume 1: Executive summary [NASA-CR-175016] p 13 N86-24875  Satellite voice broadcast. Volume 2: System study [NASA-CR-175017] p 13 N86-24876  Near-field testing of the 15-meter model of the hoop column antenna. Volume 2: Near- and far-field plots for the LaRC feeds	A step towards an ESA composites design handbook for space structure applications p 79 N86-30799 Messerschmitt-Boelkow-Blohm G.m.b.H., Munich (West Germany).  Development of an antenna structure for a deployable offset antenna p 29 N86-30797 Structural analysis, manufacturing and test evaluation of a polarization sensitive reflector p 35 N86-30798 Messerschmitt-Boelkow-Blohm G.m.b.H., Ottobrunn (West Germany).  Strength of carbon fiber composite/titanium bonded joints as used for SPAS-type structures p 79 N86-30794 Offset unfurlable antenna, phase 1 [MBB-RX11] p 29 N86-32622  N  Naples Univ. (Italy).  Tethered constellations, their utilization as microgravity platforms and relevant features p 103 N86-27645 Tethered elevator: A unique opportunity for space processing High resolution remote sensing missions of a tethered satellite p 15 N86-28424 National Aeronautics and Space Administration, Washington, D.C.  Space Station Advanced Development Program p 2 A86-32543 The NASA Flight Demonstration Program p 2 A86-32543 The NASA space plans and scenarios to 2000 and beyond p 2 A86-34594 Enabling technologies for transition to utilization of space-based resources and operations  P 3 A86-34694 Enabling technology requirements for future NASA missions	Index of aerospace mechanisms symposia proceedings 1-19 [NASA-TM-88205] p 102 N86-26650  National Aeronautics and Space Administration. Flight Research Center, Edwards, Calif.  Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599  National Aeronautics and Space Administration.  Goddard Space Flight Center, Greenbelt, Md.  Mass property control of a spin stabilized spacecraft with restrictive mission and weight constraints [SAWE PAPER 1668] p 38 A86-35212  Polar platform payload requirements in the 1990's [AAS PAPER 85-396] p 7 A86-43228  Flight results from the gravity-gradient-controlled RAE-1 satellite [AIAA PAPER 86-2140] p 11 A86-47453  The Slinger - An in-orbit booster facility [AIAA PAPER 86-2175] p 100 A86-47931  National Aeronautics and Space Administration. John F. Kennedy Space Center, Cocoa Beach, Fla.  Space Station - An integrated approach to operational logistics support [AIAA PAPER 86-2321] p 10 A86-46947  Proceedings of the 2nd Annual Conference on NASA/University Advanced Space Design Program [NASA-TM-89399] p 10 N86-29888  National Aeronautics and Space Administration.  Lyndon B. Johnson Space Center, Houston, Tex.  Lunar bases and space activities of the 21st century p 91 A86-30113  Strategies for a permanent lunar base p 1 A86-30113  Strategies for a permanent lunar base p 1 A86-30113  Maintainability planning for the Space Station [AIAA PAPER 86-9754] p 91 A86-30117  Maintainability planning for the Space Station Program p 2 A86-34962  Development of an Advanced Trapezoidal Axially Grooved (ATAG) heat pipe

,
Results of the ACCESS space construction Shuttle flight
experiment [AIAA PAPER 86-1186] p 6 A86-40593
A steerable radiator for spacecraft application
[AIAA PAPER 86-1298] p 100 A86-49597
Effects of the low Earth orbital environment on spacecraft materials p 77 N86-30595
Space station p 16 N86-30602
NASA/American Society for Engineering Education (ASEE) Summer Faculty Fellowship Program, 1985
[NASA-CR-171931] p 105 N86-31409
National Aeronautics and Space Administration.
Langley Research Center, Hampton, Va.  ACCESS (Assembly Concept for Construction of
Erectable Space Structure) - A Shuttle flight experiment
p 1 A86-32540  Dynamic verification of very large space structures
p 37 A86-33285
Optimization of mass placement in Space Station
applications [SAWE PAPER 1672] p 24 A86-35215
Weights assessment for orbit-on-demand vehicles
[SAWE PAPER 1674] p 3 A86-35217 Testing of a failure accommodation system on a highly
flexible grid p 38 A86-35390
Stability of multiloop LQ regulators with nonlinearities.  I - Regions of attraction. II - Regions of ultimate
boundedness p 38 A86-36074
Space telerobotics - A few more hurdles
p 81 A86-37047 Construction and control of large space structures
p 39 A86-37060
Microprocessor controlled force actuator [AIAA PAPER 86-0916] p 40 A86-38827
Space Station multidisciplinary analysis capability -
IDEAS2
[AlAA PAPER 86-0954] p 19 A86-38847 Dynamic analysis and experiment methods for a generic
space station model
[AIAA PAPER 86-0838] p 40 A86-38886 Multidisciplinary capability for analysis of the dynamics
and control of flexible space structures
[AIAA PAPER 86-0961] p 42 A86-38933
Structural dynamic analysis of the Large Deployable Reflector
[AIAA PAPER 86-0004] p 42 A86-38951
Effects of noise on modal parameters identified by the Eigensystem Realization Algorithm p 42 A86-39036
Spline-based distributed system identification with
application to large space antennas p 42 A86-39037 Control of Flexible Structures (COFS) Flight Experiment
Program p 5 A86-39502
Vibration control of flexible beams using an active
hinge p 46 A86-39505 A slewing control experiment for flexible structures
p 47 A86-39509
Thermal analysis of the ACCESS space truss p 32 A86-40516
The thermal and mechanical stability of composite
materials for space structures p 73 A86-40530 Results of the ACCESS space construction Shuttle flight
experiment
[AIAA PAPER 86-1186] p 6 A86-40593
Integrated analysis tools for trade studies of spacecraft controller and sensor locations
[AIAA PAPER 86-1192] p 20 A86-40613
Future space transportation options - Overview [AIAA PAPER 86-1210] p 6 A86-40616
Assessment of international payload requirements on
the dual keel space station - A systems analysis capabilities example
[AIAA PAPER 86-1226] p 6 A86-40618
Spline-based Rayleigh-Ritz methods for the approximation of the natural modes of vibration for flexible
beams with tip bodies p 48 A86-40843
Dynamic characteristics of statically determinate
space-truss platforms p 48 A86-41741 Two-stage earth-to-orbit vehicles with series and parallel
burn
[AIAA PAPER 86-1413] p 87 A86-42623 Failure detection and accommodation in structural
dynamics systems using analytic redundancy
p 49 A86-42938
The development of optimal control laws for orbiting tethered platform systems
[AAS PAPER 85-360] p 51 A86-43217
Effects of noise on ERA-identified modal parameters [AAS PAPER 85-422] p 52 A86-43222
An Eigensystem Realization Algorithm in Frequency
Domain for modal parameter identification [AIAA PAPER 86-2048] p 54 A86-47431
[AIAA PAPER 86-2048] p 54 A86-47431 Design for a goal-oriented telerobotic system
[AIAA PAPER 86-2090] p 83 A86-47440
Attitude control system synthesis for the Hoop/Column antenna using the LQG/LTR method
[AIAA PAPER 86-2139] p 55 A86-47452

```
Control effectiveness characterization for
  estimation and control on a highly flexible grid
                                     p 55 A86-47454
  [AIAA PAPER 86-2142]
    Integrated structure/control design
                                              Present
  methodology and future opportunities
                                    p 58 A86-49094
    Automation and robotics for Space Station in the
  twenty-first century
  [AIAA PAPER 86-2300]
                                     p 84 A86-49552
    Experimenal and analytical generic space staion
  dynamic models
  [NASA-TM-87696]
                                     p 58 N86-22997
    Analysis of a single-fold deployable truss beam
  preloaded by extension of selected face diagonal
  [NASA-TM-87673]
                                     p.33 N86-23623
    Structural performance of space station trusses with
  [NASA-TM-87715]
                                     p 34 N86-24731
    Deployable geodesic truss structure A01
  [NASA-CASE-LAR-13113-1]
                                    p 26 N86-24867
    Measurement apparation and procedure for the
  determination of surface emissivities
  [NASA-CASE-LAR-13455-1]
                                    p 75 N86-24880
    Mathematical correlation of
                                   modal
                                          parameter
  identification methods via system realization theory
  [NASA-TM-87720]
                                          N86-25019
                                     p 59
    Synchronously deployable truss structure
  [NASA-CASE-LAR-13117-1]
                                          N86-25789
                                    p 27
    Latching mechanism for deployable/re-stowable
  columns useful in satellite construction
  [NASA-CASE-LAR-13169-1]
                                   p 101 N86-25791
    Dynamic characteristics of power-tower space stations
  with 15-foot truss bays
 INASA-TM-876841
                                     p 60 N86-26357
    Shuttle Tethered Aerothermodynamics Research Facilty
  (STARFAC) instrumentation requirements
                                    p 34 N86-27652
   Shuttle Tethered Aerothermodynamics
                                           Research
 Facility (STARFAC)
                                    p 34 N86-27653
    Control/structures interaction study of two 300 KW
  dual-keel space station concepts
 [NASA-TM-87679]
                                     p 61 N86-28113
    Technology and test
                                     p 15 N86-28420
    Nonlinear dynamic analysis of deploying flexible space
 booms
 [NASA-TM-87617]
                                     p 61 N86-28981
   Integrated thermal-structural-electromagnetic design
  optimization of large space antenna reflectors
 [NASA-TM-87713]
                                    p 35 N86-28984
    A simple nonlinear joint model
 [NASA-TM-87749]
                                    p 85 N86-30234
   Capacitor-type micrometeoroid detectors
                                   p 104 N86-30606
   Dynamic verification of very large space structures
                                    p 63 N86-30683
   Application of the LQG/LTR technique to robust
  controller synthesis for a large flexible space antenna
 [NASA-TP-2560]
                                    p 64 N86-30800
   Effects of model error on control of large flexible space
  antenna with comparisons of decoupled and linear
  quadratic regulator control procedures
 [NASA-TP-2604]
                                    p 64 N86-30801
   Preloaded space structural coupling joints
 [NASA-CASE-LAR-13489-1]
                                    p 29 N86-31630
   Deployable M-braced truss structure
 [NASA-CASE-LAR-13081-1]
                                    p 29 N86-32737
National Aeronautics and Space Administration. Lewis
 Research Center, Cleveland, Ohio.
   Hybrid deployable/erectable solar dynamic box truss
 I AIAA PAPER 86-09551
                                     p 25 A86-38883
   Heat pipe radiator technology for space power
 [AIAA PAPER 86-1300]
                                     p 31 A86-39907
   A 10,000 hour life multipropellant engine for Space
 Station applications
 [AIAA PAPER 86-1403]
                                     p 87 A86-42616
   A long-life 50 lbf H2/O2 thruster for Space Station
 [AIAA PAPER 86-1404]
                                     p 87 A86-42617
   NASA electrothermal auxiliary propulsion technology
 [AIAA PAPER 86-1703]
                                    p 88 A86-42799
   Fluid management and its role in the future of Space
 [AIAA PAPER 86-2301]
                                     p 89 A86-49553
   Liquid droplet radiator program at the NASA Lewis
  Research Center
 [ASME PAPER 86-HT-15]
                                     p 32 A86-49621
   Oxidation protecting coatings for polymers
 [NASA-CASE-LEW-14072-3]
                                    p 75 N86-26434
   Feasibility study of a discrete bearing/roller drive rotary
 joint for the space station
 [NASA-TM-88800]
                                    p 27 N86-30206
```

```
Effect of an oxygen plasma on the physical and chemical
   properties of several fluids for the liquid droplet radiator
  [NASA-TM-88839]
                                      p 80 N86-31634
    Proven, long-life hydrogen/oxygen thrust chambers for
  space station propulsion
  [NASA-TM-88822]
                                      p 90 N86-32522
National Aeronautics and Space Administration.
  Marshall Space Flight Center, Huntsville, Ala.
    Orbital maneuvering vehicle guidance, navigation and
  control
  [AAS PAPER 85-043]
                                      p 36 A86-31794
    Mars missions and bases - A recent look
                                       p 2 A86-32548
    The NASA Flight Demonstration Program
                                       p 2 A86-32566
    An Orbital Maneuvering Vehicle simulator
                                       p 5 A86-40515
    Commerical use of space - Status and prospects
                                       p 6 A86-41154
    Analyses of spacecraft polymeric materials
                                      p 73 A86-41750
    Space Station propulsion test bed - A complete
  [AIAA PAPER 86-1402]
                                      p 87 A86-42615
    Oxygen/hydrogen Space Station propulsion system
  concept definition for IOC
  [AIAA PAPER 86-1561]
                                      p 87 A86-42714
    Shuttle-launch triangular space station
  [NASA-CASE-MSC-20676-1]
                                     p 26 N86-24729
    Evaluation of solar array flight experiment response
  during flight for extension/retraction phase
                                     p 29 N86-31606
  [NASA-TM-86551]
National Aeronautics and Space Administration.
  Pasadena Office, Calif.
    Protective telescoping shield for solar concentrator
  [NASA-CASE-NPO-16236-1]
                                    p 103 N86-27706
National Aerospace Lab., Amsterdam (Netherlands).
    Mathematical models of flexible spacecraft dynamics:
    survey of order reduction approaches
                                     p 60 N86-26367
  [NLR-MP-85004-U]
    Attitude control of spacecraft: An overview of recent
  developments and research
  (NLR-MP-85055-U)
                                     p 64 N86-31636
   Dynamics of flexible spacecraft: An analysis of
  approaches towards mathematical model order reduct
  [NLR-TR-85068-U]
                                     p 65 N86-31643
    Control theoretic analysis of human operator mediated
   endezvous and docking
                                     p 16 N86-32106
  [NLR-MP-85020-U]
    Control loops with human operators in space operations.
  Part 1: Human engineering analysis, synthesis and
  evaluation techniques
  [NLR-TR-84116-L-PT-1]
                                     p 16 N86-32107
   Control loops with human operators in space operations.
  Part 3: Rendezvous and docking operations and model
  analysis of performance with human-in-the-loop
  [NLR-TR-84116-L-PT-3]
                                     p 17 N86-32108
    Control loops with human operators in space operations.
  Part 4: Research requirements for human-in-the-loop
  space teleoperator development
                                      p 17 N86-32109
  [NLR-TR-84116-L-PT-4]
    Control loops with human operators in space operations.
                                     p 17 N86-32110
  [NLR-TR-84116-L-PT-5]
    Control loops with human operators in space operations.
  Part 2: Robotics operations and manual control
  experiment
  [NLR-TR-84116-L-PT-2]
                                     p 85 N86-33024
National Engineering Lab., East Kilbride (Scotland).
    Fatigue and damage in fibre reinforced nylon
                                     p 77 N86-30761
National Environmental Satellite Service, Washington.
  D. C.
    Plan for space station polar-orbiting platform
  [AD-A164405]
                                     p 14 N86-25403
Nevada Univ., Reno.
    Single step optimization strategies for constrained
                                      p 47 A86-39510
  retargeting maneuvers
North Carolina Univ., Charlotte.
    Dynamics and control of flexible spacecraft during and
  after slewing maneuvers
  [NASA-CR-177027]
                                      p 62 N86-28983
Northwestern Univ., Evanston, III.
    Cosmic dust collection with a sub-satellite tethered to
                                      p 14 N86-27146
  a space station
    The use of tethered satellites for the collection of cosmic
  dust and the sampling of man made orbital debris far from
```

the space station

p 15 N86-30589

0

Oak Ridge National Lab., Tenn.

Development of a simulation code for a latent heat thermal energy storage system in a space station [DE86-010070] p 70 N86-31113

OAO Corp., Greenbelt, Md.

Development of an Advanced Trapezoidal Axially Grooved (ATAG) heat pipe [AIAA PAPER 86-1342] p 31 A86-39941

Office National d'Etudes et de Recherches Aerospatiales, Paris (France).

Thermal residual stresses in symmetric and unsymmetric carbon fiber reinforced plastics: Some tentative p 77 N86-30762 evaluation

Ohio State Univ., Columbus.

manufacturing utilizing electrostatic accretion process
Old Dominion Univ., Norfolk, Va. p 102 N86-27300

A Taylor-Galerkin finite element algorithm for transient nonlinear thermal-structural analysis

p 31 A86-38823 [AIAA PAPER 86-0911] Adaptive control of large space structures using recursive lattice filters p 60 N86-27401

[NASA-CR-177270]

P

Paderborn Univ. (West Germany).

On correlation between thermal stresses, elastic strain energy and debonding in thermally loaded fiber-reinforced composite materials p 79 N86-30780

Padua Univ. (Italy).

A review of tether induced dynamical features p 61 N86-28411

Politecnico di Milano (Italy).

Analytical and experimental results of advanced composite stiffened panels under combined loads

p 78 N86-30768
Prairie View Agricultural and Mechanical Coll., Tex.

An IBM PC-based math model for space station solar p 23 N86-31418 array simulation

PRC Kentron, Inc., Hampton, Va.

Multidisciplinary capability for analysis of the dynamics and control of flexible space structures

[AIAA PAPER 86-0961] p 42 A86-38933 An improved multilevel optimization approach for the design of complex engineering systems

[AIAA PAPER 86-0950] p 19 A86-38953 design Integrated structure/control methodology and future opportunities

p 58 A86-49094

Purdue Univ., West Lafayette, Ind.

A global-local approach to solving vibration of large truss [AIAA PAPER 86-0872] p 41 A86-38907

Integrated structure/control design -Present methodology and future opportunities

p 58 A86-49094

RCA Astro-Electronics Div., Princeton, N. J.

Space Station polar orbiting platform - Mission analysis and planning [AIAA PAPER 86-2178]

p 11 A86-47960 Communications platform payload definition study [NASA-CR-174986] p 14 N86-27402 Communications platform payload definition study,

[NASA-CR-174985] p 14 N86-27407

Rockwell International Corp., Canoga Park, Calif.

Space Station propulsion test bed - A complete

(AIAA PAPER 86-1402) p 87 A86-42615 A 10,000 hour life multipropellant engine for Space Station applications

[AIAA PAPER 86-1403] p 87 A86-42616 Oxygen/hydrogen Space Station propulsion system

concept definition for IOC p 87 A86-42714 [AIAA PAPER 86-1561]

Orbit Transfer Rocket Engine Technology Program: Advanced engine study, task D.1/D.3

[NASA-CR-175084] p 90 N86-26369 Space station propulsion technology

p 90 N86-31647 [NASA-CR-178897]

Rockwell International Corp., Downey, Calif. Space platform expendables resupply concept definition

study. Volume 1: Executive summary p 13 N86-24733 [NASA-CR-178820]

Space platform expendables resupply concept definition study, volume 2 [NASA-CR-178821] p 13 N86-24734

Space platform expendables resupply concept definition study. Volume 3: Work breakdown structure and work breakdown structure dictionary

[NASA-CR-178822] p 13 N86-24735

Rockwell International Corp., Houston, Tex.

A linear quadratic tracker for Control Moment Gyro based attitude control of the Space Station [AIAA PAPER 86-1194] p 48 A86-40607

Rockwell International Corp., Huntsville, Ala.

Space platform expendables resupply concept definition study

[NASA-CR-178819] p 13 N86-24732

Rome Air Development Center, Griffiss AFB, N.Y. Proceedings of the 1985 Antenna Applications

Symposium, Volume 2 [AD-A165535] p 103 N86-27525

Rome Univ. (Italy).

Mass property control of a spin stabilized spacecraft with restrictive mission and weight constraints [SAWE PAPER 1668] p 38 A86-35212

Royal Inst. of Tech., Stockholm (Sweden).

Thermal stability of sandwich reflectors

p 35 N86-30774

Damage zone fracture analysis of fibrous composites p 78 N86-30778

Royal Netherlands Aircraft Factories Fokker.

Amsterdam. A deployable and retractable strongback structure

p 27 N86-27389

Control loops with human operators in space operations. Part 2: Robotics operations and manual control experiment

INLR-TR-84116-L-PT-21 p 85 N86-33024

Royal Netherlands Aircraft Factories Fokker, Schiphol-Oost.

Hand calculation method for buckling of composite shell p 28 N86-30769 structures

Adequate fiber reinforced structural elements in load introduction area of fiber reinforced shells p 78 N86-30770

Design and development of the Advanced Rigid Array p 70 N86-30796 (ARA) solar panel

High Power Solar Array (HPSA) study p 71 N86-31998 (FOK-TR-R-85-068)

Rutgers - The State Univ., Piscataway, N. J.

The Galileo scan platform pointing control system - A modern control theoretic viewpoint p 36 A86-31795 [AAS PAPER 85-044]

S

Salford Univ. (England).

Hygrothermal characteristics of antenna materials p 77 N86-30760

Sandia National Labs., Albuquerque, N. Mex.

Design considerations for large photovoltaic systems

p 68 N86-23053 [DE86-002125] Scientific Systems, Inc., Cambridge, Mass.

Fault-tolerant control of large space structures using the stable factorization approach

p 58 N86-23343 [NASA-CR-3964] Selenia S.p.A., Rome (Italy).

Measurement of the thermo-optical properties of varying

paint thickness on carbon fiber composites in spacecraft p 74 N86-22620 . structures Sener, S.A., Madrid (Spain).

p 27 N86-27368 The Ulysses mechanisms A SENER latch design for docking mechanisms p 85 N86-27388

Shell Oil Co., Houston, Tex.

An evaluation of foldable elastic tubes for application in space structures p 24 A86-34634

Smithsonian Astrophysical Observatory, Cambridge,

Analytical investigation of the dynamics of tethered

constellations in Earth orbit, phase 2 [NASA-CR-178754] p 58 N86-23629

System engineering study of electrodynamic tether as a spaceborne generator and radiator of electromagnetic waves in the ULF/ELF frequency band

p 68 N86-25689 [NASA-CR-176749] Dynamics of tethered constellations in Earth orbit

p 61 N86-27650 Analytical investigation of the dynamics of tethered constellations in Earth orbit, phase 2

[NASA-CR-178846] p 61 N86-28114 The investigation of tethered satellite system dynamics

[NASA-CR-178895] p 64 N86-31631 Analytical investigation of the dynamics of tethered constellations in Earth orbit, phase 2

p 65 N86-32513 [NASA-CR-178901]

Societe Crouzet, Valence (France).

Advanced Printed Wiring Board (PWB) materials for surface mounted devices in aerospace applications

p 74 N86-22617 Societe Europeenne de Propulsion, Vernon (France). Giotto despin mechanism subsystem: General loop design and pointing aspects p 60 N86-27361

Societe Nationale Industrielle Aerospatiale, Cannes (France).

Accommodation study of the CRHESUS cryostat on the EURECA platform

[SNIAS-1048ACA/LL/V] p.26 N86-22630 Solar array deployment simulation using ADAMS software p 60 N86-27360 Speed regulators for space appendages deployment

p 84 N86-27369 Use of MoS2 applied by physical vapor deposition (PVD) on space mechanisms p 76 N86-27379

Use of MoS2 applied by Physical Vapor Deposition (PVD) on space mechanisms

[SNIAS-861-440-101] p 80 N86-31639 Design and test of a space deployable radiator p 23 N86-31640 [SNIAS-861-440-103]

New aluminum alloys for satellite structures [SNIAS-861-440-111] p 80 N86-31641

High power rigid solar array [SNIAS-861-440-110] p 70 N86-31997

Influence of structural parameter uncertainties on flexible space structural control performances

[SNIAS-861-440-104] p 65 N86-32516

Societe Nationale Industrielle Aerospatiale, Les

Mureaux (France).

Comparison of classical and cocuring manufacturing techniques for a CFRP honeycomb central tube

p 29 N86-30792

Societe Nationale Industrielle Aerospatiale, Paris (France).

Impact of automation on the design of carbon fiber omega ribs [SNIAS-861-422-101] p 76 N86-28633

Spacebus: Multimission communication satellites [SNIAS-861-422-119] p 16 N86-31637

Deployable antenna reflector [SNIAS-861-422-117] p 81 N86-32537

Societe Nationale Industrielle Aerospatiale, Saint-Medard-en-Jalles (France).

Design of bonded structural joints for spacecraft [SNIAS-861-430-105]

p 22 N86-28118 Winding with thermoplastic polymers

[SNIAS-861-430-106] p 80 N86-30804 Southampton Univ. (England).

p 78 N86-30764 Damping of composites

Southern Methodist Univ., Dallas, Tex. Spline-based distributed system identification with application to large space antennas p 42 A86-39037

Space Command, Peterson AFB, Colo.

Primer on operating and support (O and S) costs for space systems

[AD-A162381] p 12 N86-24588

Spar Aerospace Ltd., Ste-Anne-de-Bellevue (Quebec). Design and test of a linear thermal actuator

p 34 N86-27380

Stanford Univ., Calif.

Material damping of simple structures in a simulated p 48 A86-41739 space environment Thermal and electromagnetic damping analysis and its

p 34 N86-27677 application Theoretical and experimental investigations of sensor location for optimal aeroelastic system state estimation

[NASA-CR-177115] p 62 N86-29272 A 3-component laser-Doppler velocimeter data equisition and reduction system

[NASA-CR-176929] p 104 N86-30135 Control of a free-flying robot manipulator system

[NASA-CR-179717] State Univ. of New York, Buffalo.

Microprocessor controlled force actuator

p 40 A86-38827 [AIAA PAPER 86-0916]

State Univ. of New York at Buffalo, Amherst. Vibration control of flexible beams using an active p 46 A86-39505 hinae

Stevens Inst. of Tech., Hoboken, N. J. Tine domain design of robust controllers for LQG (Linear

Quadratic Gaussian); application to large space structures p 59 N86-26074

[AD-A1636351 Strathclyde Univ., Glasgow (Scotland).

Assessing the effects of delaminations on the postbuckling strength of CRFP panels

p 79 N86-30781 Structural Dynamics Research Corp., San Diego, Calif. Space Station multidisciplinary analysis capability -

[AIAA PAPER 86-0954] p 19 A86-38847

p 85 N86-33016

Stuttgart Univ. (West Germany).

Plasma thruster development: Magnetoplasmadynamic propulsion, status and basic problems [AD-A165945] p 90 N86-28991

Technion, Inc., Irvine, Calif.

A 10,000 hour life multipropellant engine for Space Station applications

[AIAA PAPER 86-1403] p 87 A86-42616

Technische Hochschule, Aachen (West Germany).

Reconstruction of forcing functions based on measured structural responses p 63 N86-30684

Technische Univ., Brunswick (West Germany). Control of flexible structures with respect to infinity

p 60 N86-27359

Technische Univ., Munich (West Germany).

Modeling and control of a lightweight robot

p 84 N86-27363 dust detection with large surface Cosmic piezoceramics

Tennessee Technological Univ., Cookeville.

Reliability models applicable to space telescope solar array assembly system p 21 N86-24541

Texas A&M Univ., College Station.

A model for predicting thermomechanical response of large space structures

p 33 N86-23631

Textron Bell Aerospace Co., Buffalo, N. Y.
A long-life 50 lbf H2/O2 thruster for Space Station auxiliary propulsion p 87 A86-42617 [AIAA PAPER 86-1404]

TICRA A/S, Copenhagen (Denmark).

Offset unfurlable antenna, phase 1

[MBB-RX11] p 29 N86-32622

Tokyo Univ. (Japan).

Method of packaging and deployment of large membranes in space p 26 N86-23624

[ISAS-618]

Toronto Univ. (Ontario).

Charge accumulation and arc discharges on spacecraft materials and components

[AD-A166216] p 70 N86-29893

Tri-Con Associates, Inc., Cambridge, Mass.
Design, fabricate and test Spacecraft Automatic Active

Discharge System (SAADS) [AD-A166559] p 70 N86-30802

TRW, Inc., Redondo Beach, Calif.

Satellite voice broadcase system study. Volume 1: Executive summary

[NASA-CR-174904]

p 68 N86-24878 TRW Space Technology Labs., Redondo Beach, Calif.

Satellite voice broadcast system study, volume 2 NASA-CR-174905] p 68 N86-24877 [NASA-CR-174905]

University of Southern California, Los Angeles.

Spline-based Rayleigh-Ritz methods for the approximation of the natural modes of vibration for flexible beams with tip bodies p 48 A86-40843

Virginia Polytechnic Inst. and State Univ., Blacksburg.

Minimum-fuel control of high-order systems

p 86 A86-34174 Equations for the vibration of a slewing flexible

[AIAA PAPER 86-0906] p 41 A86-38916

An improved multilevel optimization approach for the design of complex engineering systems [AIAA PAPER 86-0950] p 19 A86-38953

Maneuvering of flexible spacecraft with application to p 47

A slewing control experiment for flexible structures

p 47 A86-39509 Maneuver and vibration control of SCOLE

[AIAA PAPER 86-1993] p 54 A86-47415

Waldrich Siegen Werkzeugmaschinen G.m.b.H.,

Burbach (West Germany).


Theoretical and experimental behavior of carbon fiber reinforced plastics under mechanical and thermal load p 78 N86-30767

Washington Univ., Seattle.

Specular and direct radiative loads on space structure [AIAA PAPER 86-1355] p 32 A86-49599

### TECHNOLOGY FOR LARGE SPACE SYSTEMS / A Bibliography (Supplement 16)

#### Typical Foreign Technology Index Listing



Listings in this index are arranged alphabetically by country of intellectual origin. The title of the document is used to provide a brief description of the subject matter. The page number and the accession number are included in each entry to assist the user in locating the citation in the abstract section.

#### A

#### AUSTRALIA

Model reference adaptive control under uncertainty of nonlinear flexible manipulators [AIAA PAPER 86-1976] p 53 A86-47403

#### В

#### BELGIUM

New prediction methods for composites hygrothermal behavior p 78 N86-30771 BRAZIL

Compensating structure and parameter optimization for attitude control of a flexible spacecraft

p 36 A86-31668

#### C

#### CANADA

Robust beam-pointing and attitude control of a flexible p 36 A86-31665 Damping synthesis for a spacecraft using substructure and component data p 37 A86-32940 Vibration qualification at the David Florida Laboratory p 38 A86-33289 The Canadarm - On earth as it is in space A86-34123 p 93 **Balanced Augmented Controller Reduction** p 44 A86-39491 Dynamics of gyroelastic vehicles p 45 A86-39494 Transient dynamics during the extension of flexible members p 46 A86-39499 control of a flexible non-symmetrical spacecraft A86-39569 On the dynamics of beam type structural members during [AAS PAPER 85-392] p 50 A86-43214

On modeling the dynamics of large space manipulators [AAS PAPER 85-393] p 51 A86-43215 Dynamics and control characteristics for the WISP 300 m dipole antenna/Shuttle configuration p 51 A86-43220 [AAS PAPER 85-365] Robust attitude and shape control of third generation (AAS PAPER 85-4251 A86-43224 Canadarm - A review of its flights p 83 A86-47053 Frequencies of longitudinal oscillations of tethered satellite systems [AIAA PAPER 86-2274] p 57 A86-47942 Space Station - The Canadian contribution A86-49563 p 12 Design and test of a linear thermal actuator p 34 N86-27380 Effects of damping on the control dynamics of the space p 61 N86-27656 shuttle based on tethered systems Charge accumulation and arc discharges on spacecraft materials and components p 70 N86-29893 [AD-A166216] Vibration qualification at the David Florida Laboratory p 63 N86-30687

#### .

The production and properties of composite materials

p 72 A86-40378

with light alloy matrices reinforced with continuous fibers

#### FRANCE

(C. SiC)

Magnesium matrix composite materials processing and p 72 A86-40384 applications French views on Columbus - Preparation of its utilization relations with other programs p 10 A86-45647 A correction for continuous rotation in measurements the near field p 67 A86-46578 International Aerospace and Ground Conference on of the near field Lightning and Static Electricity, 10th, and Congres International Aeronautique, 17th, Paris, France, June p 99 A86-47292 10-13, 1985, Proceedings A new understanding of breakdowns in the day sections of geosynchronous orbit p 67 A86-47335 Advanced Printed Wiring Board (PWB) materials for surface mounted devices in aerospace applications p 74 N86-22617 p 74 N86-22621 New space paints Long term tests of contaminated Optical Solar Reflectors (OSRs) under combined environment p 74 N86-22622 Space environment simulation to test satellite thermal control coatings, volume 1 [ESA-TT-891-VOL-1] Space environment simulation to test satellite thermal control coatings. Volume 2, appendix 1: Detailed results of optical measurements made after the various stages of the first test (ESA-TT-891-VOL-21 p 33 N86-22628 Space environment simulation to test satellite thermal control coatings. Volume 2: Appendices 2, 3, and 4. Appendix 2: Detailed results of optical measurements made after the various stages of the second test. Appendix 3: Summary of optical results obtained during the first test. Appendix 4: Summary of optical results obtained during the second test [ESA-TT-891-VOL-3] p 33 N86-22629 Accommodation study of the CRHESUS cryostat on the EURECA platform p 26 N86-22630 [SNIAS-1048ACA/LL/V] Key design parameters for a very low gravity in-orbit [MATRA-EPT/DT/VT068/098] p 58 N86-22631 Second European Space Mechanisms and Tribology Symposium p 102 N86-27353 [ESA-SP-231] Solar array deployment simulation using ADAMS p 60 N86-27360 software Giotto despin mechanism subsystem: General loop p 60 N86-27361 design and pointing aspects Speed regulators for space appendages deployment

Definition and testing of gears for space robotics p 22 N86-27375 Use of MoS2 applied by physical vapor deposition (PVD) on space mechanisms p 76 N86-27379 Mechanisms developed in the French space industry p 103 N86-27394 Design of bonded structural joints for spacecraft [SNIAS-861-430-105] p 22 N86-28118 Impact of automation on the design of carbon fiber omega ribs [SNIAS-861-422-101] p 76 N86-28633 Proceedings of a Workshop on Composites Design for Space Applications [ESA-SP-243] p 105 N86-30758 Thermal residual stresses in symmetric and unsymmetric carbon fiber reinforced plastics: Some tentative ways of p 77 N86-30762 evaluation Dimensional stability of CFRP tubes for space p 35 N86-30775 Industrial calculation of damage tolerance and stress allowables in components made of composite materials using the PAM-FISS/biphase material model p 78 N86-30779 Comparison of classical and cocuring manufacturing techniques for a CFRP honeycomb central tube p 29 N86-30792 Winding with thermoplastic polymers p 80 N86-30804 p 23 N86-31629

[SNIAS-861-430-106] Design of spacecraft [ISBN-2-225-80732-9] Spacebus: Multimission communication satellites p 16 N86-31637 ISNIAS-861-422-1191 Use of MoS2 applied by Physical Vapor Deposition (PVD) on space mechanisms ISNIAS-861-440-1011 p 80 N86-31639 Design and test of a space deployable radiator [SNIAS-861-440-103] p 23 N86-31640 New aluminum alloys for satellite structures [SNIAS-861-440-111] p 80 N86-31641 High power rigid solar array [SNIAS-861-440-110] p 70 N86-31997 Preparing for the future: The ESA technological research and development program 1986-1988 p 80 N86-32347 (FSA-SP-1079) Influence of structural parameter uncertainties on flexible pace structural control performances [SNIAS-861-440-104] SNIAS-861-440-104 J ESABASE extension to spacecraft charging P 71 N86-32517 p 65 N86-32516 [MATRA-CMT-TS101/RT/16.85] Deployable antenna reflector [SNIAS-861-422-117] p 81 N86-32537

#### G

#### GERMANY, FEDERAL REPUBLIC OF

International Symposium on Aeroelasticity and Structural Dynamics, 2nd, Rheinisch-Westfaelische Technische Hochschule, Aachen, West Germany, April 1-3, 1985, Collected Papers [DGLR BERICHT 85-02] Aspects of active isolation as applied to a satellite structure with shape precision payload Low frequency design verification of large spacecraft structures p 38 A86-33288 Motion trajectories of particles inside and outside an orbiting Space Shuttle p 93 A86-34574 Deformation measurements on antennas under simulated outer space conditions using holographic interferometry IDGLR PAPÉR 85-1501 p.30 A86-35186 Alternative space power systems p 65 A86-35194 Air and space travel - Tasks for the future p 3 A86-35518 Carbon fibres and their composites p 72 A86-40487 Autoclave, compression moulding p 72 A86-40495 Design preparations for large space structures p 32 A86-40496 Experiences in FRG in aerospace application p 72 A86-40498

Space stations: Legal aspects of scientific and A step towards an ESA composites design handbook commercial use in a framework of transatlantic for space structure applications p 79 N86-30799 cooperation; Proceedings of the International Colloquium, Offset unfurlable antenna, phase 1 Hamburg, West Germany, October 3, 4, 1984 [MBB-RX11] p 29 N86-32622 p 97 A86-43335 European experience and perspectives p 97 A86-43336 Contracts of and with private enterprises concerning the JAPAN development, the construction, and the assembly of space INTERNATIONAL ORGANIZATION p 82 A86-43341 Spacecraft structures design and verification Nonlinear deformation analysis of the Olympus A86-33287 p 23 Astromast p 21 A86-43756 European space platform developments [DGLR PAPER 85-123] p The German programme on materials science in р3 A86-35173 p 73 A86-45646 ESA-sponsored developments in the field of deployable space Distributed parameter systems; Proceedings of the p 24 A86-36029 masts Second International Conference on Control Theory for The Giotto spacecraft's performance during the Distributed Parameter Systems and Applications, Vorau, space structures geostationary transfer orbit and near-earth mission Austria, July 9-14, 1984 p 98 A86-46808 p 3 A86-36035 phases The role of Columbus in a future Space Station large-space structure The Columbus preparatory programme supporting scenario p 12 A86-49565 technology of the European Space Agency Towards Columbus and Space Station; Proceedings of p 4 A86-37856 the International Symposium, Bonn, West Germany, [AIAA PAPER 86-1191] Inflatable technology in orbit demonstration within the October 2-4, 1985 European Space Agency programs p 4 A86-37863 membranes in space (DGLR BERICHT 85-03) p 100 A86-50334 The Giotto assembly, integration and verification Concepts on Columbus flight operations HSAS-6181 programme p 5 A86-38273 p 12 A86-50337 EURECA concept and its potential evolution within the Alternative module configurations for advanced solar Space Station era arrays on low orbit and extended lifetime missions (AMOC IAAS PAPER 85-3981 p 97 A86-43230 Orbit manoeuvre and determination strategy for the NETHERLANDS (ESA-CR(P)-21291 p 89 N86-24025 EURECA Mission Selections from Flug Revue und Flugwelt International. [AAS PAPER 85-408] p 7 A86-43259 A. On the border of Time-hypersonic flight, B. NASA SPACECOM '85; Space and Radiocommunications programs pave the way for the hypersonic aircraft. C. Symposium, 5th, Paris and Le Bourget, France, June 5-7 Shuttle flight 61-B; construction in space. D. Faster than 1985, Speakers' Papers p 98 A86-43701 a bullet; hypersonic military aircraft RIT-10 low-thrust control of Eureca's orbital decay [NASA-TM-88418] p 26 N86-24652 p 88 A86-44447 An overview of European space transportation Status of ESA's planning for the Space Station systems p 8 A86-44530 [NASA-TM-77683] p 13 N86-25398 Space platform design options - A comparison, for Growth capabilities of European retractable solar cost-effectiveness, of expendable, reusable and Ultraviolet radiometers arrays serviceable spacecraft р8 A86-44531 [ESÁ-CR(P)-2141] p 69 N86-26711 The European Space Station programme Features of the solar array drive mechanism for the A86-45627 D 8 [NLR-MP-85004-U] Space Telescope p 102 N86-27356 The Columbus Programme concept and its initial Analysis of in-orbit performance of mechanisms within p 9 A86-45628 implementation steps p 84 N86-27358 large structures Technology challenges for the Columbus Programme gearhead Control of flexible structures with respect to infinity р9 A86-45629 p 60 N86-27359 Columbus technology - Status and plans handling Modeling and control of a lightweight robot p 12 A86-50338 p 84 N86-27363 ISRAEL The Extendable and Retractable Mast (ERM) Buckling and non-linear response three-legged truss columns of imperfect p 27 N86-27364 The performance of unbonded MoS2 for space AIAA PAPER 86-09741 p 24 A86-38854 p 76 N86-27376 ITAL Y Integrated sensor and actuator system for flexible space International Conference on Space, 25th, Rome, Italy structure experiments p 102 N86-27385 March 26-28, 1985, Proceedings p 94 A86-37852 structures A Dornier latch design for a docking mechanism Columbus - The European participation in international p 22 N86-27387 space stations p 3 A86-37854 Plasma thruster development: Magnetoplasmadynamic Large space structural models by combination of finite propulsion, status and basic problems elements and transfer matrix methods p 90 N86-28991 [AD-A165945] p 18 A86-37861 (ARA) solar panel Cosmic dust detection with large surface A payload for utilization of space platform in the field p 16 N86-30604 piezoceramics of communication and earth observation The Second International Symposium on Aeroelasticity p 4 A86-37862 and Structural Dynamics [NLR-MP-85055-U] Mission requirements for coorbiting and polar platforms [DGLR-85-02] p 104 N86-30627 - A critical survey p 4 A86-37872 Aspects of active isolation as applied to a satellite Active structural control with decentratized and structure with shape precision payload colocated control units p 46 A86-39506 p 63 N86-30653 A nonlinear attitude control law for a (NLR-TR-85068-U) atellite with flexible Reconstruction of forcing functions based on measured p 49 A86-42989 appendages structural responses p 63 N86-30684 Space Station - The new frontier p 8 A86-44402 [FOK-TR-R-85-068] Low frequency design verification of large spacecraft Quasi-analytical solutions for the dynamics of a class p 28 N86-30686 structures of tethered satellites with Danby's aerodynamical drag rendezvous and docking Theoretical and experimental behavior of carbon fiber p 52 A86-46383 [NLR-MP-85020-U] reinforced plastics under mechanical and thermal load CFRP support structure for high stability reflector p 78 N86-30767 p 26 A86-49988 antennas Design and manufacturing aspects of space trusses Measurement of the thermo-optical properties of varying evaluation techniques p 28 N86-30772 paint thickness on carbon fiber composites in spacecraft [NLR-TR-84116-L-PT-1] Holographic interferometry for distortion measurements structures p 74 N86-22620 of antennas p 23 N86-30776 Tethered constellations, their utilization as microgravity On correlation between thermal stresses, elastic strain platforms and relevant features p 103 N86-27645 energy and debonding in thermally loaded fiber-reinforced Tethered elevator: A unique opportunity for space [NLR-TR-84116-L-PT-3] composite materials p 79 N86-30780 p 103 N86-27649 On the defect sensitivity of spacecraft typical thin CFRP COMLINK proposal for future missions of tethered p 79 N86-30792 Part 4: Research requirements for human-in-the-loop laminates satellite p 69 N86-27658 Nondestructive testing of fiber reinforced composites space teleoperator development Numerical experiments on a controlled flexible structure (NLR-TR-84116-L-PT-4) using X-ray fine structure procedures p 79 using DCAF [ESA-CR(P)-2159] On the development of a corrugated CFRP central Control loops with human operators in space operations. p 61 N86-28116

Tethered satellite design

Electrodynamic interactions

satellite

A review of tether induced dynamical features

High resolution remote sensing missions of a tethered

Spontaneous radiation emitted by moving tethered

FOREIGN TECHNOLOGY INDEX Analytical and experimental results of advanced composite stiffened panels under combined loads p 78 N86-30768 Thermally-induced vibration and stability of booms with open cross section caused by unidirectional radiant p 35 A86-31024 Flexibility control of solar battery arrays of spacecrafts p 85 A86-33203 Controller design of flexible spacecraft attitude control p 37 A86-33204 A matrix approach to dynamics formulation of complex p 45 A86-39496 Continuous forming of thin-walled CFRP pipes for p 72 A86-40371 Electrostatic charging and arc discharges on satellite dielectrics simulated by electron beam p 66 A86-40597 Method of packaging and deployment of large p 26 N86-23624 Reduced order models for distributed systems based on Hankel-norm approximations p 19 A86-39490 High voltage potting for the Faint Object Camera p 74 N86-22619 The degradation and contamination experiment flown on the first European Communication Satellite ECS-1: Preliminary results on contamination p 74 N86-22623 Scanning laser acoustic microscopy applied to the evaluation of material interconnections p 75 N86-22624 p 75 N86-22626 Mathematical models of flexible spacecraft dynamics: A survey of order reduction approaches p 60 N86-26367 The Collapsible Tube Mast (CTM) p 27 N86-27365 Development and testing of a dual-wound dc motor n 102 N86-27382 Experiment manipulators for automatic sample p 84 N86-27386 A deployable and retractable strongback structure p 27 N86-27389 Space mechanisms development in the n 103 N86-27397 technological research program Spacecraft structures design and verification p 28 N86-30685 Hand calculation method for buckling of composite shell p 28 N86-30769 Adequate fiber reinforced structural elements in load introduction area of fiber reinforced shells p 78 N86-30770 Design and development of the Advanced Rigid Array p 70 N86-30796 Attitude control of spacecraft: An overview of recent developments and research p 64 N86-31636 Dynamics of flexible spacecraft: An analysis of approaches towards mathematical model order reduct p 65 N86-31643 High Power Solar Array (HPSA) study p 71 N86-31998 Control theoretic analysis of human operator mediated p 16 N86-32106 Control loops with human operators in space operations. Part 1: Human engineering analysis, synthesis and p 16 N86-32107 Control loops with human operators in space operations. Part 3: Rendezvous and docking operations and model analysis of performance with human-in-the-loop p 17 N86-32108 Control loops with human operators in space operations.

p 17 N86-32109

p 17 N86-32110

p 81 N86-32584

p 85 N86-33024

Part 5: Executive summary

[ESA-PSS-01-701-ISSUE-1]

Data for selection of space materials

Control loops with human operators in space operations.

Part 2: Robotics operations and manual control

[NLR-TR-84116-L-PT-5]

[NLR-TR-84116-L-PT-2]

experiment

n 22 N86-28409

p 61 N86-28411

p 15 N86-28424

p 34 N86-28427

p 69

N86-28414

offset antenna

cylinder for satellites

joints as used for SPAS-type structures

of a polarization sensitive reflector

p 28 N86-30791

p 79 N86-30794

p 29 N86-30797

p 35 N86-30798

Strength of carbon fiber composite/titanium bonded

Development of an antenna structure for a deployable

Structural analysis, manufacturing and test evaluation

S

#### SPAIN

The Ulysses mechanisms p 27 N86-27368 A SENER latch design for docking mechanisms p 85 N86-27388

p 28 N86-30773 High-stability telescope structures

SWEDEN

Thermal stability of sandwich reflectors

p 35 N86-30774 Damage zone fracture analysis of fibrous composites p 78 N86-30778

#### SWITZERI AND

for mobile Inflatable, space-rigidized reflectors p 23 A86-33921 Operation and control of space-based solar energy power plants with CCGT using helium as a working p 89 A86-48206 [ASME PAPER 86-GT-152]

Space Station evolution - The uncertainty principle p 11 A86-48373 prevails Coatings against fretting n 76 N86-27377

#### U.S.S.R.

p 86 A86-36668 Conversion of solar energy Solar energy conversion systems for power plants in space - A comparative analysis and prospects for development p 66 A86-36671

Some problems related to the thermally induced deformations of large space structures

p 30 A86-36673 p 95 A86-39981

Investigation of arrays of high-Q microstrip antennas p 66 A86-44733

Spacecraft architecture [NASA-TM-77908]

UNITED KINGDOM

p 101 N86-24736

Some electrical properties of C.F.R.P. reflector p 65 A86-31923 antennas U.S. Opportunities in Space Conference; Proceedings of the Second Annual Space Business Conference, Washington, DC, October 30-November 1, 1985

p 93 A86-34110 p 3 A86-35319 More space in space Simultaneous plant parameter and state estimation by

a successive states method p 48 A86-40769

The exploitation of space: Policy trends in the military and commercial uses of outer space p 7 A86-43650 Olympus, the spacecraft of the future

p 8 A86-43705 Space - Technology and opportunity; Proceedings of

the Conference, Geneva, Switzerland, May 28-30, 1985

p 98 A86-44526 p 82 A86-44550 Robotics in space Columbus I; Proceedings of the First Columbus Workshop Utilization Aspects, Capri, Italy, June 17-21, 1985 p 98 A86-45626

Viewing the earth from Space - Towards the Space Station polar platform p 9 A86-45642 A square root method for the identification of large space

etructurae [AIAA PAPER 86-2049]

AIAA PAPER 86-2049] p 54 A86-47432 Enhancements in the routine evaluation of composite aerospace components using a microprocessor based p 73 A86-47605 equipment

Multilayer printed circuit board characterization by p 33 N86-22618 thermal analysis Historical development of solar array drive mechanisms by British Aerospace p 102 N86-27357

Surface-treated titanium alloy gears for space echanisms performance mechanisms and component assessment in thermal vacuum tests at

STL p 85 N86-27390 Thermal vacuum inclinometry: A test facility for antenna ESTL

pointing mechanisms p 102 N86-27391
The Olympus antenna deployment subsystem design d testing p 27 N86-27392 pointing mechanisms

and testing The application of composites to space structures: Guidelines on important aspects for the designer

p 77 N86-30759 Hygrothermal characteristics of antenna materials

p 77 N86-30760 Fatigue and damage in fibre reinforced nylon

p 77 N86-30761 Dynamic mechanical analysis as an aid to the characterization of composite materials

p 77 N86-30763

Damping of composites p 78 N86-30764 The strength of bolted joints in Kevlar RP

p 28 N86-30765

Assessing the effects of delaminations on the postbuckling strength of CRFP panels


p 79 N86-30781 Developments in the nondestructive evaluation (NDE) of composite materials p 79 N86-30785

Design and development testing of the bonded joint between a typical launch vehicle attachment ring and CFRP

n 62 N86-29890

E20602-81-C-0180

### Typical Contract Number Index Listing



Listings in this index are arranged alphanumerically by contract number. Under each contract number, the accession numbers denoting documents that have been produced as a result of research done under that contract are arranged in ascending order with the AIAA accession numbers appearing first. The accession number denotes the number by which the citation is identified in the abstract section. Preceding the accession number is the page number on which the citation may be found.


AF PROJ. C65-5	p 62	N86-29890
AF-AFOSR-0051-84	p 84	N86-24294
AF-AFOSR-0342-84	p 70	N86-29893
AF-AFOSR-0394-84	p 90	N86-28991
AF-AFOSR-81-0198	p 42	A86-39037
AF-AFOSR-82-0062	p 42	A86-38918
	p 48	A86-41739
AF-AFOSR-82-0242	p 49	A86-42921
AF-AFOSR-83-0017	p 44	A86-39487
AF-AFOSR-83-0104	p 26	A86-49818
AF-AFOSR-83-0204	p 21	A86-46465
AF-AFOSR-83-0318	p 50	A86-43005
AF-AFOSR-83-0346	p 44	A86-39485
AF-AFOSR-84-0020	p 52	A86-43772
AF-AFOSR-84-0393	p 48	A86-40843
AF-AFOSR-85-0020	p 41	A86-38889
ARPA ORDER 3655	p 62	N86-29890
ARPA ORDER 4828	p 62	N86-28985
CNES-84-5393	p 67	A86-46578
DA PROJ. D82-8	p 62	N86-28985
DE-AC03-76SF-00098	p 78	N86-30777
DE-AC04-76DP-00789	p 68	N86-23053
DE-AC05-84OR-21400	p 70	N86-31113
DSS-06ST-36001-3-2484	p 36	A86-31665
200 000, 0000, 0 2 10 1 111111111111111	p 47	A86-39569
ESA-5195/82-NL-BI	p 85	N86-27388
ESA-5272/82	p 67	A86-46578
ESA-5594/83	p 16	N86-32107
LOA-3334700	p 17	N86-32108
	p 17	N86-32109
	p 17	N86-32110
	p 85	N86-33024
ESTEC-3-5632/83-NL-PP	p 71	N86-32517
ESTEC-5206/82-NL-PB(SC)	p 29	N86-32622
ESTEC-5206/82-NL-PB(S6)	p 29	N86-30797
ESTEC-5292/82-NL-PP(SC)	p 58	N86-22631
ESTEC-5326/83-NL-PB(SC)	p 37	A86-33255
E37E0-3320703-14E-1 D(00)	p 63	N86-30653
ESTEC-5494/84-NL(CM)		N86-30798
ESTEC-5508/83-NL-PB(SC)		N86-24025
ESTEC-5554/83-NL-PB(SC)		N86-26711
ESTEC-5814/84-NL-B		N86-22630
ESTEC-6063/84-NL-PB(SC)		N86-31998
F04611-82-K-0037		A86-31796
F04611-85-K-0051		A86-47435
F04701-83-C-0084		A86-43213
	`	A86-30714
F04701-84-C-0085		
F04701-85-C-0086		A86-39951
F08635-84-R-0098		A86-47445
F19628-83-C-0153	. р70	N86-30802
F19628-85-C-0002	. p7	A86-41747
	•	

F30602-84-C	-0180		•	62	N86-29890
	-0012		p	62	N86-28985
F33615-84-C				25	A86-38885
F33615-84-K				59	N86-26074
F49620-82-C				57	A86-47955
F49620-82-C				83 30	A86-47404 A86-32943
F49620-83-C	-0067			31	A86-38811
				73	A86-41740
				33	N86-23631
F49620-83-0	-0092		р	59	N86-26222
				62	N86-29891
F49620-83-K			- 1	51	A86-43219 A86-39481
F49620-84-0				43 45	A86-39495
F49620-85-0				63	N86-29892
NAGW-21				19	A86-38813
NAGW-847				14	N86-25401
NAG1-126				34	N86-24730
1110111				65 19	N86-32512 A86-38953
NAG1-145 NAG1-225				86	A86-34174
MAG 1-225				41	A86-38916
				47	A86-39508
			р	54	A86-47415
NAG1-258				42	A86-39037
	•••••			33	A86-50115
NAG1-386				54 32	A86-47414 A86-49599
NAG1-41 NAG1-429				60	N86-27401
NAG1-436				47	A86-39510
				53	A86-47412
NAG1-535				62	N86-28983
NAG1-541				52	A86-45423
11101 501		•		41	N86-31336 A86-38907
NAG1-581 NAG1-593				76	N86-28195
NAG3-516				44	A86-39485
NAG3-674				90	N86-26358
NAG8-551				68	N86-25689
NASW-3921	ا			101	N86-25794
				103	N86-27644 N86-28407
NASW-4004	4			26	N86-24652
MW244-4004	•	***************************************		101	N86-24736
NASW-4006	6		F	13	N86-25398
NASW-4066			F	104	N86-30584
NAS1-1581				42	A86-39037
NAS1-1639				42	A86-39037 N86-29989
NAS1-1685	4			76	1400-23300
NAS1-1707		***************************************		76 48	A86-40843
NAS1-1707 NAS1-1720	o		Ì	76 48 16	A86-40843 N86-30933
NAS1-1707 NAS1-1720 NAS1-1794	0 9		F	48 16 58	N86-30933 N86-23343
NAS1-1720	0 9 6		t	48 16 58 69	N86-30933 N86-23343 N86-28973
NAS1-1720 NAS1-1794	0 9 6		F	48 16 58 69 69	N86-30933 N86-23343 N86-28973 N86-29115
NAS1-1720 NAS1-1794 NAS1-1801	0 19 16 16		F	48 16 58 69 69 69	N86-30933 N86-23343 N86-28973 N86-29115 N86-29877
NAS1-1720 NAS1-1794	0 19 16 16		F	48 5 16 5 58 6 69 6 69 6 69	N86-30933 N86-23343 N86-28973 N86-29115 N86-29877 N86-32504
NAS1-1720 NAS1-1794 NAS1-1801	0 9 6 6		F	48 16 58 69 69 69	N86-30933 N86-23343 N86-28973 N86-29115 N86-29877
NAS1-1720 NAS1-1794 NAS1-1801 NAS10-111	65		F	9 48 9 16 9 58 9 69 9 69 9 17 9 17 9 90 9 68	N86-30933 N86-23343 N86-28973 N86-29115 N86-29877 N86-32504 N86-32505 N86-26369 N86-24877
NAS1-1720 NAS1-1794 NAS1-1801 NAS10-111 NAS3-2377 NAS3-2423	0 99 16 6 165 73		F	9 48 9 16 9 58 9 69 9 69 9 17 9 17 9 90 9 68 9 68	N86-30933 N86-23343 N86-28973 N86-29115 N86-29877 N86-32504 N86-32505 N86-26369 N86-24877 N86-24878
NAS1-1720 NAS1-1794 NAS1-1801 NAS10-111	0 99 16 6 165 73		F	9 48 9 16 9 58 9 69 9 69 9 17 9 17 9 90 9 68 9 68 9 13	N86-30933 N86-23343 N86-28973 N86-29115 N86-29877 N86-32504 N86-32505 N86-26369 N86-24877 N86-24878 N86-24875
NAS1-1720 NAS1-1794 NAS1-1801 NAS10-111 NAS3-2377 NAS3-2423 NAS3-2423	66 65 73 32		F	9 48 9 16 9 58 9 69 9 69 9 17 9 17 9 90 9 68 9 68 9 13 9 13	N86-30933 N86-23343 N86-28973 N86-29115 N86-29175 N86-32504 N86-32505 N86-26369 N86-24877 N86-24875 N86-24875
NAS1-1720 NAS1-1794 NAS1-1801 NAS10-111 NAS3-2377 NAS3-2423	66 65 73 32		F	9 48 9 16 9 58 9 69 9 69 9 17 9 90 9 68 9 13 9 13 9 22	N86-30933 N86-23343 N86-28973 N86-29115 N86-29877 N86-32505 N86-23505 N86-24877 N86-24878 N86-24876 N86-24876 N86-27403
NAS1-1720 NAS1-1794 NAS1-1801 NAS10-111 NAS3-2377 NAS3-2423 NAS3-2423	66 65 73 32		F	9 48 9 16 9 58 9 69 9 69 9 17 9 17 9 90 9 68 9 68 9 13 9 13	N86-30933 N86-23343 N86-28973 N86-29115 N86-29175 N86-32504 N86-32505 N86-26369 N86-24877 N86-24875 N86-24875
NAS1-1720 NAS1-1794 NAS1-1801 NAS10-111 NAS3-2377 NAS3-2423 NAS3-2423	73 32 33		F	9 48 9 16 9 58 9 69 9 69 9 17 9 18 9 68 9 68 9 13 9 13 9 22 9 22	N86-30933 N86-23343 N86-29973 N86-29115 N86-29877 N86-23504 N86-23505 N86-24877 N86-24877 N86-24878 N86-24876 N86-27403 N86-27403 N86-27404 N86-27405
NAS1-1720 NAS1-1794 NAS1-1801 NAS10-111 NAS3-2377 NAS3-2423 NAS3-2423 NAS3-2423	65 32 33 36		F	0 48 0 16 0 58 0 69 0 69 0 69 0 17 0 17 0 0 18 0 0 68 0 0 68 0 13 0 0 0 13 0 0 0 22 0 0 0 14 0 0 14	N86-20933 N86-23943 N86-29973 N86-29115 N86-29574 N86-32505 N86-2505 N86-24877 N86-24878 N86-24878 N86-24878 N86-27404 N86-27404 N86-27404 N86-27404 N86-27404 N86-27404 N86-27407
NAS1-1720 NAS1-1794 NAS1-1801 NAS10-111 NAS3-2377 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423	65 73 32 35		F F	0 48 0 16 0 58 0 69 0 69 0 69 0 17 17 0 0 18 0 0 68 0 13 0 0 13 0 0 13 0 0 14 0 0 14 0 0 15 0 0 0 15 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	N86-30933 N86-23343 N86-29973 N86-29115 N86-29177 N86-32504 N86-22505 N86-24878 N86-24878 N86-24878 N86-24878 N86-27403 N86-27404 N86-27405 N86-27404 N86-27405 N86-27407 N86-27407 N86-27407 N86-27407 N86-27407 N86-27407
NAS1-1720 NAS1-1794 NAS1-1801 NAS10-111 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423	73 32 35 36		F F	0 48 0 16 0 58 0 69 0 69 0 69 0 17 17 0 0 18 0 0 68 0 0 18 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	N86-30933 N86-23343 N86-28973 N86-29175 N86-29877 N86-23505 N86-23505 N86-24877 N86-24877 N86-24876 N86-27403 N86-27404 N86-27404 N86-27402 N86-27402 N86-27402 N86-27402 N86-27402 N86-27402 N86-27407 A86-39907 A86-47960
NAS1-1720 NAS1-1794 NAS1-1801 NAS10-111 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423	73 32 35 36		F F	0 48 0 16 0 58 0 69 0 69 0 17 0 17 0 90 0 68 0 0 13 0 0 22 0 0 22 0 0 14 0 0 14 0 0 14 0 0 15 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	N86-30933 N86-23343 N86-29973 N86-29115 N86-29177 N86-32504 N86-22505 N86-24878 N86-24878 N86-24878 N86-24878 N86-27403 N86-27404 N86-27405 N86-27404 N86-27405 N86-27407 N86-27407 N86-27407 N86-27407 N86-27407 N86-27407
NAS1-1720 NAS1-1794 NAS1-1801 NAS10-111 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423	73 32 35 36		F F F F F F F F F F F F F F F F F	0 48 0 16 0 58 0 69 0 69 0 69 0 17 17 0 0 18 0 0 68 0 0 18 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	N86-30933 N86-23343 N86-29973 N86-29175 N86-29877 N86-23505 N86-24877 N86-24877 N86-24876 N86-27403 N86-27403 N86-27404 N86-27405 N86-27405 N86-27405 N86-27405 N86-27407 N86-27407 N86-27407 N86-27407 N86-27407 N86-27407 N86-27407 N86-27407 N86-27407 N86-38887 A86-48993 A86-47434
NAS1-1720 NAS1-1794 NAS1-1801 NAS10-111 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423	73 32 33 35 36		F F F F F F F F F F F F F F F F F	0 48 0 16 0 58 0 69 0 69 0 17 0 0 68 0 13 0 0 22 0 0 18 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	N86-20933 N86-23943 N86-29973 N86-29115 N86-22504 N86-22504 N86-22505 N86-24877 N86-24877 N86-24878 N86-24878 N86-27402 N86-27404 N86-27405 N86-27407 A86-39907 A86-47960 A86-38887 A86-42993 A86-47964
NAS1-1720 NAS1-1794 NAS1-1801 NAS10-111 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2464 NAS5-294(NAS5-294)			F	0 48 0 16 0 16 0 16 0 16 0 16 0 16 0 16 0 16	N86-30933 N86-23343 N86-29973 N86-29115 N86-29504 N86-22504 N86-22505 N86-24878 N86-24878 N86-24878 N86-24878 N86-27403 N86-27404 N86-27405 N86-27407 A86-39907 A86-47960 A86-47993 A86-47434 N86-27405 N86-27405 N86-27405
NAS1-1720 NAS1-1794 NAS1-1801 NAS10-111 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423			F F	0 48 0 16 0 569 0 669 0 0 67 17 0 0 0 68 0 0 17 17 0 0 0 68 0 0 17 17 17 18 18 19 19 19 19 19 19 19 19 19 19 19 19 19	N86-30933 N86-23343 N86-29973 N86-29115 N86-29877 N86-23505 N86-24877 N86-24877 N86-24876 N86-24876 N86-27403 N86-27404 N86-27405 N86-27402 N86-27405
NAS1-1720 NAS1-1794 NAS1-1801 NAS10-111 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423			F F	0 48 0 16 0 58 0 66 0 66 0 0 66 0 0 0 17 10 0 0 68 0 0 0 13 0 0 0 13 0 0 0 14 0 0 0 14 0 0 0 18 0 0 0 0 18 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	N86-30933 N86-23343 N86-28973 N86-29115 N86-29571 N86-32504 N86-23505 N86-24877 N86-24877 N86-24878 N86-24878 N86-27403 N86-27403 N86-27405 N86-27405 N86-39907 A86-39907 A86-47960 A86-38887 A86-47960 N86-2750 N86-2733 N86-24733
NAS1-1720 NAS1-1794 NAS1-1801 NAS10-1111 NAS3-2377 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2424 NAS3-2426 NAS5-2940 NAS6-3544 NAS8-356	0		F F F F F F F F F F F F F F F F F	0 48 0 16 0 16 0 16 0 16 0 16 0 16 0 16 0 16	N86-29333 N86-29373 N86-29977 N86-22504 N86-22505 N86-25505 N86-24878 N86-24878 N86-24878 N86-24878 N86-247402 N86-27402 N86-27402 N86-27407 A86-39907 A86-49907 A86-4795 N86-27402 N86-27405 N86-27405 N86-27407 A86-39907 A86-4795 N86-24732 N86-24733 N86-24733
NAS1-1720 NAS1-1794 NAS1-1801 NAS10-111 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423	0		F F F F F F F F F F F F F F F F F	0 48 0 16 0 16 0 16 0 16 0 16 0 17 0 17 0 18 0 18 0 18 0 18 0 18 0 18 0 18 0 18	N86-30933 N86-23343 N86-28973 N86-29115 N86-29877 N86-32504 N86-23505 N86-24875 N86-24875 N86-24875 N86-24876 N86-27402 N86-27402 N86-27402 N86-27405 N86-27405 N86-27405 N86-27405 N86-27405 N86-27405 N86-27405 N86-27405 N86-27405 N86-27405 N86-27405 N86-27405 N86-27405 N86-27405 N86-27405 N86-2730 N86-2733 N86-24733 N86-24733 N86-24734 N86-24735 N86-24734 N86-24735 N86-24734 N86-24735 N86-24734
NAS1-1720 NAS1-1794 NAS1-1801 NAS10-111 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2466 NAS5-2940 NAS8-3564 NAS8-3566	0		F F F F F F F F F F F F F F F F F	0 48 0 16 0 16 0 16 0 16 0 16 0 16 0 16 0 16	N86-30933 N86-23343 N86-23973 N86-29115 N86-29517 N86-22504 N86-32505 N86-24878 N86-24878 N86-24878 N86-24878 N86-247404 N86-27405 N86-27407 A86-39907 A86-4993 A86-47434 N86-24732 N86-24732 N86-24731 N86-24735 N86-24731
NAS1-1720 NAS1-1794 NAS1-1801 NAS10-111 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2423 NAS3-2466 NAS5-294(NAS7-918 NAS8-356 NAS8-356 NAS8-356	0		F F F F F F F F F F F F F F F F F	0 48 0 16 0 16 0 16 0 16 0 16 0 17 0 17 0 18 0 18 0 18 0 18 0 18 0 18 0 18 0 18	N86-30933 N86-23343 N86-28973 N86-29115 N86-29877 N86-32504 N86-23505 N86-24875 N86-24875 N86-24875 N86-24876 N86-27402 N86-27402 N86-27402 N86-27405 N86-27405 N86-27405 N86-27405 N86-27405 N86-27405 N86-27405 N86-27405 N86-27405 N86-27405 N86-27405 N86-27405 N86-27405 N86-27405 N86-27405 N86-2730 N86-2733 N86-24733 N86-24733 N86-24734 N86-24735 N86-24734 N86-24735 N86-24734 N86-24735 N86-24734

	p 61	N86-27650
	p 61	N86-28114
	p 65	N86-32513
NAS9-15800	p 68	A86-50286
NAS9-16023	p 52	A86-46462
NAS9-16715	p 48	A86-40607
NAS9-17310	p 100	A86-49597
NAS9-18000	p 48	A86-40607
NCC2-294	p 104	N86-30135
NCC2-333	p 85	N86-33016
NCC2-338	p 77	N86-30738
NGT-33-183-801	p 40	A86-38827
NGT-33-183-802	p 46	A86-39505
NGT-44-001-800	p 105	N86-31409
NGT21-002-080	p 104	N86-29888
NIVR-1910	p 60	N86-26367
1414U-1210	p 65	N86-31643
NICEDO A AGEZ	p 57	A86-47942
NSERC-A-0967	p 57	A86-47942
NSERC-A-2181	p 50	A86-43214
NSERC-G-1547		A86-39499
NSERC-67-1547	p 46	A86-42995
NSF ECS-82-12479	p 50	A86-39510
NSF ECS-83-04968	p 47	
NSF ECS-85-16445	p 53	A86-47412
NSF MCS-82-00883	p 42	A86-39037
NSF MCS-82-05355	p 42	A86-39037
NSF MEA-82-04920	p 44	A86-39489
NSF MEA-83-03539	p 82	A86-39503
NSF MEA-83-18867	p 53	A86-46470
	p 83	A86-47469
NSG-1320	p 24	A86-34634
NSG-1414	p 43	A86-39482
NSG-4002	p 62	N86-29272
N00014-84-C-0149	p 53	A86-47412
N00014-85-C-0857	p 75	N86-24762
	p 80	N86-31668
RH4-394019	p 61	N86-27650
W-7405-ENG-48	p 68	N86-25680
324-01-00	p 58	N86-23343
481-01-02	p 90	N86-32522
482-57-13-05	p 61	N86-28113
505-63-11	p 27	N86-30206
506-41-5A	p 80	N86-31634
506-42-21	p 90	N86-26369
506-43-41-01	p 35	N86-28984
506-43-41-02	p 33	N86-23623
	p 34	N86-24731
	p 60	N86-26357
	p 85	N86-30234
506-43-51-01	p 59	N86-25019
506-43-51-02	p 58	N86-22997
506-44-21-03	p 16	N86-30933
506-56-11-01	p 64	N86-30800
Je	p 64	N86-30801
506-58-23-01		N86-28973
	p 69	N86-29115
	p 69	N86-29877
643-10-20	. p 13	N86-24876
0.10 10 20 11111111111111111111111111111	p 68	N86-24878
	p 50	

# Typical Report Number Index Listing

TECHNOLOGY FOR LARGE SPACE SYSTEMS / A Bibliography (Supplement 16)



Listings in this index are arranged alphanumerically by report number. The page number indicates the page on which the citation is located. The accession number denotes the number by which the citation is identified. An astreik (\*) indicates that the item is a NASA report. A pound sign (#) indicates that the item is available on microfiche.

A-86076 ...... p 102 N86-26650 \* #

AAS PAPER 85-010 p 36	A86-31781 * #
AAS PAPER 85-043 p 36	A86-31794 * #
AAS PAPER 85-044 p 36	A86-31795 * #
AAS PAPER 85-045 p 37	A86-31796 #
AAS PAPER 85-302 p 97	A86-43204 #
AAS PAPER 85-304 p 88	A86-43206 #
AAS PAPER 85-340 p 50	A86-43208 * #
AAS PAPER 85-360 p 51	A86-43217 * #
AAS PAPER 85-364 p 51	A86-43219 #
AAS PAPER 85-365 p 51	A86-43220 #
AAS PAPER 85-383 p 97	A86-43274 * #
AAS PAPER 85-391 p 50	A86-43213 #
AAS PAPER 85-392 p 50	A86-43214 #
AAS PAPER 85-393 p 51	A86-43215 #
AAS PAPER 85-395 p 20	A86-43216 #
AAS PAPER 85-396 p 7	A86-43228 * #
AAS PAPER 85-398 p 97	A86-43230 #
AAS PAPER 85-399 p 7	A86-43231 * #
AAS PAPER 85-408 p 7	A86-43259 #
AAS PAPER 85-420 p 51	A86-43221 #
AAS PAPER 85-422 p 52	A86-43222 * #
AAS PAPER 85-424 p 20	A86-43223 * #
AAS PAPER 85-425 p 52	A86-43224 #
7 5 6 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,
AD-A162139 p 33	N86-23631 #
AD-A162381 p 12	N86-24588 #
AD-A162385 p 84	N86-24294 #
AD-A163569 p 75	N86-24762 #
AD-A163635 p 59	N86-26074 #
AD-A163975 p 58	N86-24739 #
AD-A163977 p 59	N86-25402 #
AD-A163989p 58	N86-24717 #
AD-A164009 p 59	N86-26222 #
AD-A164016 p 59	N86-24740 #
AD-A164039 p 101	N86-24741 #
AD-A164405 p 14	N86-25403 #
AD-A165535 p 103	N86-27525 #
AD-A165864 p 62	N86-29890 #
AD-A165917 p 62	N86-28985 #
AD-A165945 p 90	N86-28991 #
AD-A166207 p 62	N86-29891 #
AD-A166208 p 63	N86-29892 #
AD-A166216 p 70	N86-29893 #
AD-A166559 p 70	N86-30802 #
AD-A166912 p 64	N86-30803 #
	A86-30323 #
1,12 1,11 1,121 1 1 1 1 1 1 1 1 1 1 1 1	N86-31668 #
AD-A167792 p 80	.100-01000 #
AD D0000001 - 00	NIGE 20207 #
AD-B098585L p 60	N86-26367 #
AD-B098585L p 60 AD-B101030L p 64	N86-26367 # N86-31636 #
AD-B101030L p 64	"
	"
AD-B101030L p 64	N86-31636 #

AFIT/CI/NR-86-47T		p 64	N86-30803 #	
			N86-24717 # N86-25402 #	
AFIT/GAE/AA/85D-5 .		p 58	N86-24739 #	•
AFIT/GE/ENG/85D-14	***************************************	p 59	N86-24740 #	ł
AFIT/GSO/ENY/85D-2		p 101	N86-24741 #	ŧ
AFOSR-85-1016TR AFOSR-85-1087TR			N86-23631 # N86-24294 #	
AFOSR-85-1233TR		p 59	N86-26222 #	ŧ
AFOSR-86-0057TR			N86-29893 #	ŧ
AFOSR-86-0094TR-PT-	1	p 63	N86-29892 #	ŧ
AFOSR-86-0095TR		p 62	N86-29891 #	ŧ
AFRPL-TR-86-013		p 90	N86-28991 #	ŧ
AFWAL-TR-85-3093		p 59	N86-26074 #	<b>#</b>
			A86-38951 * #	
AIAA PAPER 86-0837			A86-38885 # A86-38886 * #	
AIAA PAPER 86-0838			A86-38887 * #	
AIAA PAPER 86-0839 AIAA PAPER 86-0840			A86-38888 #	
				r ¥
AIAA PAPER 86-0841 AIAA PAPER 86-0860			A86-38809 * #	
AIAA PAPER 86-0872				<del>7</del> #
AIAA PAPER 86-0875				¥
AIAA PAPER 86-0876				, ¥
AIAA PAPER 86-0877				#
AIAA PAPER 86-0878				#
AIAA PAPER 86-0903			A86-38914	#
AIAA PAPER 86-0905				#
AIAA PAPER 86-0906		p 41		#
AIAA PAPER 86-0907		p 41		#
AIAA PAPER 86-0908				#
AIAA PAPER 86-0911				#
AIAA PAPER 86-0916		p 40		# #
AIAA PAPER 86-0950				# #
AIAA PAPER 86-0951 AIAA PAPER 86-0952		n 19		#
AIAA PAPER 86-0954				#
AIAA PAPER 86-0955				#
AIAA PAPER 86-0961		p 42	A86-38933 *	#
AIAA PAPER 86-0974		. р 24		#
AIAA PAPER 86-1022		. p 24		#
AIAA PAPER 86-1139				# #
AIAA PAPER 86-1160 AIAA PAPER 86-1175				" #
AIAA PAPER 86-1178		. p 96		#
AIAA PAPER 86-1184		. p5	A86-40592	#
AIAA PAPER 86-1185		. p 25		#
AIAA PAPER 86-1186				#
AIAA PAPER 86-1187				#
AIAA PAPER 86-1191			A86-40597 A86-40613 *	# #
AIAA PAPER 86-1192 AIAA PAPER 86-1194				π #
AIAA PAPER 86-1210				#
AIAA PAPER 86-1226		. р6	A86-40618 *	#
AIAA PAPER 86-1268		p 20	A86-39888	#
AIAA PAPER 86-1279		. р74	A86-49595	#
AIAA PAPER 86-1295			A86-39903	#
AIAA PAPER 86-1297			A86-39905 * A86-49597 *	# #
AIAA PAPER 86-1298 AIAA PAPER 86-1300			A86-39907 *	#
AIAA PAPER 86-1322			A86-39923	#
AIAA PAPER 86-1323			A86-39924	#
AIAA PAPER 86-1340		р 31	A86-39939	#
AIAA PAPER 86-1342	***************************************	p 31	A86-39941 *	#
AIAA PAPER 86-1355		p 32	A86-49599 * A86-39951	# #
AIAA PAPER 86-1356 AIAA PAPER 86-1391		p / f	A86-42608	#
AIAA PAPER 86-1402		p 87	A86-42615 *	#
AIAA PAPER 86-1403			A86-42616 *	#
AIAA PAPER 86-1404		p 87	A86-42617 *	#
AIAA PAPER 86-1405		p 87	A86-42618	#
AIAA PAPER 86-1413		p 87	A86-42623 *	#
AIAA PAPER 86-1560		р 87	A86-42713	#
AIAA PAPER 86-1561			A86-42714 *	#
AIAA PAPER 86-1562		p 88	A86-42715	#


AIAA PAPER 86-1564	,,	р 88	A86-42716 * #
AIAA PAPER 86-1603		p 96	A86-42743 #
AIAA PAPER 86-1703		p 88	A86-42799 * #
AIAA PAPER 86-1718	,	p 32	A86-42809 #
AIAA PAPER 86-1934		p 52 p 53	A86-45423 * # A86-47403 #
AIAA PAPER 86-1976 AIAA PAPER 86-1977		p 83	A86-47404 #
AIAA PAPER 86-1986	,	p 53	A86-47411 #
AIAA PAPER 86-1987		p 53	A86-47412 * #
AIAA PAPER 86-1988		p 56	A86-47510 #
AIAA PAPER 86-1990		p 21	A86-47413 * #
AIAA PAPER 86-1991		p 54	A86-47414 * #
AIAA PAPER 86-1993 AIAA PAPER 86-2047		p 54 p 54	A86-47415 * # A86-47430 #
AIAA PAPER 86-2048		p 54	A86-47431 * #
AIAA PAPER 86-2049		p 54	A86-47432 #
AIAA PAPER 86-2050		p 54	A86-47433 #
AIAA PAPER 86-2051		p 55	A86-47434 * #
AIAA PAPER 86-2052		p 55	A86-47435 #
AIAA PAPER 86-2053		p 55	A86-47436 #
AIAA PAPER 86-2063		p 89	A86-47910 # A86-47440 * #
AIAA PAPER 86-2090 AIAA PAPER 86-2100		p 83 p 11	A86-47445 #
AIAA PAPER 86-2122		p 84	A86-47923 #
AIAA PAPER 86-2123		p 32	A86-47924 * #
AIAA PAPER 86-2124		p 57	A86-47955 #
AIAA PAPER 86-2125		p 57	A86-47925 #
AIAA PAPER 86-2137		p 55	A86-47451 #
AIAA PAPER 86-2138		p 57	A86-47515 #
AIAA PAPER 86-2139 AIAA PAPER 86-2140		p 55	A86-47452 * # A86-47453 * #
AIAA PAPER 86-2140		р 11 р 55	A86-47454 * #
AIAA PAPER 86-2152		p 89	A86-47460 #
AIAA PAPER 86-2154		p 57	A86-47518 #
AIAA PAPER 86-2175		p 100	A86-47931 * #
AIAA PAPER 86-2178		p 11	A86-47960 * #
AIAA PAPER 86-2185		p 83	A86-47467 #
AIAA PAPER 86-2186		p 83	A86-47468 #
AIAA PAPER 86-2187		р 83 р 56	A86-47469 # A86-47471 #
AIAA PAPER 86-2190 AIAA PAPER 86-2192		p 56	A86-47472 #
AIAA PAPER 86-2193		p 56	A86-47473 #
AIAA PAPER 86-2194		p 56	A86-47474 #
AIAA PAPER 86-2198		p 56	A86-47478 #
AIAA PAPER 86-2271		p 57	A86-47940 * #
AIAA PAPER 86-2274		p 57	A86-47942 #
AIAA PAPER 86-2300		р 84 р 89	A86-49552 * # A86-49553 * #
AIAA PAPER 86-2301 AIAA PAPER 86-2302		p 11	A86-49554 * #
AIAA PAPER 86-2307		p 67	A86-46939 #
AIAA PAPER 86-2312		p 99	A86-46942 #
AIAA PAPER 86-2315		p 21	A86-47048 #
AIAA PAPER 86-2321			A86-46947 * #
AIAA PAPER 86-2328			A86-46951 #
AIAA PAPER 86-2332			A86-46955 # A86-46956 #
AIAA PAPER 86-2333 AIAA PAPER 86-2348		- 44	A86-46956 # A86-46961 #
AIAA PAPER 86-2351		- 07	A86-49561 #
AIAA PAPER 86-2353			A86-50266 * #
AIAA PAPER 86-9754			A86-32095 * #
AIAA PAPER 86-9783		p 91	A86-32117 * #
APR-1		. p 90	N86-31647 * #
	450	- 00	ADC 4000C 4
ASME PAPER 86-GT- ASME PAPER 86-HT-			A86-48206 # A86-49621 * #
D0E70400		n e0	N86.26267 4
B8578426 B8661085			N86-26367 # N86-32106 #
B8664362			N86-31636 #
B8665500			N86-31643 #
C-214		•	N86-30802 #
CDC-223-1284-FR-AS			N86-28985 #
	.,,		N86-22627 #
CERT-4128-VOL-2-AF			N86-22628
CERT-4128-VOL-2-AF			N86-22629
		•	

							HEFC	וחו ועטוי	MBEH INDEX
DE86-002125	р 68	N86-23053	#	L-16169	n 85	N86-30234 * #	NASA-CASE LAD 12112 1	- 00	NOO 0 1007 1 "
DE86-004180		N86-25680	.,		p 05	1400-30234 η	NASA-CASE-LAR-13113-1		N86-24867 * #
DE86-010070		N86-31113		LPI-TR-86-05	p 104	N86-30584 * #	NASA-CASE-LAR-13117-1 NASA-CASE-LAR-13169-1	p 27	N86-25789 * #
	•		.,			,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	NASA-CASE-LAR-13169-1	p 101	
DGLR BERICHT 85-02	p 93	A86-33226	#	MATRA-CMT-TS101/RT/16.85 .	p 71	N86-32517 #	NASA-CASE-LAR-13489-1	p / 3	N86-24880 * # N86-31630 * #
DGLR BERICHT 85-03	p 100	A86-50334	#					•	1400-31030 #
DGLD DADED OF 100	_			MATRA-EPT/DT/VT068/098	р 58	N86-22631 #	NASA-CASE-LEW-14072-3	p 75	N86-26434 * #
DGLR PAPER 85-123	рз	A86-35173		MDD DV44	- 00	1100 00000			
DGLR PAPER 85-150	р 30	A86-35186	# .	MBB-RX11	р 29	N86-32622 #	NASA-CASE-MSC-20676-1	р 26	N86-24729 * #
DGLR-85-02	n 104	N86-30627	#	MCR-85-640-VOL-2	5 60	N86-29877 * #			
DGLR-85-100		N86-25398		MCR-85-640-VOL-3		N86-28973 * #	NASA-CASE-NPO-16236-1	p 103	N86-27706 * #
	₽ 13	1400-23390	#	MCR-85-640		N86-29115 * #	NACA CD GLOS LIGH		
D180-29767-1	р 76	N86-29989	• #	MCR-85-721-ISSUE-1		N86-24762 #	NASA-CP-2422-VOL-1	p 104	N86-28407 * #
		20000	"	MCR-85-721		N86-31668 #	NASA-CP-2422-VOL-2 NASA-CP-2422	p 103	N86-27644 * #
E-3138		N86-30206	• #		•		NAGA-CF-2422	p 101	N86-25/94 * #
E-3171		N86-32522		MM-4875-85-11	р 33	N86-23631 #	NASA-CR-171931	n 105	N86-31409 * #
E-3222	p 80	N86-31634	• #				NASA-CR-174904	p 105	N86-24878 * #
				MTR-85-556-VOL-2	p 13	N86-24876 * #	NASA-CR-174905	p 68	N86-24877 * #
ESA-CR(P)-2104		N86-22630	#				NASA-CR-174928	p 22	N86-27403 * #
ESA-CR(P)-2129		N86-24025	#	NAS 1.15:77683		N86-25398 * #	NASA-CR-174929	p 22	N86-27404 * #
ESA-CR(P)-2141 ESA-CR(P)-2144		N86-26711	#	NAS 1.15:77908		N86-24736 * #	NASA-CR-174930		N86-27405 * #
ESA-CR(P)-2159		N86-22631 N86-28116	#	NAS 1.15:86551 NAS 1.15:87617		N86-31606 * #	NASA-CR-174985		N86-27407 * #
ESA-CR(P)-2180		N86-32622	#	NAS 1.15:87673		N86-28981 * # N86-23623 * #	NASA-CR-174986	р 14	N86-27402 * #
ESA-CR(P)-2182		N86-31998	#	NAS 1.15:87679		N86-28113 * #	NASA-CR-175016	p 13	N86-24875 * #
ESA-CR(P)-2190-PT-1	p 16	N86-32107	#	NAS 1.15:87684		N86-26357 * #	NASA-CR-175017 NASA-CR-175084	p 13	N86-24876 * #
ESA-CR(P)-2190-PT-2		N86-33024	#	NAS 1.15:87696		N86-22997 * #	NASA-CR-176749		N86-26369 * #
ESA-CR(P)-2190-PT-3		N86-32108	#	NAS 1.15:87713	. p 35	N86-28984 * #	NASA-CR-176762	p 66	N86-25689 * # N86-24730 * #
ESA-CR(P)-2190-PT-4		N86-32109	#	NAS 1.15:87715		N86-24731 * #	NASA-CR-176832		N86-25401 * #
ESA-CR(P)-2190-PT-5		N86-32110	#	NAS 1.15:87720		N86-25019 * #	NASA-CR-176929	n 104	N86-30135 * #
ESA-CR(P)-2191	р71	N86-32517	#	NAS 1.15:87749	. p 85	N86-30234 * #	NASA-CR-177027	p 62	N86-28983 * #
504 B00 04 304 100 15 1				NAS 1.15:88205	. p 102	N86-26650 * #	NASA-CR-177115	p 62	N86-29272 * #
ESA-PSS-01-701-ISSUE-1	p 81	N86-32584	#	NAS 1.15:88418	. р 26	N86-24652 #	NASA-CR-177146	p 64	N86-31336 * #
ESA SB 1070	. 00	NOO 000 17		NAS 1.15:88800	. p 27	N86-30206 * #	NASA-CR-177191	р 76	N86-28195 * #
ESA-SP-1079 ESA-SP-231		N86-32347	#	NAS 1.15:88822	. р 90	N86-32522 * #	NASA-CR-177263		N86-26358 * #
ESA-SP-243			#	NAS 1.15:88839 NAS 1.15:88986	. p 80	N86-31634 * #	NASA-CR-177270		N86-27401 * #
LOA-01 -240	р 105	1400-30736	#	NAS 1.15:89235	. p 15	N86-27409 * #	NASA-CR-177303	р 104	N86-30584 * #
ESA-TT-891-VOL-1	n 75	N86-22627	#	NAS 1.15:89399	. p 104	N86-28970 * # N86-29888 * #	NASA-CR-178059		N86-29115 * #
ESA-TT-891-VOL-2	р 33	N86-22628	#	NAS 1.21:7056(01)	n 101	N86-24711 #	NASA-CR-178060		N86-29877 * #
ESA-TT-891-VOL-3	p 33	N86-22629	#	NAS 1.21:7056(02)	p 103	N86-28105 * #	NASA-CR-178061		N86-28973 * #
			"	NAS 1.26:171931	p 105	N86-31409 * #	NASA-CR-178116 NASA-CR-178154	p /6	N86-29989 * #
ETN-86-96851	. p 102	N86-27353	#	NAS 1.26:174904		N86-24878 * #	NASA-CR-178350	p 10	N86-30933 * #
ETN-86-96861		N86-28116	#	NAS 1.26:174905	p 68	N86-24877 * #	NASA-CR-178754		N86-24217 * # N86-23629 * #
ETN-86-96870		N86-26711	#	NAS 1.26:174928	p 22	N86-27403 * #	NASA-CR-178819	р 13	N86-24732 * #
ETN-86-96974		N86-26367	#	NAS 1.26:174929	p 22	N86-27404 * #	NASA-CR-178820	р 13	N86-24733 * #
ETN-86-97158		N86-28633	#	NAS 1.26:174930		N86-27405 * #	NASA-CR-178821		N86-24734 * #
ETN-86-97167	. p 22	N86-28118	#	NAS 1.26:174985		N86-27407 * #	NASA-CR-178822	p 13	N86-24735 * #
ETN-86-97168 ETN-86-97217	p 80	N86-30804	#	NAS 1.26:174986		N86-27402 * #	NASA-CR-178846		N86-28114 * #
ETN-86-97411		N86-30758 N86-30627	#	NAS 1.26:175016		N86-24875 * #	NASA-CR-178895	р 64	N86-31631 * #
ETN-86-97566		N86-32347	# #	NAS 1.26:175017 NAS 1.26:175084		N86-24876 * #	NASA-CR-178897		N86-31647 * #
ETN-86-97602		N86-32537	#	NAS 1.26:176749	p 90	N86-26369 * # N86-25689 * #	NASA-CR-178901		N86-32513 * #
ETN-86-97604		N86-31637	#	NAS 1.26:176762	p 34	N86-24730 * #	NASA-CR-179654	р 77	N86-30738 * #
ETN-86-97610		N86-31639	#	NAS 1.26:176832		N86-25401 * #	NASA-CR-179705 NASA-CR-179717		N86-32504 * #
ETN-86-97612		N86-31640	#	NAS 1.26:176929	p 104	N86-30135 * #	NASA-CR-179758		N86-33016 * #
ETN-86-97613	. p 65	N86-32516	#	NAS 1.26:177027		N86-28983 * #	NASA-CR-179766	p 65	N86-32512 * # N86-32505 * #
ETN-86-97618		N86-31997	#	NAS 1.26:177115	p 62	N86-29272 * #	NASA-CR-3964		N86-32505 * # N86-23343 * #
ETN-86-97619		N86-31641	#	NAS 1.26:177146	p 64	N86-31336 * #		р оо	1100-20040 #
ETN-86-97643		N86-31629	#	NAS 1.26:177191		N86-28195 * #	NASA-SP-7056(01)	p 101	N86-24711 #
ETN-86-97669 ETN-86-97681		N86-32106	#	NAS 1.26:177263		N86-26358 * #	NASA-SP-7056(02)	p 103	N86-28105 * #
ETN-86-97782	. p 64	N86-31636	#	NAS 1.26:177270	F	N86-27401 * #		•	
ETN-86-97787	. p 29	N86-32622	#	NAS 1.26:177303		N86-30584 * #	NASA-TM-77683	р 13	N86-25398 * #
ETN-86-97788-PT-2		N86-32107 N86-33024	# #	NAS 1.26:178059 NAS 1.26:178060		N86-29115 * #	NASA-TM-77908	р 101	N86-24736 * #
ETN-86-97789		N86-32108	#	NAS 1.26:178061		N86-29877 * # N86-28973 * #	NASA-TM-86551		N86-31606 * #
ETN-86-97790		N86-32109	#	NAS 1.26:178116		N86-29989 * #	NASA-TM-87617		N86-28981 * #
ETN-86-97791	p 17	N86-32110	#	NAS 1.26:178154		N86-30933 * #	NASA-TM-87673 NASA-TM-87679	•	N86-23623 * #
ETN-86-97792	. p 71	N86-32517	#	NAS 1.26:178350		N86-24217 * #	NASA-TM-87684		N86-28113 * #
ETN-86-97795		N86-31998	#	NAS 1.26:178754	p 58	N86-23629 * #	NASA-TM-87696		N86-26357 * # N86-22997 * #
ETN-86-97796		N86-32584	#	NAS 1.26:178819	p 13	N86-24732 * #	NASA-TM-87713		N86-28984 * #
ETN-86-98038	p 65	N86-31643	#	NAS 1.26:178820		N86-24733 * #	NASA-TM-87715		N86-24731 * #
FOR THE RIPA CHIC 404 BT C	- 05			NAS 1.26:178821		N86-24734 * #	NASA-TM-87720		N86-25019 * #
FOK-TR-R-84-CHO-131-PT-2 FOK-TR-R-85-068			#	NAS 1.26:178822	p 13	N86-24735 * #	NASA-TM-87749	p 85	N86-30234 * #
, UN-111-11-00-000	p /1	N86-31998	#	NAS 1.26:178846	p 61	N86-28114 * #	NASA-TM-88205	p 102	N86-26650 * #
H-86-02	n 100	N86-24217 *		NAS 1.26:178895 NAS 1.26:178897		N86-31631 * # N86-31647 * #	NASA-TM-88418		N86-24652 #
	p 100	1400-24217					NASA-TM-88800		N86-30206 * #
IRA-85-P6	p 90	N86-28991		NAS 1.26:178901 NAS 1.26:179654		N86-32513 * # N86-30738 * #	NASA-TM-88822		N86-32522 * #
	_ 55			NAS 1.26:179705		N86-32504 * #	NASA-TM-88839		N86-31634 * #
ISAS-618	p 26	N86-23624		NAS 1.26:179717		N86-33016 * #	NASA-TM-88986		N86-27409 * #
	•			NAS 1.26:179758		N86-32512 * #	NASA-TM-89235 NASA-TM-89399		N86-28970 * #
ISBN-2-225-80732-9		N86-31629		NAS 1.26:179766		N86-32505 * #	14 (U/1-1141-03033	р 104	N86-29888 * #
ISBN-3-922010-28-8			#	NAS 1.26:3964	p 58	N86-23343 * #	NASA-TP-2560	n 64	N86-30800 * #
100N 0050 4555				NAS 1.55:2422-VOL-1	p 104	N86-28407 * #	NASA-TP-2604		N86-30801 * #
ISSN-0250-1589			#	NAS 1.55:2422-VOL-2	p 103	N86-27644 * #		•	σ σσσστ π
ISSN-0285-6808	p 26			NAS 1.55:2422	p 101	N86-25794 * #	NLR-MP-85004-U		N86-26367 #
ISSN-0379-4059				NAS 1.60:2560		N86-30800 * #	NLR-MP-85020-U	p 16	N86-32106 #
ISSN-0379-6566	p 105	N86-30758		NAS 1.60:2604		N86-30801 * #	NLR-MP-85055-U		N86-31636 #
JIAA-TR-63	n 104	N86-30135 *	#	NAS 1.71:LAR-13113-1		N86-24867 * #	W 0 T0 04:: 07:		
	p 104	1400-00100		NAS 1.71:LAR-13455-1 NAS 1.71:LAR-13489-1		N86-24880 * #	NLR-TR-84116-L-PT-1		N86-32107 #
L-16076	p 64	N86-30800 *		NAS 1.71:LEW-14072-3		N86-31630 * # N86-26434 * #	NLR-TR-84116-L-PT-2		N86-33024 #
L-16094	p 60	N86-26357 *			۲.5	10	NLR-TR-84116-L-PT-3 NLR-TR-84116-L-PT-4		N86-32108 #
L-16114	•	N86-30801 *		NASA-CASE-LAR-13081-1	n 29	N86-32737 * #	NLR-TR-84116-L-PT-5		N86-32109 #
						02.01 #	TELL THOSPIOLY CO.	p 17	N86-32110 #

NLR-TR-85068-U	p 65	N86-31643 #
	p	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,
ORNL-6213	p 70	N86-31113 #
QR-3		N86-23629 * #
QR-4		N86-28114 * #
QR-5		N86-32513 * #
QR-7	p 64	N86-31631 * #
5450 TD 45 465	-00	NOC 00000 "
RADC-TR-85-165		N86-29890 #
RADC-TR-85-166		N86-28985 #
RADC-TR-85-242-VOL-2	p 103	N86-27525 #
REPT-0737P-105	n 90	N86-31647 * #
REPT-2-86		N86-24730 * #
1121 1-2-00	p o-	1100 2-1100 #
RI/RD86-116	p 90	N86-26369 * #
RI/RD86-226	p 90	N86-31647 * #
SAE P-168	p 93	A86-35426 #
SAE PAPER 851926		A86-38542 #
SAE PAPER 851933		A86-38546 * #
SAE PAPER 851935	p 39	A86-38548 #
0.5.00.00		
SAE SP-635		A86-38540 #
SAE SP-636	p 94	A86-38551 #
SAND-85-1189C	p 68	N86-23053 #
515-00-11000	P 50	#
SAR-1	p 68	N86-25689 * #
SAR-1		N86-33016 * #
SAWE PAPER 1668	p 38	A86-35212 * #
SAWE PAPER 1672		A86-35215 * #
SAWE PAPER 1673		A86-35216 #
SAWE PAPER 1674	р3	A86-35217 #
0.000		
SNIAS-1048ACA/LL/V		N86-22630 #
SNIAS-861-422-101 SNIAS-861-422-117		N86-28633 # N86-32537 #
SNIAS-861-422-117 SNIAS-861-422-119		N86-32537 # N86-31637 #
SNIAS-861-430-105		N86-28118 #
SNIAS-861-430-106		N86-30804 #
SNIAS-861-440-101		N86-31639 #
SNIAS-861-440-103		N86-31640 #
SNIAS-861-440-104	p 65	N86-32516 #
SNIAS-861-440-110	p 70	N86-31997 #
SNIAS-861-440-111	p 80	N86-31641 #
SPIE-542	- 00	400 00407 #
SPIE-542	p 92	A86-32407 #
SSI-1103	n 58	N86-23343 * #
	P 00	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,
331-1103		
STS-85-0174-VOL-1	p 13	N86-24733 * #
STS-85-0174-VOL-1STS-85-0174-VOL-2	p 13	N86-24733 * # N86-24734 * #
STS-85-0174-VOL-1	p 13	
STS-85-0174-VOL-1STS-85-0174-VOL-2STS-85-0174-VOL-3	p 13 p 13	N86-24734 * # N86-24735 * #
STS-85-0174-VOL-1STS-85-0174-VOL-2	p 13 p 13	N86-24734 * #
STS-85-0174-VOL-1 STS-85-0174-VOL-2 STS-85-0174-VOL-3 STS85-0174-ADD	p 13 p 13 p 13	N86-24734 * # N86-24735 * # N86-24732 * #
STS-85-0174-VOL-1STS-85-0174-VOL-2STS-85-0174-VOL-3	p 13 p 13 p 13	N86-24734 * # N86-24735 * #
STS-85-0174-VOL-1 STS-85-0174-VOL-2 STS-85-0174-VOL-3 STS85-0174-ADD SU-SUDAAR-552	p 13 p 13 p 13 p 62	N86-24734 * # N86-24735 * # N86-24732 * #
STS-85-0174-VOL-1 STS-85-0174-VOL-2 STS-85-0174-VOL-3 STS85-0174-ADD SU-SUDAAR-552 UCID-20080-REV-1	p 13 p 13 p 13 p 62	N86-24734 * # N86-24735 * # N86-24732 * # N86-29272 * #
STS-85-0174-VOL-1 STS-85-0174-VOL-2 STS-85-0174-VOL-3 STS85-0174-ADD SU-SUDAAR-552 UCID-20080-REV-1 US-PATENT-APPL-SN-556512	p 13 p 13 p 13 p 62 p 68 p 27	N86-24734 * # N86-24735 * # N86-24732 * # N86-29272 * # N86-25680 # N86-25789 * #
STS-85-0174-VOL-1 STS-85-0174-VOL-2 STS-85-0174-VOL-3 STS85-0174-ADD SU-SUDAAR-552 UCID-20080-REV-1 US-PATENT-APPL-SN-556512 US-PATENT-APPL-SN-582495	p 13 p 13 p 13 p 62 p 68 p 27 p 103	N86-24734 ° # N86-24735 ° # N86-24732 ° # N86-29272 ° # N86-25680 # N86-25789 ° # N86-27706 ° #
STS-85-0174-VOL-1 STS-85-0174-VOL-2 STS-85-0174-VOL-3 STS-85-0174-ADD SU-SUDAAR-552 UCID-20080-REV-1 US-PATENT-APPL-SN-556512 US-PATENT-APPL-SN-582495 US-PATENT-APPL-SN-587764	p 13 p 13 p 13 p 62 p 68 p 27 p 103 p 26	N86-24732 * # N86-24732 * # N86-29272 * # N86-25680 # N86-25789 * # N86-27706 * # N86-24729 * #
STS-85-0174-VOL-1 STS-85-0174-VOL-2 STS-85-0174-VOL-3 STS85-0174-ADD SU-SUDAAR-552 UCID-20080-REV-1 US-PATENT-APPL-SN-556512 US-PATENT-APPL-SN-582495 US-PATENT-APPL-SN-686431	p 13 p 13 p 13 p 62 p 68 p 27 p 103 p 26 p 101	N86-24734 ° # N86-24735 ° # N86-24732 ° # N86-29272 ° # N86-25680 # N86-25789 ° # N86-27706 ° # N86-24729 ° # N86-25791 ° #
STS-85-0174-VOL-1 STS-85-0174-VOL-2 STS-85-0174-VOL-3 STS-85-0174-ADD SU-SUDAAR-552 UCID-20080-REV-1 US-PATENT-APPL-SN-556512 US-PATENT-APPL-SN-582495 US-PATENT-APPL-SN-587764 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-760378	p 13 p 13 p 13 p 62 p 68 p 27 p 103 p 26 p 101 p 29	N86-24734 * # N86-24735 * # N86-24732 * # N86-29272 * # N86-25680 # N86-25789 * # N86-27706 * # N86-25791 * # N86-32737 * #
STS-85-0174-VOL-1 STS-85-0174-VOL-2 STS-85-0174-VOL-3 STS-85-0174-ADD SU-SUDAAR-552 UCID-20080-REV-1 US-PATENT-APPL-SN-586512 US-PATENT-APPL-SN-582495 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-760378 US-PATENT-APPL-SN-760378 US-PATENT-APPL-SN-804040	p 13 p 13 p 13 p 62 p 68 p 27 p 103 p 26 p 101 p 29 p 75	N86-24734 * # N86-24735 * # N86-29272 * # N86-25680 # N86-25789 * # N86-27706 * # N86-24729 * # N86-32737 * # N86-32737 * # N86-32737 * #
STS-85-0174-VOL-1 STS-85-0174-VOL-2 STS-85-0174-VOL-3 STS-85-0174-VOL-3 STS-85-0174-ADD SU-SUDAAR-552 UCID-20080-REV-1 US-PATENT-APPL-SN-556512 US-PATENT-APPL-SN-582495 US-PATENT-APPL-SN-506431 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-760378 US-PATENT-APPL-SN-804040 US-PATENT-APPL-SN-804040 US-PATENT-APPL-SN-831371	p 13 p 13 p 13 p 62 p 68 p 27 p 103 p 26 p 101 p 29 p 75 p 26	N86-24734 ° # N86-24735 ° # N86-24732 ° # N86-29272 ° # N86-25680 # N86-25766 ° # N86-27706 ° # N86-24729 ° # N86-24729 ° # N86-24737 ° # N86-24880 ° # N86-24880 ° #
STS-85-0174-VOL-1 STS-85-0174-VOL-2 STS-85-0174-VOL-3 STS-85-0174-VOL-3 STS-85-0174-ADD SU-SUDAAR-552 UCID-20080-REV-1 US-PATENT-APPL-SN-556512 US-PATENT-APPL-SN-582495 US-PATENT-APPL-SN-587764 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-760378 US-PATENT-APPL-SN-804040 US-PATENT-APPL-SN-831371 US-PATENT-APPL-SN-831371 US-PATENT-APPL-SN-834977	p 13 p 13 p 13 p 62 p 68 p 27 p 103 p 26 p 101 p 29 p 75 p 26 p 75	N86-24734 ° # N86-24735 ° # N86-24732 ° # N86-25680 # N86-25789 ° # N86-27706 ° # N86-24729 ° # N86-24729 ° # N86-24880 ° # N86-24880 ° # N86-24867 * #
STS-85-0174-VOL-1 STS-85-0174-VOL-2 STS-85-0174-VOL-3 STS-85-0174-VOL-3 STS-85-0174-ADD SU-SUDAAR-552 UCID-20080-REV-1 US-PATENT-APPL-SN-556512 US-PATENT-APPL-SN-582495 US-PATENT-APPL-SN-506431 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-760378 US-PATENT-APPL-SN-804040 US-PATENT-APPL-SN-804040 US-PATENT-APPL-SN-831371	p 13 p 13 p 13 p 62 p 68 p 27 p 103 p 26 p 101 p 29 p 75 p 26 p 75	N86-24734 ° # N86-24735 ° # N86-24732 ° # N86-29272 ° # N86-25680 # N86-25766 ° # N86-27706 ° # N86-24729 ° # N86-24729 ° # N86-24737 ° # N86-24880 ° # N86-24880 ° #
STS-85-0174-VOL-1 STS-85-0174-VOL-2 STS-85-0174-VOL-3 STS-85-0174-VOL-3 STS-85-0174-ADD SU-SUDAAR-552 UCID-20080-REV-1 US-PATENT-APPL-SN-556512 US-PATENT-APPL-SN-582495 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-760378 US-PATENT-APPL-SN-760378 US-PATENT-APPL-SN-804040 US-PATENT-APPL-SN-804940 US-PATENT-APPL-SN-834977 US-PATENT-APPL-SN-834977 US-PATENT-APPL-SN-890445	p 13 p 13 p 13 p 62 p 68 p 27 p 103 p 26 p 101 p 29 p 75 p 26 p 75	N86-24734 ° # N86-24735 ° # N86-24732 ° # N86-25680 # N86-25789 ° # N86-27706 ° # N86-24729 ° # N86-24729 ° # N86-24880 ° # N86-24880 ° # N86-24867 * #
STS-85-0174-VOL-1 STS-85-0174-VOL-2 STS-85-0174-VOL-3 STS-85-0174-VOL-3 STS-85-0174-ADD SU-SUDAAR-552 UCID-20080-REV-1 US-PATENT-APPL-SN-586512 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-804040 US-PATENT-APPL-SN-801371 US-PATENT-APPL-SN-804040 US-PATENT-APPL-SN-804040 US-PATENT-APPL-SN-804040 US-PATENT-APPL-SN-804040 US-PATENT-APPL-SN-834977 US-PATENT-APPL-SN-890445 US-PATENT-CLASS-126-418 US-PATENT-CLASS-126-419	p 13 p 13 p 13 p 62 p 68 p 27 p 103 p 26 p 101 p 29 p 75 p 26 p 75 p 29 p 103 p 103	N86-24734 * # N86-24735 * # N86-24732 * # N86-29272 * # N86-25680 # N86-25796 * # N86-27706 * # N86-27373 * # N86-24880 * # N86-24880 * # N86-24860 * # N86-24860 * # N86-24867 * # N86-2434 * # N86-27706 * #
STS-85-0174-VOL-1 STS-85-0174-VOL-2 STS-85-0174-VOL-2 STS-85-0174-VOL-3 STS-85-0174-ADD SU-SUDAAR-552 UCID-20080-REV-1 US-PATENT-APPL-SN-556512 US-PATENT-APPL-SN-582495 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-804040 US-PATENT-APPL-SN-831371 US-PATENT-APPL-SN-834977 US-PATENT-APPL-SN-834977 US-PATENT-APPL-SN-834977 US-PATENT-APPL-SN-890445 US-PATENT-APPL-SN-890445 US-PATENT-CLASS-126-418 US-PATENT-CLASS-126-419 US-PATENT-CLASS-126-419	p 13 p 13 p 13 p 62 p 68 p 27 p 103 p 29 p 75 p 29 p 103 p 103 p 103 p 103 p 103	N86-24734 ° # N86-24732 ° # N86-29272 ° # N86-25680 # N86-25789 ° # N86-27706 ° # N86-24830 ° # N86-24830 ° # N86-24830 ° # N86-24800 ° # N86-21706 ° # N86-27706 ° # N86-27706 ° #
STS-85-0174-VOL-1 STS-85-0174-VOL-2 STS-85-0174-VOL-2 STS-85-0174-VOL-3 STS-85-0174-ADD SU-SUDAAR-552 UCID-20080-REV-1 US-PATENT-APPL-SN-556512 US-PATENT-APPL-SN-582495 US-PATENT-APPL-SN-587764 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-831371 US-PATENT-APPL-SN-831371 US-PATENT-APPL-SN-834977 US-PATENT-APPL-SN-890445 US-PATENT-APPL-SN-890445 US-PATENT-CLASS-126-418 US-PATENT-CLASS-126-419 US-PATENT-CLASS-126-419 US-PATENT-CLASS-126-419 US-PATENT-CLASS-126-419 US-PATENT-CLASS-126-419 US-PATENT-CLASS-126-419 US-PATENT-CLASS-126-419 US-PATENT-CLASS-126-419 US-PATENT-CLASS-126-419	p 13 p 13 p 13 p 62 p 68 p 27 p 103 p 26 p 101 p 29 p 75 p 26 p 75 p 29 p 103 p 103	N86-24734 ° # N86-24732 ° # N86-29272 ° # N86-25680 # N86-25789 ° # N86-27706 ° # N86-24729 ° # N86-24729 ° # N86-24806 ° # N86-24806 ° # N86-24806 ° # N86-26434 ° # N86-27706 ° # N86-27706 ° # N86-27706 ° # N86-27706 ° # N86-27706 ° #
STS-85-0174-VOL-1 STS-85-0174-VOL-2 STS-85-0174-VOL-2 STS-85-0174-VOL-3 STS-85-0174-ADD SU-SUDAAR-552 UCID-20080-REV-1 US-PATENT-APPL-SN-586512 US-PATENT-APPL-SN-587764 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-804040 US-PATENT-APPL-SN-831977 US-PATENT-APPL-SN-834977 US-PATENT-APPL-SN-834977 US-PATENT-APPL-SN-834977 US-PATENT-APPL-SN-890445 US-PATENT-CLASS-126-418 US-PATENT-CLASS-126-419 US-PATENT-CLASS-126-438 US-PATENT-CLASS-244-159 US-PATENT-CLASS-244-159	p 13 p 13 p 13 p 62 p 68 p 27 p 103 p 26 p 101 p 29 p 75 p 26 p 75 p 29 p 103 p 103 p 103 p 103 p 103 p 103 p 103 p 205 p 207 p 207	N86-24734 ° # N86-24735 ° # N86-24732 ° # N86-25680 # N86-25680 # N86-25706 ° # N86-24729 ° # N86-24729 ° # N86-24880 ° # N86-24880 ° # N86-24867 ° # N86-24867 ° # N86-27706 ° # N86-27706 ° # N86-27706 ° # N86-27706 ° # N86-27706 ° # N86-27706 ° # N86-27708 ° # N86-27708 ° # N86-27789 ° #
STS-85-0174-VOL-1 STS-85-0174-VOL-2 STS-85-0174-VOL-2 STS-85-0174-VOL-3 STS-85-0174-VOL-3 STS-85-0174-ADD SU-SUDAAR-552 UCID-20080-REV-1 US-PATENT-APPL-SN-565512 US-PATENT-APPL-SN-582495 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-804040 US-PATENT-APPL-SN-831371 US-PATENT-APPL-SN-831371 US-PATENT-APPL-SN-834977 US-PATENT-APPL-SN-834977 US-PATENT-APPL-SN-890445 US-PATENT-CLASS-126-418 US-PATENT-CLASS-126-419 US-PATENT-CLASS-126-419 US-PATENT-CLASS-126-438 US-PATENT-CLASS-244-159 US-PATENT-CLASS-244-159 US-PATENT-CLASS-244-159 US-PATENT-CLASS-244-159	p 13 p 13 p 13 p 62 p 68 p 27 p 103 p 26 p 101 p 29 p 75 p 29 p 103 p 103 p 103 p 103 p 26 p 27	N86-24734 ° # N86-24732 ° # N86-29272 ° # N86-25680 # N86-25680 # N86-27706 ° # N86-24830 ° # N86-24830 ° # N86-24830 ° # N86-24830 ° # N86-27706 ° # N86-25789 ° # N86-25789 ° #
STS-85-0174-VOL-1 STS-85-0174-VOL-2 STS-85-0174-VOL-2 STS-85-0174-VOL-3 STS-85-0174-ADD SU-SUDAAR-552 UCID-20080-REV-1 US-PATENT-APPL-SN-566512 US-PATENT-APPL-SN-582495 US-PATENT-APPL-SN-587764 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-804040 US-PATENT-APPL-SN-831371 US-PATENT-APPL-SN-831371 US-PATENT-APPL-SN-834977 US-PATENT-APPL-SN-834977 US-PATENT-CLASS-126-418 US-PATENT-CLASS-126-419 US-PATENT-CLASS-126-419 US-PATENT-CLASS-126-419 US-PATENT-CLASS-244-159 US-PATENT-CLASS-244-159 US-PATENT-CLASS-244-159 US-PATENT-CLASS-244-153 US-PATENT-CLASS-244-153 US-PATENT-CLASS-344-DIG.2	p 13 p 13 p 13 p 62 p 68 p 27 p 103 p 26 p 75 p 29 p 103 p 1	N86-24734 ° # N86-24732 ° # N86-29272 ° # N86-25680 # N86-25789 ° # N86-25791 ° # N86-24729 ° # N86-24729 ° # N86-24870 ° # N86-24880 ° # N86-24880 ° # N86-26434 ° # N86-27706 ° # N86-27706 ° # N86-27706 ° # N86-27706 ° # N86-27706 ° # N86-27706 ° # N86-27709 ° # N86-25789 ° # N86-25789 ° # N86-25789 ° #
STS-85-0174-VOL-1 STS-85-0174-VOL-2 STS-85-0174-VOL-2 STS-85-0174-VOL-3 STS-85-0174-VOL-3 STS-85-0174-ADD SU-SUDAAR-552 UCID-20080-REV-1 US-PATENT-APPL-SN-5865612 US-PATENT-APPL-SN-587764 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-804040 US-PATENT-APPL-SN-831371 US-PATENT-APPL-SN-831371 US-PATENT-APPL-SN-834977 US-PATENT-APPL-SN-834977 US-PATENT-APPL-SN-834977 US-PATENT-CLASS-126-418 US-PATENT-CLASS-126-419 US-PATENT-CLASS-126-419 US-PATENT-CLASS-126-419 US-PATENT-CLASS-244-159 US-PATENT-CLASS-244-159 US-PATENT-CLASS-244-173 US-PATENT-CLASS-244-173 US-PATENT-CLASS-343-081	p 13 p 13 p 13 p 62 p 68 p 27 p 103 p 26 p 75 p 29 p 75 p 29 p 103 p 103	N86-24734 ° # N86-24735 ° # N86-24732 ° # N86-25680 # N86-25789 ° # N86-27706 ° # N86-24729 ° # N86-24880 ° # N86-24860 ° # N86-24860 ° # N86-26434 ° # N86-3630 ° # N86-27706 ° # N86-27706 ° # N86-27706 ° # N86-27708 ° # N86-27708 ° # N86-25789 ° # N86-25789 ° # N86-25789 ° #
STS-85-0174-VOL-1 STS-85-0174-VOL-2 STS-85-0174-VOL-2 STS-85-0174-VOL-3 STS-85-0174-VOL-3 STS-85-0174-ADD SU-SUDAAR-552 UCID-20080-REV-1 US-PATENT-APPL-SN-586754 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-804040 US-PATENT-APPL-SN-831371 US-PATENT-APPL-SN-831371 US-PATENT-APPL-SN-834977 US-PATENT-APPL-SN-834977 US-PATENT-APPL-SN-890445 US-PATENT-CLASS-126-418 US-PATENT-CLASS-126-418 US-PATENT-CLASS-126-419 US-PATENT-CLASS-244-159 US-PATENT-CLASS-244-159 US-PATENT-CLASS-343-B01G_2 US-PATENT-CLASS-343-B01G_2 US-PATENT-CLASS-343-881 US-PATENT-CLASS-343-881	p 13 p 13 p 13 p 62 p 68 p 27 p 103 p 29 p 101 p 29 p 75 p 26 p 75 p 27 p 103 p 103 p 103 p 103 p 103 p 103 p 103 p 104 p 27 p 105 p 27 p 106 p 107 p 107 p 107 p 108 p 109 p	N86-24734 ° # N86-24735 ° # N86-24732 ° # N86-25680 # N86-25789 ° # N86-27706 ° # N86-24830 ° # N86-24830 ° # N86-24830 ° # N86-27706 ° # N86-27708 ° # N86-25789 ° # N86-25789 ° # N86-25789 ° #
STS-85-0174-VOL-1 STS-85-0174-VOL-2 STS-85-0174-VOL-2 STS-85-0174-VOL-3 STS-85-0174-VOL-3 STS-85-0174-ADD SU-SUDAAR-552 UCID-20080-REV-1 US-PATENT-APPL-SN-556512 US-PATENT-APPL-SN-582495 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-831371 US-PATENT-APPL-SN-831371 US-PATENT-APPL-SN-831371 US-PATENT-APPL-SN-890445 US-PATENT-APPL-SN-890445 US-PATENT-CLASS-126-418 US-PATENT-CLASS-126-418 US-PATENT-CLASS-126-419 US-PATENT-CLASS-126-419 US-PATENT-CLASS-244-159 US-PATENT-CLASS-244-159 US-PATENT-CLASS-244-159 US-PATENT-CLASS-343-B81 US-PATENT-CLASS-343-B81 US-PATENT-CLASS-343-B82 US-PATENT-CLASS-343-B82 US-PATENT-CLASS-343-B82	p 13 p 13 p 13 p 62 p 68 p 27 p 103 p 26 p 75 p 29 p 75 p 29 p 103 p 103	N86-24734 ° # N86-24735 ° # N86-24732 ° # N86-25680 # N86-25680 # N86-25799 ° # N86-27706 ° # N86-248480 ° # N86-248480 ° # N86-248480 ° # N86-26434 ° # N86-26434 ° # N86-27706 ° # N86-27706 ° # N86-27706 ° # N86-27706 ° # N86-25799 ° # N86-25789 ° # N86-25791 ° #
STS-85-0174-VOL-1 STS-85-0174-VOL-2 STS-85-0174-VOL-2 STS-85-0174-VOL-3 STS-85-0174-VOL-3 STS-85-0174-VOL-3 STS-85-0174-ADD SU-SUDAAR-552 UCID-20080-REV-1 US-PATENT-APPL-SN-5865512 US-PATENT-APPL-SN-587764 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-804040 US-PATENT-APPL-SN-831371 US-PATENT-APPL-SN-831371 US-PATENT-APPL-SN-8314977 US-PATENT-APPL-SN-890445 US-PATENT-CLASS-126-418 US-PATENT-CLASS-126-419 US-PATENT-CLASS-126-419 US-PATENT-CLASS-244-159 US-PATENT-CLASS-244-159 US-PATENT-CLASS-244-159 US-PATENT-CLASS-343-B01G 2 US-PATENT-CLASS-343-B01G 2 US-PATENT-CLASS-343-8881 US-PATENT-CLASS-343-8882 US-PATENT-CLASS-343-8883 US-PATENT-CLASS-52-1110 US-PATENT-CLASS-52-1111	p 13 p 13 p 13 p 62 p 68 p 27 p 103 p 26 p 75 p 29 p 103 p 1	N86-24734 ° # N86-24735 ° # N86-24732 ° # N86-25680 # N86-25789 ° # N86-27706 ° # N86-24830 ° # N86-248480 ° # N86-24867 ° # N86-24867 ° # N86-27706 ° # N86-27706 ° # N86-27706 ° # N86-25789 ° #
STS-85-0174-VOL-1 STS-85-0174-VOL-2 STS-85-0174-VOL-2 STS-85-0174-VOL-3 STS-85-0174-VOL-3 STS-85-0174-ADD SU-SUDAAR-552 UCID-20080-REV-1 US-PATENT-APPL-SN-556512 US-PATENT-APPL-SN-582495 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-760378 US-PATENT-APPL-SN-831371 US-PATENT-APPL-SN-831371 US-PATENT-APPL-SN-831371 US-PATENT-APPL-SN-890445 US-PATENT-APPL-SN-890445 US-PATENT-CLASS-126-418 US-PATENT-CLASS-126-419 US-PATENT-CLASS-126-419 US-PATENT-CLASS-244-159 US-PATENT-CLASS-244-159 US-PATENT-CLASS-244-159 US-PATENT-CLASS-343-881 US-PATENT-CLASS-343-881 US-PATENT-CLASS-343-882 US-PATENT-CLASS-343-883 US-PATENT-CLASS-343-883 US-PATENT-CLASS-52-111 US-PATENT-CLASS-52-111	P 13 P 13 P 62 P 68 P 27 P 103 P 26 P 75 P 29 P 103 P 26 P 75 P 29 P 103 P 103 P 103 P 103 P 103 P 103 P 103 P 104 P 105 P 105	N86-24734 ° # N86-24732 ° # N86-29272 ° # N86-25680 # N86-25789 ° # N86-27706 ° # N86-24729 ° # N86-24729 ° # N86-24880 ° # N86-24880 ° # N86-24880 ° # N86-27706 ° # N86-25789 ° # N86-25789 ° # N86-25789 ° # N86-25789 ° # N86-25791 ° #
STS-85-0174-VOL-1 STS-85-0174-VOL-2 STS-85-0174-VOL-2 STS-85-0174-VOL-3 STS-85-0174-VOL-3 STS-85-0174-ADD SU-SUDAAR-552 UCID-20080-REV-1 US-PATENT-APPL-SN-566512 US-PATENT-APPL-SN-587764 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-804040 US-PATENT-APPL-SN-831371 US-PATENT-APPL-SN-831371 US-PATENT-APPL-SN-831371 US-PATENT-APPL-SN-834977 US-PATENT-APPL-SN-834977 US-PATENT-CLASS-126-418 US-PATENT-CLASS-126-419 US-PATENT-CLASS-126-419 US-PATENT-CLASS-244-159 US-PATENT-CLASS-244-159 US-PATENT-CLASS-244-159 US-PATENT-CLASS-343-B81 US-PATENT-CLASS-343-B81 US-PATENT-CLASS-343-B82 US-PATENT-CLASS-52-110 US-PATENT-CLASS-52-111 US-PATENT-CLASS-52-111 US-PATENT-CLASS-52-111 US-PATENT-CLASS-52-111	p 13 p 13 p 13 p 62 p 68 p 27 p 103 p 26 p 75 p 29 p 75 p 29 p 103 p 103 p 103 p 103 p 103 p 103 p 104 p 107 p 107	N86-24734 ° # N86-24735 ° # N86-24732 ° # N86-25680 # N86-25680 # N86-25789 ° # N86-27706 ° # N86-248480 ° # N86-248480 ° # N86-26434 ° # N86-26434 ° # N86-27706 ° # N86-25789 ° # N86-25791 ° # N86-25799 ° # N86-25791 ° #
STS-85-0174-VOL-1 STS-85-0174-VOL-2 STS-85-0174-VOL-2 STS-85-0174-VOL-3 STS-85-0174-VOL-3 STS-85-0174-VOL-3 STS-85-0174-VOL-3 STS-85-0174-VOL-3 STS-85-0174-VOL-3 STS-85-0174-VOL-3 SU-SUDAAR-552 UCID-20080-REV-1 US-PATENT-APPL-SN-5865512 US-PATENT-APPL-SN-58764 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-804040 US-PATENT-APPL-SN-831371 US-PATENT-APPL-SN-831371 US-PATENT-APPL-SN-8314977 US-PATENT-APPL-SN-890445 US-PATENT-CLASS-126-418 US-PATENT-CLASS-126-419 US-PATENT-CLASS-126-419 US-PATENT-CLASS-244-159 US-PATENT-CLASS-244-159 US-PATENT-CLASS-343-881 US-PATENT-CLASS-343-881 US-PATENT-CLASS-343-882 US-PATENT-CLASS-343-883 US-PATENT-CLASS-52-111 US-PATENT-CLASS-52-111 US-PATENT-CLASS-52-111 US-PATENT-CLASS-52-6263 US-PATENT-CLASS-52-6645	p 13 p 13 p 13 p 62 p 68 p 27 p 103 p 29 p 101 p 29 p 75 p 26 p 75 p 27 p 103 p 103 p 103 p 103 p 103 p 103 p 104 p 27 p 105 p 27 p 107 p 29 p 107 p 29 p 107 p 29 p 27 p 107 p 27 p 27 p 107 p 27 p 27 p 27 p 107 p 27 p 27 p 27 p 27 p 27 p 27 p 27 p 2	N86-24734 ° # N86-24735 ° # N86-24732 ° # N86-25680 # N86-25680 # N86-25789 ° # N86-27706 ° # N86-24880 ° # N86-24880 ° # N86-24880 ° # N86-24890 ° # N86-27706 ° # N86-27706 ° # N86-27706 ° # N86-27706 ° # N86-25791 ° # N86-25791 ° # N86-25799 ° #
STS-85-0174-VOL-1 STS-85-0174-VOL-2 STS-85-0174-VOL-2 STS-85-0174-VOL-3 STS-85-0174-VOL-3 STS-85-0174-VOL-3 STS-85-0174-VOL-3 STS-85-0174-VOL-3 STS-85-0174-VOL-3 STS-85-0174-VOL-3 SU-SUDAAR-552 UCID-20080-REV-1 US-PATENT-APPL-SN-5856512 US-PATENT-APPL-SN-58696431 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-804040 US-PATENT-APPL-SN-831371 US-PATENT-APPL-SN-831371 US-PATENT-APPL-SN-890445 US-PATENT-APPL-SN-890445 US-PATENT-CLASS-126-418 US-PATENT-CLASS-126-419 US-PATENT-CLASS-126-419 US-PATENT-CLASS-244-159 US-PATENT-CLASS-244-159 US-PATENT-CLASS-244-159 US-PATENT-CLASS-244-159 US-PATENT-CLASS-343-881 US-PATENT-CLASS-343-881 US-PATENT-CLASS-52-111 US-PATENT-CLASS-52-111 US-PATENT-CLASS-52-111 US-PATENT-CLASS-52-111 US-PATENT-CLASS-52-645 US-PATENT-CLASS-52-645	P 13 P 13 P 13 P 62 P 68 P 27 P 103 P 26 P 75 P 29 P 103 P 29 P 103 P 104 P 105 P 10	N86-24734 ° # N86-24735 ° # N86-24732 ° # N86-25680 # N86-25789 ° # N86-27706 ° # N86-24729 ° # N86-24737 ° # N86-24737 ° # N86-24729 ° # N86-24706 ° # N86-27706 ° # N86-25789 ° #
STS-85-0174-VOL-1 STS-85-0174-VOL-2 STS-85-0174-VOL-2 STS-85-0174-VOL-3 STS-85-0174-	p 13 p 13 p 13 p 62 p 68 p 27 p 103 p 26 p 101 p 29 p 75 p 26 p 75 p 26 p 75 p 27 p 103 p 103 p 103 p 103 p 103 p 104 p 27 p 107 p 107 p 27 p 107 p 10	N86-24734 ° # N86-24735 ° # N86-24732 ° # N86-25680 # N86-25789 ° # N86-27706 ° # N86-24729 ° # N86-24737 ° # N86-24880 ° # N86-24880 ° # N86-24880 ° # N86-24880 ° # N86-24806 ° # N86-27706 ° # N86-27709 ° # N86-25789 ° # N86-25791 ° #
STS-85-0174-VOL-1 STS-85-0174-VOL-2 STS-85-0174-VOL-2 STS-85-0174-VOL-3 STS-85-0174-VOL-3 STS-85-0174-VOL-3 STS-85-0174-VOL-3 STS-85-0174-VOL-3 STS-85-0174-VOL-3 STS-85-0174-VOL-3 SU-SUDAAR-552 UCID-20080-REV-1 US-PATENT-APPL-SN-5856512 US-PATENT-APPL-SN-58696431 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-804040 US-PATENT-APPL-SN-831371 US-PATENT-APPL-SN-831371 US-PATENT-APPL-SN-890445 US-PATENT-APPL-SN-890445 US-PATENT-CLASS-126-418 US-PATENT-CLASS-126-419 US-PATENT-CLASS-126-419 US-PATENT-CLASS-244-159 US-PATENT-CLASS-244-159 US-PATENT-CLASS-244-159 US-PATENT-CLASS-244-159 US-PATENT-CLASS-343-881 US-PATENT-CLASS-343-881 US-PATENT-CLASS-52-111 US-PATENT-CLASS-52-111 US-PATENT-CLASS-52-111 US-PATENT-CLASS-52-111 US-PATENT-CLASS-52-645 US-PATENT-CLASS-52-645	p 13 p 13 p 13 p 62 p 68 p 27 p 103 p 26 p 101 p 29 p 75 p 26 p 75 p 26 p 75 p 27 p 103 p 103 p 103 p 103 p 103 p 104 p 27 p 107 p 107 p 27 p 107 p 10	N86-24734 ° # N86-24735 ° # N86-24732 ° # N86-25680 # N86-25789 ° # N86-27706 ° # N86-24729 ° # N86-24737 ° # N86-24737 ° # N86-24729 ° # N86-24706 ° # N86-27706 ° # N86-25789 ° #
STS-85-0174-VOL-1 STS-85-0174-VOL-2 STS-85-0174-VOL-2 STS-85-0174-VOL-3 SUS-PATENT-APPL-SN-556512 US-PATENT-APPL-SN-587641 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-606431 US-PATENT-APPL-SN-831977 US-PATENT-APPL-SN-831977 US-PATENT-APPL-SN-831977 US-PATENT-APPL-SN-831971 US-PATENT-CLASS-126-418 US-PATENT-CLASS-126-419 US-PATENT-CLASS-126-419 US-PATENT-CLASS-244-159 US-PATENT-CLASS-244-159 US-PATENT-CLASS-244-159 US-PATENT-CLASS-343-881 US-PATENT-CLASS-343-881 US-PATENT-CLASS-343-881 US-PATENT-CLASS-52-111 US-PATENT-CLASS-52-111 US-PATENT-CLASS-52-111 US-PATENT-CLASS-52-645 US-PATENT-CLASS-52-645 US-PATENT-CLASS-52-646 US-PATENT-CLASS-52-646	P 13 P 13 P 13 P 62 P 68 P 27 P 103 P 26 P 75 P 29 P 103 P 26 P 27 P 101 P 29 P 102 P 27 P 101 P 27 P 27 P 101 P 27 P 27 P 27 P 27 P 27 P 27 P 27 P 27	N86-24734 ° # N86-24735 ° # N86-24732 ° # N86-25680 # N86-25789 ° # N86-27706 ° # N86-24729 ° # N86-24737 ° # N86-24880 ° # N86-24880 ° # N86-24880 ° # N86-24880 ° # N86-24806 ° # N86-27706 ° # N86-27709 ° # N86-25789 ° # N86-25791 ° #
STS-85-0174-VOL-1 STS-85-0174-VOL-2 STS-85-0174-VOL-2 STS-85-0174-VOL-3 STS-85-0174-	p 13 p 13 p 13 p 62 p 68 p 27 p 103 p 26 p 101 p 29 p 75 p 26 p 75 p 26 p 75 p 26 p 75 p 27 p 103 p 103 p 103 p 103 p 27 p 27 p 103 p 27 p 27 p 27 p 27 p 27 p 27 p 27 p 27	N86-24734 ° # N86-24735 ° # N86-24732 ° # N86-25680 # N86-25680 # N86-25796 ° # N86-27706 ° # N86-24729 ° # N86-32737 ° # N86-24800 ° # N86-24800 ° # N86-26434 ° # N86-27706 ° # N86-25791 ° #
STS-85-0174-VOL-1 STS-85-0174-VOL-2 STS-85-0174-VOL-2 STS-85-0174-VOL-3 STS-85-0174-	P 13 P 13 P 13 P 62 P 68 P 27 P 103 P 75 P 26 P 101 P 29 P 103 P 103 P 103 P 103 P 103 P 107 P 27 P 27 P 107 P 27 P 27 P 27 P 27 P 29 P 27 P 27 P 27 P 27 P 27 P 27 P 27 P 27	N86-24734 ° # N86-24735 ° # N86-24732 ° # N86-25680 # N86-25789 ° # N86-27706 ° # N86-24729 ° # N86-24729 ° # N86-24880 ° # N86-24880 ° # N86-24880 ° # N86-25789 ° # N86-27706 ° # N86-27706 ° # N86-27706 ° # N86-27706 ° # N86-27709 ° # N86-25789 ° #

US-PATENT-4,587,526 US-PATENT-4,604,844		N86-25791 * # N86-32737 * #
WDL-TR-10631-VOL-1 WDL-TR-10632-VOL-2 WDL-TR-10633-VOL-3	p 22	N86-27403 * # N86-27404 * # N86-27405 * #

### **Typical Accession Number Index Listing**

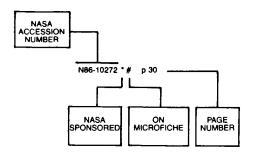

Listings in this index are arranged alphanumerically by accession number. The page number listed to the right indicates the page on which the citation is located. An asterisk (\*) indicates that the item is a NASA report. A pound sign (#) indicates that the item is available on microfiche.

A86-30113 * #	p 91	A86-33289 #	p 38
A86-30117 * #	p 1	A86-33921 #	p 23
A86-30180 #	p 1	A86-33942 #	p 30
A86-30323 #	p 71	A86-34110 #	p 93
A86-30714 #	p 65	A86-34123 #	p 93
A86-31024 #	p 35	A86-34174 * #	p 86
A86-31259 #	p 91	A86-34574 #	p 93
A86-31260 #	p 91	A86-34594 * #	p 2
A86-31651 #	p 35	A86-34634 * #	p 24
A86-31664 #	p 36	A86-34951 #	p 93
A86-31665 #	p 36	A86-34962 *#	p 2
A86-31666 #	p 36	A86-34970 #	p 81
A86-31668 #	p 36	A86-34971 #	p 81
A86-31776 #	p 91	A86-34972 #	p 86
A86-31781 *#	p 36	A86-34987 #	p 24
A86-31794 * #	p 36	A86-34990 #	p 86
A86-31795 *#	p 36	A86-34992 * #	p 93
A86-31796 #	p 37	A86-34994 # A86-35173 #	р 86 р 3
A86-31923 #	p 65	A86-35186 #	р30 р30
A86-32095 * #	p 91	A86-35194 #	p 65
A86-32117 * #	p 91	A86-35212 * #	p 38
A86-32406 #	p 71	A86-35215 *#	p 24
A86-32407 #	p 92	A86-35216 #	p 18
A86-32413 * #	p 1	A86-35217 #	p 3
A86-32526 #	p 92	A86-35319 #	p 3
A86-32536 #	p 1	A86-35333 * #	p 38
A86-32538 * #	p 17	A86-35390 * #	p 38
A86-32540 *#	p 1	A86-35426 #	p 93
A86-32543 *#	p 2	A86-35518 #	p 3
A86-32547 #	p 2	A86-36029 #	p 24
A86-32548 * #	p 2	A86-36035 #	р3
A86-32550 #	p 81	A86-36074 * #	p 38
A86-32552 #	p 92	A86-36216 #	p 39
A86-32553 #	p 18	A86-36668 #	p 86
A86-32566 * #	p 2	A86-36671 #	p 66
A86-32904 #	p 92	A86-36673 #	p 30
A86-32909 #	p 92	A86-36866 #	p 18
A86-32910 #	p 18	A86-37041 #	p 30
A86-32912 #	p 92	A86-37047 * #	p 81
A86-32917 #	p 71	A86-37060 *#	p 39
A86-32929 #	p 81	A86-37107 #	p 30
A86-32933 #	p 30	A86-37176 #	p 94
A86-32940 #	p 37	A86-37184 #	p 18
A86-32943 # A86-32944 * #	p 30 p 37	A86-37186 *#	р 39
A86-32977 #		A86-37852 #	p 94
A86-33203 #	p 71 p 85	A86-37853 * #	р3
A86-33204 #	p 37	A86-37854 #	р3
A86-33226 #	p 93	A86-37856 #	p 4
A86-33254 * #	p 37	A86-37861 #	p 18
A86-33255 #	p 37	A86-37862 #	p 4
A86-33284 * #	p 37	A86-37863 #	p 4
A86-33285 * #	p 37	A86-37868 * #	p 4
A86-33287 #	p 23	A86-37869 #	p 4
A86-33288 #	p 38	A86-37872 #	p 4
	F		

A86-38051 #	p 94
A86-38061 #	p 19
A86-38100 #	p 4
A86-38168 # A86-38273 #	р5 р5
A86-38273 # A86-38540 #	р5 р94
A86-38542 #	p 39
A86-38546 *#	p 39
A86-38548 # A86-38551 #	р 39 р 94
A86-38623 #	р 94 р 86
A86-38801 #	p 94
A86-38809 *#	p 24
A86-38811 # A86-38812 #	р 31 р 40
A86-38813 *#	p 19
A86-38823 *#	p 31
A86-38827 * # A86-38844 #	р 40 р 40
A86-38845 #	p 19
A86-38847 *#	p 19
A86-38854 #	p 24
A86-38879 # A86-38881 #	p 24 p 25
A86-38883 *#	p 25
A86-38885 #	p 25
A86-38886 *#	p 40
A86-38887 * # A86-38888 #	р 40 р 40
A86-38889 #	p 41
A86-38907 *#	p 41
A86-38914 # A86-38915 *#	p 41 p 41
A86-38916 *#	p 41 p 41
A86-38917 *#	p 41
A86-38918 #	p 42
A86-38933 * # A86-38951 * #	p 42 p 42
A86-38953 *#	p 42 p 19
A86-39035 #	p 42
A86-39036 *#	p 42
A86-39037 * # A86-39476 #	p 42 p 95
A86-39477 *#	p 95
A86-39478 #	p 43
A86-39479 # A86-39480 * #	р 43 р 66
A86-39480 * # A86-39481 #	p 43
A86-39482 *#	p 43
A86-39483 #	p 43
A86-39484 # A86-39485 * #	p 43 p 44
A86-39486 #	p 44
A86-39487 #	p 44
A86-39488 # A86-39489 #	р 44 р 44
A86-39489 # A86-39490 #	р 44 р 19
A86-39491 #	p 44
A86-39492 #	p 45
A86-39493 # A86-39494 #	р 45 р 45
A86-39495 #	p 45
A86-39496 #	p 45
A86-39497 # A86-39498 #	p 45 p 45
A86-39499 #	p 46
A86-39500 *#	p 46
A86-39501 #	p 46
A86-39502 * # A86-39503 #	р5 р82
A86-39504 #	p 46
A86-39505 *#	p 46
A86-39506 # A86-39507 #	p 46
A86-39507 # A86-39508 * #	р 47 р 47
A86-39509 * #	p 47
A86-39510 *#	p 47
A86-39511 # A86-39569 #	р 47 р 47
A86-39888 #	p 20
A86-39903 #	p 31
A86-39905 * # A86-39907 * #	р5 р31
400-33801 #	p 31

A0C 00000 #	- 05
A86-39923 #	p 25
A86-39924 #	p 20
A86-39939 #	p 31
A86-39941 * #	p 31
A86-39951 #	p 71
A86-39981 #	p 95
A86-40371 #	p 72
A86-40378 #	р 72
A86-40384 #	р 72
A86-40487 #	p 72
A86-40495 #	р 72
A86-40496 #	р 32
A86-40498 #	p 72
A86-40502 #	p 5
A86-40503 #	р 72
A86-40508 #	р 82
A86-40509 #	p 95
A86-40515 * #	р5
A86-40516 * #	р32
A86-40521 #	p 20
A86-40529 * #	p 66
A86-40530 * #	p 73
A86-40576 #	р 95
A86-40585 #	р 96
A86-40588 #	р 96
A86-40592 #	р 5
A86-40593 *#	p 6
A86-40594 #	р 73
A86-40597 #	р 66
A86-40607 * #	p 48
A86-40609 * #	р 6
A86-40611 * #	р 25
A86-40613 * #	р 20
A86-40616 * #	р 6
A86-40618 * #	р6
A86-40769 #	р 48
A86-40843 * #	р 48
A86-41018 #	р 66
A86-41154 * #	р 6
A86-41679 #	р6
A86-41739 * #	р 48
A86-41740 #	р 73
A86-41741 *#	p 48
A86-41742 # A86-41747 * #	p 7
A86-41750 * #	p 73
A86-41978 * #	p 96
A86-41982 #	p 96
A86-42236 #	р 96
A86-42608 #	р 86
A86-42615 * #	p 87
A86-42616 * #	p 87
A86-42617 * #	p 87
A86-42618 #	р 87
A86-42623 * #	р 87
A86-42713 #	р 87
A86-42714 * #	р 87
A86-42715 #	p 88
A86-42716 * #	р 88
A86-42743 #	р 96
A86-42799 * #	p 88
A86-42809 #	p 32
A86-42855 #	p 48
A86-42909 #	р 48
A86-42921 #	р 49
A86-42938 * # A86-42939 #	p 49
A86-42941 #	p 49
A86-42960 #	р 49
A86-42965 #	р 49
A86-42989 #	p 49
A86-42993 * #	р 96
A86-42995 #	р 50
A86-42997 #	р 82
A86-43003 #	р 50
A86-43005 #	p 50
A86-43201 #	р 97
A86-43204 #	р 97
A86-43206 #	p 88
A86-43208 * #	р 50
A86-43213 #	р 50
A86-43214 #	p 50

A86-43215 #	p 51
A86-43216 #	p 20
A86-43217 *#	p 51
A86-43219 #	p 51
A86-43220 #	p 51
A86-43221 #	p 51
A86-43222 * #	p 52
A86-43223 * # A86-43224 #	p 20 p 52
A86-43228 * #	p 7
A86-43230 #	p 97
A86-43231 *#	p 7
A86-43259 #	p 7
A86-43274 * # A86-43328 #	р 97 р 25
A86-43335 #	p 97
A86-43336 #	p 97
A86-43337 *#	p 7
A86-43341 #	p 82
A86-43650 # A86-43701 #	р7 р98
A86-43705 #	p 8
A86-43756 #	p 21
A86-43772 #	p 52
A86-43884 #	p 82
A86-43885 #	p 82
A86-44326 # A86-44402 #	р 98 р 8
A86-44405 * #	p8
A86-44447 #	p 88
A86-44526 #	p 98
A86-44528 * # A86-44529 * #	p 8
A86-44529 * # A86-44530 #	р8 р8
A86-44531 #	p 8
A86-44550 #	p 82
A86-44733 #	p 66
A86-44884 * #	p 52
A86-44906 # A86-45423 * #	p 66 p 52
A86-45626 #	p 98
A86-45627 #	р8
A86-45628 #	р9
A86-45629 #	p 9
A86-45630 # A86-45637 * #	р9 р9
A86-45641 * #	p 9
A86-45642 #	р9
A86-45646 #	p 73
A86-45647 #	p 10
A86-45706 * # A86-45709 #	p 67 p 10
A86-45767 #	p 10
A86-46383 #	p 52
A86-46455 #	p 52
A86-46462 * #	p 52
A86-46463 # A86-46464 * #	p 53 p 53
A86-46465 #	p 21
A86-46470 #	p 53
A86-46578 #	p 67
A86-46808 # A86-46851 * #	p 98
A86-46851 * # A86-46855 #	p 99
A86-46939 #	p 67
A86-46942 #	p 99
A86-46947 * #	p 10
A86-46951 #	p 10
A86-46955 # A86-46956 #	р 10 р 10
A86-46961 #	p 11
A86-47048 #	p 21
A86-47053 #	p 83
A86-47088 * #	p 53
A86-47115 * # A86-47292 #	p 21 p 99
A86-47335 #	p 67
A86-47336 #	p 67
A86-47337 #	p 73
A86-47401 #	p 99
A86-47403 # A86-47404 #	p 53 p 83
A86-47411 #	p 53
	,
	G_1

A86-47412 * #	p 53	N86-24717 #	p 58	N86-28409 * #	p 22
A86-47413 *#	p 21	N86-24729 * #	p 26	N86-28410 * #	p 104
A86-47414 * #	p 54	N86-24730 * #	p 34	N86-28411 * #	p 61
A86-47415 * #	p 54	N86-24731 * #	p 34	N86-28414 * #	p 69
A86-47430 #	p 54		•	N86-28420 * #	p 15
A86-47431 * #	p 54	N86-24732 * #	p 13	N86-28424 * #	p 15
A86-47432 #	p 54	N86-24733 * #	p 13	N86-28427 * #	p 34
A86-47433 #	p 54	N86-24734 * #	p 13	N86-28633 #	p 76
A86-47434 * #	p 55	N86-24735 * #	p 13	N86-28970 * #	p 15
A86-47435 #	p 55	N86-24736 * #	p 101	N86-28973 * #	p 69
	·	N86-24739 #	p 58	N86-28981 * #	p 61
A86-47436 #	p 55	N86-24740 #	p 59		
A86-47440 *#	p 83	N86-24741 #	p 101	N86-28983 * #	p 62
A86-47445 #	p 11	N86-24762 #	p 75	N86-28984 * #	p 35
A86-47451 #	p 55	N86-24867 * #	p 26	N86-28985 #	p 62
A86-47452 *#	p 55	N86-24875 * #	p 13	N86-28991 #	p 90
A86-47453 * #	p 11	N86-24876 * #	p 13	N86-29115 *#	p 69
A86-47454 * #	p 55			N86-29272 * #	p 62
A86-47460 #	p 89	N86-24877 * #	p 68	N86-29877 * #	p 69
A86-47467 #	p 83	N86-24878 * #	p 68	N86-29888 * #	p 104
A86-47468 #	p 83	N86-24880 *#	p 75	N86-29890 #	p 62
A86-47469 #	p 83	N86-25019 * #	p 59	N86-29891 #	p 62
A86-47471 #	p 56	N86-25398 * #	p 13	N86-29892 #	p 63
A86-47472 #	p 56	N86-25401 * #	p 14	N86-29893 #	p 70
A86-47473 #	p 56	N86-25402 #	p 59	N86-29989 * #	p 76
A86-47474 #	p 56	N86-25403 #	p 14	N86-30135 * #	p 104
A86-47478 #	p 56	N86-25680 #	p 68	N86-30206 * #	p 27
		N86-25689 * #	p 68	N86-30234 * #	p 85
A86-47510 #	p 56	N86-25789 * #	p 27	N86-30584 * #	p 104
A86-47515 #	p 57	N86-25791 * #	p 101		
A86-47518 #	p 57	N86-25794 * #	p 101	N86-30589 * #	p 15
A86-47605 #	p 73	N86-26074 #	p 59	N86-30590 * #	p 70
A86-47648 #	p 99	N86-26222 #	p 59	N86-30595 * #	p 77
A86-47901 #	p 100	N86-26357 * #	p 60	N86-30602 * #	p 16
A86-47910 #	p 89	N86-26358 * #	p 90 p 90	N86-30604 * #	p 16
A86-47923 #	p 84		•	N86-30606 * #	p 104
A86-47924 * #	p 32	N86-26367 #	p 60	N86-30627 #	p 104
A86-47925 #	p 57	N86-26369 * #	p 90	N86-30652 * #	p 63
A86-47931 *#	p 100	N86-26434 * #	p 75	N86-30653 #	p 63
A86-47940 * #	p 57	N86-26650 * #	p 102	N86-30682 * #	p 63
A86-47942 #	p 57	N86-26711 #	p 69	N86-30683 * #	p 63
A86-47955 #	p 57	N86-27146 * #	p 14	N86-30684 #	p 63
A86-47960 * #	p 11	N86-27162 * #	p 14	N86-30685 #	p 28
A86-47969 #	p 89	N86-27300 * #	p 102	N86-30686 #	p 28
		N86-27353 #	p 102	N86-30687 #	p 63
A86-48206 #	p 89	N86-27356 #	p 102		
A86-48373 #	p 11	N86-27357 #	p 102	N86-30738 * #	p 77
A86-48451 #	p 11	N86-27358 #	p 84	N86-30758 #	p 105
A86-48713 * #	p 21	N86-27359 #	p 60	N86-30759 #	p 77
A86-49094 *#	p 58	N86-27360 #	p 60	N86-30760 #	p 77
A86-49552 * #	p 84		·	N86-30761 #	p 77
A86-49553 * #	p 89	N86-27361 #	p 60	N86-30762 #	p 77
A86-49554 * #	p 11	N86-27363 #	p 84	N86-30763 #	p 77
A86-49561 #	p 67	N86-27364 #	p 27	N86-30764 #	p 78
A86-49563 #	p 12	N86-27365 #	p 27	N86-30765 #	p 28
A86-49565 #	p 12	N86-27368 #	p 27	N86-30767 #	p 78
A86-49595 #	p 74	N86-27369 #	p 84	N86-30768 #	p 78
A86-49597 * #	p 100	N86-27375 #	p 22	N86-30769 #	p 28
A86-49599 * #	p 32	N86-27376 #	p 76	N86-30770 #	p 78
A86-49621 * #		N86-27377 #	p 76		
	p 32	N86-27378 #	p 76	N86-30771 #	p 78
A86-49818 #	p 26	N86-27379 #	p 76	N86-30772 #	p 28
A86-49988 #	p 26	N86-27380 #	p 34	N86-30773 #	p 28
A86-50115 *#	p 33	N86-27382 #	p 102	N86-30774 #	p 35
A86-50266 * #	p 12	N86-27385 #	p 102	N86-30775 #	p 35
A86-50286 * #	p 68	N86-27386 #	p 84	N86-30776 #	p 23
A86-50334 #	p 100	N86-27387 #	p 22	N86-30777 #	p 78
A86-50337 #	p 12	N86-27388 #	p 85	N86-30778 #	p 78
A86-50338 #	p 12	N86-27389 #	p 27	N86-30779 #	p 78
		N86-27390 #	p 85	N86-30780 #	p 79
N86-22617 #	p 74	N86-27391 #	p 102	N86-30781 #	p 79
N86-22618 #	p 33			N86-30782 #	p 79
N86-22619 #	p 74	N86-27392 #	p 27	N86-30784 #	p 79
N86-22620 #	p 74	N86-27394 #	p 103	N86-30785 #	p 79
N86-22621 #	p 74	N86-27397 #	p 103	N86-30790 #	p 28
N86-22622 #	p 74	N86-27401 * #	p 60	N86-30791 #	p 28
N86-22623 #	p 74	N86-27402 * #	p 14	N86-30792 #	p 29
N86-22624 #	p 75	N86-27403 * #	p 22	N86-30794 #	p 79
N86-22626 #	p 75	N86-27404 * #	p 22	N86-30796 #	p 70
N86-22627 #	p 75	N86-27405 * #	p 22	N86-30797 #	p 29
N86-22628 #	p 33	N86-27407 * #	p 14	N86-30798 #	p 35
N86-22629 #	p 33	N86-27409 * #	p 15	N86-30799 #	p 79
N86-22630 #	p 26	N86-27525 #	p 103	N86-30800 * #	p 64
N86-22631 #	p 58	N86-27644 * #	p 103	N86-30800 #	p 64
N86-22997 * #	p 58	N86-27645 * #	p 103		р 64 р 70
N86-23053 #	,	N86-27649 * #	p 103		
N86-23343 * #	n 68		p 61	N86-30803 #	p 64
1400-20040 #	p 68	N86-27650 * #	POI		
N86-33633 * #	p 58	N86-27650 * # N86-27652 * #	p 34	N86-30804 #	p 80
N86-23623 * #	p 58 p 33			N86-30933 * #	p 16
N86-23624 #	p 58 p 33 p 26	N86-27652 * # N86-27653 * #	p 34 p 34	N86-30933 * # N86-31113 #	р 16 р 70
N86-23624 # N86-23629 * #	p 58 p 33 p 26 p 58	N86-27652 * # N86-27653 * # N86-27655 * #	p 34 p 34 p 61	N86-30933 * # N86-31113 # N86-31336 * #	p 16 p 70 p 64
N86-23624 # N86-23629 * # N86-23631 #	p 58 p 33 p 26 p 58 p 33	N86-27652 * # N86-27653 * # N86-27655 * # N86-27656 * #	p 34 p 34 p 61 p 61	N86-30933 * # N86-31113 # N86-31336 * # N86-31409 * #	p 16 p 70 p 64 p 105
N86-23624 # N86-23629 * # N86-23631 # N86-24025 #	p 58 p 33 p 26 p 58 p 33 p 89	N86-27652 * # N86-27653 * # N86-27655 * # N86-27656 * # N86-27658 * #	p 34 p 34 p 61 p 61 p 69	N86-30933 * # N86-31113 # N86-31336 * # N86-31409 * # N86-31418 * #	p 16 p 70 p 64 p 105 p 23
N86-23624 # N86-23629 * # N86-23631 # N86-24025 # N86-24217 * #	p 58 p 33 p 26 p 58 p 33 p 89 p 100	N86-27652 * # N86-27653 * # N86-27655 * # N86-27656 * # N86-27658 * # N86-27677 #	p 34 p 34 p 61 p 61 p 69 p 34	N86-30933 * # N86-31113 # N86-31336 * # N86-31409 * # N86-31418 * # N86-31427 * #	p 16 p 70 p 64 p 105 p 23 p 80
N86-23624 # N86-23629 * # N86-23631 # N86-24025 # N86-24217 * # N86-24294 #	p 58 p 33 p 26 p 58 p 33 p 89 p 100 p 84	N86-27652 * # N86-27653 * # N86-27655 * # N86-27656 * # N86-27658 * # N86-27677 # N86-27706 * #	p 34 p 34 p 61 p 61 p 69 p 34 p 103	N86-30933 * # N86-31113 # N86-31336 * # N86-31409 * # N86-31418 * # N86-31427 * # N86-31606 * #	p 16 p 70 p 64 p 105 p 23 p 80 p 29
N86-23624 # N86-23629 * # N86-23631 # N86-24025 # N86-24217 * # N86-24294 # N86-24536 * #	p 58 p 33 p 26 p 58 p 33 p 89 p 100 p 84 p 100	N86-27652 * # N86-27653 * # N86-27655 * # N86-27656 * # N86-27658 * # N86-27677 # N86-27706 * # N86-28105 * #	p 34 p 34 p 61 p 61 p 69 p 34 p 103 p 103	N86-30933 * # N86-31113 # N86-31336 * # N86-31409 * # N86-31418 * # N86-31427 * #	p 16 p 70 p 64 p 105 p 23 p 80 p 29 p 23
N86-23624 # N86-23629 * # N86-23631 # N86-24025 # N86-24217 * # N86-24294 #	p 58 p 33 p 26 p 58 p 33 p 89 p 100 p 84	N86-27652 * # N86-27653 * # N86-27655 * # N86-27656 * # N86-27658 * # N86-27777 * N86-27706 * # N86-28105 * # N86-28113 * #	p 34 p 34 p 61 p 61 p 69 p 34 p 103 p 103 p 61	N86-30933 * # N86-31113 # N86-31336 * # N86-31409 * # N86-31418 * # N86-31427 * # N86-31606 * #	p 16 p 70 p 64 p 105 p 23 p 80 p 29
N86-23624 # N86-23629 * # N86-23631 # N86-24025 # N86-24217 * # N86-24294 # N86-24536 * #	p 58 p 33 p 26 p 58 p 33 p 89 p 100 p 84 p 100	N86-27652 ° # N86-27653 ° # N86-27655 ° # N86-27656 ° # N86-27677	p 34 p 34 p 61 p 61 p 69 p 34 p 103 p 103 p 61 p 61	N86-30933 * # N86-31113 # N86-31336 * # N86-31409 * # N86-31418 * # N86-31427 * # N86-31606 * # N86-31629 #	p 16 p 70 p 64 p 105 p 23 p 80 p 29 p 23
N86-23624 # N86-23629 * # N86-23631 # N86-24025 # N86-24217 * # N86-24536 * # N86-24537 * # N86-24541 * #	p 58 p 33 p 26 p 58 p 33 p 89 p 100 p 84 p 100 p 101 p 21	N86-27652 * # N86-27655 * # N86-27655 * # N86-27656 * # N86-27657 * # N86-27677 * # N86-281105 * # N86-28113 * # N86-28114 * # N86-28114 #	p 34 p 34 p 61 p 61 p 69 p 34 p 103 p 103 p 61 p 61	N86-30933 ° # N86-31113 ° # N86-31336 ° # N86-31409 ° # N86-31418 ° # N86-31606 ° # N86-31609 ° # N86-31630 ° # N86-31631 ° #	p 16 p 70 p 64 p 105 p 23 p 80 p 29 p 23 p 29 p 64
N86-23624 # N86-23629 # N86-24025 # N86-24217 # N86-24294 # N86-24536 # N86-24537 # N86-24541 # N86-24588 #	p 58 p 33 p 26 p 58 p 33 p 89 p 100 p 84 p 100 p 101 p 21 p 12	N86-27652 ° # N86-27653 ° # N86-27656 ° # N86-27656 ° # N86-27658 ° # N86-2767706 ° # N86-28105 ° # N86-28113 ° # N86-28114 ° # N86-28116 #	p 34 p 34 p 61 p 61 p 69 p 34 p 103 p 103 p 61 p 61 p 61 p 61 p 22	N86-31933 * # N86-31113 * # N86-31336 * # N86-31409 * # N86-31418 * # N86-31606 * # N86-31630 * # N86-31631 * # N86-31631 * #	p 16 p 70 p 64 p 105 p 23 p 80 p 29 p 23 p 29 p 64 p 80
N86-23624 # N86-23629 # N86-24025 # N86-24217 # N86-24294 # N86-24536 *# N86-24541 *# N86-24546 # N86-24568 # N86-24658 #	p 58 p 33 p 26 p 58 p 33 p 89 p 100 p 84 p 100 p 101 p 21 p 12 p 26	N86-27652 * # N86-27655 * # N86-27655 * # N86-27656 * # N86-27677 * # N86-28105 * # N86-28113 * # N86-28114 * # N86-28116 # N86-28195 * #	p 34 p 34 p 61 p 61 p 69 p 34 p 103 p 103 p 61 p 61 p 61 p 61 p 62 p 76	N86-30933 * # N86-313136 * # N86-31336 * # N86-31409 * # N86-31427 * # N86-31427 * # N86-31629 # N86-31630 * # N86-31631 * # N86-31634 * #	p 16 p 70 p 64 p 105 p 23 p 80 p 29 p 23 p 29 p 64 p 80 p 64
N86-23624 # N86-23629 # N86-24025 # N86-24217 # N86-24294 # N86-24536 # N86-24537 # N86-24541 # N86-24588 #	p 58 p 33 p 26 p 58 p 33 p 89 p 100 p 84 p 100 p 101 p 21 p 12	N86-27652 ° # N86-27653 ° # N86-27656 ° # N86-27656 ° # N86-27658 ° # N86-27706 ° # N86-28105 ° # N86-28113 ° # N86-28114 ° # N86-28116   #	p 34 p 34 p 61 p 61 p 69 p 34 p 103 p 103 p 61 p 61 p 61 p 61 p 22	N86-31933 * # N86-31113 * # N86-31336 * # N86-31409 * # N86-31418 * # N86-31606 * # N86-31630 * # N86-31631 * # N86-31631 * #	p 16 p 70 p 64 p 105 p 23 p 80 p 29 p 23 p 29 p 64 p 80

N86-31639 # p 80
N86-31640 # p 23
N86-31641 # p 80
N86-31643 # p 65
N86-31643 # p 90
N86-31663 # p 80
N86-31997 # p 70
N86-31998 # p 71
N86-32106 # p 16
N86-32107 # p 16
N86-32107 # p 17
N86-32109 # p 17
N86-32504 # p 17
N86-32504 # p 17
N86-32505 # p 17
N86-32505 # p 17
N86-32513 # p 65
N86-32513 # p 65
N86-32517 # p 71
N86-32522 # p 90
N86-32534 # p 81
N86-32584 # p 81
N86-32584 # p 81
N86-32584 # p 81
N86-32584 # p 81
N86-32594 # p 85
N86-33016 \* # p 85
N86-33016 \* # p 85
N86-33024 # p 85

# **AVAILABILITY OF CITED PUBLICATIONS**

### IAA ENTRIES (A87-10000 Series)

Publications announced in *IAA* are available from the AIAA Technical Information Service as follows: Paper copies of accessions are available at \$10.00 per document (up to 50 pages), additional pages \$0.25 each. Microfiche<sup>(1)</sup> of documents announced in *IAA* are available at the rate of \$4.00 per microfiche on demand. Standing order microfiche are available at the rate of \$1.45 per microfiche for *IAA* source documents and \$1.75 per microfiche for AIAA meeting papers.

Minimum air-mail postage to foreign countries is \$2.50. All foreign orders are shipped on payment of pro-forma invoices.

All inquiries and requests should be addressed to: Technical Information Service, American Institute of Aeronautics and Astronautics, 555 West 57th Street, New York, NY 10019. Please refer to the accession number when requesting publications.

### STAR ENTRIES (N87-10000 Series)

One or more sources from which a document announced in *STAR* is available to the public is ordinarily given on the last line of the citation. The most commonly indicated sources and their acronyms or abbreviations are listed below. If the publication is available from a source other than those listed, the publisher and his address will be displayed on the availability line or in combination with the corporate source line.

Avail: NTIS. Sold by the National Technical Information Service. Prices for hard copy (HC) and microfiche (MF) are indicated by a price code preceded by the letters HC or MF in the STAR citation. Current values for the price codes are given in the tables on NTIS PRICE SCHEDULES.

Documents on microfiche are designated by a pound sign (#) following the accession number. The pound sign is used without regard to the source or quality of the microfiche.

Initially distributed microfiche under the NTIS SRIM (Selected Research in Microfiche) is available at greatly reduced unit prices. For this service and for information concerning subscription to NASA printed reports, consult the NTIS Subscription Section, Springfield, Va. 22161.

NOTE ON ORDERING DOCUMENTS: When ordering NASA publications (those followed by the \* symbol), use the N accession number. NASA patent applications (only the specifications are offered) should be ordered by the US-Patent-Appl-SN number. Non-NASA publications (no asterisk) should be ordered by the AD, PB, or other *report* number shown on the last line of the citation, not by the N accession number. It is also advisable to cite the title and other bibliographic identification.

Avail: SOD (or GPO). Sold by the Superintendent of Documents, U.S. Government Printing Office, in hard copy. The current price and order number are given following the availability line. (NTIS will fill microfiche requests, as indicated above, for those documents identified by a # symbol.)

<sup>(1)</sup> A microfiche is a transparent sheet of film, 105 by 148 mm in size containing as many as 60 to 98 pages of information reduced to micro images (not to exceed 26.1 reduction).

- Avail: BLL (formerly NLL): British Library Lending Division, Boston Spa, Wetherby, Yorkshire, England. Photocopies available from this organization at the price shown. (If none is given, inquiry should be addressed to the BLL.)
- Avail: DOE Depository Libraries. Organizations in U.S. cities and abroad that maintain collections of Department of Energy reports, usually in microfiche form, are listed in *Energy Research Abstracts*. Services available from the DOE and its depositories are described in a booklet, *DOE Technical Information Center Its Functions and Services* (TID-4660), which may be obtained without charge from the DOE Technical Information Center.
- Avail: ESDU. Pricing information on specific data, computer programs, and details on ESDU topic categories can be obtained from ESDU International Ltd. Requesters in North America should use the Virginia address while all other requesters should use the London address, both of which are on page vi.
- Avail: Fachinformationszentrum, Karlsruhe. Sold by the Fachinformationszentrum Energie, Physik, Mathematik GMBH, Eggenstein Leopoldshafen, Federal Republic of Germany, at the price shown in deutschmarks (DM).
- Avail: HMSO. Publications of Her Majesty's Stationery Office are sold in the U.S. by Pendragon House, Inc. (PHI), Redwood City, California. The U.S. price (including a service and mailing charge) is given, or a conversion table may be obtained from PHI.
- Avail: NASA Public Document Rooms. Documents so indicated may be examined at or purchased from the National Aeronautics and Space Administration, Public Documents Room (Room 126), 600 Independence Ave., S.W., Washington, D.C. 20546, or public document rooms located at each of the NASA research centers, the NASA Space Technology Laboratories, and the NASA Pasadena Office at the Jet Propulsion Laboratory.
- Avail: Univ. Microfilms. Documents so indicated are dissertations selected from *Dissertation Abstracts* and are sold by University Microfilms as xerographic copy (HC) and microfilm. All requests should cite the author and the Order Number as they appear in the citation.
- Avail: US Patent and Trademark Office. Sold by Commissioner of Patents and Trademarks, U.S. Patent and Trademark Office, at the standard price of \$1.50 each, postage free. (See discussion of NASA patents and patent applications below.)
- Avail: (US Sales Only). These foreign documents are available to users within the United States from the National Technical Information Service (NTIS). They are available to users outside the United States through the International Nuclear Information Service (INIS) representative in their country, or by applying directly to the issuing organization.
- Avail: USGS. Originals of many reports from the U.S. Geological Survey, which may contain color illustrations, or otherwise may not have the quality of illustrations preserved in the microfiche or facsimile reproduction, may be examined by the public at the libraries of the USGS field offices whose addresses are listed in this Introduction. The libraries may be queried concerning the availability of specific documents and the possible utilization of local copying services, such as color reproduction.
- Avail: Issuing Activity, or Corporate Author, or no indication of availability. Inquiries as to the availability of these documents should be addressed to the organization shown in the citation as the corporate author of the document.

### **PUBLIC COLLECTIONS OF NASA DOCUMENTS**

**DOMESTIC:** NASA and NASA-sponsored documents and a large number of aerospace publications are available to the public for reference purposes at the library maintained by the American Institute of Aeronautics and Astronautics, Technical Information Service, 555 West 57th Street, 12th Floor, New York, New York 10019.

**EUROPEAN:** An extensive collection of NASA and NASA-sponsored publications is maintained by the British Library Lending Division, Boston Spa, Wetherby, Yorkshire, England for public access. The British Library Lending Division also has available many of the non-NASA publications cited in *STAR*. European requesters may purchase facsimile copy or microfiche of NASA and NASA-sponsored documents, those identified by both the symbols # and \* from ESA - Information Retrieval Service European Space Agency, 8-10 rue Mario-Nikis, 75738 CEDEX 15, France.

### FEDERAL DEPOSITORY LIBRARY PROGRAM

In order to provide the general public with greater access to U.S. Government publications, Congress established the Federal Depository Library Program under the Government Printing Office (GPO), with 50 regional depositories responsible for permanent retention of material, inter-library loan, and reference services. At least one copy of nearly every NASA and NASA-sponsored publication, either in printed or microfiche format, is received and retained by the 50 regional depositories. A list of the regional GPO libraries, arranged alphabetically by state, appears on the inside back cover. These libraries are *not* sales outlets. A local library can contact a Regional Depository to help locate specific reports, or direct contact may be made by an individual.

### **ADDRESSES OF ORGANIZATIONS**

American Institute of Aeronautics and Astronautics Technical Information Service 555 West 57th Street, 12th Floor New York, New York 10019

British Library Lending Division, Boston Spa, Wetherby, Yorkshire, England

Commissioner of Patents and Trademarks U.S. Patent and Trademark Office Washington, D.C. 20231

Department of Energy Technical Information Center P.O. Box 62 Oak Ridge, Tennessee 37830

ESA-Information Retrieval Service ESRIN Via Galileo Galilei 00044 Frascati (Rome) Italy

ESDU International, Ltd. 1495 Chain Bridge Road McLean, Virginia 22101

ESDU International, Ltd. 251-259 Regent Street London, W1R 7AD, England

Fachinformationszentrum Energie, Physik, Mathematik GMBH 7514 Eggenstein Leopoldshafen Federal Republic of Germany

Her Majesty's Stationery Office P.O. Box 569, S.E. 1 London, England

NASA Scientific and Technical Information Facility P.O. Box 8757 B.W.I. Airport, Maryland 21240 National Aeronautics and Space Administration Scientific and Technical Information Office (NTT-1) Washington, D.C. 20546

National Technical Information Service 5285 Port Royal Road Springfield, Virginia 22161

Pendragon House, Inc. 899 Broadway Avenue Redwood City, California 94063

Superintendent of Documents U.S. Government Printing Office Washington, D.C. 20402

University Microfilms A Xerox Company 300 North Zeeb Road Ann Arbor, Michigan 48106

University Microfilms, Ltd. Tylers Green London, England

U.S. Geological Survey Library National Center - MS 950 12201 Sunrise Valley Drive Reston, Virginia 22092

U.S. Geological Survey Library 2255 North Gemini Drive Flagstaff, Arizona 86001

U.S. Geological Survey 345 Middlefield Road Menlo Park, California 94025

U.S. Geological Survey Library Box 25046 Denver Federal Center, MS914 Denver, Colorado 80225

# **NTIS PRICE SCHEDULES**

(Effective January 1, 1987)

# Schedule A STANDARD PRICE DOCUMENTS AND MICROFICHE

PAGE RANGE	NORTH AMERICAN PRICE	FOREIGN PRICE
Microfiche	\$ 6.50	\$13.00
001-025	9.95	19.90
026-050	11.95	23.90
051-100	13.95	27.90
101-200	18.95	37.90
201-300	24.95	49.90
301-400	30.95	61.90
401-500	36.95	73.90
501-600	42.95	85.90
601-up	*	•
	45.00	80.00
	48.00	80.00
	Microfiche 001-025 026-050 051-100 101-200 201-300 301-400 401-500 501-600	PAGE RANGE PRICAN PRICE  Microfiche \$ 6.50 001-025 9.95 026-050 11.95 051-100 13.95 101-200 18.95 201-300 24.95 301-400 30.95 401-500 36.95 501-600 42.95 601-up *

# Schedule E EXCEPTION PRICE DOCUMENTS AND MICROFICHE

PRICE CODE	NORTH AMERICAN PRICE	FOREIGN PRICE
E01	\$ 7.50	15.00
E02	10.00	20.00
E03	11.00	22.00
E04	13.50	27.00
E05	15.50	31.00
E06	18.00	36.00
E07	20.50	41.00
E08	23.00	46.00
E09	25.50	51.00
E10	28.00	56.00
E11	30.50	61.00
E12	33.00	66.00
E13	35.50	71.00
E14	38.50	77.00
E15	42.00	84.00
E16	46.00	92.00
E17	50.00	100.00
E18	54.00	108.00
E19	60.00	120.00
E20	70.00	140.00
E99	•	•

<sup>\*</sup>Contact NTIS for price quote.

#### **IMPORTANT NOTICE**

NTIS Shipping and Handling Charges
U.S., Canada, Mexico — ADD \$3.00 per TOTAL ORDER
All Other Countries — ADD \$4.00 per TOTAL ORDER

Exceptions — Does NOT apply to:
ORDERS REQUESTING NTIS RUSH HANDLING
ORDERS FOR SUBSCRIPTION OR STANDING ORDER PRODUCTS ONLY

NOTE: Each additional delivery address on an order requires a separate shipping and handling charge.

NASA SP-7046 (16)  4. Title and Subtitle Technology for Large Space System			
Technology for Large Space System		5. Report Date	
	ns	June 1987	
A Bibliography with Indexes		6. Performing Organization	on Code
7 Author(a)		8. Performing Organization	on Report No.
7. Author(s)		o, ronoming organization	
		10. Work Unit No.	
9. Performing Organization Name and Address		IO. VYOIK OHILINO.	
National Aeronautics and Space Ad	ministration	11. Contract or Grant No.	
Washington, DC 20546		Th. Commact of Grant No.	•
		40. True of December of E	Desired Covered
40. Consession America Name and Address		13. Type of Peport and F	renod Covered
12. Sponsoring Agency Name and Address			
		14. Sponsoring Agency (	Code
15. Supplementary Notes			
Compiled by Technical Library Bran	nch and edited by Space Station Office	e, Langley Research Center,	
Hampton, Virginia.			
16. Abstract			
This bibliography lists 673 reports	, articles and other documents introdu	uced into the NASA scientific	and technical
information system between July	1. 1986 and December 31, 1986. Its p	ourpose is to provide helpful i	nformation to
the researcher, manager, and de-	esigner in technology development a	and mission design accordin	ng to system,
interactive analysis and design, str	ructural and thermal analysis and desig	jn, structural concepts and col	ntroi systems,
electronics, advanced materials, a		color nower estallite eveteme	
	assembly concepts, propulsion, and s	solar power satellite systems.	•
,,	assembly concepts, propulsion, and s	solar power satellite systems.	
,	assembly concepts, propulsion, and s	solar power satellite systems.	
,	assembly concepts, propulsion, and s	solar power satellite systems.	
	assembly concepts, propulsion, and s	solar power satellite systems.	
	assembly concepts, propulsion, and s	solar power satellite systems.	
,	assembly concepts, propulsion, and s	solar power satellite systems.	
	assembly concepts, propulsion, and s	solar power satellite systems.	
	assembly concepts, propulsion, and s	solar power satellite systems.	
	assembly concepts, propulsion, and s	solar power satellite systems.	
	assembly concepts, propulsion, and s	solar power satellite systems.	
	assembly concepts, propulsion, and s	solar power satellite systems.	
	assembly concepts, propulsion, and s	solar power satellite systems.	
	assembly concepts, propulsion, and s	solar power satellite systems.	
	assembly concepts, propulsion, and s	solar power satellite systems.	
	assembly concepts, propulsion, and s	solar power satellite systems.	
	assembly concepts, propulsion, and s	solar power satellite systems.	
17. Key Words (Suggested by Authors(s)) Large Space Antenna	18. Distribution	solar power satellite systems.	
17. Key Words (Suggested by Authors(s)) Large Space Antenna Large Space Structures	18. Distribution	Statement	
17. Key Words (Suggested by Authors(s)) Large Space Antenna	18. Distribution	Statement	
17. Key Words (Suggested by Authors(s)) Large Space Antenna Large Space Structures	18. Distribution	Statement	
17. Key Words (Suggested by Authors(s)) Large Space Antenna Large Space Structures	18. Distribution Unclassif	Statement ried - Unlimited	
17. Key Words (Suggested by Authors(s)) Large Space Antenna Large Space Structures	18. Distribution	Statement	22. Price *